



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

| | |
|--------------------------------|---|
| Product Status | Obsolete |
| Number of LABs/CLBs | 158500 |
| Number of Logic Elements/Cells | 420000 |
| Total RAM Bits | 37888000 |
| Number of I/O | 696 |
| Number of Gates | - |
| Voltage - Supply | 0.82V ~ 0.88V |
| Mounting Type | Surface Mount |
| Operating Temperature | -40°C ~ 100°C (TJ) |
| Package / Case | 1517-BBGA, FCBGA |
| Supplier Device Package | 1517-FBGA (40x40) |
| Purchase URL | https://www.e-xfl.com/product-detail/intel/5sgxea4k3f40i4 |

Table 1. Stratix V GX and GS Commercial and Industrial Speed Grade Offering ^{(1), (2), (3)} (Part 2 of 2)

| Transceiver Speed Grade | Core Speed Grade | | | | | | | |
|--------------------------|------------------|---------|-----|-----|---------|---------|--------------------|-----|
| | C1 | C2, C2L | C3 | C4 | I2, I2L | I3, I3L | I3YY | I4 |
| 3 GX channel—8.5 Gbps | — | Yes | Yes | Yes | — | Yes | Yes ⁽⁴⁾ | Yes |

Notes to Table 1:

- (1) C = Commercial temperature grade; I = Industrial temperature grade.
 (2) Lower number refers to faster speed grade.
 (3) C2L, I2L, and I3L speed grades are for low-power devices.
 (4) I3YY speed grades can achieve up to 10.3125 Gbps.

Table 2 lists the industrial and commercial speed grades for the Stratix V GT devices.

Table 2. Stratix V GT Commercial and Industrial Speed Grade Offering ^{(1), (2)}

| Transceiver Speed Grade | Core Speed Grade | | | |
|--|------------------|-----|-----|-----|
| | C1 | C2 | I2 | I3 |
| 2 GX channel—12.5 Gbps GT channel—28.05 Gbps | Yes | Yes | — | — |
| 3 GX channel—12.5 Gbps GT channel—25.78 Gbps | Yes | Yes | Yes | Yes |

Notes to Table 2:

- (1) C = Commercial temperature grade; I = Industrial temperature grade.
 (2) Lower number refers to faster speed grade.

Absolute Maximum Ratings

Absolute maximum ratings define the maximum operating conditions for Stratix V devices. The values are based on experiments conducted with the devices and theoretical modeling of breakdown and damage mechanisms. The functional operation of the device is not implied for these conditions.



Conditions other than those listed in Table 3 may cause permanent damage to the device. Additionally, device operation at the absolute maximum ratings for extended periods of time may have adverse effects on the device.

Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 1 of 2)

| Symbol | Description | Minimum | Maximum | Unit |
|---------------------|--|---------|---------|------|
| V _{CC} | Power supply for core voltage and periphery circuitry | −0.5 | 1.35 | V |
| V _{CCPT} | Power supply for programmable power technology | −0.5 | 1.8 | V |
| V _{CCPGM} | Power supply for configuration pins | −0.5 | 3.9 | V |
| V _{CC_AUX} | Auxiliary supply for the programmable power technology | −0.5 | 3.4 | V |
| V _{CCBAT} | Battery back-up power supply for design security volatile key register | −0.5 | 3.9 | V |
| V _{CCPD} | I/O pre-driver power supply | −0.5 | 3.9 | V |
| V _{CCIO} | I/O power supply | −0.5 | 3.9 | V |

Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 2 of 2)

| Symbol | Description | Minimum | Maximum | Unit |
|-----------------------|--------------------------------|---------|---------|------|
| V _{CCD_FPLL} | PLL digital power supply | −0.5 | 1.8 | V |
| V _{CCA_FPLL} | PLL analog power supply | −0.5 | 3.4 | V |
| V _I | DC input voltage | −0.5 | 3.8 | V |
| T _J | Operating junction temperature | −55 | 125 | °C |
| T _{STG} | Storage temperature (No bias) | −65 | 150 | °C |
| I _{OUT} | DC output current per pin | −25 | 40 | mA |

Table 4 lists the absolute conditions for the transceiver power supply for Stratix V GX, GS, and GT devices.

Table 4. Transceiver Power Supply Absolute Conditions for Stratix V GX, GS, and GT Devices

| Symbol | Description | Devices | Minimum | Maximum | Unit |
|-----------------------|--|------------|---------|---------|------|
| V _{CCA_GXBL} | Transceiver channel PLL power supply (left side) | GX, GS, GT | −0.5 | 3.75 | V |
| V _{CCA_GXBR} | Transceiver channel PLL power supply (right side) | GX, GS | −0.5 | 3.75 | V |
| V _{CCA_GTBR} | Transceiver channel PLL power supply (right side) | GT | −0.5 | 3.75 | V |
| V _{CCHIP_L} | Transceiver hard IP power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCHIP_R} | Transceiver hard IP power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCHSSI_L} | Transceiver PCS power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCHSSI_R} | Transceiver PCS power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCR_GXBL} | Receiver analog power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCR_GXBR} | Receiver analog power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCR_GTBR} | Receiver analog power supply for GT channels (right side) | GT | −0.5 | 1.35 | V |
| V _{CCT_GXBL} | Transmitter analog power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCT_GXBR} | Transmitter analog power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCT_GTBR} | Transmitter analog power supply for GT channels (right side) | GT | −0.5 | 1.35 | V |
| V _{CCL_GTBR} | Transmitter clock network power supply (right side) | GT | −0.5 | 1.35 | V |
| V _{CCH_GXBL} | Transmitter output buffer power supply (left side) | GX, GS, GT | −0.5 | 1.8 | V |
| V _{CCH_GXBR} | Transmitter output buffer power supply (right side) | GX, GS, GT | −0.5 | 1.8 | V |

Maximum Allowed Overshoot and Undershoot Voltage

During transitions, input signals may overshoot to the voltage shown in Table 5 and undershoot to −2.0 V for input currents less than 100 mA and periods shorter than 20 ns.

Recommended Operating Conditions

This section lists the functional operating limits for the AC and DC parameters for Stratix V devices. Table 6 lists the steady-state voltage and current values expected from Stratix V devices. Power supply ramps must all be strictly monotonic, without plateaus.

Table 6. Recommended Operating Conditions for Stratix V Devices (Part 1 of 2)

| Symbol | Description | Condition | Min ⁽⁴⁾ | Typ | Max ⁽⁴⁾ | Unit |
|-----------------------------------|---|------------|--------------------|------|--------------------|------|
| V _{CC} | Core voltage and periphery circuitry power supply (C1, C2, I2, and I3YY speed grades) | — | 0.87 | 0.9 | 0.93 | V |
| | Core voltage and periphery circuitry power supply (C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) ⁽³⁾ | — | 0.82 | 0.85 | 0.88 | V |
| V _{CCPT} | Power supply for programmable power technology | — | 1.45 | 1.50 | 1.55 | V |
| V _{CC_AUX} | Auxiliary supply for the programmable power technology | — | 2.375 | 2.5 | 2.625 | V |
| V _{CCPD} ⁽¹⁾ | I/O pre-driver (3.0 V) power supply | — | 2.85 | 3.0 | 3.15 | V |
| | I/O pre-driver (2.5 V) power supply | — | 2.375 | 2.5 | 2.625 | V |
| V _{CCIO} | I/O buffers (3.0 V) power supply | — | 2.85 | 3.0 | 3.15 | V |
| | I/O buffers (2.5 V) power supply | — | 2.375 | 2.5 | 2.625 | V |
| | I/O buffers (1.8 V) power supply | — | 1.71 | 1.8 | 1.89 | V |
| | I/O buffers (1.5 V) power supply | — | 1.425 | 1.5 | 1.575 | V |
| | I/O buffers (1.35 V) power supply | — | 1.283 | 1.35 | 1.45 | V |
| | I/O buffers (1.25 V) power supply | — | 1.19 | 1.25 | 1.31 | V |
| | I/O buffers (1.2 V) power supply | — | 1.14 | 1.2 | 1.26 | V |
| V _{CCPGM} | Configuration pins (3.0 V) power supply | — | 2.85 | 3.0 | 3.15 | V |
| | Configuration pins (2.5 V) power supply | — | 2.375 | 2.5 | 2.625 | V |
| | Configuration pins (1.8 V) power supply | — | 1.71 | 1.8 | 1.89 | V |
| V _{CCA_FPLL} | PLL analog voltage regulator power supply | — | 2.375 | 2.5 | 2.625 | V |
| V _{CCD_FPLL} | PLL digital voltage regulator power supply | — | 1.45 | 1.5 | 1.55 | V |
| V _{CCBAT} ⁽²⁾ | Battery back-up power supply (For design security volatile key register) | — | 1.2 | — | 3.0 | V |
| V _I | DC input voltage | — | −0.5 | — | 3.6 | V |
| V _O | Output voltage | — | 0 | — | V _{CCIO} | V |
| T _J | Operating junction temperature | Commercial | 0 | — | 85 | °C |
| | | Industrial | −40 | — | 100 | °C |

Table 7. Recommended Transceiver Power Supply Operating Conditions for Stratix V GX, GS, and GT Devices (Part 2 of 2)

| Symbol | Description | Devices | Minimum ⁽⁴⁾ | Typical | Maximum ⁽⁴⁾ | Unit |
|------------------------|--|------------|------------------------|---------|------------------------|------|
| V_{CCR_GXBR} (2) | Receiver analog power supply (right side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |
| V_{CCR_GTBR} | Receiver analog power supply for GT channels (right side) | GT | 1.02 | 1.05 | 1.08 | V |
| V_{CCT_GXBL} (2) | Transmitter analog power supply (left side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |
| V_{CCT_GXBR} (2) | Transmitter analog power supply (right side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |
| V_{CCT_GTBR} | Transmitter analog power supply for GT channels (right side) | GT | 1.02 | 1.05 | 1.08 | V |
| V_{CCL_GTBR} | Transmitter clock network power supply | GT | 1.02 | 1.05 | 1.08 | V |
| V_{CCH_GXBL} | Transmitter output buffer power supply (left side) | GX, GS, GT | 1.425 | 1.5 | 1.575 | V |
| V_{CCH_GXBR} | Transmitter output buffer power supply (right side) | GX, GS, GT | 1.425 | 1.5 | 1.575 | V |

Notes to Table 7:

- (1) This supply must be connected to 3.0 V if the CMU PLL, receiver CDR, or both, are configured at a base data rate > 6.5 Gbps. Up to 6.5 Gbps, you can connect this supply to either 3.0 V or 2.5 V.
- (2) Refer to Table 8 to select the correct power supply level for your design.
- (3) When using ATX PLLs, the supply must be 3.0 V.
- (4) This value describes the budget for the DC (static) power supply tolerance and does not include the dynamic tolerance requirements. Refer to the PDN tool for the additional budget for the dynamic tolerance requirements.

Table 11. OCT Calibration Accuracy Specifications for Stratix V Devices ⁽¹⁾ (Part 2 of 2)

| Symbol | Description | Conditions | Calibration Accuracy | | | | Unit |
|--|--|---|----------------------|------------|----------------|------------|------|
| | | | C1 | C2,I2 | C3,I3, I3YY | C4,I4 | |
| 50-Ω R _S | Internal series termination with calibration (50-Ω setting) | V _{CCIO} = 3.0, 2.5, 1.8, 1.5, 1.2 V | ±15 | ±15 | ±15 | ±15 | % |
| 34-Ω and 40-Ω R _S | Internal series termination with calibration (34-Ω and 40-Ω setting) | V _{CCIO} = 1.5, 1.35, 1.25, 1.2 V | ±15 | ±15 | ±15 | ±15 | % |
| 48-Ω, 60-Ω, 80-Ω, and 240-Ω R _S | Internal series termination with calibration (48-Ω, 60-Ω, 80-Ω, and 240-Ω setting) | V _{CCIO} = 1.2 V | ±15 | ±15 | ±15 | ±15 | % |
| 50-Ω R _T | Internal parallel termination with calibration (50-Ω setting) | V _{CCIO} = 2.5, 1.8, 1.5, 1.2 V | -10 to +40 | -10 to +40 | -10 to +40 | -10 to +40 | % |
| 20-Ω, 30-Ω, 40-Ω, 60-Ω, and 120-Ω R _T | Internal parallel termination with calibration (20-Ω, 30-Ω, 40-Ω, 60-Ω, and 120-Ω setting) | V _{CCIO} = 1.5, 1.35, 1.25 V | -10 to +40 | -10 to +40 | -10 to +40 | -10 to +40 | % |
| 60-Ω and 120-Ω R _T | Internal parallel termination with calibration (60-Ω and 120-Ω setting) | V _{CCIO} = 1.2 | -10 to +40 | -10 to +40 | -10 to +40 | -10 to +40 | % |
| 25-Ω R _{S_left_shift} | Internal left shift series termination with calibration (25-Ω R _{S_left_shift} setting) | V _{CCIO} = 3.0, 2.5, 1.8, 1.5, 1.2 V | ±15 | ±15 | ±15 | ±15 | % |

Note to Table 11:

(1) OCT calibration accuracy is valid at the time of calibration only.

Table 12 lists the Stratix V OCT without calibration resistance tolerance to PVT changes.

Table 12. OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices (Part 1 of 2)

| Symbol | Description | Conditions | Resistance Tolerance | | | | Unit |
|-----------------------------|--|-----------------------------------|----------------------|-------|-----------------|--------|------|
| | | | C1 | C2,I2 | C3, I3, I3YY | C4, I4 | |
| 25-Ω R, 50-Ω R _S | Internal series termination without calibration (25-Ω setting) | V _{CCIO} = 3.0 and 2.5 V | ±30 | ±30 | ±40 | ±40 | % |
| 25-Ω R _S | Internal series termination without calibration (25-Ω setting) | V _{CCIO} = 1.8 and 1.5 V | ±30 | ±30 | ±40 | ±40 | % |
| 25-Ω R _S | Internal series termination without calibration (25-Ω setting) | V _{CCIO} = 1.2 V | ±35 | ±35 | ±50 | ±50 | % |

Table 12. OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices (Part 2 of 2)

| Symbol | Description | Conditions | Resistance Tolerance | | | | Unit |
|----------------------|--|-----------------------------------|----------------------|--------|--------------|--------|------|
| | | | C1 | C2, I2 | C3, I3, I3YY | C4, I4 | |
| 50-Ω R _S | Internal series termination without calibration (50-Ω setting) | V _{CCIO} = 1.8 and 1.5 V | ±30 | ±30 | ±40 | ±40 | % |
| 50-Ω R _S | Internal series termination without calibration (50-Ω setting) | V _{CCIO} = 1.2 V | ±35 | ±35 | ±50 | ±50 | % |
| 100-Ω R _D | Internal differential termination (100-Ω setting) | V _{CCPD} = 2.5 V | ±25 | ±25 | ±25 | ±25 | % |

Calibration accuracy for the calibrated series and parallel OCTs are applicable at the moment of calibration. When voltage and temperature conditions change after calibration, the tolerance may change.

OCT calibration is automatically performed at power-up for OCT-enabled I/Os. Table 13 lists the OCT variation with temperature and voltage after power-up calibration. Use Table 13 to determine the OCT variation after power-up calibration and Equation 1 to determine the OCT variation without recalibration.

Equation 1. OCT Variation Without Recalibration for Stratix V Devices ^{(1), (2), (3), (4), (5), (6)}

$$R_{OCT} = R_{SCAL} \left(1 + \left\langle \frac{dR}{dT} \times \Delta T \right\rangle \pm \left\langle \frac{dR}{dV} \times \Delta V \right\rangle \right)$$

Notes to Equation 1:

- (1) The R_{OCT} value shows the range of OCT resistance with the variation of temperature and V_{CCIO}.
- (2) R_{SCAL} is the OCT resistance value at power-up.
- (3) ΔT is the variation of temperature with respect to the temperature at power-up.
- (4) ΔV is the variation of voltage with respect to the V_{CCIO} at power-up.
- (5) dR/dT is the percentage change of R_{SCAL} with temperature.
- (6) dR/dV is the percentage change of R_{SCAL} with voltage.

Table 13 lists the on-chip termination variation after power-up calibration.

Table 13. OCT Variation after Power-Up Calibration for Stratix V Devices (Part 1 of 2) ⁽¹⁾

| Symbol | Description | V _{CCIO} (V) | Typical | Unit |
|--------|--|-----------------------|---------|--------|
| dR/dV | OCT variation with voltage without recalibration | 3.0 | 0.0297 | % / mV |
| | | 2.5 | 0.0344 | |
| | | 1.8 | 0.0499 | |
| | | 1.5 | 0.0744 | |
| | | 1.2 | 0.1241 | |

Table 13. OCT Variation after Power-Up Calibration for Stratix V Devices (Part 2 of 2) ⁽¹⁾

| Symbol | Description | V _{CCIO} (V) | Typical | Unit |
|--------|--|-----------------------|---------|-------------------|
| dR/dT | OCT variation with temperature without recalibration | 3.0 | 0.189 | %/ ^o C |
| | | 2.5 | 0.208 | |
| | | 1.8 | 0.266 | |
| | | 1.5 | 0.273 | |
| | | 1.2 | 0.317 | |

Note to Table 13:

(1) Valid for a V_{CCIO} range of $\pm 5\%$ and a temperature range of 0° to 85°C.

Pin Capacitance

Table 14 lists the Stratix V device family pin capacitance.

Table 14. Pin Capacitance for Stratix V Devices

| Symbol | Description | Value | Unit |
|--------------------|--|-------|------|
| C _{IOTB} | Input capacitance on the top and bottom I/O pins | 6 | pF |
| C _{IOLR} | Input capacitance on the left and right I/O pins | 6 | pF |
| C _{OUTFB} | Input capacitance on dual-purpose clock output and feedback pins | 6 | pF |

Hot Socketing

Table 15 lists the hot socketing specifications for Stratix V devices.

Table 15. Hot Socketing Specifications for Stratix V Devices

| Symbol | Description | Maximum |
|---------------------------|--|---------------------|
| I _{IOPIN} (DC) | DC current per I/O pin | 300 μ A |
| I _{IOPIN} (AC) | AC current per I/O pin | 8 mA ⁽¹⁾ |
| I _{XCVR-TX} (DC) | DC current per transceiver transmitter pin | 100 mA |
| I _{XCVR-RX} (DC) | DC current per transceiver receiver pin | 50 mA |

Note to Table 15:

(1) The I/O ramp rate is 10 ns or more. For ramp rates faster than 10 ns, $|I_{IOPIN}| = C \, dv/dt$, in which C is the I/O pin capacitance and dv/dt is the slew rate.

Table 21. Differential HSTL and HSUL I/O Standards for Stratix V Devices (Part 2 of 2)

| I/O Standard | V_{CCIO} (V) | | | $V_{DIF(DC)}$ (V) | | $V_{X(AC)}$ (V) | | | $V_{CM(DC)}$ (V) | | | $V_{DIF(AC)}$ (V) | |
|---------------------|----------------|-----|------|-------------------|------------------|-------------------------|------------------|-------------------------|------------------|------------------|------------------|-------------------|-------------------|
| | Min | Typ | Max | Min | Max | Min | Typ | Max | Min | Typ | Max | Min | Max |
| HSTL-12 Class I, II | 1.14 | 1.2 | 1.26 | 0.16 | $V_{CCIO} + 0.3$ | — | $0.5^* V_{CCIO}$ | — | $0.4^* V_{CCIO}$ | $0.5^* V_{CCIO}$ | $0.6^* V_{CCIO}$ | 0.3 | $V_{CCIO} + 0.48$ |
| HSUL-12 | 1.14 | 1.2 | 1.3 | 0.26 | 0.26 | $0.5^* V_{CCIO} - 0.12$ | $0.5^* V_{CCIO}$ | $0.5^* V_{CCIO} + 0.12$ | $0.4^* V_{CCIO}$ | $0.5^* V_{CCIO}$ | $0.6^* V_{CCIO}$ | 0.44 | 0.44 |

Table 22. Differential I/O Standard Specifications for Stratix V Devices ⁽⁷⁾

| I/O Standard | V_{CCIO} (V) ⁽¹⁰⁾ | | | V_{ID} (mV) ⁽⁸⁾ | | | $V_{ICM(DC)}$ (V) | | | V_{OD} (V) ⁽⁶⁾ | | | V_{OCM} (V) ⁽⁶⁾ | | |
|--------------------------------|--|-----|-------|------------------------------|-------------------|-----|-------------------|-------------------------|-------|-----------------------------|-----|-----|------------------------------|------|-------|
| | Min | Typ | Max | Min | Condition | Max | Min | Condition | Max | Min | Typ | Max | Min | Typ | Max |
| PCML | Transmitter, receiver, and input reference clock pins of the high-speed transceivers use the PCML I/O standard. For transmitter, receiver, and reference clock I/O pin specifications, refer to Table 23 on page 18. | | | | | | | | | | | | | | |
| 2.5 V LVDS ⁽¹⁾ | 2.375 | 2.5 | 2.625 | 100 | $V_{CM} = 1.25$ V | — | 0.05 | $D_{MAX} \leq 700$ Mbps | 1.8 | 0.247 | — | 0.6 | 1.125 | 1.25 | 1.375 |
| | | | | | | — | 1.05 | $D_{MAX} > 700$ Mbps | 1.55 | 0.247 | — | 0.6 | 1.125 | 1.25 | 1.375 |
| BLVDS ⁽⁵⁾ | 2.375 | 2.5 | 2.625 | 100 | — | — | — | — | — | — | — | — | — | — | — |
| RSDS (HIO) ⁽²⁾ | 2.375 | 2.5 | 2.625 | 100 | $V_{CM} = 1.25$ V | — | 0.3 | — | 1.4 | 0.1 | 0.2 | 0.6 | 0.5 | 1.2 | 1.4 |
| Mini-LVDS (HIO) ⁽³⁾ | 2.375 | 2.5 | 2.625 | 200 | — | 600 | 0.4 | — | 1.325 | 0.25 | — | 0.6 | 1 | 1.2 | 1.4 |
| LVPECL ^{(4), (9)} | — | — | — | 300 | — | — | 0.6 | $D_{MAX} \leq 700$ Mbps | 1.8 | — | — | — | — | — | — |
| | — | — | — | 300 | — | — | 1 | $D_{MAX} > 700$ Mbps | 1.6 | — | — | — | — | — | — |

Notes to Table 22:

- (1) For optimized LVDS receiver performance, the receiver voltage input range must be between 1.0 V to 1.6 V for data rates above 700 Mbps, and 0 V to 1.85 V for data rates below 700 Mbps.
- (2) For optimized RSDS receiver performance, the receiver voltage input range must be between 0.25 V to 1.45 V.
- (3) For optimized Mini-LVDS receiver performance, the receiver voltage input range must be between 0.3 V to 1.425 V.
- (4) For optimized LVPECL receiver performance, the receiver voltage input range must be between 0.85 V to 1.75 V for data rate above 700 Mbps and 0.45 V to 1.95 V for data rate below 700 Mbps.
- (5) There are no fixed V_{ICM} , V_{OD} , and V_{OCM} specifications for BLVDS. They depend on the system topology.
- (6) RL range: $90 \leq RL \leq 110 \Omega$.
- (7) The 1.4-V and 1.5-V PCML transceiver I/O standard specifications are described in "Transceiver Performance Specifications" on page 18.
- (8) The minimum VID value is applicable over the entire common mode range, VCM.
- (9) LVPECL is only supported on dedicated clock input pins.
- (10) Differential inputs are powered by VCCPD which requires 2.5 V.

Power Consumption

Altera offers two ways to estimate power consumption for a design—the Excel-based Early Power Estimator and the Quartus® II PowerPlay Power Analyzer feature.

Table 23. Transceiver Specifications for Stratix V GX and GS Devices ⁽¹⁾ (Part 2 of 7)

| Symbol/ Description | Conditions | Transceiver Speed Grade 1 | | | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--|--|----------------------------------|-------------------|------|----------------------------------|-------------------|------|----------------------------------|-------------------|------|-------------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Spread-spectrum downspread | PCIe | — | 0 to -0.5 | — | — | 0 to -0.5 | — | — | 0 to -0.5 | — | % |
| On-chip termination resistors ⁽²¹⁾ | — | — | 100 | — | — | 100 | — | — | 100 | — | Ω |
| Absolute V_{MAX} ⁽⁵⁾ | Dedicated reference clock pin | — | — | 1.6 | — | — | 1.6 | — | — | 1.6 | V |
| | RX reference clock pin | — | — | 1.2 | — | — | 1.2 | — | — | 1.2 | |
| Absolute V_{MIN} | — | -0.4 | — | — | -0.4 | — | — | -0.4 | — | — | V |
| Peak-to-peak differential input voltage | — | 200 | — | 1600 | 200 | — | 1600 | 200 | — | 1600 | mV |
| V_{ICM} (AC coupled) ⁽³⁾ | Dedicated reference clock pin | 1050/1000/900/850 ⁽²⁾ | | | 1050/1000/900/850 ⁽²⁾ | | | 1050/1000/900/850 ⁽²⁾ | | | mV |
| | RX reference clock pin | 1.0/0.9/0.85 ⁽⁴⁾ | | | 1.0/0.9/0.85 ⁽⁴⁾ | | | 1.0/0.9/0.85 ⁽⁴⁾ | | | V |
| V_{ICM} (DC coupled) | HCSL I/O standard for PCIe reference clock | 250 | — | 550 | 250 | — | 550 | 250 | — | 550 | mV |
| Transmitter REFCLK Phase Noise (622 MHz) ⁽²⁰⁾ | 100 Hz | — | — | -70 | — | — | -70 | — | — | -70 | dBc/Hz |
| | 1 kHz | — | — | -90 | — | — | -90 | — | — | -90 | dBc/Hz |
| | 10 kHz | — | — | -100 | — | — | -100 | — | — | -100 | dBc/Hz |
| | 100 kHz | — | — | -110 | — | — | -110 | — | — | -110 | dBc/Hz |
| | ≥ 1 MHz | — | — | -120 | — | — | -120 | — | — | -120 | dBc/Hz |
| Transmitter REFCLK Phase Jitter (100 MHz) ⁽¹⁷⁾ | 10 kHz to 1.5 MHz (PCIe) | — | — | 3 | — | — | 3 | — | — | 3 | ps (rms) |
| R_{REF} ⁽¹⁹⁾ | — | — | 1800 $\pm 1\%$ | — | — | 1800 $\pm 1\%$ | — | — | 1800 $\pm 1\%$ | — | Ω |
| Transceiver Clocks | | | | | | | | | | | |
| fixedclk clock frequency | PCIe Receiver Detect | — | 100 or 125 | — | — | 100 or 125 | — | — | 100 or 125 | — | MHz |

Table 28. Transceiver Specifications for Stratix V GT Devices (Part 1 of 5) ⁽¹⁾

| Symbol/ Description | Conditions | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--|--|--|-----------|------|------------------------------|-----------|------|------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Reference Clock | | | | | | | | |
| Supported I/O Standards | Dedicated reference clock pin | 1.2-V PCML, 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS, and HCSL | | | | | | |
| | RX reference clock pin | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS | | | | | | |
| Input Reference Clock Frequency (CMU PLL) ⁽⁶⁾ | — | 40 | — | 710 | 40 | — | 710 | MHz |
| Input Reference Clock Frequency (ATX PLL) ⁽⁶⁾ | — | 100 | — | 710 | 100 | — | 710 | MHz |
| Rise time | 20% to 80% | — | — | 400 | — | — | 400 | ps |
| Fall time | 80% to 20% | — | — | 400 | — | — | 400 | |
| Duty cycle | — | 45 | — | 55 | 45 | — | 55 | % |
| Spread-spectrum modulating clock frequency | PCI Express (PCIe) | 30 | — | 33 | 30 | — | 33 | kHz |
| Spread-spectrum downspread | PCIe | — | 0 to −0.5 | — | — | 0 to −0.5 | — | % |
| On-chip termination resistors ⁽¹⁹⁾ | — | — | 100 | — | — | 100 | — | Ω |
| Absolute V _{MAX} ⁽³⁾ | Dedicated reference clock pin | — | — | 1.6 | — | — | 1.6 | V |
| | RX reference clock pin | — | — | 1.2 | — | — | 1.2 | |
| Absolute V _{MIN} | — | -0.4 | — | — | -0.4 | — | — | V |
| Peak-to-peak differential input voltage | — | 200 | — | 1600 | 200 | — | 1600 | mV |
| V _{ICM} (AC coupled) | Dedicated reference clock pin | 1050/1000 ⁽²⁾ | | | 1050/1000 ⁽²⁾ | | | mV |
| | RX reference clock pin | 1.0/0.9/0.85 ⁽²²⁾ | | | 1.0/0.9/0.85 ⁽²²⁾ | | | V |
| V _{ICM} (DC coupled) | HCSL I/O standard for PCIe reference clock | 250 | — | 550 | 250 | — | 550 | mV |

Figure 4 shows the differential transmitter output waveform.

Figure 4. Differential Transmitter/Receiver Output/Input Waveform

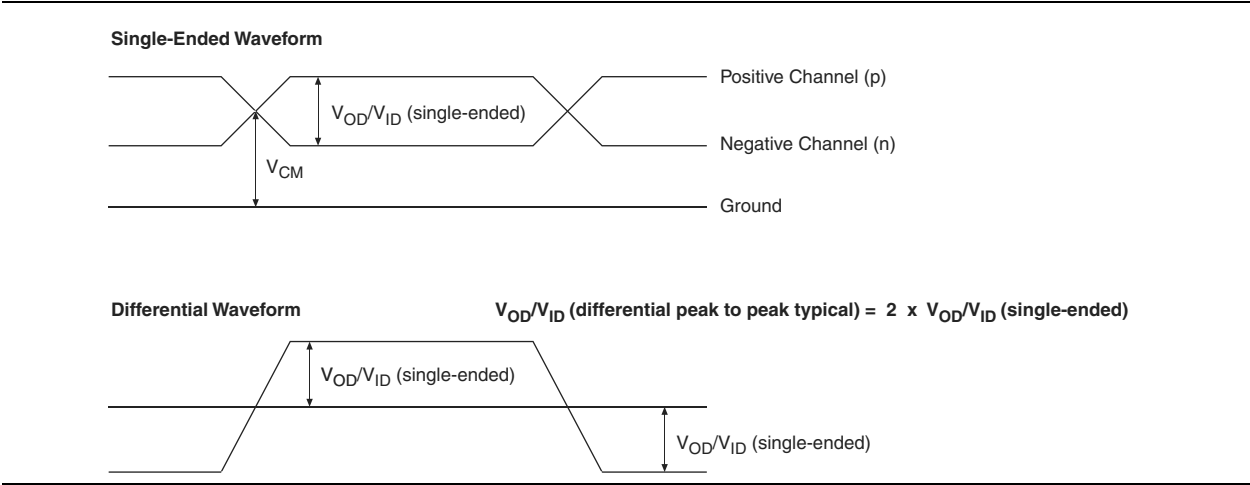


Figure 5 shows the Stratix V AC gain curves for GT channels.

Figure 5. AC Gain Curves for GT Channels

- XFI
- ASI
- HiGig/HiGig+
- HiGig2/HiGig2+
- Serial Data Converter (SDC)
- GPON
- SDI
- SONET
- Fibre Channel (FC)
- PCIe
- QPI
- SFF-8431

Download the Stratix V Characterization Report Tool to view the characterization report summary for these protocols.

Core Performance Specifications

This section describes the clock tree, phase-locked loop (PLL), digital signal processing (DSP), memory blocks, configuration, and JTAG specifications.

Clock Tree Specifications

Table 30 lists the clock tree specifications for Stratix V devices.

Table 30. Clock Tree Performance for Stratix V Devices ⁽¹⁾

| Symbol | Performance | | | Unit |
|---------------------------|--------------------------|-----------------------|--------|------|
| | C1, C2, C2L, I2, and I2L | C3, I3, I3L, and I3YY | C4, I4 | |
| Global and Regional Clock | 717 | 650 | 580 | MHz |
| Periphery Clock | 550 | 500 | 500 | MHz |

Note to Table 30:

(1) The Stratix V ES devices are limited to 600 MHz core clock tree performance.

PLL Specifications

Table 31 lists the Stratix V PLL specifications when operating in both the commercial junction temperature range (0° to 85°C) and the industrial junction temperature range (–40° to 100°C).

Table 31. PLL Specifications for Stratix V Devices (Part 1 of 3)

| Symbol | Parameter | Min | Typ | Max | Unit |
|--------------------------|--|-----|-----|--------------------|------|
| f_{IN} | Input clock frequency (C1, C2, C2L, I2, and I2L speed grades) | 5 | — | 800 ⁽¹⁾ | MHz |
| | Input clock frequency (C3, I3, I3L, and I3YY speed grades) | 5 | — | 800 ⁽¹⁾ | MHz |
| | Input clock frequency (C4, I4 speed grades) | 5 | — | 650 ⁽¹⁾ | MHz |
| f_{INPFD} | Input frequency to the PFD | 5 | — | 325 | MHz |
| f_{FINPFD} | Fractional Input clock frequency to the PFD | 50 | — | 160 | MHz |
| f_{VCO} ⁽⁹⁾ | PLL VCO operating range (C1, C2, C2L, I2, I2L speed grades) | 600 | — | 1600 | MHz |
| | PLL VCO operating range (C3, I3, I3L, I3YY speed grades) | 600 | — | 1600 | MHz |
| | PLL VCO operating range (C4, I4 speed grades) | 600 | — | 1300 | MHz |
| $t_{EINDUTY}$ | Input clock or external feedback clock input duty cycle | 40 | — | 60 | % |
| f_{OUT} | Output frequency for an internal global or regional clock (C1, C2, C2L, I2, I2L speed grades) | — | — | 717 ⁽²⁾ | MHz |
| | Output frequency for an internal global or regional clock (C3, I3, I3L speed grades) | — | — | 650 ⁽²⁾ | MHz |
| | Output frequency for an internal global or regional clock (C4, I4 speed grades) | — | — | 580 ⁽²⁾ | MHz |
| f_{OUT_EXT} | Output frequency for an external clock output (C1, C2, C2L, I2, I2L speed grades) | — | — | 800 ⁽²⁾ | MHz |
| | Output frequency for an external clock output (C3, I3, I3L speed grades) | — | — | 667 ⁽²⁾ | MHz |
| | Output frequency for an external clock output (C4, I4 speed grades) | — | — | 553 ⁽²⁾ | MHz |
| $t_{OUTDUTY}$ | Duty cycle for a dedicated external clock output (when set to 50%) | 45 | 50 | 55 | % |
| t_{FCOMP} | External feedback clock compensation time | — | — | 10 | ns |
| $f_{DYCONFIGCLK}$ | Dynamic Configuration Clock used for <code>mgmt_clk</code> and <code>scanclk</code> | — | — | 100 | MHz |
| t_{LOCK} | Time required to lock from the end-of-device configuration or deassertion of <code>areset</code> | — | — | 1 | ms |
| t_{DLOCK} | Time required to lock dynamically (after switchover or reconfiguring any non-post-scale counters/delays) | — | — | 1 | ms |
| f_{CLBW} | PLL closed-loop low bandwidth | — | 0.3 | — | MHz |
| | PLL closed-loop medium bandwidth | — | 1.5 | — | MHz |
| | PLL closed-loop high bandwidth ⁽⁷⁾ | — | 4 | — | MHz |
| t_{PLL_PSERR} | Accuracy of PLL phase shift | — | — | ±50 | ps |
| t_{ARESET} | Minimum pulse width on the <code>areset</code> signal | 10 | — | — | ns |

Table 36. High-Speed I/O Specifications for Stratix V Devices ^{(1), (2)} (Part 4 of 4)

| Symbol | Conditions | C1 | | | C2, C2L, I2, I2L | | | C3, I3, I3L, I3YY | | | C4, I4 | | | Unit |
|-------------------------------|---|-----|-----|-----------|------------------|-----|-----------|-------------------|-----|-----------|--------|-----|-----------|----------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| f _{HSDR} (data rate) | SERDES factor J = 3 to 10 | (6) | — | (8) | (6) | — | (8) | (6) | — | (8) | (6) | — | (8) | Mbps |
| | SERDES factor J = 2, uses DDR Registers | (6) | — | (7) | (6) | — | (7) | (6) | — | (7) | (6) | — | (7) | Mbps |
| | SERDES factor J = 1, uses SDR Register | (6) | — | (7) | (6) | — | (7) | (6) | — | (7) | (6) | — | (7) | Mbps |
| DPA Mode | | | | | | | | | | | | | | |
| DPA run length | — | — | — | 1000 0 | — | — | 1000 0 | — | — | 1000 0 | — | — | 1000 0 | UI |
| Soft CDR mode | | | | | | | | | | | | | | |
| Soft-CDR PPM tolerance | — | — | — | 300 | — | — | 300 | — | — | 300 | — | — | 300 | ± PPM |
| Non DPA Mode | | | | | | | | | | | | | | |
| Sampling Window | — | — | — | 300 | — | — | 300 | — | — | 300 | — | — | 300 | ps |

Notes to Table 36:

- (1) When J = 3 to 10, use the serializer/deserializer (SERDES) block.
- (2) When J = 1 or 2, bypass the SERDES block.
- (3) This only applies to DPA and soft-CDR modes.
- (4) Clock Boost Factor (W) is the ratio between the input data rate to the input clock rate.
- (5) This is achieved by using the **LVDS** clock network.
- (6) The minimum specification depends on the clock source (for example, the PLL and clock pin) and the clock routing resource (global, regional, or local) that you use. The I/O differential buffer and input register do not have a minimum toggle rate.
- (7) The maximum ideal frequency is the SERDES factor (J) x the PLL maximum output frequency (f_{OUT}) provided you can close the design timing and the signal integrity simulation is clean.
- (8) You can estimate the achievable maximum data rate for non-DPA mode by performing link timing closure analysis. You must consider the board skew margin, transmitter delay margin, and receiver sampling margin to determine the maximum data rate supported.
- (9) If the receiver with DPA enabled and transmitter are using shared PLLs, the minimum data rate is 150 Mbps.
- (10) You must calculate the leftover timing margin in the receiver by performing link timing closure analysis. You must consider the board skew margin, transmitter channel-to-channel skew, and receiver sampling margin to determine leftover timing margin.
- (11) The F_{MAX} specification is based on the fast clock used for serial data. The interface F_{MAX} is also dependent on the parallel clock domain which is design-dependent and requires timing analysis.
- (12) Stratix V RX LVDS will need DPA. For Stratix V TX LVDS, the receiver side component must have DPA.
- (13) Stratix V LVDS serialization and de-serialization factor needs to be x4 and above.
- (14) Requires package skew compensation with PCB trace length.
- (15) Do not mix single-ended I/O buffer within LVDS I/O bank.
- (16) Chip-to-chip communication only with a maximum load of 5 pF.
- (17) When using True LVDS RX channels for emulated LVDS TX channel, only serialization factors 1 and 2 are supported.

Figure 7 shows the dynamic phase alignment (DPA) lock time specifications with the DPA PLL calibration option enabled.

Figure 7. DPA Lock Time Specification with DPA PLL Calibration Enabled

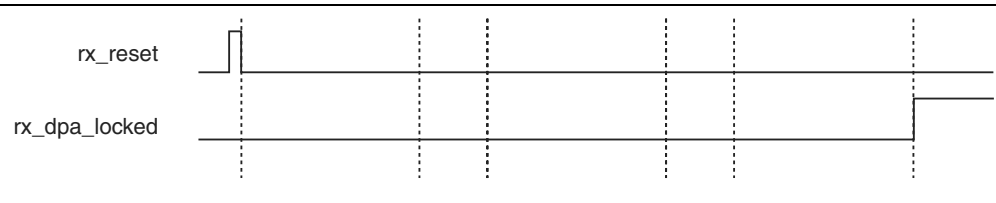


Table 37 lists the DPA lock time specifications for Stratix V devices.

Table 37. DPA Lock Time Specifications for Stratix V GX Devices Only ^{(1), (2), (3)}

| Standard | Training Pattern | Number of Data Transitions in One Repetition of the Training Pattern | Number of Repetitions per 256 Data Transitions ⁽⁴⁾ | Maximum |
|--------------------|----------------------|--|---|----------------------|
| SPI-4 | 00000000001111111111 | 2 | 128 | 640 data transitions |
| Parallel Rapid I/O | 00001111 | 2 | 128 | 640 data transitions |
| | 10010000 | 4 | 64 | 640 data transitions |
| Miscellaneous | 10101010 | 8 | 32 | 640 data transitions |
| | 01010101 | 8 | 32 | 640 data transitions |

Notes to Table 37:

- (1) The DPA lock time is for one channel.
- (2) One data transition is defined as a 0-to-1 or 1-to-0 transition.
- (3) The DPA lock time stated in this table applies to both commercial and industrial grade.
- (4) This is the number of repetitions for the stated training pattern to achieve the 256 data transitions.

Figure 8 shows the LVDS soft-clock data recovery (CDR)/DPA sinusoidal jitter tolerance specification for a data rate ≥ 1.25 Gbps. Table 38 lists the LVDS soft-CDR/DPA sinusoidal jitter tolerance specification for a data rate ≥ 1.25 Gbps.

Figure 8. LVDS Soft-CDR/DPA Sinusoidal Jitter Tolerance Specification for a Data Rate ≥ 1.25 Gbps

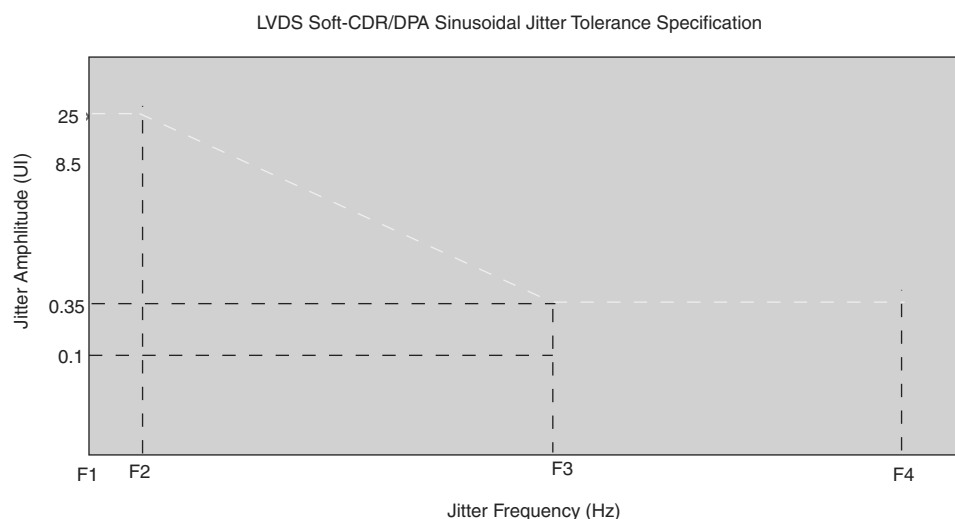
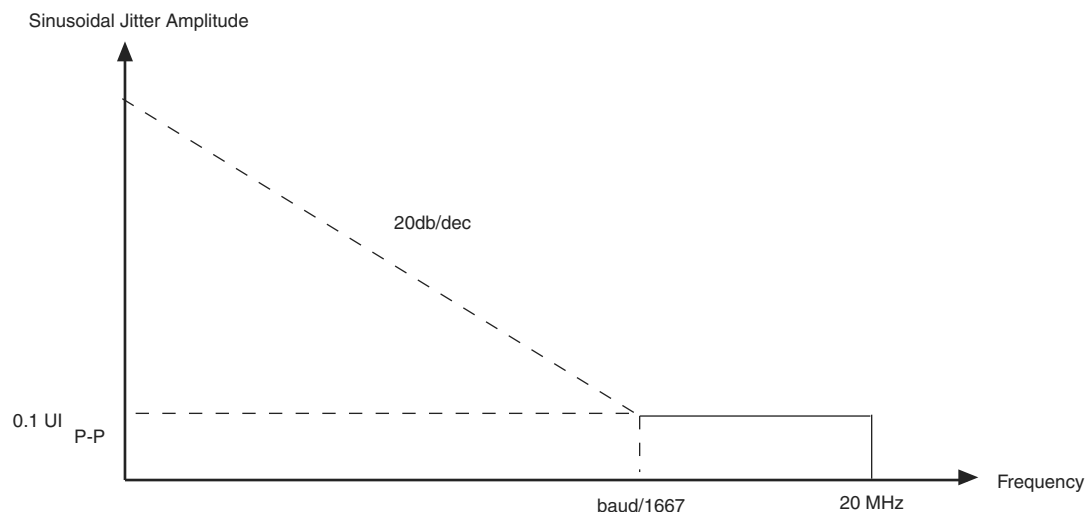


Table 38. LVDS Soft-CDR/DPA Sinusoidal Jitter Mask Values for a Data Rate ≥ 1.25 Gbps

| Jitter Frequency (Hz) | | Sinusoidal Jitter (UI) |
|-----------------------|------------|------------------------|
| F1 | 10,000 | 25.000 |
| F2 | 17,565 | 25.000 |
| F3 | 1,493,000 | 0.350 |
| F4 | 50,000,000 | 0.350 |

Figure 9 shows the LVDS soft-CDR/DPA sinusoidal jitter tolerance specification for a data rate < 1.25 Gbps.

Figure 9. LVDS Soft-CDR/DPA Sinusoidal Jitter Tolerance Specification for a Data Rate < 1.25 Gbps

DLL Range, DQS Logic Block, and Memory Output Clock Jitter Specifications

Table 39 lists the DLL range specification for Stratix V devices. The DLL is always in 8-tap mode in Stratix V devices.

Table 39. DLL Range Specifications for Stratix V Devices ⁽¹⁾

| C1 | C2, C2L, I2, I2L | C3, I3, I3L, I3YY | C4,I4 | Unit |
|---------|------------------|-------------------|---------|------|
| 300-933 | 300-933 | 300-890 | 300-890 | MHz |

Note to Table 39:

- (1) Stratix V devices support memory interface frequencies lower than 300 MHz, although the reference clock that feeds the DLL must be at least 300 MHz. To support interfaces below 300 MHz, multiply the reference clock feeding the DLL to ensure the frequency is within the supported range of the DLL.

Table 40 lists the DQS phase offset delay per stage for Stratix V devices.

Table 40. DQS Phase Offset Delay Per Setting for Stratix V Devices ^{(1), (2)} (Part 1 of 2)

| Speed Grade | Min | Max | Unit |
|------------------|-----|-----|------|
| C1 | 8 | 14 | ps |
| C2, C2L, I2, I2L | 8 | 14 | ps |
| C3,I3, I3L, I3YY | 8 | 15 | ps |

Table 48. Minimum Configuration Time Estimation for Stratix V Devices

| Variant | Member Code | Active Serial ⁽¹⁾ | | | Fast Passive Parallel ⁽²⁾ | | |
|---------|-------------|------------------------------|------------|---------------------|--------------------------------------|------------|---------------------|
| | | Width | DCLK (MHz) | Min Config Time (s) | Width | DCLK (MHz) | Min Config Time (s) |
| GS | D3 | 4 | 100 | 0.344 | 32 | 100 | 0.043 |
| | D4 | 4 | 100 | 0.534 | 32 | 100 | 0.067 |
| | | 4 | 100 | 0.344 | 32 | 100 | 0.043 |
| | D5 | 4 | 100 | 0.534 | 32 | 100 | 0.067 |
| | D6 | 4 | 100 | 0.741 | 32 | 100 | 0.093 |
| | D8 | 4 | 100 | 0.741 | 32 | 100 | 0.093 |
| E | E9 | 4 | 100 | 0.857 | 32 | 100 | 0.107 |
| | EB | 4 | 100 | 0.857 | 32 | 100 | 0.107 |

Notes to Table 48:

(1) DCLK frequency of 100 MHz using external CLKUSR.

(2) Max FPGA FPP bandwidth may exceed bandwidth available from some external storage or control logic.

Fast Passive Parallel Configuration Timing

This section describes the fast passive parallel (FPP) configuration timing parameters for Stratix V devices.

DCLK-to-DATA[] Ratio for FPP Configuration

FPP configuration requires a different DCLK-to-DATA [] ratio when you enable the design security, decompression, or both features. Table 49 lists the DCLK-to-DATA [] ratio for each combination.

Table 49. DCLK-to-DATA[] Ratio ⁽¹⁾ (Part 1 of 2)

| Configuration Scheme | Decompression | Design Security | DCLK-to-DATA[] Ratio |
|----------------------|---------------|-----------------|----------------------|
| FPP ×8 | Disabled | Disabled | 1 |
| | Disabled | Enabled | 1 |
| | Enabled | Disabled | 2 |
| | Enabled | Enabled | 2 |
| FPP ×16 | Disabled | Disabled | 1 |
| | Disabled | Enabled | 2 |
| | Enabled | Disabled | 4 |
| | Enabled | Enabled | 4 |

Active Serial Configuration Timing

Table 52 lists the DCLK frequency specification in the AS configuration scheme.

Table 52. DCLK Frequency Specification in the AS Configuration Scheme ^{(1), (2)}


| Minimum | Typical | Maximum | Unit |
|---------|---------|---------|------|
| 5.3 | 7.9 | 12.5 | MHz |
| 10.6 | 15.7 | 25.0 | MHz |
| 21.3 | 31.4 | 50.0 | MHz |
| 42.6 | 62.9 | 100.0 | MHz |

Notes to Table 52:

- (1) This applies to the DCLK frequency specification when using the internal oscillator as the configuration clock source.
- (2) The AS multi-device configuration scheme does not support DCLK frequency of 100 MHz.

Figure 14 shows the single-device configuration setup for an AS ×1 mode.

Figure 14. AS Configuration Timing

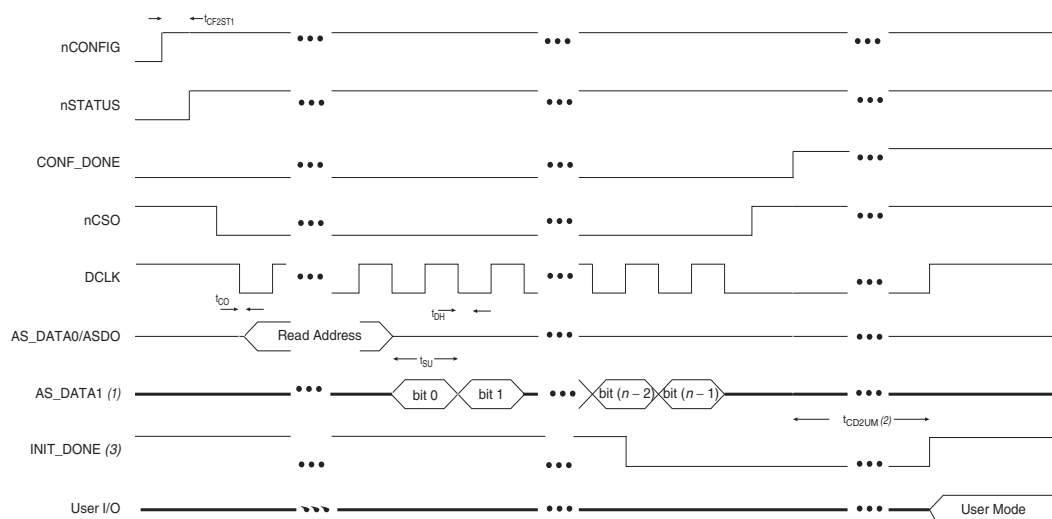

Notes to Figure 14:

- (1) If you are using AS ×4 mode, this signal represents the AS_DATA [3 : 0] and EPCQ sends in 4-bits of data for each DCLK cycle.
- (2) The initialization clock can be from internal oscillator or CLKUSR pin.
- (3) After the option bit to enable the INIT_DONE pin is configured into the device, the INIT_DONE goes low.

Table 53 lists the timing parameters for AS ×1 and AS ×4 configurations in Stratix V devices.

Table 53. AS Timing Parameters for AS ×1 and AS ×4 Configurations in Stratix V Devices ^{(1), (2)} (Part 1 of 2)

| Symbol | Parameter | Minimum | Maximum | Units |
|----------|---|---------|---------|-------|
| t_{CO} | DCLK falling edge to AS_DATA0/ASDO output | — | 2 | ns |
| t_{SU} | Data setup time before falling edge on DCLK | 1.5 | — | ns |
| t_H | Data hold time after falling edge on DCLK | 0 | — | ns |

Table 53. AS Timing Parameters for AS ×1 and AS ×4 Configurations in Stratix V Devices ^{(1), (2)} (Part 2 of 2)


| Symbol | Parameter | Minimum | Maximum | Units |
|--------------|---|--|---------|-------|
| t_{CD2UM} | CONF_DONE high to user mode ⁽³⁾ | 175 | 437 | μs |
| t_{CD2CU} | CONF_DONE high to CLKUSR enabled | 4 × maximum DCLK period | — | — |
| t_{CD2UMC} | CONF_DONE high to user mode with CLKUSR option on | $t_{CD2CU} + (8576 \times \text{CLKUSR period})$ | — | — |

Notes to Table 53:

- (1) The minimum and maximum numbers apply only if you choose the internal oscillator as the clock source for initializing the device.
- (2) t_{CF2CD} , t_{CF2ST0} , t_{CFG} , t_{STATUS} , and t_{CF2ST1} timing parameters are identical to the timing parameters for PS mode listed in Table 54 on page 63.
- (3) To enable the CLKUSR pin as the initialization clock source and to obtain the maximum frequency specification on this pin, refer to the Initialization section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.

Passive Serial Configuration Timing

Figure 15 shows the timing waveform for a passive serial (PS) configuration when using a MAX II device, MAX V device, or microprocessor as an external host.

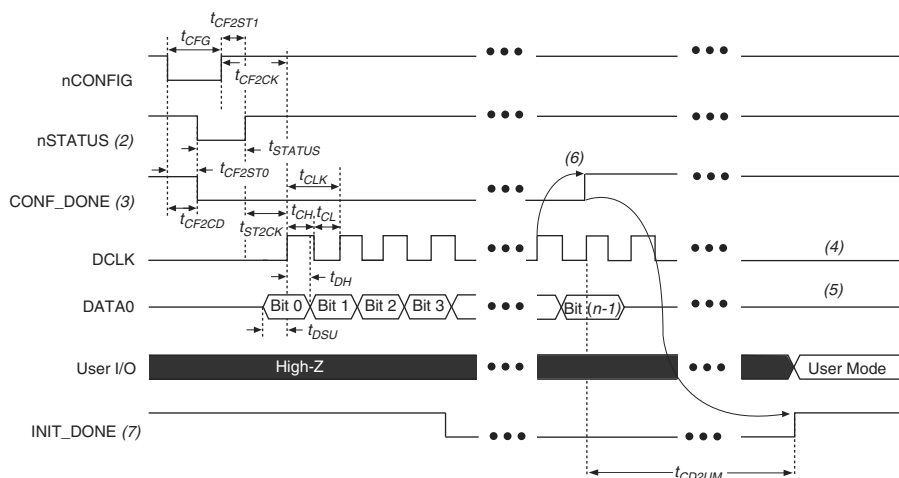Figure 15. PS Configuration Timing Waveform ⁽¹⁾**Notes to Figure 15:**

- (1) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF_DONE are at logic high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (2) After power-up, the Stratix V device holds nSTATUS low for the time of the POR delay.
- (3) After power-up, before and during configuration, CONF_DONE is low.
- (4) Do not leave DCLK floating after configuration. You can drive it high or low, whichever is more convenient.
- (5) DATA0 is available as a user I/O pin after configuration. The state of this pin depends on the dual-purpose pin settings in the **Device and Pins Option**.
- (6) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF_DONE is released high after the Stratix V device receives all the configuration data successfully. After CONF_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (7) After the option bit to enable the INIT_DONE pin is configured into the device, the INIT_DONE goes low.

