



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

| | |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Product Status | Obsolete |
| Number of LABs/CLBs | 185000 |
| Number of Logic Elements/Cells | 490000 |
| Total RAM Bits | 41984000 |
| Number of I/O | 432 |
| Number of Gates | - |
| Voltage - Supply | 0.82V ~ 0.88V |
| Mounting Type | Surface Mount |
| Operating Temperature | 0°C ~ 85°C (TJ) |
| Package / Case | 1517-FBGA (40x40) |
| Supplier Device Package | 1517-FBGA (40x40) |
| Purchase URL | https://www.e-xfl.com/product-detail/intel/5sgxeb5r1f40c2ln |

Table 5 lists the maximum allowed input overshoot voltage and the duration of the overshoot voltage as a percentage of device lifetime. The maximum allowed overshoot duration is specified as a percentage of high time over the lifetime of the device. A DC signal is equivalent to 100% of the duty cycle. For example, a signal that overshoots to 3.95 V can be at 3.95 V for only ~21% over the lifetime of the device; for a device lifetime of 10 years, the overshoot duration amounts to ~2 years.

Table 5. Maximum Allowed Overshoot During Transitions

| Symbol | Description | Condition (V) | Overshoot Duration as % @ $T_J = 100^{\circ}\text{C}$ | Unit |
|------------|------------------|---------------|----------------------------------------------------------|------|
| V_i (AC) | AC input voltage | 3.8 | 100 | % |
| | | 3.85 | 64 | % |
| | | 3.9 | 36 | % |
| | | 3.95 | 21 | % |
| | | 4 | 12 | % |
| | | 4.05 | 7 | % |
| | | 4.1 | 4 | % |
| | | 4.15 | 2 | % |
| | | 4.2 | 1 | % |

Figure 1. Stratix V Device Overshoot Duration



Table 6. Recommended Operating Conditions for Stratix V Devices (Part 2 of 2)

| Symbol | Description | Condition | Min ⁽⁴⁾ | Typ | Max ⁽⁴⁾ | Unit |
|-------------------|------------------------|--------------|--------------------|-----|--------------------|------|
| t _{RAMP} | Power supply ramp time | Standard POR | 200 μ s | — | 100 ms | — |
| | | Fast POR | 200 μ s | — | 4 ms | — |

Notes to Table 6:

- (1) V_{CCPD} must be 2.5 V when V_{CCIO} is 2.5, 1.8, 1.5, 1.35, 1.25 or 1.2 V. V_{CCPD} must be 3.0 V when V_{CCIO} is 3.0 V.
- (2) If you do not use the design security feature in Stratix V devices, connect V_{CCBAT} to a 1.2- to 3.0-V power supply. Stratix V power-on-reset (POR) circuitry monitors V_{CCBAT}. Stratix V devices will not exit POR if V_{CCBAT} stays at logic low.
- (3) C2L and I2L can also be run at 0.90 V for legacy boards that were designed for the C2 and I2 speed grades.
- (4) The power supply value describes the budget for the DC (static) power supply tolerance and does not include the dynamic tolerance requirements. Refer to the PDN tool for the additional budget for the dynamic tolerance requirements.

Table 7 lists the transceiver power supply recommended operating conditions for Stratix V GX, GS, and GT devices.

Table 7. Recommended Transceiver Power Supply Operating Conditions for Stratix V GX, GS, and GT Devices (Part 1 of 2)

| Symbol | Description | Devices | Minimum ⁽⁴⁾ | Typical | Maximum ⁽⁴⁾ | Unit |
|-----------------------------------|-----------------------------------------------------------------------------------------------|------------|------------------------|---------|------------------------|------|
| V _{CCA_GXBL} (1), (3) | Transceiver channel PLL power supply (left side) | GX, GS, GT | 2.85 | 3.0 | 3.15 | V |
| | | | 2.375 | 2.5 | 2.625 | |
| V _{CCA_GXBR} (1), (3) | Transceiver channel PLL power supply (right side) | GX, GS | 2.85 | 3.0 | 3.15 | V |
| | | | 2.375 | 2.5 | 2.625 | |
| V _{CCA_GTBR} | Transceiver channel PLL power supply (right side) | GT | 2.85 | 3.0 | 3.15 | V |
| V _{CCHIP_L} | Transceiver hard IP power supply (left side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver hard IP power supply (left side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| V _{CCHIP_R} | Transceiver hard IP power supply (right side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver hard IP power supply (right side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| V _{CCHSSI_L} | Transceiver PCS power supply (left side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver PCS power supply (left side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| V _{CCHSSI_R} | Transceiver PCS power supply (right side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver PCS power supply (right side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| V _{CCR_GXBL} (2) | Receiver analog power supply (left side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |

Table 18. Single-Ended SSTL, HSTL, and HSUL I/O Reference Voltage Specifications for Stratix V Devices

| I/O Standard | V_{CCIO} (V) | | | V_{REF} (V) | | | V_{TT} (V) | | |
|-------------------------|----------------|------|-------|-------------------|------------------|-------------------|-------------------|------------------|-------------------|
| | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max |
| SSTL-2 Class I, II | 2.375 | 2.5 | 2.625 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $V_{REF} - 0.04$ | V_{REF} | $V_{REF} + 0.04$ |
| SSTL-18 Class I, II | 1.71 | 1.8 | 1.89 | 0.833 | 0.9 | 0.969 | $V_{REF} - 0.04$ | V_{REF} | $V_{REF} + 0.04$ |
| SSTL-15 Class I, II | 1.425 | 1.5 | 1.575 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-135 Class I, II | 1.283 | 1.35 | 1.418 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-125 Class I, II | 1.19 | 1.25 | 1.26 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-12 Class I, II | 1.14 | 1.20 | 1.26 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| HSTL-18 Class I, II | 1.71 | 1.8 | 1.89 | 0.85 | 0.9 | 0.95 | — | $V_{CCIO}/2$ | — |
| HSTL-15 Class I, II | 1.425 | 1.5 | 1.575 | 0.68 | 0.75 | 0.9 | — | $V_{CCIO}/2$ | — |
| HSTL-12 Class I, II | 1.14 | 1.2 | 1.26 | $0.47 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.53 * V_{CCIO}$ | — | $V_{CCIO}/2$ | — |
| HSUL-12 | 1.14 | 1.2 | 1.3 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | — | — | — |

Table 19. Single-Ended SSTL, HSTL, and HSUL I/O Standards Signal Specifications for Stratix V Devices (Part 1 of 2)

| I/O Standard | $V_{IL(DC)}$ (V) | | $V_{IH(DC)}$ (V) | | $V_{IL(AC)}$ (V) | $V_{IH(AC)}$ (V) | V_{OL} (V) | V_{OH} (V) | I_{OI} (mA) | I_{OH} (mA) |
|-------------------------|------------------|-------------------|-------------------|------------------|-------------------|-------------------|------------------|-------------------|---------------|---------------|
| | Min | Max | Min | Max | Max | Min | Max | Min | | |
| SSTL-2 Class I | -0.3 | $V_{REF} - 0.15$ | $V_{REF} + 0.15$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$ | $V_{REF} + 0.31$ | $V_{TT} - 0.608$ | $V_{TT} + 0.608$ | 8.1 | -8.1 |
| SSTL-2 Class II | -0.3 | $V_{REF} - 0.15$ | $V_{REF} + 0.15$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$ | $V_{REF} + 0.31$ | $V_{TT} - 0.81$ | $V_{TT} + 0.81$ | 16.2 | -16.2 |
| SSTL-18 Class I | -0.3 | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$ | $V_{REF} + 0.25$ | $V_{TT} - 0.603$ | $V_{TT} + 0.603$ | 6.7 | -6.7 |
| SSTL-18 Class II | -0.3 | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$ | $V_{REF} + 0.25$ | 0.28 | $V_{CCIO} - 0.28$ | 13.4 | -13.4 |
| SSTL-15 Class I | — | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | — | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$ | 8 | -8 |
| SSTL-15 Class II | — | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | — | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$ | 16 | -16 |
| SSTL-135 Class I, II | — | $V_{REF} - 0.09$ | $V_{REF} + 0.09$ | — | $V_{REF} - 0.16$ | $V_{REF} + 0.16$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$ | — | — |
| SSTL-125 Class I, II | — | $V_{REF} - 0.85$ | $V_{REF} + 0.85$ | — | $V_{REF} - 0.15$ | $V_{REF} + 0.15$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$ | — | — |
| SSTL-12 Class I, II | — | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | — | $V_{REF} - 0.15$ | $V_{REF} + 0.15$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$ | — | — |

-  You typically use the interactive Excel-based Early Power Estimator before designing the FPGA to get a magnitude estimate of the device power. The Quartus II PowerPlay Power Analyzer provides better quality estimates based on the specifics of the design after you complete place-and-route. The PowerPlay Power Analyzer can apply a combination of user-entered, simulation-derived, and estimated signal activities that, when combined with detailed circuit models, yields very accurate power estimates.
-  For more information about power estimation tools, refer to the *PowerPlay Early Power Estimator User Guide* and the *PowerPlay Power Analysis* chapter in the *Quartus II Handbook*.

Table 23. Transceiver Specifications for Stratix V GX and GS Devices ⁽¹⁾ (Part 2 of 7)

| Symbol/ Description | Conditions | Transceiver Speed Grade 1 | | | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--------------------------------------------------------------------|--------------------------------------------------------|----------------------------------|-------------------|------|----------------------------------|-------------------|------|----------------------------------|-----------------------|------|-------------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Spread-spectrum downspread | PCIe | — | 0 to -0.5 | — | — | 0 to -0.5 | — | — | 0 to -0.5 | — | % |
| On-chip termination resistors ⁽²¹⁾ | — | — | 100 | — | — | 100 | — | — | 100 | — | Ω |
| Absolute V_{MAX} ⁽⁵⁾ | Dedicated reference clock pin | — | — | 1.6 | — | — | 1.6 | — | — | 1.6 | V |
| | RX reference clock pin | — | — | 1.2 | — | — | 1.2 | — | — | 1.2 | |
| Absolute V_{MIN} | — | -0.4 | — | — | -0.4 | — | — | -0.4 | — | — | V |
| Peak-to-peak differential input voltage | — | 200 | — | 1600 | 200 | — | 1600 | 200 | — | 1600 | mV |
| V_{ICM} (AC coupled) ⁽³⁾ | Dedicated reference clock pin | 1050/1000/900/850 ⁽²⁾ | | | 1050/1000/900/850 ⁽²⁾ | | | 1050/1000/900/850 ⁽²⁾ | | | mV |
| | RX reference clock pin | 1.0/0.9/0.85 ⁽⁴⁾ | | | 1.0/0.9/0.85 ⁽⁴⁾ | | | 1.0/0.9/0.85 ⁽⁴⁾ | | | V |
| V_{ICM} (DC coupled) | HCSL I/O standard for PCIe reference clock | 250 | — | 550 | 250 | — | 550 | 250 | — | 550 | mV |
| Transmitter REFCLK Phase Noise (622 MHz) ⁽²⁰⁾ | 100 Hz | — | — | -70 | — | — | -70 | — | — | -70 | dBc/Hz |
| | 1 kHz | — | — | -90 | — | — | -90 | — | — | -90 | dBc/Hz |
| | 10 kHz | — | — | -100 | — | — | -100 | — | — | -100 | dBc/Hz |
| | 100 kHz | — | — | -110 | — | — | -110 | — | — | -110 | dBc/Hz |
| | ≥ 1 MHz | — | — | -120 | — | — | -120 | — | — | -120 | dBc/Hz |
| Transmitter REFCLK Phase Jitter (100 MHz) ⁽¹⁷⁾ | 10 kHz to 1.5 MHz (PCIe) | — | — | 3 | — | — | 3 | — | — | 3 | ps (rms) |
| R_{REF} ⁽¹⁹⁾ | — | — | 1800 $\pm 1\%$ | — | — | 1800 $\pm 1\%$ | — | — | 180 0 $\pm 1\%$ | — | Ω |
| Transceiver Clocks | | | | | | | | | | | |
| fixedclk clock frequency | PCIe Receiver Detect | — | 100 or 125 | — | — | 100 or 125 | — | — | 100 or 125 | — | MHz |

Table 23. Transceiver Specifications for Stratix V GX and GS Devices ⁽¹⁾ (Part 6 of 7)

| Symbol/ Description | Conditions | Transceiver Speed Grade 1 | | | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|-----------------------------------------------------------------------|----------------------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Inter-transceiver block transmitter channel-to- channel skew | xN PMA bonded mode | — | — | 500 | — | — | 500 | — | — | 500 | ps |
| CMU PLL | | | | | | | | | | | |
| Supported Data Range | — | 600 | — | 12500 | 600 | — | 12500 | 600 | — | 8500/ 10312.5 (24) | Mbps |
| t _{pll_powerdown} ⁽¹⁵⁾ | — | 1 | — | — | 1 | — | — | 1 | — | — | μs |
| t _{pll_lock} ⁽¹⁶⁾ | — | — | — | 10 | — | — | 10 | — | — | 10 | μs |
| ATX PLL | | | | | | | | | | | |
| Supported Data Rate Range | VCO post-divider L=2 | 8000 | — | 14100 | 8000 | — | 12500 | 8000 | — | 8500/ 10312.5 (24) | Mbps |
| | L=4 | 4000 | — | 7050 | 4000 | — | 6600 | 4000 | — | 6600 | Mbps |
| | L=8 | 2000 | — | 3525 | 2000 | — | 3300 | 2000 | — | 3300 | Mbps |
| | L=8, Local/Central Clock Divider =2 | 1000 | — | 1762.5 | 1000 | — | 1762.5 | 1000 | — | 1762.5 | Mbps |
| t _{pll_powerdown} ⁽¹⁵⁾ | — | 1 | — | — | 1 | — | — | 1 | — | — | μs |
| t _{pll_lock} ⁽¹⁶⁾ | — | — | — | 10 | — | — | 10 | — | — | 10 | μs |
| fPLL | | | | | | | | | | | |
| Supported Data Range | — | 600 | — | 3250/ 3125 ⁽²⁵⁾ | 600 | — | 3250/ 3125 ⁽²⁵⁾ | 600 | — | 3250/ 3125 ⁽²⁵⁾ | Mbps |
| t _{pll_powerdown} ⁽¹⁵⁾ | — | 1 | — | — | 1 | — | — | 1 | — | — | μs |

Table 24 shows the maximum transmitter data rate for the clock network.

Table 24. Clock Network Maximum Data Rate Transmitter Specifications ⁽¹⁾

| Clock Network | ATX PLL | | | CMU PLL ⁽²⁾ | | | fPLL | | |
|--------------------------------|------------------------|--------------------|---------------------------------------|------------------------|--------------------|---------------------------------------|------------------------|--------------------|---------------------------------------|
| | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span |
| x1 ⁽³⁾ | 14.1 | — | 6 | 12.5 | — | 6 | 3.125 | — | 3 |
| x6 ⁽³⁾ | — | 14.1 | 6 | — | 12.5 | 6 | — | 3.125 | 6 |
| x6 PLL Feedback ⁽⁴⁾ | — | 14.1 | Side-wide | — | 12.5 | Side-wide | — | — | — |
| xN (PCIe) | — | 8.0 | 8 | — | 5.0 | 8 | — | — | — |
| xN (Native PHY IP) | 8.0 | 8.0 | Up to 13 channels above and below PLL | 7.99 | 7.99 | Up to 13 channels above and below PLL | 3.125 | 3.125 | Up to 13 channels above and below PLL |
| | — | 8.01 to 9.8304 | Up to 7 channels above and below PLL | | | | | | |

Notes to Table 24:

- (1) Valid data rates below the maximum specified in this table depend on the reference clock frequency and the PLL counter settings. Check the MegaWizard message during the PHY IP instantiation.
- (2) ATX PLL is recommended at 8 Gbps and above data rates for improved jitter performance.
- (3) Channel span is within a transceiver bank.
- (4) Side-wide channel bonding is allowed up to the maximum supported by the PHY IP.

Table 26 shows the approximate maximum data rate using the 10G PCS.

Table 26. Stratix V 10G PCS Approximate Maximum Data Rate ⁽¹⁾

| Mode ⁽²⁾ | Transceiver Speed Grade | PMA Width | 64 | 40 | 40 | 40 | 32 | 32 |
|---------------------|-------------------------|---------------------------------------|--------------|-------|-------|------|----------|-------|
| | | PCS Width | 64 | 66/67 | 50 | 40 | 64/66/67 | 32 |
| FIFO or Register | 1 | C1, C2, C2L, I2, I2L core speed grade | 14.1 | 14.1 | 10.69 | 14.1 | 13.6 | 13.6 |
| | 2 | C1, C2, C2L, I2, I2L core speed grade | 12.5 | 12.5 | 10.69 | 12.5 | 12.5 | 12.5 |
| | | C3, I3, I3L core speed grade | 12.5 | 12.5 | 10.69 | 12.5 | 10.88 | 10.88 |
| | 3 | C1, C2, C2L, I2, I2L core speed grade | 8.5 Gbps | | | | | |
| | | C3, I3, I3L core speed grade | | | | | | |
| | | C4, I4 core speed grade | | | | | | |
| | | I3YY core speed grade | 10.3125 Gbps | | | | | |

Notes to Table 26:

- (1) The maximum data rate is in Gbps.
- (2) The Phase Compensation FIFO can be configured in FIFO mode or register mode. In the FIFO mode, the pointers are not fixed, and the latency can vary. In the register mode the pointers are fixed for low latency.

Table 28. Transceiver Specifications for Stratix V GT Devices (Part 2 of 5) ⁽¹⁾

| Symbol/ Description | Conditions | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------|---------------|--------|------------------------------|---------------|--------|----------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Transmitter REFCLK Phase Noise (622 MHz) ⁽¹⁸⁾ | 100 Hz | — | — | -70 | — | — | -70 | dBc/Hz |
| | 1 kHz | — | — | -90 | — | — | -90 | |
| | 10 kHz | — | — | -100 | — | — | -100 | |
| | 100 kHz | — | — | -110 | — | — | -110 | |
| | ≥ 1 MHz | — | — | -120 | — | — | -120 | |
| Transmitter REFCLK Phase Jitter (100 MHz) ⁽¹⁵⁾ | 10 kHz to 1.5 MHz (PCIe) | — | — | 3 | — | — | 3 | ps (rms) |
| RREF ⁽¹⁷⁾ | — | — | 1800 ± 1% | — | — | 1800 ± 1% | — | Ω |
| Transceiver Clocks | | | | | | | | |
| fixedclk clock frequency | PCIe Receiver Detect | — | 100 or 125 | — | — | 100 or 125 | — | MHz |
| Reconfiguration clock (mgmt_clk_clk) frequency | — | 100 | — | 125 | 100 | — | 125 | MHz |
| Receiver | | | | | | | | |
| Supported I/O Standards | — | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS | | | | | | |
| Data rate (Standard PCS) ⁽²¹⁾ | GX channels | 600 | — | 8500 | 600 | — | 8500 | Mbps |
| Data rate (10G PCS) ⁽²¹⁾ | GX channels | 600 | — | 12,500 | 600 | — | 12,500 | Mbps |
| Data rate | GT channels | 19,600 | — | 28,050 | 19,600 | — | 25,780 | Mbps |
| Absolute V _{MAX} for a receiver pin ⁽³⁾ | GT channels | — | — | 1.2 | — | — | 1.2 | V |
| Absolute V _{MIN} for a receiver pin | GT channels | -0.4 | — | — | -0.4 | — | — | V |
| Maximum peak-to-peak differential input voltage V _{ID} (diff p-p) before device configuration ⁽²⁰⁾ | GT channels | — | — | 1.6 | — | — | 1.6 | V |
| | GX channels | ⁽⁸⁾ | | | | | | |
| Maximum peak-to-peak differential input voltage V _{ID} (diff p-p) after device configuration ⁽¹⁶⁾ , ⁽²⁰⁾ | GT channels V _{CCR_GTB} = 1.05 V (V _{ICM} = 0.65 V) | — | — | 2.2 | — | — | 2.2 | V |
| | GX channels | ⁽⁸⁾ | | | | | | |
| Minimum differential eye opening at receiver serial input pins ⁽⁴⁾ , ⁽²⁰⁾ | GT channels | 200 | — | — | 200 | — | — | mV |
| | GX channels | ⁽⁸⁾ | | | | | | |

Table 28. Transceiver Specifications for Stratix V GT Devices (Part 4 of 5) ⁽¹⁾

| Symbol/ Description | Conditions | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--------------------------------------------------------------------|----------------------------------------------|------------------------------|-----|--------------------------------|------------------------------|-----|--------------------------------|------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Data rate | GT channels | 19,600 | — | 28,050 | 19,600 | — | 25,780 | Mbps |
| Differential on-chip termination resistors | GT channels | — | 100 | — | — | 100 | — | Ω |
| | GX channels | (8) | | | | | | |
| V _{OCM} (AC coupled) | GT channels | — | 500 | — | — | 500 | — | mV |
| | GX channels | (8) | | | | | | |
| Rise/Fall time | GT channels | — | 15 | — | — | 15 | — | ps |
| | GX channels | (8) | | | | | | |
| Intra-differential pair skew | GX channels | (8) | | | | | | |
| Intra-transceiver block transmitter channel-to- channel skew | GX channels | (8) | | | | | | |
| Inter-transceiver block transmitter channel-to- channel skew | GX channels | (8) | | | | | | |
| CMU PLL | | | | | | | | |
| Supported Data Range | — | 600 | — | 12500 | 600 | — | 8500 | Mbps |
| t _{pll_powerdown} ⁽¹³⁾ | — | 1 | — | — | 1 | — | — | μs |
| t _{pll_lock} ⁽¹⁴⁾ | — | — | — | 10 | — | — | 10 | μs |
| ATX PLL | | | | | | | | |
| Supported Data Rate Range for GX Channels | VCO post- divider L=2 | 8000 | — | 12500 | 8000 | — | 8500 | Mbps |
| | L=4 | 4000 | — | 6600 | 4000 | — | 6600 | Mbps |
| | L=8 | 2000 | — | 3300 | 2000 | — | 3300 | Mbps |
| | L=8, Local/Central Clock Divider =2 | 1000 | — | 1762.5 | 1000 | — | 1762.5 | Mbps |
| Supported Data Rate Range for GT Channels | VCO post- divider L=2 | 9800 | — | 14025 | 9800 | — | 12890 | Mbps |
| t _{pll_powerdown} ⁽¹³⁾ | — | 1 | — | — | 1 | — | — | μs |
| t _{pll_lock} ⁽¹⁴⁾ | — | — | — | 10 | — | — | 10 | μs |
| fPLL | | | | | | | | |
| Supported Data Range | — | 600 | — | 3250/ 3.125 ⁽²³⁾ | 600 | — | 3250/ 3.125 ⁽²³⁾ | Mbps |
| t _{pll_powerdown} ⁽¹³⁾ | — | 1 | — | — | 1 | — | — | μs |

Table 28. Transceiver Specifications for Stratix V GT Devices (Part 5 of 5) ⁽¹⁾

| Symbol/ Description | Conditions | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|---------------------------------|------------|------------------------------|-----|-----|------------------------------|-----|-----|------|
| | | Min | Typ | Max | Min | Typ | Max | |
| t_{pll_lock} ⁽¹⁴⁾ | — | — | — | 10 | — | — | 10 | μs |

Notes to Table 28:

- (1) Speed grades shown refer to the PMA Speed Grade in the device ordering code. The maximum data rate could be restricted by the Core/PCS speed grade. Contact your Altera Sales Representative for the maximum data rate specifications in each speed grade combination offered. For more information about device ordering codes, refer to the *Stratix V Device Overview*.
- (2) The reference clock common mode voltage is equal to the VCCR_GXB power supply level.
- (3) The device cannot tolerate prolonged operation at this absolute maximum.
- (4) The differential eye opening specification at the receiver input pins assumes that receiver equalization is disabled. If you enable receiver equalization, the receiver circuitry can tolerate a lower minimum eye opening, depending on the equalization level.
- (5) Refer to Figure 5 for the GT channel AC gain curves. The total effective AC gain is the AC gain minus the DC gain.
- (6) Refer to Figure 6 for the GT channel DC gain curves.
- (7) CFP2 optical modules require the host interface to have the receiver data pins differentially terminated with 100 Ω. The internal OCT feature is available after the Stratix V FPGA configuration is completed. Altera recommends that FPGA configuration is completed before inserting the optical module. Otherwise, minimize unnecessary removal and insertion with unconfigured devices.
- (8) Specifications for this parameter are the same as for Stratix V GX and GS devices. See Table 23 for specifications.
- (9) t_{LTR} is the time required for the receive CDR to lock to the input reference clock frequency after coming out of reset.
- (10) t_{LTD} is time required for the receiver CDR to start recovering valid data after the $rx_is_lockedto\ data$ signal goes high.
- (11) t_{LTD_manual} is the time required for the receiver CDR to start recovering valid data after the $rx_is_lockedto\ data$ signal goes high when the CDR is functioning in the manual mode.
- (12) $t_{LTR_LTD_manual}$ is the time the receiver CDR must be kept in lock to reference (LTR) mode after the $rx_is_lockedto\ ref$ signal goes high when the CDR is functioning in the manual mode.
- (13) $tp11_powerdown$ is the PLL powerdown minimum pulse width.
- (14) $tp11_lock$ is the time required for the transmitter CMU/ATX PLL to lock to the input reference clock frequency after coming out of reset.
- (15) To calculate the REFCLK rms phase jitter requirement for PCIe at reference clock frequencies other than 100 MHz, use the following formula:
REFCLK rms phase jitter at f(MHz) = REFCLK rms phase jitter at 100 MHz × 100/f.
- (16) The maximum peak to peak differential input voltage V_{ID} after device configuration is equal to $4 \times (\text{absolute } V_{MAX} \text{ for receiver pin} - V_{ICM})$.
- (17) For ES devices, RREF is 2000 Ω ±1%.
- (18) To calculate the REFCLK phase noise requirement at frequencies other than 622 MHz, use the following formula: REFCLK phase noise at f(MHz) = REFCLK phase noise at 622 MHz + 20*log(f/622).
- (19) SFP/+ optical modules require the host interface to have RD+/- differentially terminated with 100 Ω. The internal OCT feature is available after the Stratix V FPGA configuration is completed. Altera recommends that FPGA configuration is completed before inserting the optical module. Otherwise, minimize unnecessary removal and insertion with unconfigured devices.
- (20) Refer to Figure 4.
- (21) For oversampling design to support data rates less than the minimum specification, the CDR needs to be in LTR mode only.
- (22) This supply follows VCCR_GXB for both GX and GT channels.
- (23) When you use fPLL as a TXPLL of the transceiver.

Figure 4 shows the differential transmitter output waveform.

Figure 4. Differential Transmitter/Receiver Output/Input Waveform



Figure 5 shows the Stratix V AC gain curves for GT channels.

Figure 5. AC Gain Curves for GT Channels

Figure 6 shows the Stratix V DC gain curves for GT channels.

Figure 6. DC Gain Curves for GT Channels

Transceiver Characterization

This section summarizes the Stratix V transceiver characterization results for compliance with the following protocols:

- Interlaken
- 40G (XLAUI)/100G (CAUI)
- 10GBase-KR
- QSGMII
- XAUI
- SFI
- Gigabit Ethernet (Gbe / GIGE)
- SPAUI
- Serial Rapid IO (SRIO)
- CPRI
- OBSAI
- Hyper Transport (HT)
- SATA
- SAS
- CEI

PLL Specifications

Table 31 lists the Stratix V PLL specifications when operating in both the commercial junction temperature range (0° to 85°C) and the industrial junction temperature range (–40° to 100°C).

Table 31. PLL Specifications for Stratix V Devices (Part 1 of 3)

| Symbol | Parameter | Min | Typ | Max | Unit |
|--------------------------|----------------------------------------------------------------------------------------------------------|-----|-----|--------------------|------|
| f_{IN} | Input clock frequency (C1, C2, C2L, I2, and I2L speed grades) | 5 | — | 800 ⁽¹⁾ | MHz |
| | Input clock frequency (C3, I3, I3L, and I3YY speed grades) | 5 | — | 800 ⁽¹⁾ | MHz |
| | Input clock frequency (C4, I4 speed grades) | 5 | — | 650 ⁽¹⁾ | MHz |
| f_{INPFD} | Input frequency to the PFD | 5 | — | 325 | MHz |
| f_{FINPFD} | Fractional Input clock frequency to the PFD | 50 | — | 160 | MHz |
| f_{VCO} ⁽⁹⁾ | PLL VCO operating range (C1, C2, C2L, I2, I2L speed grades) | 600 | — | 1600 | MHz |
| | PLL VCO operating range (C3, I3, I3L, I3YY speed grades) | 600 | — | 1600 | MHz |
| | PLL VCO operating range (C4, I4 speed grades) | 600 | — | 1300 | MHz |
| $t_{EINDUTY}$ | Input clock or external feedback clock input duty cycle | 40 | — | 60 | % |
| f_{OUT} | Output frequency for an internal global or regional clock (C1, C2, C2L, I2, I2L speed grades) | — | — | 717 ⁽²⁾ | MHz |
| | Output frequency for an internal global or regional clock (C3, I3, I3L speed grades) | — | — | 650 ⁽²⁾ | MHz |
| | Output frequency for an internal global or regional clock (C4, I4 speed grades) | — | — | 580 ⁽²⁾ | MHz |
| f_{OUT_EXT} | Output frequency for an external clock output (C1, C2, C2L, I2, I2L speed grades) | — | — | 800 ⁽²⁾ | MHz |
| | Output frequency for an external clock output (C3, I3, I3L speed grades) | — | — | 667 ⁽²⁾ | MHz |
| | Output frequency for an external clock output (C4, I4 speed grades) | — | — | 553 ⁽²⁾ | MHz |
| $t_{OUTDUTY}$ | Duty cycle for a dedicated external clock output (when set to 50%) | 45 | 50 | 55 | % |
| t_{FCOMP} | External feedback clock compensation time | — | — | 10 | ns |
| $f_{DYCONFIGCLK}$ | Dynamic Configuration Clock used for <code>mgmt_clk</code> and <code>scanclk</code> | — | — | 100 | MHz |
| t_{LOCK} | Time required to lock from the end-of-device configuration or deassertion of <code>areset</code> | — | — | 1 | ms |
| t_{DLOCK} | Time required to lock dynamically (after switchover or reconfiguring any non-post-scale counters/delays) | — | — | 1 | ms |
| f_{CLBW} | PLL closed-loop low bandwidth | — | 0.3 | — | MHz |
| | PLL closed-loop medium bandwidth | — | 1.5 | — | MHz |
| | PLL closed-loop high bandwidth ⁽⁷⁾ | — | 4 | — | MHz |
| t_{PLL_PSERR} | Accuracy of PLL phase shift | — | — | ±50 | ps |
| t_{ARESET} | Minimum pulse width on the <code>areset</code> signal | 10 | — | — | ns |

Figure 7 shows the dynamic phase alignment (DPA) lock time specifications with the DPA PLL calibration option enabled.

Figure 7. DPA Lock Time Specification with DPA PLL Calibration Enabled

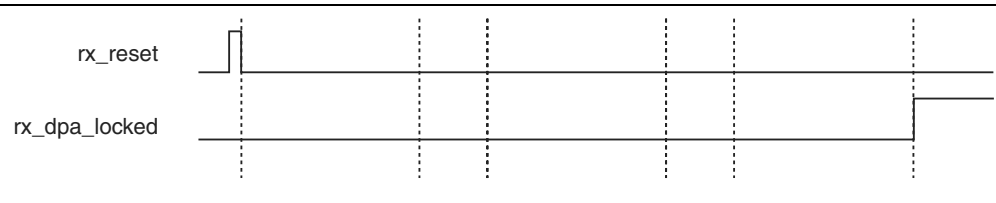


Table 37 lists the DPA lock time specifications for Stratix V devices.

Table 37. DPA Lock Time Specifications for Stratix V GX Devices Only ^{(1), (2), (3)}

| Standard | Training Pattern | Number of Data Transitions in One Repetition of the Training Pattern | Number of Repetitions per 256 Data Transitions ⁽⁴⁾ | Maximum |
|--------------------|----------------------|----------------------------------------------------------------------|---------------------------------------------------------------|----------------------|
| SPI-4 | 00000000001111111111 | 2 | 128 | 640 data transitions |
| Parallel Rapid I/O | 00001111 | 2 | 128 | 640 data transitions |
| | 10010000 | 4 | 64 | 640 data transitions |
| Miscellaneous | 10101010 | 8 | 32 | 640 data transitions |
| | 01010101 | 8 | 32 | 640 data transitions |

Notes to Table 37:

- (1) The DPA lock time is for one channel.
- (2) One data transition is defined as a 0-to-1 or 1-to-0 transition.
- (3) The DPA lock time stated in this table applies to both commercial and industrial grade.
- (4) This is the number of repetitions for the stated training pattern to achieve the 256 data transitions.

Figure 8 shows the LVDS soft-clock data recovery (CDR)/DPA sinusoidal jitter tolerance specification for a data rate ≥ 1.25 Gbps. Table 38 lists the LVDS soft-CDR/DPA sinusoidal jitter tolerance specification for a data rate ≥ 1.25 Gbps.

Figure 8. LVDS Soft-CDR/DPA Sinusoidal Jitter Tolerance Specification for a Data Rate ≥ 1.25 Gbps



Table 40. DQS Phase Offset Delay Per Setting for Stratix V Devices ^{(1), (2)} (Part 2 of 2)

| Speed Grade | Min | Max | Unit |
|-------------|-----|-----|------|
| C4,I4 | 8 | 16 | ps |

Notes to Table 40:

- (1) The typical value equals the average of the minimum and maximum values.
- (2) The delay settings are linear with a cumulative delay variation of 40 ps for all speed grades. For example, when using a –2 speed grade and applying a 10-phase offset setting to a 90° phase shift at 400 MHz, the expected average cumulative delay is $[625 \text{ ps} + (10 \times 10 \text{ ps}) \pm 20 \text{ ps}] = 725 \text{ ps} \pm 20 \text{ ps}$.

Table 41 lists the DQS phase shift error for Stratix V devices.

Table 41. DQS Phase Shift Error Specification for DLL-Delayed Clock ($t_{\text{DQS_PSERR}}$) for Stratix V Devices ⁽¹⁾

| Number of DQS Delay Buffers | C1 | C2, C2L, I2, I2L | C3, I3, I3L, I3YY | C4,I4 | Unit |
|-----------------------------|-----|------------------|-------------------|-------|------|
| 1 | 28 | 28 | 30 | 32 | ps |
| 2 | 56 | 56 | 60 | 64 | ps |
| 3 | 84 | 84 | 90 | 96 | ps |
| 4 | 112 | 112 | 120 | 128 | ps |

Notes to Table 41:

- (1) This error specification is the absolute maximum and minimum error. For example, skew on three DQS delay buffers in a –2 speed grade is $\pm 78 \text{ ps}$ or $\pm 39 \text{ ps}$.

Table 42 lists the memory output clock jitter specifications for Stratix V devices.

Table 42. Memory Output Clock Jitter Specification for Stratix V Devices ^{(1), (Part 1 of 2)} ^{(2), (3)}

| Clock Network | Parameter | Symbol | C1 | | C2, C2L, I2, I2L | | C3, I3, I3L, I3YY | | C4,I4 | | Unit |
|---------------|------------------------------|------------------------|------|-----|------------------|-----|-------------------|------|-------|------|------|
| | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| Regional | Clock period jitter | $t_{\text{JIT(per)}}$ | –50 | 50 | –50 | 50 | –55 | 55 | –55 | 55 | ps |
| | Cycle-to-cycle period jitter | $t_{\text{JIT(cc)}}$ | –100 | 100 | –100 | 100 | –110 | 110 | –110 | 110 | ps |
| | Duty cycle jitter | $t_{\text{JIT(duty)}}$ | –50 | 50 | –50 | 50 | –82.5 | 82.5 | –82.5 | 82.5 | ps |
| Global | Clock period jitter | $t_{\text{JIT(per)}}$ | –75 | 75 | –75 | 75 | –82.5 | 82.5 | –82.5 | 82.5 | ps |
| | Cycle-to-cycle period jitter | $t_{\text{JIT(cc)}}$ | –150 | 150 | –150 | 150 | –165 | 165 | –165 | 165 | ps |
| | Duty cycle jitter | $t_{\text{JIT(duty)}}$ | –75 | 75 | –75 | 75 | –90 | 90 | –90 | 90 | ps |

FPP Configuration Timing when DCLK-to-DATA [] = 1

Figure 12 shows the timing waveform for FPP configuration when using a MAX II or MAX V device as an external host. This waveform shows timing when the DCLK-to-DATA [] ratio is 1.

Figure 12. FPP Configuration Timing Waveform When the DCLK-to-DATA[] Ratio is 1 ^{(1), (2)}



Notes to Figure 12:

- (1) Use this timing waveform when the DCLK-to-DATA [] ratio is 1.
- (2) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF_DONE are at logic-high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (3) After power-up, the Stratix V device holds nSTATUS low for the time of the POR delay.
- (4) After power-up, before and during configuration, CONF_DONE is low.
- (5) Do not leave DCLK floating after configuration. DCLK is ignored after configuration is complete. It can toggle high or low if required.
- (6) For FPP x16, use DATA [15..0]. For FPP x8, use DATA [7..0]. DATA [31..0] are available as a user I/O pin after configuration. The state of this pin depends on the dual-purpose pin settings.
- (7) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF_DONE is released high when the Stratix V device receives all the configuration data successfully. After CONF_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (8) After the option bit to enable the INIT_DONE pin is configured into the device, the INIT_DONE goes low.

Remote System Upgrades

Table 56 lists the timing parameter specifications for the remote system upgrade circuitry.

Table 56. Remote System Upgrade Circuitry Timing Specifications

| Parameter | Minimum | Maximum | Unit |
|--------------------------|---------|---------|------|
| $t_{RU_nCONFIG}^{(1)}$ | 250 | — | ns |
| $t_{RU_nRSTIMER}^{(2)}$ | 250 | — | ns |

Notes to Table 56:

- (1) This is equivalent to strobing the reconfiguration input of the ALTREMOTE_UPDATE megafunction high for the minimum timing specification. For more information, refer to the Remote System Upgrade State Machine section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.
- (2) This is equivalent to strobing the reset_timer input of the ALTREMOTE_UPDATE megafunction high for the minimum timing specification. For more information, refer to the User Watchdog Timer section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.

User Watchdog Internal Circuitry Timing Specification

Table 57 lists the operating range of the 12.5-MHz internal oscillator.

Table 57. 12.5-MHz Internal Oscillator Specifications

| Minimum | Typical | Maximum | Units |
|---------|---------|---------|-------|
| 5.3 | 7.9 | 12.5 | MHz |

I/O Timing

Altera offers two ways to determine I/O timing—the Excel-based I/O Timing and the Quartus II Timing Analyzer.

Excel-based I/O timing provides pin timing performance for each device density and speed grade. The data is typically used prior to designing the FPGA to get an estimate of the timing budget as part of the link timing analysis. The Quartus II Timing Analyzer provides a more accurate and precise I/O timing data based on the specifics of the design after you complete place-and-route.



You can download the Excel-based I/O Timing spreadsheet from the Stratix V Devices Documentation web page.

Programmable IOE Delay

Table 58 lists the Stratix V IOE programmable delay settings.

Table 58. IOE Programmable Delay for Stratix V Devices (Part 1 of 2)

| Parameter (1) | Available Settings | Min Offset (2) | Fast Model | | Slow Model | | | | | | | |
|------------------|-----------------------|----------------------|------------|------------|------------|-------|-------|-------|-------|-------------|-------|------|
| | | | Industrial | Commercial | C1 | C2 | C3 | C4 | I2 | I3, I3YY | I4 | Unit |
| D1 | 64 | 0 | 0.464 | 0.493 | 0.838 | 0.838 | 0.924 | 1.011 | 0.844 | 0.921 | 1.006 | ns |
| D2 | 32 | 0 | 0.230 | 0.244 | 0.415 | 0.415 | 0.459 | 0.503 | 0.417 | 0.456 | 0.500 | ns |

Table 60. Glossary (Part 4 of 4)

| Letter | Subject | Definitions |
|----------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V | $V_{CM(DC)}$ | DC common mode input voltage. |
| | V_{ICM} | Input common mode voltage—The common mode of the differential signal at the receiver. |
| | V_{ID} | Input differential voltage swing—The difference in voltage between the positive and complementary conductors of a differential transmission at the receiver. |
| | $V_{DIF(AC)}$ | AC differential input voltage—Minimum AC input differential voltage required for switching. |
| | $V_{DIF(DC)}$ | DC differential input voltage— Minimum DC input differential voltage required for switching. |
| | V_{IH} | Voltage input high—The minimum positive voltage applied to the input which is accepted by the device as a logic high. |
| | $V_{IH(AC)}$ | High-level AC input voltage |
| | $V_{IH(DC)}$ | High-level DC input voltage |
| | V_{IL} | Voltage input low—The maximum positive voltage applied to the input which is accepted by the device as a logic low. |
| | $V_{IL(AC)}$ | Low-level AC input voltage |
| | $V_{IL(DC)}$ | Low-level DC input voltage |
| | V_{OCM} | Output common mode voltage—The common mode of the differential signal at the transmitter. |
| | V_{OD} | Output differential voltage swing—The difference in voltage between the positive and complementary conductors of a differential transmission at the transmitter. |
| | V_{SWING} | Differential input voltage |
| | V_X | Input differential cross point voltage |
| | V_{OX} | Output differential cross point voltage |
| W | W | High-speed I/O block—clock boost factor |
| X | — | — |
| Y | | |
| Z | | |

Document Revision History

Table 61 lists the revision history for this chapter.

Table 61. Document Revision History (Part 1 of 3)

| Date | Version | Changes |
|---------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| June 2018 | 3.9 | <ul style="list-style-type: none"> Added the “Stratix V Device Overshoot Duration” figure. |
| April 2017 | 3.8 | <ul style="list-style-type: none"> Added a footnote to the “High-Speed I/O Specifications for Stratix V Devices” table. Changed the minimum value for t_{CD2UMC} in the “PS Timing Parameters for Stratix V Devices” table. Changed the condition for $100\text{-}\Omega$ R_D in the “OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices” table. Changed the minimum value for t_{CD2UMC} in the “AS Timing Parameters for AS ‘1 and AS ‘4 Configurations in Stratix V Devices” table Changed the minimum value for t_{CD2UMC} in the “FPP Timing Parameters for Stratix V Devices When the DCLK-to-DATA[] Ratio is >1” table. Changed the minimum value for t_{CD2UMC} in the “FPP Timing Parameters for Stratix V Devices When the DCLK-to-DATA[] Ratio is >1” table. Changed the minimum number of clock cycles value in the “Initialization Clock Source Option and the Maximum Frequency” table. |
| June 2016 | 3.7 | <ul style="list-style-type: none"> Added the V_{ID} minimum specification for LVPECL in the “Differential I/O Standard Specifications for Stratix V Devices” table Added the I_{OUT} specification to the “Absolute Maximum Ratings for Stratix V Devices” table. |
| December 2015 | 3.6 | <ul style="list-style-type: none"> Added a footnote to the “High-Speed I/O Specifications for Stratix V Devices” table. |
| December 2015 | 3.5 | <ul style="list-style-type: none"> Changed the transmitter, receiver, and ATX PLL data rate specifications in the “Transceiver Specifications for Stratix V GX and GS Devices” table. Changed the configuration .rbf sizes in the “Uncompressed .rbf Sizes for Stratix V Devices” table. |
| July 2015 | 3.4 | <ul style="list-style-type: none"> Changed the data rate specification for transceiver speed grade 3 in the following tables: <ul style="list-style-type: none"> “Transceiver Specifications for Stratix V GX and GS Devices” “Stratix V Standard PCS Approximate Maximum Date Rate” “Stratix V 10G PCS Approximate Maximum Data Rate” Changed the conditions for reference clock rise and fall time, and added a note to the “Transceiver Specifications for Stratix V GX and GS Devices” table. Added a note to the “Minimum differential eye opening at receiver serial input pins” specification in the “Transceiver Specifications for Stratix V GX and GS Devices” table. Changed the t_{CO} maximum value in the “AS Timing Parameters for AS ‘1 and AS ‘4 Configurations in Stratix V Devices” table. Removed the CDR ppm tolerance specification from the “Transceiver Specifications for Stratix V GX and GS Devices” table. |