



Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

### Details

|                                |                                                                                                                                                                               |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                                      |
| Number of LABs/CLBs            | 10000                                                                                                                                                                         |
| Number of Logic Elements/Cells | 40000                                                                                                                                                                         |
| Total RAM Bits                 | 4075520                                                                                                                                                                       |
| Number of I/O                  | 604                                                                                                                                                                           |
| Number of Gates                | -                                                                                                                                                                             |
| Voltage - Supply               | 0.95V ~ 1.26V                                                                                                                                                                 |
| Mounting Type                  | Surface Mount                                                                                                                                                                 |
| Operating Temperature          | -40°C ~ 105°C (TJ)                                                                                                                                                            |
| Package / Case                 | 1152-BBGA, FCBGA                                                                                                                                                              |
| Supplier Device Package        | 1152-FCBGA (35x35)                                                                                                                                                            |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfsc3ga40e-7fcn1152c">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfsc3ga40e-7fcn1152c</a> |

## Modes of Operation

Each Slice is capable of four modes of operation: Logic, Ripple, RAM and ROM. Table 2-2 lists the modes and the capability of the Slice blocks.

**Table 2-2. Slice Modes**

|           | Logic              | Ripple                | RAM                  | ROM      |
|-----------|--------------------|-----------------------|----------------------|----------|
| PFU Slice | LUT 4x2 or LUT 5x1 | 2-bit Arithmetic Unit | SPR 16x2<br>DPR 16x2 | ROM 16x2 |

## Logic Mode

In this mode, the LUTs in each Slice are configured as combinatorial lookup tables. A LUT4 can have 16 possible input combinations. Any logic function with four inputs can be generated by programming this lookup table. Since there are two LUT4s per Slice, a LUT5 can be constructed within one Slice. Larger lookup tables such as LUT6, LUT7 and LUT8 can be constructed by concatenating other Slices in the PFU.

## Ripple Mode

Ripple mode allows the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each Slice:

- Addition 2-bit
- Subtraction 2-bit
- Up counter 2-bit
- Down counter 2-bit
- Comparator functions of A and B inputs
  - A greater-than-or-equal-to B
  - A not-equal-to B
  - A less-than-or-equal-to B

Ripple Mode includes an optional configuration that performs arithmetic using fast carry chain methods. In this configuration (also referred to as CCU2 mode) two additional signals, Carry Generate and Carry Propagate, are generated on a per slice basis to allow fast arithmetic functions to be constructed by concatenating Slices.

## RAM Mode

In this mode, distributed RAM can be constructed using each LUT block as a 16x1-bit memory. Through the combination of LUTs and Slices, a variety of different memories can be constructed.

The Lattice design tools support the creation of a variety of different size memories. Where appropriate, the software will construct these using distributed memory primitives that represent the capabilities of the Slice. Table 2-3 shows the number of Slices required to implement different distributed RAM primitives. Dual port memories involve the pairing of two Slices, one Slice functions as the read-write port. The other companion Slice supports the read-only port. For more information on RAM mode, please see details of additional technical documentation at the end of this data sheet.

**Table 2-3. Number of Slices Required For Implementing Distributed RAM**

|                  | SPR16x2 | DPR16x2 |
|------------------|---------|---------|
| Number of Slices | 1       | 2       |

Note: SPR = Single Port RAM, DPR = Dual Port RAM

## ROM Mode

The ROM mode uses the same principal as the RAM modes, but without the Write port. Pre-loading is accomplished through the programming interface during configuration.

Figure 2-26. LatticeSC Banks

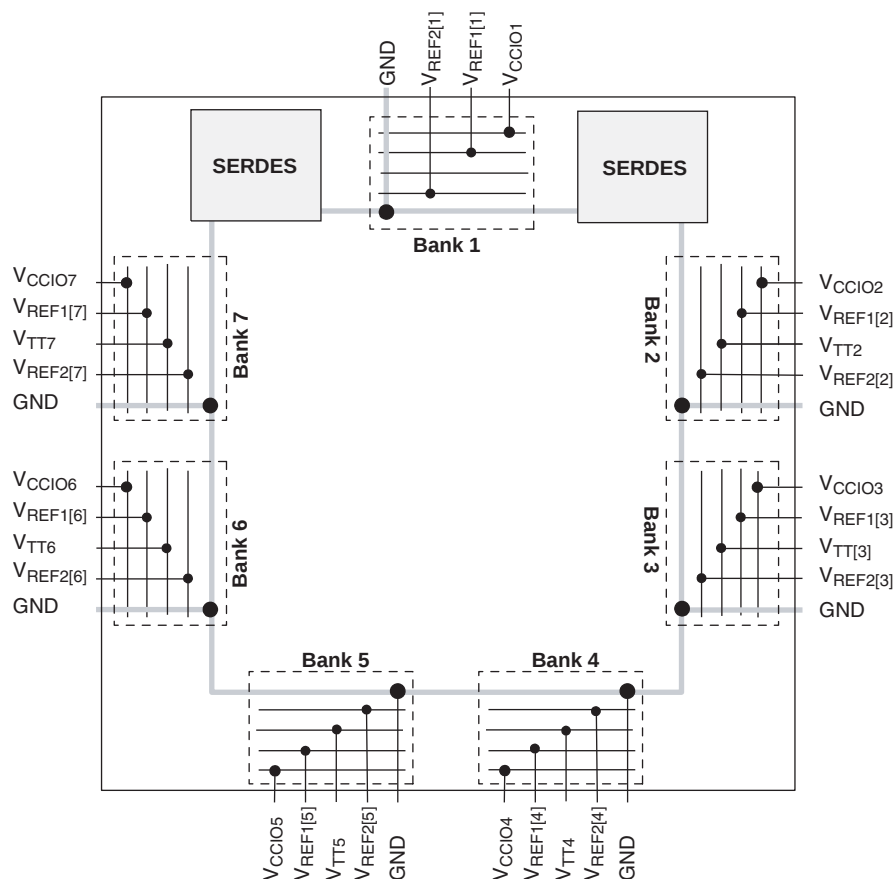


Table 2-7. Maximum Number of I/Os Per Bank in LatticeSC Family

| Device | LFSC/M15 | LFSC/M25 | LFSC/M40 | LFSC/M80 | LFSC/M115 |
|--------|----------|----------|----------|----------|-----------|
| Bank1  | 104      | 80       | 136      | 80       | 136       |
| Bank2  | 28       | 36       | 60       | 96       | 136       |
| Bank3  | 60       | 84       | 96       | 132      | 156       |
| Bank4  | 72       | 100      | 124      | 184      | 208       |
| Bank5  | 72       | 100      | 124      | 184      | 208       |
| Bank6  | 60       | 84       | 96       | 132      | 156       |
| Bank7  | 28       | 36       | 60       | 96       | 136       |

Note: Not all the I/Os of the Banks are available in all the packages

The LatticeSC devices contain three types of PURESPEED I/O buffers:

#### 1. Left and Right Sides (Banks 2, 3, 6 and 7)

These buffers can support LVCMOS standards up to 2.5V. A differential output driver (for LVDS and RSFS) is provided on all primary PIO pairs (A and B) and differential receivers are available on all pairs. Complimentary drivers are available. Adaptive input logic is available on PIOs A or C.

#### 2. Top Side (Bank 1)

These buffers can support LVCMOS standards up to 3.3V, including PCI33, PCI-X33 and SSTL-33. Differential receivers are provided on all PIO pairs but differential drivers for LVDS and RSFS are not available. Adaptive input logic is not available on this side. Complimentary output drivers are available.

---

## Density Shifting

The LatticeSC family has been designed to ensure that different density devices in the same package have the same pin-out. Furthermore, the architecture ensures a high success rate when performing design migration from lower density parts to higher density parts. In many cases, it is also possible to shift a lower utilization design targeted for a high-density device to a lower density device. However, the exact details of the final resource utilization will impact the likely success in each case.


**LatticeSC/M Family Timing Adders (Continued)**

Over Recommended Operating Conditions at VCC = 1.2V +/- 5%

| Buffer Type             | Description                   | -7     |        | -6     |        | -5     |        | Units |
|-------------------------|-------------------------------|--------|--------|--------|--------|--------|--------|-------|
|                         |                               | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   |       |
| GTLPLUS15               | GTLPLUS15                     | -0.013 | -0.017 | 0.012  | 0.004  | 0.037  | 0.024  | ns    |
| GTL12                   | GTL12                         | -0.063 | -0.071 | -0.007 | -0.048 | 0.056  | -0.032 | ns    |
| <b>Output Adjusters</b> |                               |        |        |        |        |        |        |       |
| LVDS                    | LVDS                          | 0.708  | 0.854  | 0.856  | 1.021  | 1.005  | 1.189  | ns    |
| RSDS                    | RSDS                          | 0.708  | 0.854  | 0.856  | 1.021  | 1.005  | 1.189  | ns    |
| BLVDS25                 | BLVDS                         | -0.129 | 0.05   | -0.136 | 0.069  | -0.136 | 0.083  | ns    |
| MLVDS25                 | MLVDS                         | -0.059 | 0.059  | -0.057 | 0.096  | -0.054 | 0.133  | ns    |
| LVPECL33                | LVPECL                        | -0.334 | -0.181 | -0.325 | -1.389 | -0.315 | -2.598 | ns    |
| HSTL18_I                | HSTL_18 class I               | 0.132  | 0.209  | 0.153  | 0.24   | 0.175  | 0.272  | ns    |
| HSTL18_II               | HSTL_18 class II              | 0.24   | 0.176  | 0.268  | 0.255  | 0.298  | 0.333  | ns    |
| HSTL18D_I               | Differential HSTL 18 class I  | 0.132  | 0.209  | 0.153  | 0.24   | 0.175  | 0.272  | ns    |
| HSTL18D_II              | Differential HSTL 18 class II | 0.24   | 0.176  | 0.268  | 0.255  | 0.298  | 0.333  | ns    |
| HSTL15_I                | HSTL_15 class I               | 0.096  | 0.172  | 0.112  | 0.198  | 0.129  | 0.224  | ns    |
| HSTL15_II               | HSTL_15 class II              | 0.208  | 0.131  | 0.233  | 0.203  | 0.259  | 0.275  | ns    |
| HSTL15D_I               | Differential HSTL 15 class I  | 0.096  | 0.172  | 0.112  | 0.198  | 0.129  | 0.224  | ns    |
| HSTL15D_II              | Differential HSTL 15 class II | 0.208  | 0.131  | 0.233  | 0.203  | 0.259  | 0.275  | ns    |
| SSTL33_I                | SSTL_3 class I                | 0.133  | 0.177  | 0.11   | 0.166  | 0.088  | 0.154  | ns    |
| SSTL33_II               | SSTL_3 class II               | 0.173  | 0.247  | 0.164  | 0.253  | 0.156  | 0.258  | ns    |
| SSTL33D_I               | Differential SSTL_3 class I   | 0.133  | 0.177  | 0.11   | 0.166  | 0.088  | 0.154  | ns    |
| SSTL33D_II              | Differential SSTL_3 class II  | 0.173  | 0.247  | 0.164  | 0.253  | 0.156  | 0.258  | ns    |
| SSTL25_I                | SSTL_2 class I                | 0.215  | 0.125  | 0.239  | 0.228  | 0.264  | 0.331  | ns    |
| SSTL25_II               | SSTL_2 class II               | 0.277  | 0.181  | 0.311  | 0.284  | 0.345  | 0.387  | ns    |
| SSTL25D_I               | Differential SSTL_2 class I   | 0.215  | 0.125  | 0.239  | 0.228  | 0.264  | 0.331  | ns    |
| SSTL25D_II              | Differential SSTL_2 class II  | 0.277  | 0.181  | 0.311  | 0.284  | 0.345  | 0.387  | ns    |
| SSTL18_I                | SSTL_2 class I                | 0.16   | 0.081  | 0.179  | 0.173  | 0.199  | 0.265  | ns    |
| SSTL18_II               | SSTL_2 class II               | 0.238  | 0.15   | 0.263  | 0.244  | 0.295  | 0.338  | ns    |
| SSTL18D_I               | Differential SSTL_2 class I   | 0.16   | 0.081  | 0.179  | 0.173  | 0.199  | 0.265  | ns    |
| SSTL18D_II              | Differential SSTL_2 class II  | 0.238  | 0.15   | 0.263  | 0.244  | 0.295  | 0.338  | ns    |
| LVTTTL33_8mA            | LVTTTL 8mA drive              | -0.346 | -0.165 | -0.496 | -0.296 | -0.646 | -0.428 | ns    |
| LVTTTL33_16mA           | LVTTTL 16mA drive             | -0.11  | -0.18  | -0.218 | -0.32  | -0.325 | -0.46  | ns    |
| LVTTTL33_24mA           | LVTTTL 24mA drive             | -0.012 | -0.18  | -0.099 | -0.321 | -0.185 | -0.463 | ns    |
| LVC MOS33_8mA           | LVC MOS 3.3 8mA drive         | -0.346 | -0.165 | -0.496 | -0.296 | -0.646 | -0.428 | ns    |
| LVC MOS33_16mA          | LVC MOS 3.3 16mA drive        | -0.11  | -0.18  | -0.218 | -0.32  | -0.325 | -0.46  | ns    |
| LVC MOS33_24mA          | LVC MOS 3.3 24mA drive        | -0.012 | -0.18  | -0.099 | -0.321 | -0.185 | -0.463 | ns    |
| LVC MOS25_4mA           | LVC MOS 2.5 4mA drive         | -0.174 | 0.004  | -0.195 | 0.002  | -0.215 | 0      | ns    |
| LVC MOS25_8mA           | LVC MOS 2.5 8mA drive         | 0      | 0      | 0      | 0      | 0      | 0      | ns    |
| LVC MOS25_12mA          | LVC MOS 2.5 12mA drive        | 0.094  | -0.025 | 0.107  | 0.096  | 0.12   | 0.216  | ns    |
| LVC MOS25_16mA          | LVC MOS 2.5 16mA drive        | 0.145  | -0.054 | 0.162  | 0.063  | 0.181  | 0.179  | ns    |
| LVC MOS25_OD            | LVC MOS 2.5 open drain        | 0.073  | -0.125 | 0.081  | -0.081 | 0.091  | -0.09  | ns    |
| LVC MOS18_4mA           | LVC MOS 1.8 4mA drive         | -0.278 | -0.099 | -0.312 | -0.115 | -0.345 | -0.131 | ns    |
| LVC MOS18_8mA           | LVC MOS 1.8 8mA drive         | -0.073 | -0.078 | -0.078 | -0.084 | -0.083 | -0.089 | ns    |

# EBR Memory Timing Diagrams

Figure 3-6. Read Mode

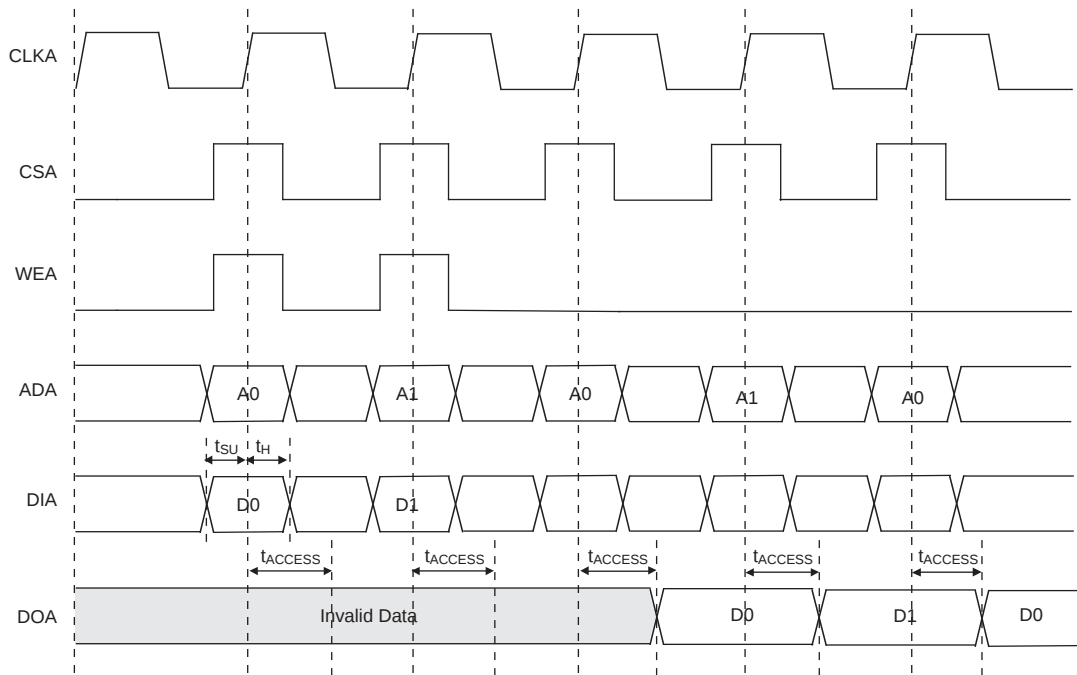

Note: Input data and address are registered at the positive edge of the clock and output data appears after the positive of the clock.

Figure 3-7. Read Mode with Input Registers Only

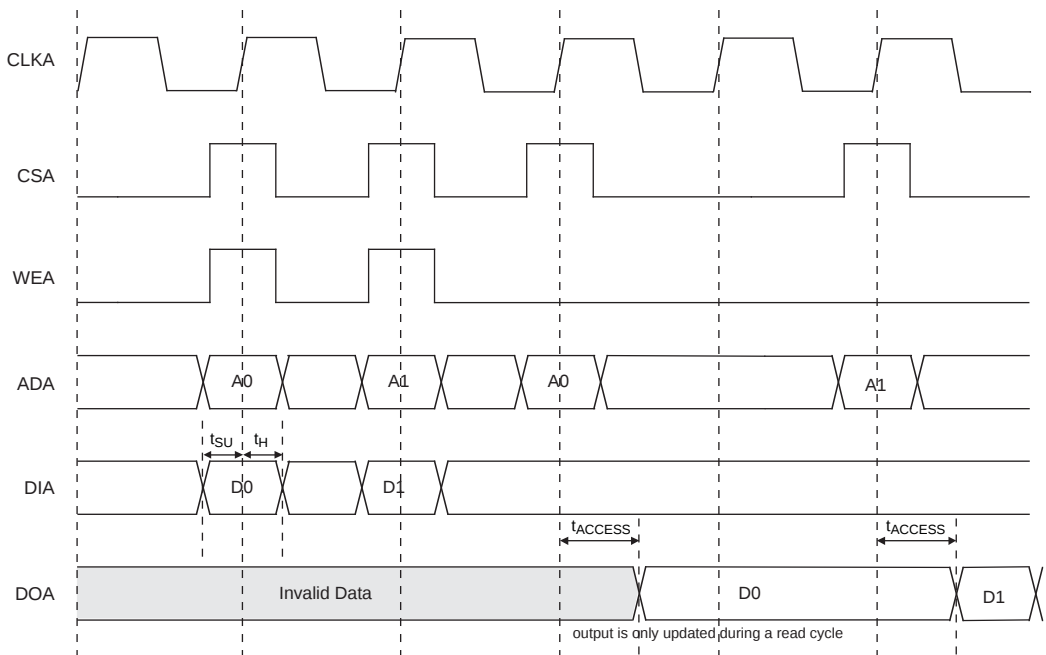


Figure 3-12. Waveforms First Read after Full Flag


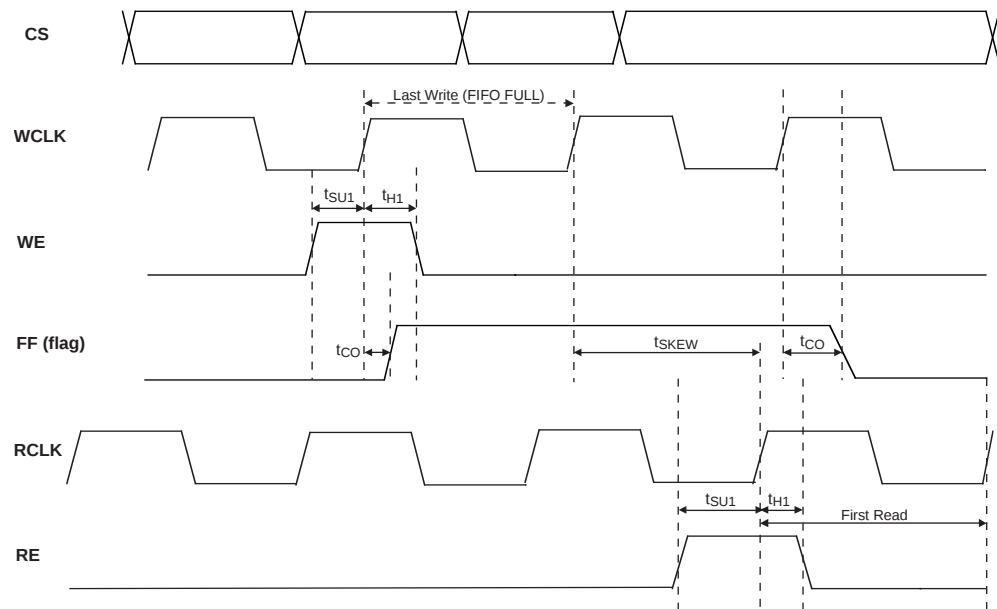


Figure 3-13. Waveform First Write after Empty Flag

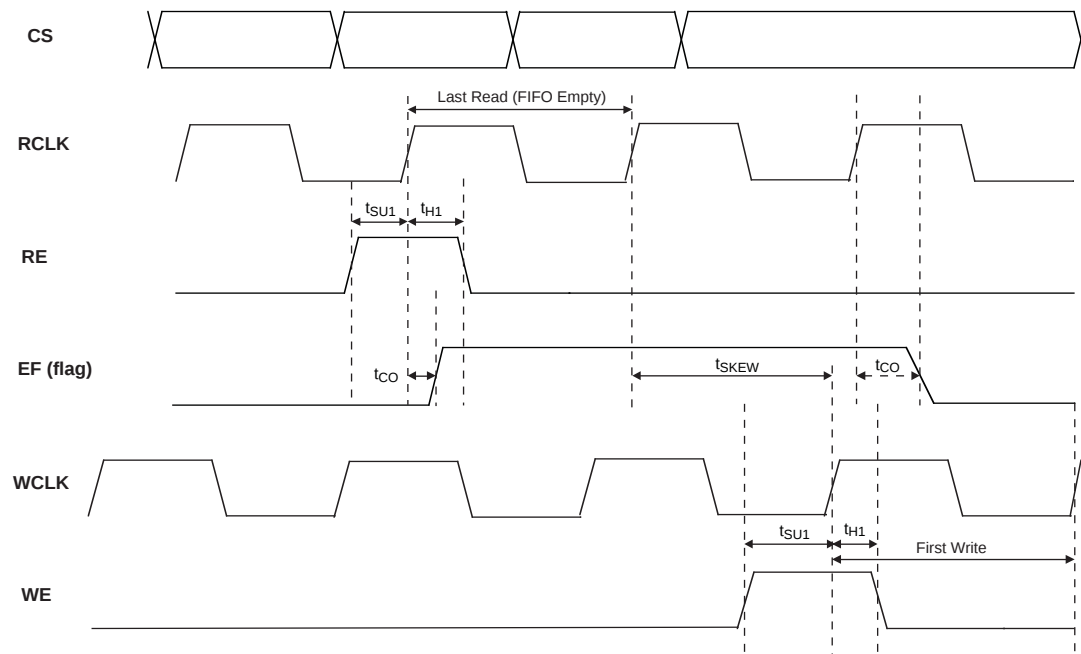

**LFSC/M15 Logic Signal Connections: 256 fpBGA<sup>1,2</sup> (Cont.)**

| Ball Number | LFSC/M15      |            |                             |
|-------------|---------------|------------|-----------------------------|
|             | Ball Function | VCCIO Bank | Dual Function               |
| N12         | PB39C         | 4          |                             |
| T15         | PB40A         | 4          | PCLKT4_3                    |
| R16         | PB40B         | 4          | PCLKC4_3                    |
| L12         | PB43A         | 4          |                             |
| M12         | PB43B         | 4          |                             |
| P16         | PB44A         | 4          |                             |
| N16         | PB44B         | 4          |                             |
| R14         | PB47C         | 4          | VREF1_4                     |
| P15         | PB48A         | 4          | LRC_DLLT_IN_C/LRC_DLLT_FB_D |
| M13         | PB48B         | 4          | LRC_DLLC_IN_C/LRC_DLLC_FB_D |
| N13         | PB49A         | 4          | LRC_PLLT_IN_A/LRC_PLLT_FB_B |
| P14         | PB49B         | 4          | LRC_PLLC_IN_A/LRC_PLLC_FB_B |
| M16         | PR45B         | 3          | LRC_DLLC_IN_F/LRC_DLLC_FB_E |
| L16         | PR45A         | 3          | LRC_DLLT_IN_F/LRC_DLLT_FB_E |
| M14         | PR43B         | 3          |                             |
| M15         | PR43A         | 3          |                             |
| K16         | PR41D         | 3          | VREF2_3                     |
| J16         | PR37B         | 3          |                             |
| H16         | PR37A         | 3          |                             |
| L13         | PR35D         | 3          | DIFFR_3                     |
| L14         | PR35B         | 3          |                             |
| L15         | PR35A         | 3          |                             |
| K12         | PR31C         | 3          | VREF1_3                     |
| J13         | PR28D         | 3          | PCLKC3_2                    |
| K13         | PR28C         | 3          | PCLKT3_2                    |
| H15         | PR28B         | 3          |                             |
| F16         | PR28A         | 3          |                             |
| J11         | PR26D         | 3          | PCLKC3_1                    |
| J12         | PR26C         | 3          | PCLKT3_1                    |
| J15         | PR26B         | 3          | PCLKC3_0                    |
| J14         | PR26A         | 3          | PCLKT3_0                    |
| E16         | PR24D         | 2          | PCLKC2_2                    |
| D16         | PR24C         | 2          | PCLKT2_2                    |
| H11         | PR24B         | 2          | PCLKC2_0                    |
| H12         | PR24A         | 2          | PCLKT2_0                    |
| H13         | PR23B         | 2          | PCLKC2_1                    |
| H14         | PR23A         | 2          | PCLKT2_1                    |
| G12         | PR22D         | 2          | DIFFR_2                     |
| G13         | PR22C         | 2          | VREF1_2                     |
| F8          | PR22B         | 2          |                             |
| F9          | PR22A         | 2          |                             |
| G16         | PR18D         | 2          | VREF2_2                     |
| F15         | PR17B         | 2          | URC_DLLC_IN_C/URC_DLLC_FB_D |

**LFSC/M15 Logic Signal Connections: 256 fpBGA<sup>1,2</sup> (Cont.)**

| Ball Number | LFSC/M15      |            |               |
|-------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function |
| J9          | VCC           | -          |               |
| K8          | VCC           | -          |               |
| F6          | VCC12         | -          |               |
| F11         | VCC12         | -          |               |
| L11         | VCC12         | -          |               |
| L6          | VCC12         | -          |               |
| K7          | VCC12         | -          |               |
| K10         | VCC12         | -          |               |
| F10         | VCCAUX        | -          |               |
| F7          | VCCAUX        | -          |               |
| T1          | GND           | -          |               |
| G11         | VCCAUX        | -          |               |
| K11         | VCCAUX        | -          |               |
| L10         | VCCAUX        | -          |               |
| L9          | VCCAUX        | -          |               |
| L7          | VCCAUX        | -          |               |
| L8          | VCCAUX        | -          |               |
| T16         | GND           | -          |               |
| G6          | VCCAUX        | -          |               |
| K6          | VCCAUX        | -          |               |
| B13         | VCCIO1        | -          |               |
| D11         | VCCIO1        | -          |               |
| D14         | VCCIO1        | -          |               |
| F12         | VCCIO2        | -          |               |
| G15         | VCCIO2        | -          |               |
| K14         | VCCIO3        | -          |               |
| N15         | VCCIO3        | -          |               |
| M11         | VCCIO4        | -          |               |
| P13         | VCCIO4        | -          |               |
| R10         | VCCIO4        | -          |               |
| N6          | VCCIO5        | -          |               |
| P7          | VCCIO5        | -          |               |
| R4          | VCCIO5        | -          |               |
| K2          | VCCIO6        | -          |               |
| N3          | VCCIO6        | -          |               |
| F4          | VCCIO7        | -          |               |
| G3          | VCCIO7        | -          |               |
| D4          | VCC12         | -          |               |
| D7          | VCC12         | -          |               |
| D5          | VCC12         | -          |               |
| D6          | VCC12         | -          |               |

1. Differential pair grouping within a PIC is A (True) and B (Complement) and C (True) and D (Complement).

2. The LatticeSC/M15 in a 256-pin package does not support an MPI interface.

**LFSC/M15, LFSC/M25 Logic Signal Connections: 900 fpBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M15      |            |                             | LFSC/M25      |            |                             |
|-------------|---------------|------------|-----------------------------|---------------|------------|-----------------------------|
|             | Ball Function | VCCIO Bank | Dual Function               | Ball Function | VCCIO Bank | Dual Function               |
| N3          | PL27A         | 6          |                             | PL30A         | 6          |                             |
| P3          | PL27B         | 6          |                             | PL30B         | 6          |                             |
| P4          | PL27C         | 6          | PCLKT6_3                    | PL30C         | 6          | PCLKT6_3                    |
| P2          | PL28A         | 6          |                             | PL31A         | 6          |                             |
| R2          | PL28B         | 6          |                             | PL31B         | 6          |                             |
| T3          | PL28C         | 6          | PCLKT6_2                    | PL31C         | 6          | PCLKT6_2                    |
| R3          | PL28D         | 6          | PCLKC6_2                    | PL31D         | 6          | PCLKC6_2                    |
| P1          | PL31A         | 6          |                             | PL34A         | 6          |                             |
| R1          | PL31B         | 6          |                             | PL34B         | 6          |                             |
| R5          | PL31C         | 6          | VREF1_6                     | PL34C         | 6          | VREF1_6                     |
| R4          | PL31D         | 6          |                             | PL34D         | 6          |                             |
| T2          | PL32A         | 6          |                             | PL35A         | 6          |                             |
| U2          | PL32B         | 6          |                             | PL35B         | 6          |                             |
| T1          | PL33A         | 6          |                             | PL38A         | 6          |                             |
| U1          | PL33B         | 6          |                             | PL38B         | 6          |                             |
| V1          | PL35A         | 6          |                             | PL42A         | 6          |                             |
| W1          | PL35B         | 6          |                             | PL42B         | 6          |                             |
| V6          | PL35D         | 6          | DIFFR_6                     | PL42D         | 6          | DIFFR_6                     |
| V2          | PL36A         | 6          |                             | PL43A         | 6          |                             |
| W2          | PL36B         | 6          |                             | PL43B         | 6          |                             |
| Y1          | PL37A         | 6          |                             | PL44A         | 6          |                             |
| AA1         | PL37B         | 6          |                             | PL44B         | 6          |                             |
| AB1         | PL39A         | 6          |                             | PL48A         | 6          |                             |
| AC1         | PL39B         | 6          |                             | PL48B         | 6          |                             |
| Y5          | PL40A         | 6          |                             | PL49A         | 6          |                             |
| Y6          | PL40B         | 6          |                             | PL49B         | 6          |                             |
| AD2         | PL41A         | 6          |                             | PL51A         | 6          |                             |
| AE2         | PL41B         | 6          |                             | PL51B         | 6          |                             |
| AB5         | PL41D         | 6          | VREF2_6                     | PL51D         | 6          | VREF2_6                     |
| AC3         | PL43A         | 6          |                             | PL52A         | 6          |                             |
| AD3         | PL43B         | 6          |                             | PL52B         | 6          |                             |
| AF1         | PL44A         | 6          |                             | PL55A         | 6          |                             |
| AG1         | PL44B         | 6          |                             | PL55B         | 6          |                             |
| AB6         | PL44C         | 6          | LLC_DLLT_IN_E/LLC_DLLT_FB_F | PL55C         | 6          | LLC_DLLT_IN_E/LLC_DLLT_FB_F |
| AC5         | PL44D         | 6          | LLC_DLLC_IN_E/LLC_DLLC_FB_F | PL55D         | 6          | LLC_DLLC_IN_E/LLC_DLLC_FB_F |
| AF2         | PL45A         | 6          | LLC_DLLT_IN_F/LLC_DLLT_FB_E | PL57A         | 6          | LLC_DLLT_IN_F/LLC_DLLT_FB_E |
| AG2         | PL45B         | 6          | LLC_DLLC_IN_F/LLC_DLLC_FB_E | PL57B         | 6          | LLC_DLLC_IN_F/LLC_DLLC_FB_E |
| AC6         | PL45C         | 6          | LLC_PLLT_IN_B/LLC_PLLT_FB_A | PL57C         | 6          | LLC_PLLT_IN_B/LLC_PLLT_FB_A |
| AC7         | PL45D         | 6          | LLC_PLLC_IN_B/LLC_PLLC_FB_A | PL57D         | 6          | LLC_PLLC_IN_B/LLC_PLLC_FB_A |
| AE4         | XRES          | -          |                             | XRES          | -          |                             |
| AG4         | VCC12         | -          |                             | VCC12         | -          |                             |
| AD5         | TEMP          | 6          |                             | TEMP          | 6          |                             |
| AF5         | VCC12         | -          |                             | VCC12         | -          |                             |
| AH1         | PB3A          | 5          | LLC_PLLT_IN_A/LLC_PLLT_FB_B | PB3A          | 5          | LLC_PLLT_IN_A/LLC_PLLT_FB_B |
| AJ1         | PB3B          | 5          | LLC_PLLC_IN_A/LLC_PLLC_FB_B | PB3B          | 5          | LLC_PLLC_IN_A/LLC_PLLC_FB_B |

**LFSC/M15, LFSC/M25 Logic Signal Connections: 900 fpBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M15      |            |                             | LFSC/M25      |            |                             |
|-------------|---------------|------------|-----------------------------|---------------|------------|-----------------------------|
|             | Ball Function | VCCIO Bank | Dual Function               | Ball Function | VCCIO Bank | Dual Function               |
| AK14        | PB25A         | 5          |                             | PB35A         | 5          |                             |
| AK15        | PB25B         | 5          |                             | PB35B         | 5          |                             |
| AK16        | PB27A         | 4          |                             | PB37A         | 4          |                             |
| AK17        | PB27B         | 4          |                             | PB37B         | 4          |                             |
| AJ16        | PB28A         | 4          |                             | PB38A         | 4          |                             |
| AJ17        | PB28B         | 4          |                             | PB38B         | 4          |                             |
| AE16        | PB28C         | 4          |                             | PB38C         | 4          |                             |
| AH16        | PB29A         | 4          |                             | PB39A         | 4          |                             |
| AG16        | PB29B         | 4          |                             | PB39B         | 4          |                             |
| AK18        | PB31A         | 4          |                             | PB41A         | 4          |                             |
| AK19        | PB31B         | 4          |                             | PB41B         | 4          |                             |
| AH17        | PB32A         | 4          |                             | PB42A         | 4          |                             |
| AH18        | PB32B         | 4          |                             | PB42B         | 4          |                             |
| AG17        | PB32D         | 4          |                             | PB42D         | 4          |                             |
| AJ18        | PB33A         | 4          |                             | PB43A         | 4          |                             |
| AJ19        | PB33B         | 4          |                             | PB43B         | 4          |                             |
| AK20        | PB35A         | 4          | PCLKT4_2                    | PB46A         | 4          | PCLKT4_2                    |
| AK21        | PB35B         | 4          | PCLKC4_2                    | PB46B         | 4          | PCLKC4_2                    |
| AF18        | PB36A         | 4          | PCLKT4_1                    | PB47A         | 4          | PCLKT4_1                    |
| AG18        | PB36B         | 4          | PCLKC4_1                    | PB47B         | 4          | PCLKC4_1                    |
| AJ20        | PB37A         | 4          | PCLKT4_0                    | PB49A         | 4          | PCLKT4_0                    |
| AJ21        | PB37B         | 4          | PCLKC4_0                    | PB49B         | 4          | PCLKC4_0                    |
| AG19        | PB37C         | 4          | VREF2_4                     | PB49C         | 4          | VREF2_4                     |
| AK22        | PB39A         | 4          | PCLKT4_5                    | PB51A         | 4          | PCLKT4_5                    |
| AK23        | PB39B         | 4          | PCLKC4_5                    | PB51B         | 4          | PCLKC4_5                    |
| AH19        | PB39C         | 4          |                             | PB51C         | 4          |                             |
| AK24        | PB40A         | 4          | PCLKT4_3                    | PB52A         | 4          | PCLKT4_3                    |
| AK25        | PB40B         | 4          | PCLKC4_3                    | PB52B         | 4          | PCLKC4_3                    |
| AE19        | PB40C         | 4          | PCLKT4_4                    | PB52C         | 4          | PCLKT4_4                    |
| AE20        | PB40D         | 4          | PCLKC4_4                    | PB52D         | 4          | PCLKC4_4                    |
| AE21        | PB41A         | 4          |                             | PB53A         | 4          |                             |
| AF21        | PB41B         | 4          |                             | PB53B         | 4          |                             |
| AG21        | PB43A         | 4          |                             | PB55A         | 4          |                             |
| AG22        | PB43B         | 4          |                             | PB55B         | 4          |                             |
| AH22        | PB44A         | 4          |                             | PB56A         | 4          |                             |
| AH23        | PB44B         | 4          |                             | PB56B         | 4          |                             |
| AH21        | PB44C         | 4          |                             | PB56C         | 4          |                             |
| AK28        | PB45A         | 4          |                             | PB60A         | 4          |                             |
| AK29        | PB45B         | 4          |                             | PB60B         | 4          |                             |
| AE22        | PB45C         | 4          |                             | PB60C         | 4          |                             |
| AJ28        | PB47A         | 4          |                             | PB67A         | 4          |                             |
| AH28        | PB47B         | 4          |                             | PB67B         | 4          |                             |
| AE24        | PB47C         | 4          | VREF1_4                     | PB67C         | 4          | VREF1_4                     |
| AE25        | PB47D         | 4          |                             | PB67D         | 4          |                             |
| AJ29        | PB48A         | 4          | LRC_DLLT_IN_C/LRC_DLLT_FB_D | PB68A         | 4          | LRC_DLLT_IN_C/LRC_DLLT_FB_D |

**LFSC/M15, LFSC/M25 Logic Signal Connections: 900 fpBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M15      |            |               | LFSC/M25      |            |               |
|-------------|---------------|------------|---------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function | Ball Function | VCCIO Bank | Dual Function |
| P22         | VCCIO2        | -          |               | VCCIO2        | -          |               |
| R22         | VCCIO2        | -          |               | VCCIO2        | -          |               |
| AA23        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AA24        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AB23        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AB24        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| T22         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| U22         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| V22         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| W22         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| Y22         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| Y23         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| Y24         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AB16        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AB17        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AB18        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AB19        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AB20        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AC20        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AC21        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AC22        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AD20        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AD21        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AD22        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AB11        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AB12        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AB13        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AB14        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AB15        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AC10        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AC11        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AC9         | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AD10        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AD11        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AD9         | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AA7         | VCCIO6        | -          |               | VCCIO6        | -          |               |
| AA8         | VCCIO6        | -          |               | VCCIO6        | -          |               |
| AB7         | VCCIO6        | -          |               | VCCIO6        | -          |               |
| AB8         | VCCIO6        | -          |               | VCCIO6        | -          |               |
| T9          | VCCIO6        | -          |               | VCCIO6        | -          |               |
| U9          | VCCIO6        | -          |               | VCCIO6        | -          |               |
| V9          | VCCIO6        | -          |               | VCCIO6        | -          |               |
| W9          | VCCIO6        | -          |               | VCCIO6        | -          |               |
| Y7          | VCCIO6        | -          |               | VCCIO6        | -          |               |
| Y8          | VCCIO6        | -          |               | VCCIO6        | -          |               |

**LFSC/M15, LFSC/M25 Logic Signal Connections: 900 fpBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M15      |            |               | LFSC/M25      |            |               |
|-------------|---------------|------------|---------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function | Ball Function | VCCIO Bank | Dual Function |
| AJ27        | GND           | -          |               | GND           | -          |               |
| AF23        | GND           | -          |               | GND           | -          |               |
| AF22        | GND           | -          |               | GND           | -          |               |
| AE27        | GND           | -          |               | GND           | -          |               |
| AA27        | GND           | -          |               | GND           | -          |               |
| AB29        | GND           | -          |               | GND           | -          |               |
| Y26         | GND           | -          |               | GND           | -          |               |
| AC30        | GND           | -          |               | GND           | -          |               |
| Y29         | GND           | -          |               | GND           | -          |               |
| F30         | GND           | -          |               | GND           | -          |               |
| E27         | GND           | -          |               | GND           | -          |               |
| F27         | GND           | -          |               | GND           | -          |               |
| P25         | GND           | -          |               | GND           | -          |               |
| H29         | GND           | -          |               | GND           | -          |               |
| K29         | GND           | -          |               | GND           | -          |               |
| R24         | GND           | -          |               | GND           | -          |               |
| M28         | GND           | -          |               | GND           | -          |               |
| J27         | GND           | -          |               | GND           | -          |               |
| N26         | GND           | -          |               | GND           | -          |               |
| E20         | GND           | -          |               | GND           | -          |               |
| E21         | GND           | -          |               | GND           | -          |               |
| F21         | GND           | -          |               | GND           | -          |               |
| F23         | GND           | -          |               | GND           | -          |               |
| G23         | GND           | -          |               | GND           | -          |               |
| D21         | GND           | -          |               | GND           | -          |               |
| D20         | GND           | -          |               | GND           | -          |               |
| E18         | GND           | -          |               | GND           | -          |               |
| C20         | GND           | -          |               | GND           | -          |               |
| C11         | GND           | -          |               | GND           | -          |               |
| A12         | GND           | -          |               | GND           | -          |               |
| E11         | GND           | -          |               | GND           | -          |               |
| F8          | GND           | -          |               | GND           | -          |               |
| G8          | GND           | -          |               | GND           | -          |               |
| D11         | GND           | -          |               | GND           | -          |               |
| D10         | GND           | -          |               | GND           | -          |               |
| H7          | GND           | -          |               | GND           | -          |               |
| F10         | GND           | -          |               | GND           | -          |               |
| E10         | GND           | -          |               | GND           | -          |               |
| AC16        | NC            | -          |               | NC            | -          |               |
| J22         | VCC           | -          |               | VCC           | -          |               |
| J9          | VCC           | -          |               | VCC           | -          |               |
| B2          | NC            | -          |               | NC            | -          |               |
| C2          | RESPN_ULC     | -          |               | RESPN_ULC     | -          |               |
| C29         | RESPN_URC     | -          |               | RESPN_URC     | -          |               |

**LFSC/M40, LFSC/M80 Logic Signal Connections: 1152 fcBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M40      |            |               | LFSC/M80      |            |               |
|-------------|---------------|------------|---------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function | Ball Function | VCCIO Bank | Dual Function |
| AH11        | PB57D         | 4          |               | PB79D         | 4          |               |
| AN13        | PB58A         | 4          | PCLKT4_3      | PB80A         | 4          | PCLKT4_3      |
| AN12        | PB58B         | 4          | PCLKC4_3      | PB80B         | 4          | PCLKC4_3      |
| AD14        | PB58C         | 4          | PCLKT4_4      | PB80C         | 4          | PCLKT4_4      |
| AD15        | PB58D         | 4          | PCLKC4_4      | PB80D         | 4          | PCLKC4_4      |
| AP13        | PB61A         | 4          |               | PB73A         | 4          |               |
| AP12        | PB61B         | 4          |               | PB73B         | 4          |               |
| AK13        | PB61C         | 4          |               | PB73C         | 4          |               |
| AK12        | PB61D         | 4          |               | PB73D         | 4          |               |
| AP11        | PB62A         | 4          |               | PB83A         | 4          |               |
| AP10        | PB62B         | 4          |               | PB83B         | 4          |               |
| AN11        | PB63A         | 4          |               | PB99A         | 4          |               |
| AN10        | PB63B         | 4          |               | PB99B         | 4          |               |
| AF14        | PB63C         | 4          |               | PB99C         | 4          |               |
| AF13        | PB63D         | 4          |               | PB99D         | 4          |               |
| AM10        | PB67A         | 4          |               | PB101A        | 4          |               |
| AM9         | PB67B         | 4          |               | PB101B        | 4          |               |
| AE14        | PB67C         | 4          |               | PB101C        | 4          |               |
| AE13        | PB67D         | 4          |               | PB101D        | 4          |               |
| AP9         | PB69A         | 4          |               | PB104A        | 4          |               |
| AP8         | PB69B         | 4          |               | PB104B        | 4          |               |
| AK11        | PB69C         | 4          |               | PB104C        | 4          |               |
| AK10        | PB69D         | 4          |               | PB104D        | 4          |               |
| AL10        | PB70A         | 4          |               | PB107A        | 4          |               |
| AL9         | PB70B         | 4          |               | PB107B        | 4          |               |
| AF12        | PB70C         | 4          |               | PB107C        | 4          |               |
| AF11        | PB70D         | 4          |               | PB107D        | 4          |               |
| AN9         | PB73A         | 4          |               | PB109A        | 4          |               |
| AN8         | PB73B         | 4          |               | PB109B        | 4          |               |
| AG11        | PB73C         | 4          |               | PB109C        | 4          |               |
| AG10        | PB73D         | 4          |               | PB109D        | 4          |               |
| AP7         | PB74A         | 4          |               | PB111A        | 4          |               |
| AP6         | PB74B         | 4          |               | PB111B        | 4          |               |
| AG13        | PB74C         | 4          |               | PB111C        | 4          |               |
| AG12        | PB74D         | 4          |               | PB111D        | 4          |               |
| AN7         | PB75A         | 4          |               | PB113A        | 4          |               |
| AN6         | PB75B         | 4          |               | PB113B        | 4          |               |
| AK9         | PB75C         | 4          |               | PB113C        | 4          |               |
| AK8         | PB75D         | 4          |               | PB113D        | 4          |               |
| AP5         | PB77A         | 4          |               | PB115A        | 4          |               |
| AP4         | PB77B         | 4          |               | PB115B        | 4          |               |
| AD11        | PB77C         | 4          |               | PB115C        | 4          |               |
| AE11        | PB77D         | 4          |               | PB115D        | 4          |               |
| AM7         | PB78A         | 4          |               | PB117A        | 4          |               |
| AM6         | PB78B         | 4          |               | PB117B        | 4          |               |

**LFSC/M40, LFSC/M80 Logic Signal Connections: 1152 fcBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M40      |            |               | LFSC/M80      |            |               |
|-------------|---------------|------------|---------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function | Ball Function | VCCIO Bank | Dual Function |
| W13         | VCCAUX        | -          |               | VCCAUX        | -          |               |
| W22         | VCCAUX        | -          |               | VCCAUX        | -          |               |
| Y21         | GND           | -          |               | GND           | -          |               |
| Y25         | GND           | -          |               | GND           | -          |               |
| C18         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| D17         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| F16         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| G19         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| J20         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| K12         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| K15         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| L23         | VCCIO1        | -          |               | VCCIO1        | -          |               |
| Y9          | GND           | -          |               | GND           | -          |               |
| J9          | VCCIO1        | -          |               | VCCIO1        | -          |               |
| E3          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| G6          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| H4          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| K7          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| L3          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| M11         | VCCIO2        | -          |               | VCCIO2        | -          |               |
| N6          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| P4          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| R9          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| AA3         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AB7         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AC10        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AD4         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AE6         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AG3         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AK4         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| T7          | VCCIO3        | -          |               | VCCIO3        | -          |               |
| U3          | VCCIO3        | -          |               | VCCIO3        | -          |               |
| V4          | VCCIO3        | -          |               | VCCIO3        | -          |               |
| W6          | VCCIO3        | -          |               | VCCIO3        | -          |               |
| Y10         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AD12        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AF15        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AF9         | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AH10        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AH16        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AJ13        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AJ7         | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AL14        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AL8         | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AM11        | VCCIO4        | -          |               | VCCIO4        | -          |               |

**LFSC/M115 Logic Signal Connections: 1152 fcBGA<sup>1, 2</sup>**

| Ball Number | LFSC/M115     |            |               |
|-------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function |
| W30         | PL69B         | 6          | VREF1_6       |
| W27         | PL69C         | 6          |               |
| Y27         | PL69D         | 6          |               |
| T33         | PL70A         | 6          |               |
| U33         | PL70B         | 6          |               |
| V25         | PL70C         | 6          |               |
| W25         | PL70D         | 6          |               |
| U34         | PL71A         | 6          |               |
| V34         | PL71B         | 6          |               |
| V26         | PL71C         | 6          |               |
| W26         | PL71D         | 6          |               |
| V33         | PL74A         | 6          |               |
| W33         | PL74B         | 6          |               |
| V24         | PL74C         | 6          |               |
| W24         | PL74D         | 6          |               |
| W31         | PL77A         | 6          |               |
| Y31         | PL77B         | 6          |               |
| Y29         | PL77C         | 6          |               |
| AA29        | PL77D         | 6          |               |
| Y33         | PL79A         | 6          |               |
| AA33        | PL79B         | 6          |               |
| Y28         | PL79C         | 6          |               |
| AA28        | PL79D         | 6          |               |
| AB32        | PL90A         | 6          |               |
| AC32        | PL90B         | 6          |               |
| AA26        | PL90C         | 6          |               |
| AA27        | PL90D         | 6          |               |
| AB31        | PL91A         | 6          | DIFFR_6       |
| AC31        | PL91B         | 6          |               |
| Y24         | PL91C         | 6          |               |
| AA24        | PL91D         | 6          |               |
| AE34        | PL92A         | 6          |               |
| AF34        | PL92B         | 6          |               |
| AB30        | PL92C         | 6          |               |
| AC30        | PL92D         | 6          |               |
| AD33        | PL94A         | 6          |               |
| AE33        | PL94B         | 6          |               |
| AD30        | PL94C         | 6          |               |
| AE30        | PL94D         | 6          |               |
| AE32        | PL96A         | 6          |               |
| AF32        | PL96B         | 6          |               |
| AA25        | PL96C         | 6          |               |
| AB25        | PL96D         | 6          |               |

**LFSC/M115 Logic Signal Connections: 1152 fcBGA<sup>1, 2</sup>**

| Ball Number | LFSC/M115     |            |                             |
|-------------|---------------|------------|-----------------------------|
|             | Ball Function | VCCIO Bank | Dual Function               |
| AN33        | PB3B          | 5          | LLC_PLLC_IN_A/LLC_PLLC_FB_B |
| AH29        | PB3C          | 5          | LLC_DLLT_IN_C/LLC_DLLT_FB_D |
| AJ29        | PB3D          | 5          | LLC_DLLC_IN_C/LLC_DLLC_FB_D |
| AM32        | PB4A          | 5          | LLC_DLLT_IN_D/LLC_DLLT_FB_C |
| AM31        | PB4B          | 5          | LLC_DLLC_IN_D/LLC_DLLC_FB_C |
| AG27        | PB4C          | 5          |                             |
| AG26        | PB4D          | 5          |                             |
| AL29        | PB5A          | 5          |                             |
| AL28        | PB5B          | 5          |                             |
| AH27        | PB5C          | 5          |                             |
| AH26        | PB5D          | 5          | VREF1_5                     |
| AN32        | PB7A          | 5          |                             |
| AP32        | PB7B          | 5          |                             |
| AF25        | PB7C          | 5          |                             |
| AE25        | PB7D          | 5          |                             |
| AN31        | PB11A         | 5          |                             |
| AN30        | PB11B         | 5          |                             |
| AK29        | PB11C         | 5          |                             |
| AK28        | PB11D         | 5          |                             |
| AP31        | PB12A         | 5          |                             |
| AP30        | PB12B         | 5          |                             |
| AD24        | PB12C         | 5          |                             |
| AE24        | PB12D         | 5          |                             |
| AM29        | PB15A         | 5          |                             |
| AM28        | PB15B         | 5          |                             |
| AJ27        | PB15C         | 5          |                             |
| AJ26        | PB15D         | 5          |                             |
| AP29        | PB16A         | 5          |                             |
| AP28        | PB16B         | 5          |                             |
| AK27        | PB16C         | 5          |                             |
| AK26        | PB16D         | 5          |                             |
| AN29        | PB19A         | 5          |                             |
| AN28        | PB19B         | 5          |                             |
| AG25        | PB19C         | 5          |                             |
| AG24        | PB19D         | 5          |                             |
| AL26        | PB20A         | 5          |                             |
| AL25        | PB20B         | 5          |                             |
| AG23        | PB20C         | 5          |                             |
| AG22        | PB20D         | 5          |                             |
| AN27        | PB23A         | 5          |                             |
| AN26        | PB23B         | 5          |                             |
| AF24        | PB23C         | 5          |                             |
| AF23        | PB23D         | 5          |                             |

**LFSC/M115 Logic Signal Connections: 1152 fcBGA<sup>1, 2</sup>**

| Ball Number | LFSC/M115     |            |                         |
|-------------|---------------|------------|-------------------------|
|             | Ball Function | VCCIO Bank | Dual Function           |
| D9          | B_VDDIB2_R    | -          |                         |
| E12         | B_HDINP2_R    | -          | PCS 3E1 CH 2 IN P       |
| F12         | B_HDINN2_R    | -          | PCS 3E1 CH 2 IN N       |
| K11         | VCC12         | -          |                         |
| A13         | B_HDOUTP2_R   | -          | PCS 3E1 CH 2 OUT P      |
| D12         | B_VDDOB2_R    | -          |                         |
| B13         | B_HDOUTN2_R   | -          | PCS 3E1 CH 2 OUT N      |
| D13         | B_VDDOB3_R    | -          |                         |
| B14         | B_HDOUTN3_R   | -          | PCS 3E1 CH 3 OUT N      |
| L11         | VCC12         | -          |                         |
| A14         | B_HDOUTP3_R   | -          | PCS 3E1 CH 3 OUT P      |
| F13         | B_HDINN3_R    | -          | PCS 3E1 CH 3 IN N       |
| E13         | B_HDINP3_R    | -          | PCS 3E1 CH 3 IN P       |
| G13         | VCC12         | -          |                         |
| E9          | B_VDDIB3_R    | -          |                         |
| L13         | VCC12         | -          |                         |
| J11         | B_REFCLKN_R   | -          |                         |
| H11         | B_REFCLKP_R   | -          |                         |
| M15         | PT93D         | 1          | HDC/SI                  |
| M16         | PT93C         | 1          | LDCN/SCS                |
| F14         | PT93B         | 1          | D8/MPI_DATA8            |
| G14         | PT93A         | 1          | CS1/MPI_CS1             |
| L15         | PT90D         | 1          | D9/MPI_DATA9            |
| L14         | PT90C         | 1          | D10/MPI_DATA10          |
| D14         | PT90B         | 1          | CS0N/MPI_CS0N           |
| E14         | PT90A         | 1          | RDN/MPI_STRB_N          |
| L16         | PT89D         | 1          | WRN/MPI_WR_N            |
| K16         | PT89C         | 1          | D7/MPI_DATA7            |
| G15         | PT89B         | 1          | D6/MPI_DATA6            |
| F15         | PT89A         | 1          | D5/MPI_DATA5            |
| K14         | PT87D         | 1          | D4/MPI_DATA4            |
| K13         | PT87C         | 1          | D3/MPI_DATA3            |
| B15         | PT87B         | 1          | D2/MPI_DATA2            |
| A15         | PT87A         | 1          | D1/MPI_DATA1            |
| J14         | PT86D         | 1          | D16/PCLKC1_3/MPI_DATA16 |
| H14         | PT86C         | 1          | D17/PCLKT1_3/MPI_DATA17 |
| A16         | PT86B         | 1          | D0/MPI_DATA0            |
| B16         | PT86A         | 1          | QOUT/CEON               |
| J13         | PT83D         | 1          | VREF2_1                 |
| H13         | PT83C         | 1          | D18/MPI_DATA18          |
| D15         | PT83B         | 1          | DOUT                    |
| E15         | PT83A         | 1          | MCA_DONE_IN             |
| J16         | PT81D         | 1          | D19/PCLKC1_2/MPI_DATA19 |

**LFSC/M115 Logic Signal Connections: 1152 fcBGA<sup>1, 2</sup>**

| Ball Number | LFSC/M115     |            |               |
|-------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function |
| U22         | VCCAUX        | -          |               |
| V13         | VCCAUX        | -          |               |
| V22         | VCCAUX        | -          |               |
| V23         | VCCAUX        | -          |               |
| W13         | VCCAUX        | -          |               |
| W22         | VCCAUX        | -          |               |
| Y21         | GND           | -          |               |
| Y25         | GND           | -          |               |
| C18         | VCCIO1        | -          |               |
| D17         | VCCIO1        | -          |               |
| F16         | VCCIO1        | -          |               |
| G19         | VCCIO1        | -          |               |
| J20         | VCCIO1        | -          |               |
| K12         | VCCIO1        | -          |               |
| K15         | VCCIO1        | -          |               |
| L23         | VCCIO1        | -          |               |
| Y9          | GND           | -          |               |
| J9          | VCCIO1        | -          |               |
| E3          | VCCIO2        | -          |               |
| G6          | VCCIO2        | -          |               |
| H4          | VCCIO2        | -          |               |
| K7          | VCCIO2        | -          |               |
| L3          | VCCIO2        | -          |               |
| M11         | VCCIO2        | -          |               |
| N6          | VCCIO2        | -          |               |
| P4          | VCCIO2        | -          |               |
| R9          | VCCIO2        | -          |               |
| AA3         | VCCIO3        | -          |               |
| AB7         | VCCIO3        | -          |               |
| AC10        | VCCIO3        | -          |               |
| AD4         | VCCIO3        | -          |               |
| AE6         | VCCIO3        | -          |               |
| AG3         | VCCIO3        | -          |               |
| AK4         | VCCIO3        | -          |               |
| T7          | VCCIO3        | -          |               |
| U3          | VCCIO3        | -          |               |
| V4          | VCCIO3        | -          |               |
| W6          | VCCIO3        | -          |               |
| Y10         | VCCIO3        | -          |               |
| AD12        | VCCIO4        | -          |               |
| AF15        | VCCIO4        | -          |               |
| AF9         | VCCIO4        | -          |               |
| AH10        | VCCIO4        | -          |               |

**LFSC/M80, LFSC/M115 Logic Signal Connections: 1704 fcBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M80      |            |                             | LFSC/M115     |            |                             |
|-------------|---------------|------------|-----------------------------|---------------|------------|-----------------------------|
|             | Ball Function | VCCIO Bank | Dual Function               | Ball Function | VCCIO Bank | Dual Function               |
| J1          | PR25B         | 2          |                             | PR38B         | 2          |                             |
| K1          | PR25A         | 2          |                             | PR38A         | 2          |                             |
| V12         | PR24D         | 2          |                             | PR34D         | 2          |                             |
| U12         | PR24C         | 2          |                             | PR34C         | 2          |                             |
| K2          | PR24B         | 2          |                             | PR34B         | 2          |                             |
| J2          | PR24A         | 2          |                             | PR34A         | 2          |                             |
| R10         | PR22D         | 2          |                             | PR30D         | 2          |                             |
| T10         | PR22C         | 2          |                             | PR30C         | 2          |                             |
| L5          | PR22B         | 2          |                             | PR30B         | 2          |                             |
| K5          | PR22A         | 2          |                             | PR30A         | 2          |                             |
| P9          | PR21D         | 2          |                             | PR26D         | 2          |                             |
| N9          | PR21C         | 2          |                             | PR26C         | 2          |                             |
| L6          | PR21B         | 2          |                             | PR26B         | 2          |                             |
| K6          | PR21A         | 2          |                             | PR26A         | 2          |                             |
| M8          | PR20D         | 2          |                             | PR19D         | 2          |                             |
| M9          | PR20C         | 2          |                             | PR19C         | 2          |                             |
| H1          | PR20B         | 2          |                             | PR19B         | 2          |                             |
| G1          | PR20A         | 2          |                             | PR19A         | 2          |                             |
| U14         | PR18D         | 2          | VREF2_2                     | PR18D         | 2          | VREF2_2                     |
| T14         | PR18C         | 2          |                             | PR18C         | 2          |                             |
| H2          | PR18B         | 2          | URC_DLLC_IN_D/URC_DLLC_FB_C | PR18B         | 2          | URC_DLLC_IN_D/URC_DLLC_FB_C |
| G2          | PR18A         | 2          | URC_DLLT_IN_D/URC_DLLT_FB_C | PR18A         | 2          | URC_DLLT_IN_D/URC_DLLT_FB_C |
| P10         | PR17D         | 2          | URC_PLLC_IN_B/URC_PLLC_FB_A | PR17D         | 2          | URC_PLLC_IN_B/URC_PLLC_FB_A |
| N10         | PR17C         | 2          | URC_PLLT_IN_B/URC_PLLT_FB_A | PR17C         | 2          | URC_PLLT_IN_B/URC_PLLT_FB_A |
| H3          | PR17B         | 2          | URC_DLLC_IN_C/URC_DLLC_FB_D | PR17B         | 2          | URC_DLLC_IN_C/URC_DLLC_FB_D |
| G3          | PR17A         | 2          | URC_DLLT_IN_C/URC_DLLT_FB_D | PR17A         | 2          | URC_DLLT_IN_C/URC_DLLT_FB_D |
| R11         | PR16D         | 2          |                             | PR15D         | 2          |                             |
| P11         | PR16C         | 2          |                             | PR15C         | 2          |                             |
| J5          | PR16B         | 2          | URC_PLLC_IN_A/URC_PLLC_FB_B | PR15B         | 2          | URC_PLLC_IN_A/URC_PLLC_FB_B |
| J6          | PR16A         | 2          | URC_PLLT_IN_A/URC_PLLT_FB_B | PR15A         | 2          | URC_PLLT_IN_A/URC_PLLT_FB_B |
| P18         | VCCJ          | -          |                             | VCCJ          | -          |                             |
| P19         | TDO           | -          | TDO                         | TDO           | -          | TDO                         |
| R21         | TMS           | -          |                             | TMS           | -          |                             |
| P20         | TCK           | -          |                             | TCK           | -          |                             |
| P12         | TDI           | -          |                             | TDI           | -          |                             |
| P17         | PROGRAMN      | 1          |                             | PROGRAMN      | 1          |                             |
| P21         | MPIIRQN       | 1          | CFGIRQN/MPI_IRQ_N           | MPIIRQN       | 1          | CFGIRQN/MPI_IRQ_N           |
| P13         | CCLK          | 1          |                             | CCLK          | 1          |                             |
| H10         | RESP_URC      | -          |                             | RESP_URC      | -          |                             |
| N13         | VCC12         | -          |                             | VCC12         | -          |                             |
| H9          | A_REFCLKN_R   | -          |                             | A_REFCLKN_R   | -          |                             |
| G9          | A_REFCLKP_R   | -          |                             | A_REFCLKP_R   | -          |                             |
| F2          | VCC12         | -          |                             | VCC12         | -          |                             |
| H4          | A_VDDIB0_R    | -          |                             | A_VDDIB0_R    | -          |                             |
| C1          | A_HDINP0_R    | -          | PCS 3E0 CH 0 IN P           | A_HDINP0_R    | -          | PCS 3E0 CH 0 IN P           |

**LFSC/M80, LFSC/M115 Logic Signal Connections: 1704 fcBGA<sup>1, 2</sup> (Cont.)**

| Ball Number | LFSC/M80      |            |               | LFSC/M115     |            |               |
|-------------|---------------|------------|---------------|---------------|------------|---------------|
|             | Ball Function | VCCIO Bank | Dual Function | Ball Function | VCCIO Bank | Dual Function |
| L8          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| M3          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| P7          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| R4          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| T12         | VCCIO2        | -          |               | VCCIO2        | -          |               |
| U8          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| V3          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| W11         | VCCIO2        | -          |               | VCCIO2        | -          |               |
| Y7          | VCCIO2        | -          |               | VCCIO2        | -          |               |
| AB3         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AC7         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AD11        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AE4         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AF8         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AG12        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AH3         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AJ7         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AK11        | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AL4         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AM8         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AP3         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AR7         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AU4         | VCCIO3        | -          |               | VCCIO3        | -          |               |
| AL16        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AM13        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AM19        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AR11        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AR17        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AT14        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AT20        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AT8         | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AW15        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AW21        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AW9         | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AY12        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AY18        | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AY6         | VCCIO4        | -          |               | VCCIO4        | -          |               |
| AL27        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AM24        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AM30        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AR26        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AR32        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AT23        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AT29        | VCCIO5        | -          |               | VCCIO5        | -          |               |
| AT35        | VCCIO5        | -          |               | VCCIO5        | -          |               |