


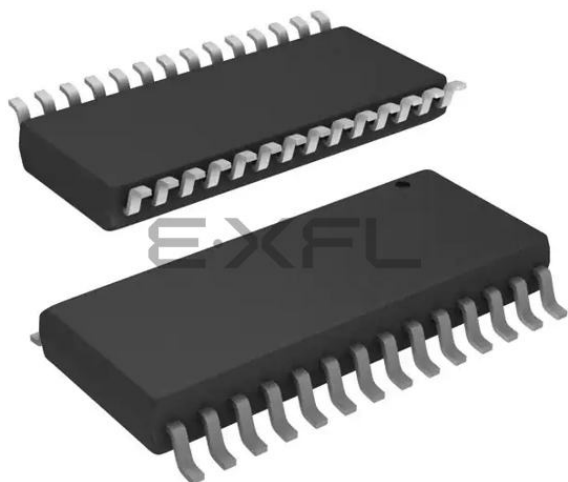

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                     |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                              |
| Core Processor             | PIC                                                                                                                                                                 |
| Core Size                  | 8-Bit                                                                                                                                                               |
| Speed                      | 32MHz                                                                                                                                                               |
| Connectivity               | I <sup>2</sup> C, LINbus, SPI, UART/USART                                                                                                                           |
| Peripherals                | Brown-out Detect/Reset, POR, PWM, WDT                                                                                                                               |
| Number of I/O              | 25                                                                                                                                                                  |
| Program Memory Size        | 7KB (4K x 14)                                                                                                                                                       |
| Program Memory Type        | FLASH                                                                                                                                                               |
| EEPROM Size                | 128 x 8                                                                                                                                                             |
| RAM Size                   | 512 x 8                                                                                                                                                             |
| Voltage - Supply (Vcc/Vdd) | 1.8V ~ 3.6V                                                                                                                                                         |
| Data Converters            | A/D 17x10b; D/A 3x5b, 3x10b                                                                                                                                         |
| Oscillator Type            | Internal                                                                                                                                                            |
| Operating Temperature      | -40°C ~ 125°C (TA)                                                                                                                                                  |
| Mounting Type              | Surface Mount                                                                                                                                                       |
| Package / Case             | 28-SOIC (0.295", 7.50mm Width)                                                                                                                                      |
| Supplier Device Package    | 28-SOIC                                                                                                                                                             |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic16lf1773-e-so">https://www.e-xfl.com/product-detail/microchip-technology/pic16lf1773-e-so</a> |

# PIC16(L)F1773/6/7/8/9

---

## 28/40/44-Pin, 8-Bit Flash Microcontroller Product Brief

---

### Description

PIC16(L)F177X microcontrollers feature a high level of integration of intelligent analog and digital peripherals for a wide range of applications, such as lighting, power supplies, battery charging, motor control and other general purpose applications. These devices deliver multiple op amps, 5-/10-bit DACs, high-speed comparators, 10-bit ADC, 10-/16-bit PWMs, programmable ramp generator (PRG) and other peripherals that can be connected internally to create closed loop systems without using pins or PCB area. The 10-/16-bit PWMs, digital signal modulators and tri-state output op amp can be used together to create a LED dimming engine for lighting applications. The peripheral pin select (PPS) functionality provides flexibility, eases PCB layout and peripheral utilization by allowing digital peripheral pin mapping to an I/O.

### Core Features

- C Compiler Optimized RISC Architecture
- Only 49 Instructions
- Operating Speed:
  - DC – 32 MHz clock input
  - 125 ns minimum instruction cycle
- Interrupt Capability
- 16-Level Deep Hardware Stack
- Five 8-Bit Timers
- Three 16-Bit Timers
- Low-Current Power-on Reset (POR)
- Configurable Power-up Timer (PWRT)
- Brown-out Reset (BOR) with Selectable Trip Point
- Extend Watchdog Timer (EWDT):
  - Low-power 31 kHz WDT
  - Software selectable pre-scaler
  - Software selectable enable

### Memory

- Up to 28 Kbytes Program Flash Memory (PFM)
- Up to 2 Kbytes Data RAM
- Direct, Indirect and Relative Addressing modes
- High-Endurance Flash (HEF):
  - 128B of nonvolatile data storage
  - 100K Erase/Write cycles

### Operating Characteristics

- Operating Voltage Range:
  - 1.8V to 3.6V (PIC16LF1773/6/7/8/9)
  - 2.3V to 5.5V (PIC16F1773/6/7/8/9)
- Temperature Range:
  - Industrial: -40°C to 85°C
  - Extended: -40°C to 125°C

### eXtreme Low-Power (XLP) Features

- Sleep mode: 50 nA @ 1.8V, typical
- Watchdog Timer: 500 nA @ 1.8V, typical
- Secondary Oscillator: 500 nA @ 32 kHz
- Operating Current:
  - 8 uA @ 31 kHz, 1.8V, typical
  - 32 uA/MHz @ 1.8V, typical

### Intelligent Analog Peripherals

- 10-Bit Analog-to-Digital Converter (ADC):
  - Up to 28 external channels
  - Conversion available during Sleep
- Up to Four Operational Amplifiers (OPA):
  - Selectable internal and external channels
  - Tri-state output
  - Part of LED dimming engine
  - Selectable internal and external channels
- Up to Eight High-Speed Comparators (HS Comp):
  - Up to nine external inverting inputs
  - Up to 12 external noninverting inputs
  - Fixed voltage reference at inverting and noninverting input(s)
  - Comparator outputs externally accessible
- Digital-to-Analog Converters (DAC):
  - Up to four 10-bit resolution DACs
  - 10-bit resolution, rail-to-rail
  - Conversion during Sleep
  - Internal connections to ADCs and HS Comparators
- Voltage Reference:
  - Fixed Voltage Reference (FVR)
  - 1.024V, 2.048V and 4.096V output levels
- Zero-Cross Detector (ZCD):
  - Detect high-voltage AC signal
- Up to Four Programmable Ramp Generators (PRG):
  - Slope compensation
  - Ramp generation
- Two High-Current Drive I/Os:
  - Up to 100 mA sink or source @ 5V

# PIC16(L)F1773/6/7/8/9

## Digital Peripherals

- Up to Four Configurable Logic Cells (CLC):
  - Integrated combinational and state logic
- Up to Four Complementary Output Generators (COG):
  - Push-pull, Full-Bridge and Steering modes
- Up to Four Capture/Compare/PWM (CCP) Modules
- Pulse-Width Modulator (PWM):
  - Up to four 16-bit PWMs
  - Independent timers
  - Multiple output modes (edge-, center-aligned, set and toggle on register match)
  - User settings for phase, duty cycle, period, offset and polarity
  - 16-bit timer capability
  - Up to four 10-bit PWMs
- Up to Four Data Signal Modulators (DSM):
  - Modulates a carrier signal with a digital data to create custom carrier synchronized output waveforms
  - Part of LED dimming engine

- Peripheral Pin Select (PPS):
  - I/O remapping of digital peripherals
- Serial Communications:
  - Enhanced USART (EUSART)
  - SPI, I<sup>2</sup>C™, RS-232, RS-485, LIN compatible
  - Auto-Baud Detect, auto-wake-up on start
- Up to 38 I/O Pins:
  - Individually programmable pull-ups
  - Slew rate control
  - Interrupt-on-change with edge-select

## Clocking Structure

- Precision Internal Oscillator:
  - ±1% at calibration
  - Selectable frequency range 32 MHz to 31 kHz
- 31 kHz Low-Power Internal Oscillator
- 4x Phase-Locked Loop (PLL) for up to 32 MHz Internal Operation
- External Oscillator Block with Three External Clock modes up to 32 MHz

**TABLE 1: PIC16(L)F1773/6/7/8/9 FAMILY TYPES**

| Device        | Data Sheet Index | Program Flash Memory (bytes) | Program Flash Memory (word) | High Endurance Flash (B) | Data SRAM (Bytes) | I/O Pins <sup>(1)</sup> | 8-Bit/16-Bit Timers | High-Speed Comparator | 10-bit ADC (ch) | 5/10-bit DAC | CCP | 10-bit/16-bit PWM | COG | CLC | Op Amp | Zero Cross Detect | Data Signal Modulator | Programmable Ramp Gen | High-Current I/Os | Peripheral Pin Select | EUSART | I <sup>2</sup> C™/SPI | Debug <sup>(2)</sup> |
|---------------|------------------|------------------------------|-----------------------------|--------------------------|-------------------|-------------------------|---------------------|-----------------------|-----------------|--------------|-----|-------------------|-----|-----|--------|-------------------|-----------------------|-----------------------|-------------------|-----------------------|--------|-----------------------|----------------------|
| PIC16(L)F1773 | (A)              | 7K                           | 4K                          | 128                      | 512               | 25                      | 5/3                 | 6                     | 17              | 3/3          | 3   | 3/3               | 3   | 4   | 3      | 1                 | 3                     | 3                     | 2                 | Y                     | 1      | 1                     | I                    |
| PIC16(L)F1776 | (A)              | 14K                          | 8K                          | 128                      | 1K                | 25                      | 5/3                 | 6                     | 17              | 3/3          | 3   | 3/3               | 3   | 4   | 3      | 1                 | 3                     | 3                     | 2                 | Y                     | 1      | 1                     | I                    |
| PIC16(L)F1777 | (B)              | 14K                          | 8K                          | 128                      | 1K                | 36                      | 5/3                 | 8                     | 28              | 4/4          | 4   | 4/4               | 4   | 4   | 4      | 1                 | 4                     | 4                     | 2                 | Y                     | 1      | 1                     | I                    |
| PIC16(L)F1778 | (B)              | 28K                          | 16K                         | 128                      | 2K                | 25                      | 5/3                 | 6                     | 17              | 3/3          | 3   | 3/3               | 3   | 4   | 3      | 1                 | 3                     | 3                     | 2                 | Y                     | 1      | 1                     | I                    |
| PIC16(L)F1779 | (B)              | 28K                          | 16K                         | 128                      | 2K                | 36                      | 5/3                 | 8                     | 28              | 4/4          | 4   | 4/4               | 4   | 4   | 4      | 1                 | 4                     | 4                     | 2                 | Y                     | 1      | 1                     | I                    |

**Note 1:** One pin is input-only.

**Note 2:** I – Debugging integrated on chip

### Data Sheet Index:

**A:** Future Release PIC16(L)F1773/6 Data Sheet, 24-Pin, 8-bit Flash Microcontrollers

**B:** Future Release PIC16(L)F1777/8/9 Data Sheet, 24/40/44-Pin, 8-bit Flash Microcontrollers

**Note:** For other small form-factor package availability and marking information, please visit <http://www.microchip.com/packaging> or contact your local sales office.

**TABLE 2: PACKAGES**

| Packages      | SPDIP | PDIP | SOIC | SSOP | UQFN | TQFP |
|---------------|-------|------|------|------|------|------|
| PIC16(L)F1773 | X     |      | X    | X    | X    |      |
| PIC16(L)F1776 | X     |      | X    | X    | X    |      |
| PIC16(L)F1777 |       | X    |      |      | X    | X    |
| PIC16(L)F1778 | X     |      | X    | X    | X    |      |
| PIC16(L)F1779 |       | X    |      |      | X    | X    |

**Note:** Pin details are subject to change.

# PIC16(L)F1773/6/7/8/9

## PIN DIAGRAMS

FIGURE 1: 28-PIN SPDIP, SOIC, SSOP



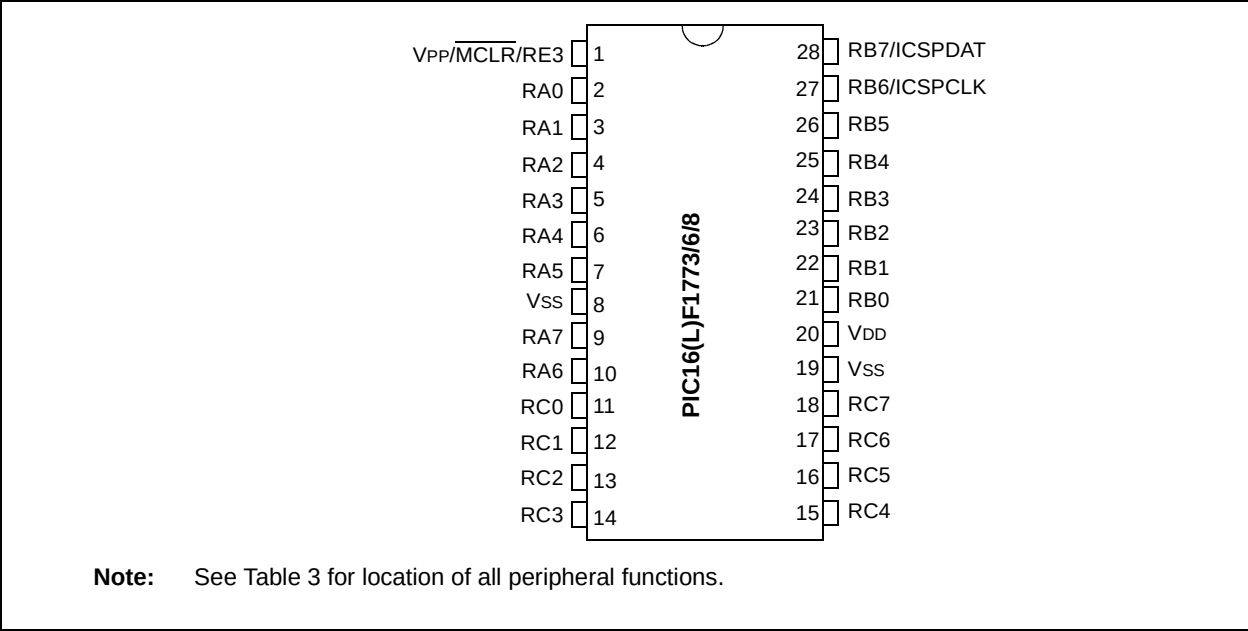


FIGURE 2: 28-PIN UQFN (6x6x0.5 mm)

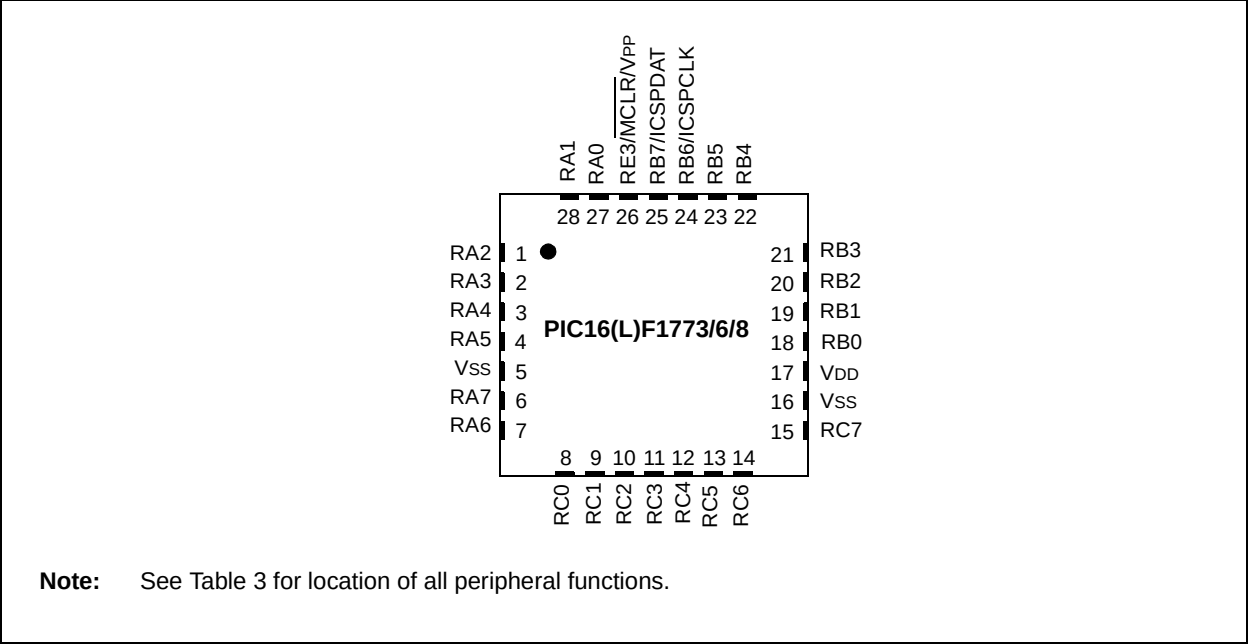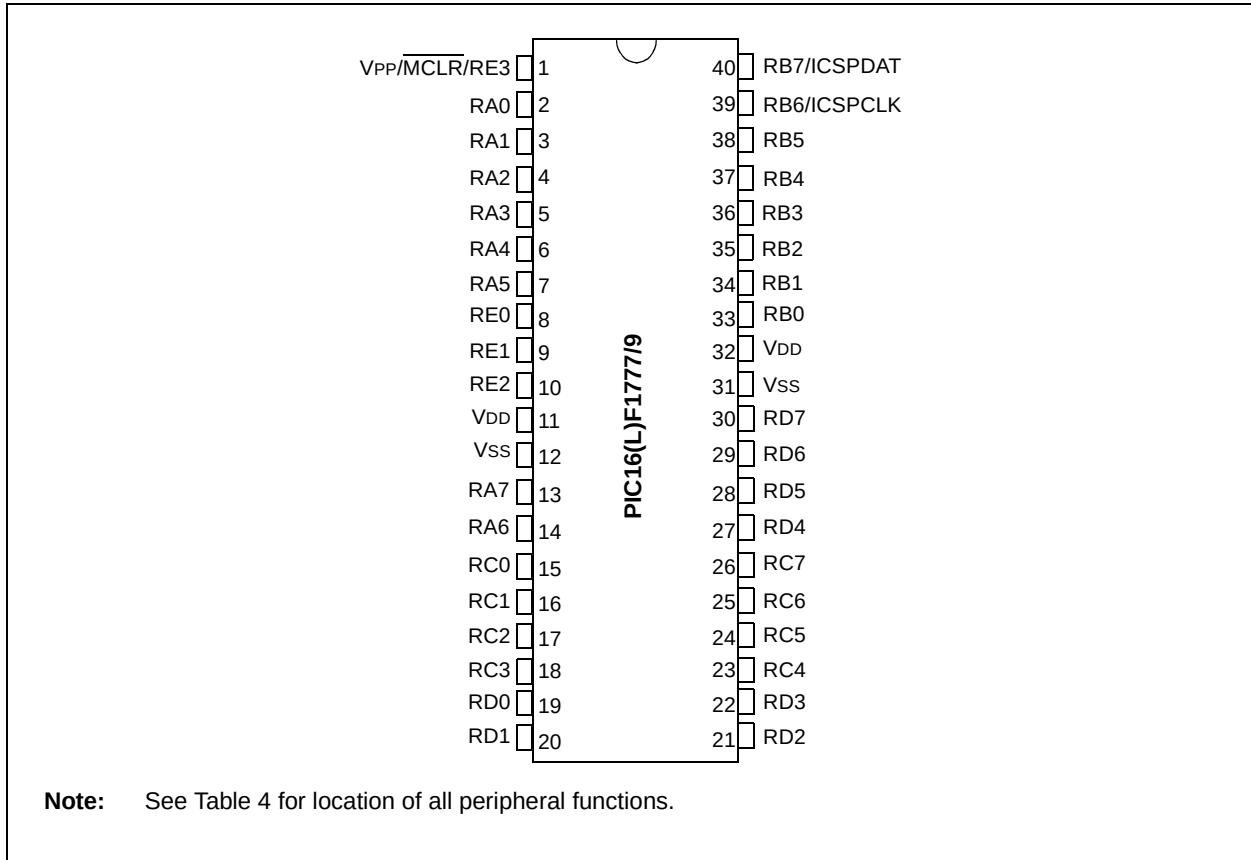


# PIC16(L)F1773/6/7/8/9

**FIGURE 3: 40-PIN PDIP**




**FIGURE 4: 40-PIN UQFN (5x5x0.5 mm)**

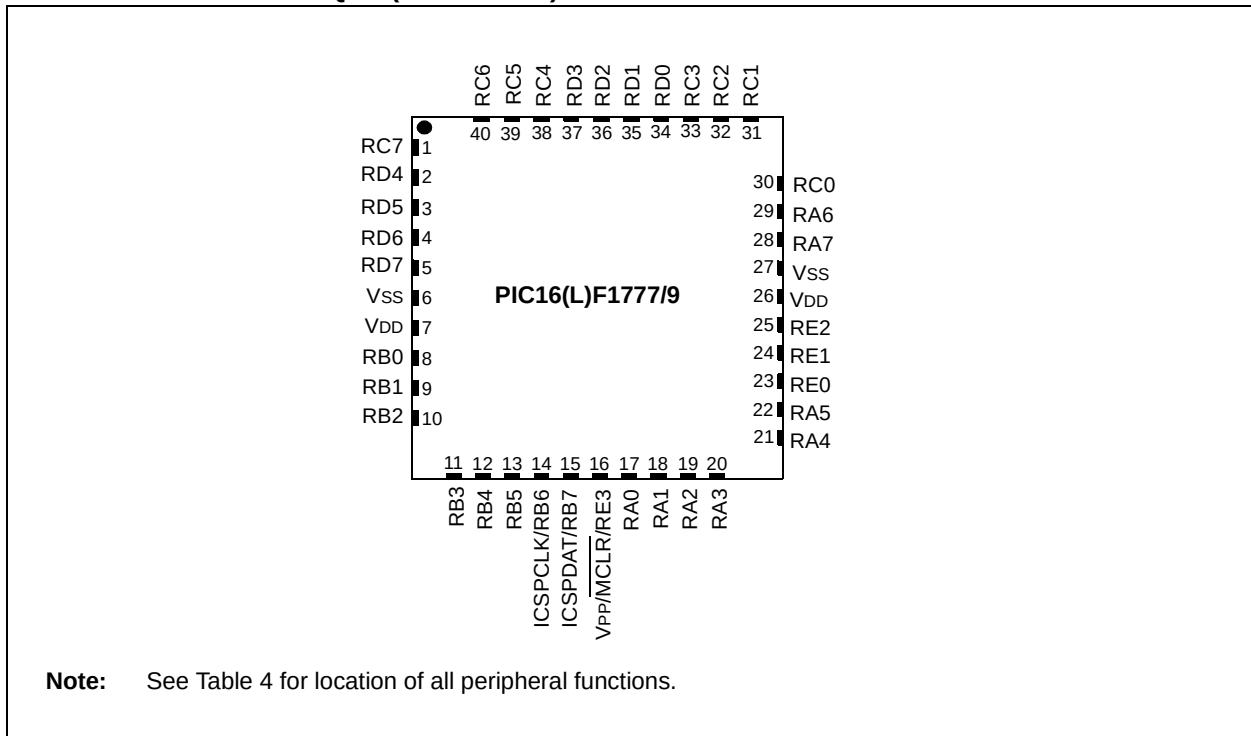

# PIC16(L)F1773/6/7/8/9

FIGURE 5: 44-PIN TQFP (4x4 mm)

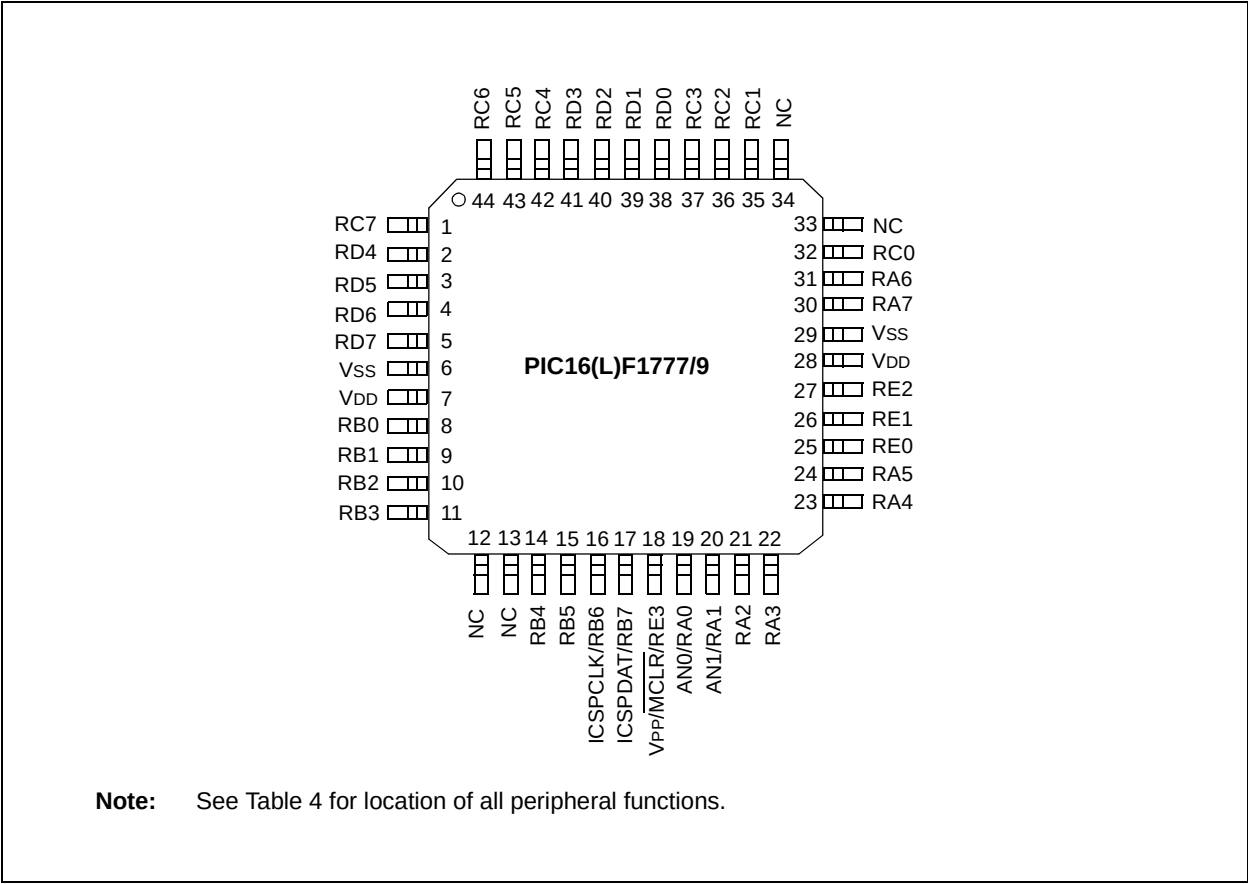

## PIN ALLOCATION TABLES

TABLE 3: 28-PIN ALLOCATION TABLE (PIC16(L)F1773/6/8)

| I/O | 28-Pin SPDIP/SOIC/SSOP | 28-Pin UQFN | ADC          | Voltage Reference                                                          | DAC      | Op Amp                          | Comparator                                               | Zero Cross | Programmable Ramp Generator | Timer                | PWM | CCP | COG | CLC                   | Modulator             | EUSART | MSSP | Interrupts | Pull-ups | High Current | Basic |
|-----|------------------------|-------------|--------------|----------------------------------------------------------------------------|----------|---------------------------------|----------------------------------------------------------|------------|-----------------------------|----------------------|-----|-----|-----|-----------------------|-----------------------|--------|------|------------|----------|--------------|-------|
| RA0 | 2                      | 27          | AN0          | —                                                                          | —        | —                               | C1IN0-<br>C2IN0-<br>C3IN0-<br>C4IN0-<br>C5IN0-<br>C6IN0- | —          | —                           | —                    | —   | —   | —   | CLCIN1 <sup>(1)</sup> | —                     | —      | —    | IOC        | —        | —            | —     |
| RA1 | 3                      | 28          | AN1          | —                                                                          | —        | OPA1OUT<br>OPA2IN1+<br>OPA2IN1- | C1IN1-<br>C2IN1-<br>C3IN1-<br>C4IN1-                     | —          | PRG1IN0<br>PRG2IN1          | —                    | —   | —   | —   | CLCIN2 <sup>(1)</sup> | —                     | —      | —    | IOC        | —        | —            | —     |
| RA2 | 4                      | 1           | AN2<br>VREF- | DAC1REF0-<br>DAC2REF0-<br>DAC3REF0-<br>DAC4REF0-<br>DAC5REF0-<br>DAC7REF0- | DAC1OUT1 | —                               | C1IN0+<br>C2IN0+<br>C3IN0+<br>C4IN0+<br>C5IN0+<br>C6IN0+ | —          | —                           | —                    | —   | —   | —   | —                     | —                     | —      | —    | IOC        | —        | —            | —     |
| RA3 | 5                      | 2           | AN3<br>VREF+ | DAC1REF0+<br>DAC2REF0+<br>DAC3REF0+<br>DAC4REF0+<br>DAC5REF0+<br>DAC7REF0+ | —        | —                               | C1IN1+                                                   | —          | —                           | —                    | —   | —   | —   | —                     | MD1CL <sup>(1)</sup>  | —      | —    | IOC        | —        | —            | —     |
| RA4 | 6                      | 3           | —            | —                                                                          | DAC4OUT1 | OPA1IN0+                        | —                                                        | —          | PRG1R <sup>(1)</sup>        | T0CKI <sup>(1)</sup> | —   | —   | —   | —                     | MD1CH <sup>(1)</sup>  | —      | —    | IOC        | —        | —            | —     |
| RA5 | 7                      | 4           | AN4          | —                                                                          | DAC2OUT1 | OPA1IN0-                        | —                                                        | —          | PRG1F <sup>(1)</sup>        | —                    | —   | —   | —   | —                     | MD1MOD <sup>(1)</sup> | —      | SS   | IOC        | —        | —            | —     |
| RA6 | 10                     | 7           | —            | —                                                                          | —        | —                               | CLKOUT<br>C6IN1+                                         | —          | —                           | —                    | —   | —   | —   | —                     | —                     | —      | —    | IOC        | —        | —            | OSC2  |
| RA7 | 9                      | 6           | —            | —                                                                          | —        | —                               | CLKIN                                                    | —          | —                           | —                    | —   | —   | —   | —                     | —                     | —      | —    | IOC        | —        | —            | OSC1  |

- Note**
- 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.
  - 2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.
  - 3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.



**TABLE 3: 28-PIN ALLOCATION TABLE (PIC16(L)F1773/6/8) (CONTINUED)**

| I/O | 28-Pin SPDIP/SOIC/SSOP | 28-Pin UQFN | ADC    | Voltage Reference      | DAC                                                                  | Op Amp                          | Comparator                           | Zero Cross | Programmable Ramp Generator | Timer                | PWM | CCP                 | COG                   | CLC                   | Modulator             | EUSART | MSSP | Interrupts | Pull-ups | High Current | Basic             |
|-----|------------------------|-------------|--------|------------------------|----------------------------------------------------------------------|---------------------------------|--------------------------------------|------------|-----------------------------|----------------------|-----|---------------------|-----------------------|-----------------------|-----------------------|--------|------|------------|----------|--------------|-------------------|
| RB0 | 21                     | 18          | AN12   | HIB0                   | —                                                                    | —                               | C2IN1+                               | ZCD        | —                           | —                    | —   | —                   | COG1IN <sup>(1)</sup> | —                     | —                     | —      | —    | IOC        | —        | —            | —                 |
| RB1 | 22                     | 19          | AN10   | HIB1                   | —                                                                    | OPA2OUT<br>OPA1IN1+<br>OPA1IN1- | C1IN3-<br>C2IN3-<br>C3IN3-<br>C4IN3- | —          | PRG1IN1<br>PRG2IN0          | —                    | —   | —                   | COG2IN <sup>(1)</sup> | —                     | —                     | —      | —    | IOC        | —        | —            | —                 |
| RB2 | 23                     | 20          | AN8    | —                      | DAC3OUT1                                                             | OPA2IN0-                        | —                                    | —          | —                           | —                    | —   | —                   | COG3IN <sup>(1)</sup> | —                     | —                     | —      | —    | IOC        | —        | —            | —                 |
| RB3 | 24                     | 21          | AN9    | —                      | —                                                                    | OPA2IN0+                        | C1IN2-<br>C2IN2-<br>C3IN2-           | —          | —                           | —                    | —   | —                   | —                     | —                     | MD3CL <sup>(1)</sup>  | —      | —    | IOC        | —        | —            | —                 |
| RB4 | 25                     | 22          | ADCACT | —                      | —                                                                    | —                               | C3IN1+                               | —          | —                           | T5G <sup>(1)</sup>   | —   | —                   | —                     | —                     | MD3CH <sup>(1)</sup>  | —      | —    | IOC        | —        | —            | —                 |
| RB5 | 26                     | 23          | AN13   | DAC5REF1-<br>DAC7REF1- | —                                                                    | —                               | C4IN2-                               | —          | —                           | T1G <sup>(1)</sup>   | —   | CCP3 <sup>(1)</sup> | —                     | —                     | MD3MOD <sup>(1)</sup> | —      | —    | IOC        | —        | —            | —                 |
| RB6 | 27                     | 24          | —      | DAC5REF1+<br>DAC7REF1+ | —                                                                    | —                               | C4IN1+                               | —          | —                           | —                    | —   | —                   | —                     | CLCIN3 <sup>(1)</sup> | —                     | —      | —    | IOC        | —        | —            | ICSPCLK<br>ICDCLK |
| RB7 | 28                     | 25          | —      | —                      | DAC1OUT2<br>DAC2OUT2<br>DAC5OUT2<br>DAC3OUT2<br>DAC4OUT2<br>DAC7OUT2 | —                               | C5IN1+                               | —          | —                           | T6CKI <sup>(1)</sup> | —   | —                   | —                     | CLCIN4 <sup>(1)</sup> | —                     | —      | —    | IOC        | —        | —            | ICSPDAT<br>ICDDAT |

- Note**
- 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.
  - 2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.
  - 3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.

**TABLE 3: 28-PIN ALLOCATION TABLE (PIC16(L)F1773/6/8) (CONTINUED)**

| I/O                | 28-Pin SPDIP/SOIC/SSOP | 28-Pin UQFN | ADC  | Voltage Reference | DAC      | Op Amp   | Comparator                                               | Zero Cross | Programmable Ramp Generator | Timer                                                              | PWM                                          | CCP                  | COG                                                                                                      | CLC                                      | Modulator                  | EUSART                        | MSSP                                                   | Interrupts | Pull-ups | High Current | Basic       |
|--------------------|------------------------|-------------|------|-------------------|----------|----------|----------------------------------------------------------|------------|-----------------------------|--------------------------------------------------------------------|----------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------|-------------------------------|--------------------------------------------------------|------------|----------|--------------|-------------|
| RC0                | 11                     | 8           | —    | —                 | DAC5OUT1 | —        | —                                                        | —          | —                           | T1CKI <sup>(1)</sup><br>T3CKI <sup>(1)</sup><br>T3G <sup>(1)</sup> | —                                            | —                    | —                                                                                                        | —                                        | —                          | —                             | —                                                      | IOC        | —        | —            | —           |
| RC1                | 12                     | 9           | —    | —                 | DAC7OUT1 | —        | —                                                        | —          | PRG2R <sup>(2)</sup>        | —                                                                  | —                                            | CCP2 <sup>(1)</sup>  | —                                                                                                        | —                                        | —                          | —                             | —                                                      | IOC        | —        | —            | —           |
| RC2                | 13                     | 10          | AN14 | —                 | —        | —        | C5IN2-<br>C6IN2-                                         | —          | PRG2F <sup>(1)</sup>        | T5CKI <sup>(1)</sup>                                               | —                                            | CCP1 <sup>(1)</sup>  | —                                                                                                        | —                                        | —                          | —                             | —                                                      | IOC        | —        | —            | —           |
| RC3                | 14                     | 11          | AN15 | —                 | —        | —        | C1IN4-<br>C2IN4-<br>C3IN4-<br>C4IN4-<br>C5IN4-<br>C6IN4- | —          | —                           | T2CKI <sup>(1)</sup>                                               | —                                            | —                    | —                                                                                                        | —                                        | MD2CL <sup>(1)</sup>       | —                             | SD <sup>(1)</sup><br>SDA <sup>(1,3)</sup>              | IOC        | —        | —            | —           |
| RC4                | 15                     | 12          | AN16 | —                 | —        | —        | C5IN3-<br>C6IN3-                                         | —          | PRG3R <sup>(1)</sup>        | T8CKI <sup>(1)</sup>                                               | —                                            | —                    | —                                                                                                        | —                                        | MD2CH <sup>(1)</sup>       | —                             | SCL <sup>(1)</sup><br>SCK <sup>(1,3)</sup>             | IOC        | —        | —            | —           |
| RC5                | 16                     | 13          | AN17 | —                 | —        | OPA3IN0+ | —                                                        | —          | PRG3F <sup>(1)</sup>        | T4CKI <sup>(1)</sup>                                               | —                                            | —                    | —                                                                                                        | —                                        | MD2MOD <sup>(1)</sup>      | —                             | —                                                      | IOC        | —        | —            | —           |
| RC6                | 17                     | 14          | AN18 | —                 | —        | OPA3OUT  | C5IN1-<br>C6IN1-                                         | —          | PRG3IN0                     | —                                                                  | —                                            | —                    | —                                                                                                        | —                                        | —                          | CK <sup>(1)</sup>             | —                                                      | IOC        | —        | —            | —           |
| RC7                | 18                     | 15          | AN19 | —                 | —        | OPA3IN0- | —                                                        | —          | —                           | —                                                                  | —                                            | —                    | —                                                                                                        | —                                        | —                          | RX <sup>(1,3)</sup>           | —                                                      | IOC        | —        | —            | —           |
| RE3                | 1                      | 26          | —    | —                 | —        | —        | —                                                        | —          | —                           | —                                                                  | —                                            | —                    | —                                                                                                        | —                                        | —                          | —                             | —                                                      | IOC        | —        | —            | MCLR<br>ICD |
| VDD                | 20                     | 17          | —    | —                 | —        | —        | —                                                        | —          | —                           | —                                                                  | —                                            | —                    | —                                                                                                        | —                                        | —                          | —                             | —                                                      | —          | —        | —            | VDD         |
| VSS                | 8                      | 5           | —    | —                 | —        | —        | —                                                        | —          | —                           | —                                                                  | —                                            | —                    | —                                                                                                        | —                                        | —                          | —                             | —                                                      | —          | —        | —            | VSS         |
| VSS                | 19                     | 16          | —    | —                 | —        | —        | —                                                        | —          | —                           | —                                                                  | —                                            | —                    | —                                                                                                        | —                                        | —                          | —                             | —                                                      | —          | —        | —            | VSS         |
| OUT <sup>(2)</sup> | —                      | —           | —    | —                 | —        | —        | C1OUT<br>C2OUT<br>C3OUT<br>C4OUT<br>C5OUT<br>C6OUT       | —          | —                           | —                                                                  | PWM1<br>PWM2<br>PWM3<br>PWM4<br>PWM5<br>PWM6 | CCP1<br>CCP2<br>CCP3 | COG1A<br>COG1B<br>COG1C<br>COG1D<br>COG2A<br>COG2B<br>COG2C<br>COG2D<br>COG3A<br>COG3B<br>COG3C<br>COG3D | CLC1OUT<br>CLC2OUT<br>CLC3OUT<br>CLC4OUT | MD1OUT<br>MD2OUT<br>MD3OUT | DT <sup>(3)</sup><br>TX<br>CK | SDO<br>SDA <sup>(3)</sup><br>SCK<br>SCL <sup>(3)</sup> | —          | —        | —            | —           |

**Note** 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.  
2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.  
3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.

**TABLE 4: 40/44-PIN ALLOCATION TABLE (PIC16(L)F1777/9)**

| I/O | 40-Pin PDIP | 40-Pin UQFN | 44-Pin TQFP | ADC | Voltage Reference                                                                                    | DAC      | Op Amp                          | Comparator                                                                   | Zero Cross | Programmable Ramp Generator | Timers               | PWM | CCP | COG | CLC | Modulator             | EUSART | MSSP | Interrupt | Pull-ups | High Current | Basic |
|-----|-------------|-------------|-------------|-----|------------------------------------------------------------------------------------------------------|----------|---------------------------------|------------------------------------------------------------------------------|------------|-----------------------------|----------------------|-----|-----|-----|-----|-----------------------|--------|------|-----------|----------|--------------|-------|
| RA0 | 2           | 17          | 19          | AN0 | —                                                                                                    | —        | —                               | C1IN0-<br>C2IN0-<br>C3IN0-<br>C4IN0-<br>C5IN0-<br>C6IN0-<br>C7IN0-<br>C8IN0- | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —    | IOC       | —        | —            | —     |
| RA1 | 3           | 18          | 20          | AN1 | —                                                                                                    | —        | OPA1OUT<br>OPA2IN1+<br>OPA2IN1- | C1IN1-<br>C2IN1-<br>C3IN1-<br>C4IN1-                                         | —          | PRG1IN0<br>PRG2IN1          | —                    | —   | —   | —   | —   | —                     | —      | —    | IOC       | —        | —            | —     |
| RA2 | 4           | 19          | 21          | AN2 | DAC1REF0-<br>DAC2REF0-<br>DAC3REF0-<br>DAC4REF0-<br>DAC5REF0-<br>DAC6REF0-<br>DAC7REF0-<br>DAC8REF0- | DAC1OUT1 | —                               | C1IN0+<br>C2IN0+<br>C3IN0+<br>C4IN0+<br>C5IN0+<br>C6IN0+<br>C7IN0+<br>C8IN0+ | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —    | IOC       | —        | —            | —     |
| RA3 | 5           | 20          | 22          | AN3 | DAC1REF0+<br>DAC2REF0+<br>DAC3REF0+<br>DAC4REF0+<br>DAC5REF0+<br>DAC6REF0+<br>DAC7REF0+<br>DAC8REF0+ | —        | —                               | C1IN1+                                                                       | —          | —                           | —                    | —   | —   | —   | —   | MD1CL <sup>(1)</sup>  | —      | —    | IOC       | —        | —            | —     |
| RA4 | 6           | 21          | 23          | —   | —                                                                                                    | —        | OPA1IN0+                        | —                                                                            | —          | PRG1R <sup>(1)</sup>        | T0CKI <sup>(1)</sup> | —   | —   | —   | —   | MD1CH <sup>(1)</sup>  | —      | —    | IOC       | —        | —            | —     |
| RA5 | 7           | 22          | 24          | AN4 | —                                                                                                    | DAC2OUT1 | OPA1IN0-                        | —                                                                            | —          | PRG1F <sup>(1)</sup>        | —                    | —   | —   | —   | —   | MD1MOD <sup>(1)</sup> | —      | SS   | IOC       | —        | —            | —     |
| RA6 | 14          | 29          | 31          | —   | —                                                                                                    | —        | —                               | CLKOUT<br>C6IN1+                                                             | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —    | IOC       | —        | —            | OSC2  |
| RA7 | 13          | 28          | 30          | —   | —                                                                                                    | —        | —                               | CLKIN                                                                        | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —    | IOC       | —        | —            | OSC1  |

**Note** 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.  
2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.  
3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.

**TABLE 4: 40/44-PIN ALLOCATION TABLE (PIC16(L)F1777/9) (CONTINUED)**

| I/O | 40-Pin PDIP | 40-Pin UQFN | 44-Pin TQFP | ADC    | Voltage Reference      | DAC      | Op Amp                          | Comparator                           | Zero Cross | Programmable Ramp Generator | Timers                                                             | PWM | CCP                 | COG                   | CLC | Modulator             | EUSART | MSSP                                       | Interrupt | Pull-ups | High Current | Basic             |
|-----|-------------|-------------|-------------|--------|------------------------|----------|---------------------------------|--------------------------------------|------------|-----------------------------|--------------------------------------------------------------------|-----|---------------------|-----------------------|-----|-----------------------|--------|--------------------------------------------|-----------|----------|--------------|-------------------|
| RB0 | 33          | 8           | 8           | AN12   | HIB0                   | —        | —                               | C2IN1+                               | ZCD        | —                           | —                                                                  | —   | CCP4 <sup>(1)</sup> | COG1IN <sup>(1)</sup> | —   | MD4CL <sup>(1)</sup>  | —      | —                                          | IOC INT   | —        | —            | —                 |
| RB1 | 34          | 9           | 9           | AN10   | HIB1                   | —        | OPA2OUT<br>OPA1IN1+<br>OPA1IN1- | C1IN3-<br>C2IN3-<br>C3IN3-<br>C4IN3- | —          | PRG4R <sup>(1)</sup>        | —                                                                  | —   | —                   | COG2IN <sup>(1)</sup> | —   | MD4CH <sup>(1)</sup>  | —      | —                                          | IOC       | —        | —            | —                 |
| RB2 | 35          | 10          | 10          | AN8    | —                      | —        | OPA2IN0-                        | —                                    | —          | PRG4F <sup>(1)</sup>        | —                                                                  | —   | —                   | COG3IN <sup>(1)</sup> | —   | MD4MOD <sup>(1)</sup> | —      | —                                          | IOC       | —        | —            | —                 |
| RB3 | 36          | 11          | 11          | AN9    | —                      | —        | OPA2IN0+                        | C1IN2-<br>C2IN2-<br>C3IN2-           | —          | —                           | —                                                                  | —   | —                   | COG4IN <sup>(1)</sup> | —   | MD3CL <sup>(1)</sup>  | —      | —                                          | IOC       | —        | —            | —                 |
| RB4 | 37          | 12          | 14          | ADCACT | —                      | —        | —                               | C3IN1+                               | —          | —                           | T5G <sup>(1)</sup>                                                 | —   | —                   | —                     | —   | MD3CH <sup>(1)</sup>  | —      | —                                          | IOC       | —        | —            | —                 |
| RB5 | 38          | 13          | 15          | AN13   | DAC5REF1-<br>DAC7REF1- | —        | —                               | C4IN2-                               | —          | —                           | T1G <sup>(1)</sup>                                                 | —   | CCP3 <sup>(1)</sup> | —                     | —   | MD3MOD <sup>(1)</sup> | —      | —                                          | IOC       | —        | —            | —                 |
| RB6 | 39          | 14          | 16          | —      | DAC5REF1+<br>DAC7REF1+ | —        | —                               | C4IN1+                               | —          | —                           | —                                                                  | —   | —                   | —                     | —   | —                     | —      | —                                          | IOC       | —        | —            | ICSPCLK<br>ICDCLK |
| RB7 | 40          | 15          | 17          | —      | —                      | DACxOUT2 | —                               | C5IN1+                               | —          | —                           | T6CKI <sup>(1)</sup>                                               | —   | —                   | —                     | —   | —                     | —      | —                                          | IOC       | —        | —            | ICSPDAT<br>ICDDAT |
| RC0 | 15          | 30          | 32          | —      | —                      | DAC5OUT1 | —                               | —                                    | —          | —                           | T1CKI <sup>(1)</sup><br>T3CKI <sup>(1)</sup><br>T3G <sup>(1)</sup> | —   | —                   | —                     | —   | —                     | —      | —                                          | IOC       | —        | —            | —                 |
| RC1 | 16          | 31          | 35          | —      | —                      | DAC7OUT1 | —                               | —                                    | —          | PRG2R <sup>(1)</sup>        | SOSCO                                                              | —   | CCP2 <sup>(1)</sup> | —                     | —   | —                     | —      | —                                          | IOC       | —        | —            | —                 |
| RC2 | 17          | 32          | 36          | AN14   | —                      | —        | —                               | C5IN2-<br>C6IN2-                     | —          | PRG2F <sup>(1)</sup>        | T5CKI <sup>(1)</sup>                                               | —   | CCP1 <sup>(1)</sup> | —                     | —   | —                     | —      | —                                          | IOC       | —        | —            | —                 |
| RC3 | 18          | 33          | 37          | AN15   | —                      | —        | —                               | —                                    | —          | —                           | T2CKI <sup>(1)</sup>                                               | —   | —                   | —                     | —   | MD2CL <sup>(1)</sup>  | —      | SDI <sup>(1)</sup><br>SDA <sup>(1,3)</sup> | IOC       | —        | —            | —                 |
| RC4 | 23          | 38          | 42          | AN16   | —                      | —        | —                               | C5IN3-<br>C6IN3-                     | —          | PRG3R <sup>(1)</sup>        | T8CKI <sup>(1)</sup>                                               | —   | —                   | —                     | —   | MD2CH <sup>(1)</sup>  | —      | SCL <sup>(1)</sup><br>SCK <sup>(1,3)</sup> | IOC       | —        | —            | —                 |

**Note**

- 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.
- 2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.
- 3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.

**TABLE 4: 40/44-PIN ALLOCATION TABLE (PIC16(L)F1777/9) (CONTINUED)**

| I/O | 40-Pin PDIP | 40-Pin UQFN | 44-Pin TQFP | ADC  | Voltage Reference      | DAC      | Op Amp                          | Comparator                                                                   | Zero Cross | Programmable Ramp Generator | Timers               | PWM | CCP | COG | CLC | Modulator             | EUSART | MSSP                | Interrupt | Pull-ups | High Current | Basic       |
|-----|-------------|-------------|-------------|------|------------------------|----------|---------------------------------|------------------------------------------------------------------------------|------------|-----------------------------|----------------------|-----|-----|-----|-----|-----------------------|--------|---------------------|-----------|----------|--------------|-------------|
| RC5 | 24          | 39          | 43          | AN17 | —                      | —        | OPA3IN0+                        | —                                                                            | —          | PRG3F <sup>(1)</sup>        | T4CKI <sup>(1)</sup> | —   | —   | —   | —   | MD2MOD <sup>(1)</sup> | —      | —                   | IOC       | —        | —            | —           |
| RC6 | 25          | 40          | 44          | AN18 | —                      | —        | OPA3OUT<br>OPA4IN1+<br>OPA4IN1- | C5IN1-<br>C6IN1-<br>C7IN1-<br>C8IN1-                                         | —          | PRG3IN0<br>PRG4IN1          | —                    | —   | —   | —   | —   | —                     | —      | CK <sup>(1)</sup>   | IOC       | —        | —            | —           |
| RC7 | 26          | 1           | 1           | AN19 | —                      | —        | OPA3IN0-                        | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | RX <sup>(1,3)</sup> | IOC       | —        | —            | —           |
| RD0 | 19          | 34          | 38          | AN20 | —                      | —        | OPA4IN0+                        | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD1 | 20          | 35          | 39          | AN21 | —                      | —        | OPA4OUT<br>OPA3IN1+<br>OPA3IN1- | C1IN4-<br>C2IN4-<br>C3IN4-<br>C4IN4-<br>C5IN4-<br>C6IN4-<br>C7IN4-<br>C8IN4- | —          | PRG3IN1<br>PRG4IN0          | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD2 | 21          | 36          | 40          | AN22 | —                      | —        | OPA4IN0-                        | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD3 | 22          | 37          | 41          | AN23 | —                      | —        | —                               | C8IN2-                                                                       | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD4 | 27          | 2           | 2           | AN24 | —                      | —        | —                               | C7IN2-                                                                       | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD5 | 28          | 3           | 3           | AN25 | —                      | —        | —                               | C7IN3-<br>C8IN3-                                                             | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD6 | 29          | 4           | 4           | AN26 | —                      | —        | —                               | C7IN1+                                                                       | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RD7 | 30          | 5           | 5           | AN27 | —                      | —        | —                               | C8IN1+                                                                       | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | —           |
| RE0 | 8           | 23          | 25          | AN5  | DAC6REF1+<br>DAC8REF1+ | —        | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | IOC       | —        | —            | —           |
| RE1 | 9           | 24          | 26          | AN6  | DAC6REF1-<br>DAC8REF1- | —        | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | IOC       | —        | —            | —           |
| RE2 | 10          | 25          | 27          | AN7  | —                      | DAC6OUT1 | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | IOC       | —        | —            | —           |
| RE3 | 1           | 16          | 18          | —    | —                      | DAC8OUT1 | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | IOC       | —        | —            | MCLR<br>ICD |
| VDD | 11          | 7           | 7           | —    | —                      | —        | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | VDD         |
| VDD | 32          | 26          | 28          | —    | —                      | —        | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | VDD         |
| VSS | 12          | 6           | 6           | —    | —                      | —        | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | VSS         |
| VSS | 31          | 27          | 29          | —    | —                      | —        | —                               | —                                                                            | —          | —                           | —                    | —   | —   | —   | —   | —                     | —      | —                   | —         | —        | —            | VSS         |

**Note** 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.  
2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.  
3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.

**TABLE 4: 40/44-PIN ALLOCATION TABLE (PIC16(L)F1777/9) (CONTINUED)**

| I/O                | 40-Pin PDIP | 40-Pin UQFN | 44-Pin TQFP | ADC | Voltage Reference | DAC | Op Amp | Comparator                                                           | Zero Cross | Programmable Ramp Generator | Timers | PWM                                                          | CCP                          | COG                                                                                                                                          | CLC                                      | Modulator                            | EUSART                        | MSSP                                                   | Interrupt | Pull-ups | High Current | Basic |
|--------------------|-------------|-------------|-------------|-----|-------------------|-----|--------|----------------------------------------------------------------------|------------|-----------------------------|--------|--------------------------------------------------------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------|-------------------------------|--------------------------------------------------------|-----------|----------|--------------|-------|
| OUT <sup>(2)</sup> | —           | —           | —           | —   | —                 | —   | —      | C1OUT<br>C2OUT<br>C3OUT<br>C4OUT<br>C5OUT<br>C6OUT<br>C7OUT<br>C8OUT | —          | —                           | —      | PWM1<br>PWM2<br>PWM3<br>PWM4<br>PWM5<br>PWM6<br>PWM7<br>PWM8 | CCP1<br>CCP2<br>CCP3<br>CCP4 | COG1A<br>COG1B<br>COG1C<br>COG1D<br>COG2A<br>COG2B<br>COG2C<br>COG2D<br>COG3A<br>COG3B<br>COG3C<br>COG3D<br>COG4A<br>COG4B<br>COG4C<br>COG4D | CLC1OUT<br>CLC2OUT<br>CLC3OUT<br>CLC4OUT | MD1OUT<br>MD2OUT<br>MD3OUT<br>MD4OUT | DT <sup>(3)</sup><br>TX<br>CK | SDO<br>SDA <sup>(3)</sup><br>SCK<br>SCL <sup>(3)</sup> | —         | —        | —            | —     |

- Note**
- 1: Default peripheral input. Input can be moved to any other pin with the PPS input selection register.
  - 2: All pin outputs default to PORT latch data. Any pin can be selected as a digital peripheral output with the PPS output selection registers.
  - 3: These peripheral functions are bidirectional. The output pin selections must be the same as the input pin selections.

# PIC16(L)F1773/6/7/8/9

---

NOTES:

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELoQ, KEELoQ logo, Klear, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC<sup>32</sup> logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KlearNet, KlearNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63277-450-7

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949 ==**

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



---

---

## Worldwide Sales and Service

---

---

### AMERICAS

#### Corporate Office

2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Austin, TX

Tel: 512-257-3370

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Cleveland

Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Novi, MI  
Tel: 248-848-4000

#### Houston, TX

Tel: 281-894-5983

#### Indianapolis

Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### New York, NY

Tel: 631-435-6000

#### San Jose, CA

Tel: 408-735-9110

#### Canada - Toronto

Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

#### Asia Pacific Office

Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2943-5100  
Fax: 852-2401-3431

#### Australia - Sydney

Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

#### China - Beijing

Tel: 86-10-8569-7000  
Fax: 86-10-8528-2104

#### China - Chengdu

Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

#### China - Chongqing

Tel: 86-23-8980-9588  
Fax: 86-23-8980-9500

#### China - Dongguan

Tel: 86-769-8702-9880

#### China - Hangzhou

Tel: 86-571-8792-8115  
Fax: 86-571-8792-8116

#### China - Hong Kong SAR

Tel: 852-2943-5100  
Fax: 852-2401-3431

#### China - Nanjing

Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

#### China - Qingdao

Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

#### China - Shanghai

Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

#### China - Shenyang

Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

#### China - Shenzhen

Tel: 86-755-8864-2200  
Fax: 86-755-8203-1760

#### China - Wuhan

Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

#### China - Xian

Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

### ASIA/PACIFIC

#### China - Xiamen

Tel: 86-592-2388138  
Fax: 86-592-2388130

#### China - Zhuhai

Tel: 86-756-3210040  
Fax: 86-756-3210049

#### India - Bangalore

Tel: 91-80-3090-4444  
Fax: 91-80-3090-4123

#### India - New Delhi

Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

#### India - Pune

Tel: 91-20-3019-1500

#### Japan - Osaka

Tel: 81-6-6152-7160  
Fax: 81-6-6152-9310

#### Japan - Tokyo

Tel: 81-3-6880-3770  
Fax: 81-3-6880-3771

#### Korea - Daegu

Tel: 82-53-744-4301  
Fax: 82-53-744-4302

#### Korea - Seoul

Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

#### Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

#### Malaysia - Penang

Tel: 60-4-227-8870  
Fax: 60-4-227-4068

#### Philippines - Manila

Tel: 63-2-634-9065  
Fax: 63-2-634-9069

#### Singapore

Tel: 65-6334-8870  
Fax: 65-6334-8850

#### Taiwan - Hsin Chu

Tel: 886-3-5778-366  
Fax: 886-3-5770-955

#### Taiwan - Kaohsiung

Tel: 886-7-213-7828

#### Taiwan - Taipei

Tel: 886-2-2508-8600  
Fax: 886-2-2508-0102

#### Thailand - Bangkok

Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

#### Austria - Wels

Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

#### Denmark - Copenhagen

Tel: 45-4450-2828  
Fax: 45-4485-2829

#### France - Paris

Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

#### Germany - Dusseldorf

Tel: 49-2129-3766400

#### Germany - Munich

Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

#### Germany - Pforzheim

Tel: 49-7231-424750

#### Italy - Milan

Tel: 39-0331-742611  
Fax: 39-0331-466781

#### Italy - Venice

Tel: 39-049-7625286

#### Netherlands - Drunen

Tel: 31-416-690399  
Fax: 31-416-690340

#### Poland - Warsaw

Tel: 48-22-3325737

#### Spain - Madrid

Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

#### Sweden - Stockholm

Tel: 46-8-5090-4654

#### UK - Wokingham

Tel: 44-118-921-5800  
Fax: 44-118-921-5820

01/27/15