


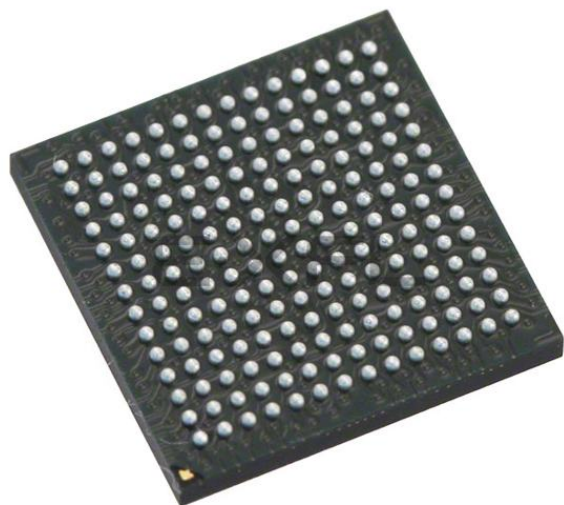

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                  |
| Number of LABs/CLBs            | 300                                                                                                                                     |
| Number of Logic Elements/Cells | 3840                                                                                                                                    |
| Total RAM Bits                 | 221184                                                                                                                                  |
| Number of I/O                  | 106                                                                                                                                     |
| Number of Gates                | -                                                                                                                                       |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                           |
| Mounting Type                  | Surface Mount                                                                                                                           |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                      |
| Package / Case                 | 196-TFBGA, CSBGA                                                                                                                        |
| Supplier Device Package        | 196-CSPBGA (8x8)                                                                                                                        |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/xilinx/xc6slx4-2cpg196i">https://www.e-xfl.com/product-detail/xilinx/xc6slx4-2cpg196i</a> |

Table 1: Absolute Maximum Ratings<sup>(1)</sup> (Cont'd)

| Symbol                               | Description                                                                                          |                                        |              |                                       |               | Units |
|--------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------|--------------|---------------------------------------|---------------|-------|
| $V_{IN}$ and $V_{TS}$ <sup>(3)</sup> | I/O input voltage or voltage applied to 3-state output, relative to GND <sup>(4)</sup>               | All user and dedicated I/Os            | Commercial   | DC                                    | –0.60 to 4.10 | V     |
|                                      |                                                                                                      |                                        |              | 20% overshoot duration                | –0.75 to 4.25 | V     |
|                                      |                                                                                                      |                                        |              | 8% overshoot duration <sup>(5)</sup>  | –0.75 to 4.40 | V     |
|                                      |                                                                                                      |                                        | Industrial   | DC                                    | –0.60 to 3.95 | V     |
|                                      |                                                                                                      |                                        |              | 20% overshoot duration                | –0.75 to 4.15 | V     |
|                                      |                                                                                                      |                                        |              | 4% overshoot duration <sup>(5)</sup>  | –0.75 to 4.40 | V     |
|                                      |                                                                                                      |                                        | Expanded (Q) | DC                                    | –0.60 to 3.95 | V     |
|                                      |                                                                                                      |                                        |              | 20% overshoot duration                | –0.75 to 4.15 | V     |
|                                      |                                                                                                      |                                        |              | 4% overshoot duration <sup>(5)</sup>  | –0.75 to 4.40 | V     |
|                                      |                                                                                                      | Restricted to maximum of 100 user I/Os | Commercial   | 20% overshoot duration                | –0.75 to 4.35 | V     |
|                                      |                                                                                                      |                                        |              | 15% overshoot duration <sup>(5)</sup> | –0.75 to 4.40 | V     |
|                                      |                                                                                                      |                                        |              | 10% overshoot duration                | –0.75 to 4.45 | V     |
|                                      |                                                                                                      |                                        | Industrial   | 20% overshoot duration                | –0.75 to 4.25 | V     |
|                                      |                                                                                                      |                                        |              | 10% overshoot duration                | –0.75 to 4.35 | V     |
|                                      |                                                                                                      |                                        |              | 8% overshoot duration <sup>(5)</sup>  | –0.75 to 4.40 | V     |
|                                      |                                                                                                      |                                        | Expanded (Q) | 20% overshoot duration                | –0.75 to 4.25 | V     |
|                                      |                                                                                                      |                                        |              | 10% overshoot duration                | –0.75 to 4.35 | V     |
|                                      |                                                                                                      |                                        |              | 8% overshoot duration <sup>(5)</sup>  | –0.75 to 4.40 | V     |
| $T_{STG}$                            | Storage temperature (ambient)                                                                        |                                        |              |                                       | –65 to 150    | °C    |
| $T_{SOL}$                            | Maximum soldering temperature <sup>(6)</sup><br>(TQG144, CPG196, CSG225, CSG324, CSG484, and FTG256) |                                        |              |                                       | +260          | °C    |
|                                      | Maximum soldering temperature <sup>(6)</sup> (Pb-free packages: FGG484, FGG676, and FGG900)          |                                        |              |                                       | +250          | °C    |
|                                      | Maximum soldering temperature <sup>(6)</sup> (Pb packages: CS484, FT256, FG484, FG676, and FG900)    |                                        |              |                                       | +220          | °C    |
| $T_j$                                | Maximum junction temperature <sup>(6)</sup>                                                          |                                        |              |                                       | +125          | °C    |

**Notes:**

- Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.
- When programming eFUSE,  $V_{FS} \leq V_{CCAUX}$ . Requires up to 40 mA current. For read mode,  $V_{FS}$  can be between GND and 3.45 V.
- I/O absolute maximum limit applied to DC and AC signals. Overshoot duration is the percentage of a data period that the I/O is stressed beyond 3.45V.
- For I/O operation, refer to [UG381](#): *Spartan-6 FPGA SelectIO Resources User Guide*.
- Maximum percent overshoot duration to meet 4.40V maximum.
- For soldering guidelines and thermal considerations, see [UG385](#): *Spartan-6 FPGA Packaging and Pinout Specification*.

Table 3: eFUSE Programming Conditions<sup>(1)</sup>

| Symbol           | Description                                  | Min  | Typ  | Max  | Units              |
|------------------|----------------------------------------------|------|------|------|--------------------|
| $V_{FS}^{(2)}$   | External voltage supply                      | 3.2  | 3.3  | 3.4  | V                  |
| $I_{FS}$         | $V_{FS}$ supply current                      | –    | –    | 40   | mA                 |
| $V_{CCAUX}$      | Auxiliary supply voltage relative to GND     | 3.2  | 3.3  | 3.45 | V                  |
| $R_{FUSE}^{(3)}$ | External resistor from $R_{FUSE}$ pin to GND | 1129 | 1140 | 1151 | $\Omega$           |
| $V_{CCINT}$      | Internal supply voltage relative to GND      | 1.14 | 1.2  | 1.26 | V                  |
| $t_j$            | Temperature range                            | 15   | –    | 85   | $^{\circ}\text{C}$ |

**Notes:**

1. These specifications apply during programming of the eFUSE AES key. Programming is only supported through JTAG. The AES key is only supported in the following devices: LX75, LX75T, LX100, LX100T, LX150, and LX150T.
2. When programming eFUSE,  $V_{FS}$  must be less than or equal to  $V_{CCAUX}$ . When not programming or when eFUSE is not used, Xilinx recommends connecting  $V_{FS}$  to GND. However,  $V_{FS}$  can be between GND and 3.45 V.
3. An  $R_{FUSE}$  resistor is required when programming the eFUSE AES key. When not programming or when eFUSE is not used, Xilinx recommends connecting the  $R_{FUSE}$  pin to  $V_{CCAUX}$  or GND. However,  $R_{FUSE}$  can be unconnected.

Table 4: DC Characteristics Over Recommended Operating Conditions

| Symbol               | Description                                                                                                                                    | Min                | Typ | Max | Units    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-----|----------|
| $V_{DRINT}$          | Data retention $V_{CCINT}$ voltage (below which configuration data might be lost)                                                              | 0.8                | –   | –   | V        |
| $V_{DRAUX}$          | Data retention $V_{CCAUX}$ voltage (below which configuration data might be lost)                                                              | 2.0                | –   | –   | V        |
| $I_{REF}$            | $V_{REF}$ leakage current per pin for commercial (C) and industrial (I) devices                                                                | –10                | –   | 10  | $\mu A$  |
|                      | $V_{REF}$ leakage current per pin for expanded (Q) devices                                                                                     | –15                | –   | 15  | $\mu A$  |
| $I_L$                | Input or output leakage current per pin (sample-tested) for commercial (C) and industrial (I) devices                                          | –10                | –   | 10  | $\mu A$  |
|                      | Input or output leakage current per pin (sample-tested) for expanded (Q) devices                                                               | –15                | –   | 15  | $\mu A$  |
| $I_{HS}$             | Leakage current on pins during hot socketing with FPGA unpowered                                                                               | –20                | –   | 20  | $\mu A$  |
|                      | All pins except PROGRAM_B, DONE, and JTAG pins when HSWAPEN = 1<br>PROGRAM_B, DONE, and JTAG pins, or other pins when HSWAPEN = 0              | $I_{HS} + I_{RPU}$ |     |     | $\mu A$  |
| $C_{IN}^{(1)}$       | Die input capacitance at the pad                                                                                                               | –                  | –   | 10  | pF       |
| $I_{RPU}$            | Pad pull-up (when selected) @ $V_{IN} = 0V$ , $V_{CCO} = 3.3V$ or $V_{CCAUX} = 3.3V$                                                           | 200                | –   | 500 | $\mu A$  |
|                      | Pad pull-up (when selected) @ $V_{IN} = 0V$ , $V_{CCO} = 2.5V$ or $V_{CCAUX} = 2.5V$                                                           | 120                | –   | 350 | $\mu A$  |
|                      | Pad pull-up (when selected) @ $V_{IN} = 0V$ , $V_{CCO} = 1.8V$                                                                                 | 60                 | –   | 200 | $\mu A$  |
|                      | Pad pull-up (when selected) @ $V_{IN} = 0V$ , $V_{CCO} = 1.5V$                                                                                 | 40                 | –   | 150 | $\mu A$  |
|                      | Pad pull-up (when selected) @ $V_{IN} = 0V$ , $V_{CCO} = 1.2V$                                                                                 | 12                 | –   | 100 | $\mu A$  |
| $I_{RPD}$            | Pad pull-down (when selected) @ $V_{IN} = V_{CCO}$ , $V_{CCAUX} = 3.3V$                                                                        | 200                | –   | 550 | $\mu A$  |
|                      | Pad pull-down (when selected) @ $V_{IN} = V_{CCO}$ , $V_{CCAUX} = 2.5V$                                                                        | 140                | –   | 400 | $\mu A$  |
| $I_{BATT}^{(2)}$     | Battery supply current                                                                                                                         | –                  | –   | 150 | nA       |
| $R_{DT}^{(3)}$       | Resistance of optional input differential termination circuit, $V_{CCAUX} = 3.3V$                                                              | –                  | 100 | –   | $\Omega$ |
| $R_{IN\_TERM}^{(5)}$ | Thevenin equivalent resistance of programmable input termination to $V_{CCO}$ (UNTUNED_SPLIT_25) for commercial (C) and industrial (I) devices | 23                 | 25  | 55  | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable input termination to $V_{CCO}$ (UNTUNED_SPLIT_25) for expanded (Q) devices                      | 20                 | 25  | 55  | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable input termination to $V_{CCO}$ (UNTUNED_SPLIT_50) for commercial (C) and industrial (I) devices | 39                 | 50  | 72  | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable input termination to $V_{CCO}$ (UNTUNED_SPLIT_50) for expanded (Q) devices                      | 32                 | 50  | 74  | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable input termination to $V_{CCO}$ (UNTUNED_SPLIT_75) for commercial (C) and industrial (I) devices | 56                 | 75  | 109 | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable input termination to $V_{CCO}$ (UNTUNED_SPLIT_75) for expanded (Q) devices                      | 47                 | 75  | 115 | $\Omega$ |
| $R_{OUT\_TERM}$      | Thevenin equivalent resistance of programmable output termination (UNTUNED_25)                                                                 | 11                 | 25  | 52  | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable output termination (UNTUNED_50)                                                                 | 21                 | 50  | 96  | $\Omega$ |
|                      | Thevenin equivalent resistance of programmable output termination (UNTUNED_75)                                                                 | 29                 | 75  | 145 | $\Omega$ |

**Notes:**

- The  $C_{IN}$  measurement represents the die capacitance at the pad, not including the package.
- Maximum value specified for worst case process at 25°C. LX75, LX75T, LX100, LX100T, LX150, and LX150T only.
- Refer to IBIS models for  $R_{DT}$  variation and for values at  $V_{CCAUX} = 2.5V$ . IBIS values for  $R_{DT}$  are valid for all temperature ranges.
- $V_{CCO2}$  is not required for data retention. The minimum  $V_{CCO2}$  for power-on reset and configuration is 1.65V.
- Termination resistance to a  $V_{CCO}/2$  level.

Table 8: Recommended Operating Conditions for User I/Os Using Differential Signal Standards

| I/O Standard             | V <sub>CCO</sub> for Drivers |        |        |
|--------------------------|------------------------------|--------|--------|
|                          | V, Min                       | V, Nom | V, Max |
| LVDS_33                  | 3.0                          | 3.3    | 3.45   |
| LVDS_25                  | 2.25                         | 2.5    | 2.75   |
| BLVDS_25                 | 2.25                         | 2.5    | 2.75   |
| MINI_LVDS_33             | 3.0                          | 3.3    | 3.45   |
| MINI_LVDS_25             | 2.25                         | 2.5    | 2.75   |
| LVPECL_33 <sup>(1)</sup> | N/A—Inputs Only              |        |        |
| LVPECL_25                | N/A—Inputs Only              |        |        |
| RSDS_33                  | 3.0                          | 3.3    | 3.45   |
| RSDS_25                  | 2.25                         | 2.5    | 2.75   |
| TMDS_33 <sup>(1)</sup>   | 3.14                         | 3.3    | 3.45   |
| PPDS_33                  | 3.0                          | 3.3    | 3.45   |
| PPDS_25                  | 2.25                         | 2.5    | 2.75   |
| DISPLAY_PORT             | 2.3                          | 2.5    | 2.7    |
| DIFF_MOBILE_DDR          | 1.7                          | 1.8    | 1.9    |
| DIFF_HSTL_I              | 1.4                          | 1.5    | 1.6    |
| DIFF_HSTL_II             | 1.4                          | 1.5    | 1.6    |
| DIFF_HSTL_III            | 1.4                          | 1.5    | 1.6    |
| DIFF_HSTL_I_18           | 1.7                          | 1.8    | 1.9    |
| DIFF_HSTL_II_18          | 1.7                          | 1.8    | 1.9    |
| DIFF_HSTL_III_18         | 1.7                          | 1.8    | 1.9    |
| DIFF_SSTL3_I             | 3.0                          | 3.3    | 3.45   |
| DIFF_SSTL3_II            | 3.0                          | 3.3    | 3.45   |
| DIFF_SSTL2_I             | 2.3                          | 2.5    | 2.7    |
| DIFF_SSTL2_II            | 2.3                          | 2.5    | 2.7    |
| DIFF_SSTL18_I            | 1.7                          | 1.8    | 1.9    |
| DIFF_SSTL18_II           | 1.7                          | 1.8    | 1.9    |
| DIFF_SSTL15_II           | 1.425                        | 1.5    | 1.575  |

**Notes:**

1. LVPECL\_33 and TMDS\_33 inputs require V<sub>CCAUX</sub> = 3.3V nominal.

Table 28: IOB Switching Characteristics for the Commercial (XC) Spartan-6 Devices (Cont'd)

| I/O Standard     | T <sub>IOPI</sub> |      |      |                     | T <sub>IOOP</sub> |       |       |                     | T <sub>IOTP</sub> |       |       |                     | Units |
|------------------|-------------------|------|------|---------------------|-------------------|-------|-------|---------------------|-------------------|-------|-------|---------------------|-------|
|                  | Speed Grade       |      |      |                     | Speed Grade       |       |       |                     | Speed Grade       |       |       |                     |       |
|                  | -3                | -3N  | -2   | -1L <sup>(1)</sup>  | -3                | -3N   | -2    | -1L <sup>(1)</sup>  | -3                | -3N   | -2    | -1L <sup>(1)</sup>  |       |
| PPDS_33          | 1.17              | 1.29 | 1.42 | 1.68                | 1.57              | 1.71  | 1.91  | 2.43                | 3000              | 3000  | 3000  | 3000                | ns    |
| PPDS_25          | 1.01              | 1.13 | 1.26 | 1.56                | 1.68              | 1.82  | 2.02  | 2.47                | 3000              | 3000  | 3000  | 3000                | ns    |
| PCI33_3          | 1.07              | 1.19 | 1.32 | 1.57 <sup>(2)</sup> | 3.51              | 3.65  | 3.85  | 4.38 <sup>(2)</sup> | 3.51              | 3.65  | 3.85  | 4.38 <sup>(1)</sup> | ns    |
| PCI66_3          | 1.07              | 1.19 | 1.32 | 1.57 <sup>(2)</sup> | 3.53              | 3.67  | 3.87  | 4.39 <sup>(2)</sup> | 3.53              | 3.67  | 3.87  | 4.39 <sup>(1)</sup> | ns    |
| DISPLAY_PORT     | 1.02              | 1.14 | 1.27 | 1.56                | 3.15              | 3.29  | 3.49  | 4.08                | 3.15              | 3.29  | 3.49  | 4.08                | ns    |
| I2C              | 1.33              | 1.45 | 1.58 | 1.82                | 11.56             | 11.70 | 11.90 | 12.52               | 11.56             | 11.70 | 11.90 | 12.52               | ns    |
| SMBUS            | 1.33              | 1.45 | 1.58 | 1.82                | 11.56             | 11.70 | 11.90 | 12.52               | 11.56             | 11.70 | 11.90 | 12.52               | ns    |
| SDIO             | 1.36              | 1.48 | 1.61 | 1.84                | 2.64              | 2.78  | 2.98  | 3.60                | 2.64              | 2.78  | 2.98  | 3.60                | ns    |
| MOBILE_DDR       | 0.94              | 1.06 | 1.19 | 1.43                | 2.35              | 2.49  | 2.69  | 3.31                | 2.35              | 2.49  | 2.69  | 3.31                | ns    |
| HSTL_I           | 0.90              | 1.02 | 1.15 | 1.39                | 1.66              | 1.80  | 2.00  | 2.62                | 1.66              | 1.80  | 2.00  | 2.62                | ns    |
| HSTL_II          | 0.91              | 1.03 | 1.16 | 1.40                | 1.72              | 1.86  | 2.06  | 2.68                | 1.72              | 1.86  | 2.06  | 2.68                | ns    |
| HSTL_III         | 0.95              | 1.07 | 1.20 | 1.44                | 1.67              | 1.81  | 2.01  | 2.61                | 1.67              | 1.81  | 2.01  | 2.61                | ns    |
| HSTL_I_18        | 0.94              | 1.06 | 1.19 | 1.43                | 1.77              | 1.91  | 2.11  | 2.73                | 1.77              | 1.91  | 2.11  | 2.73                | ns    |
| HSTL_II_18       | 0.94              | 1.06 | 1.19 | 1.43                | 1.85              | 1.99  | 2.19  | 2.81                | 1.85              | 1.99  | 2.19  | 2.81                | ns    |
| HSTL_III_18      | 0.99              | 1.11 | 1.24 | 1.47                | 1.79              | 1.93  | 2.13  | 2.72                | 1.79              | 1.93  | 2.13  | 2.72                | ns    |
| SSTL3_I          | 1.58              | 1.70 | 1.83 | 2.16                | 1.83              | 1.97  | 2.17  | 2.72                | 1.83              | 1.97  | 2.17  | 2.72                | ns    |
| SSTL3_II         | 1.58              | 1.70 | 1.83 | 2.16                | 2.01              | 2.15  | 2.35  | 2.94                | 2.01              | 2.15  | 2.35  | 2.94                | ns    |
| SSTL2_I          | 1.30              | 1.42 | 1.55 | 1.87                | 1.77              | 1.91  | 2.11  | 2.69                | 1.77              | 1.91  | 2.11  | 2.69                | ns    |
| SSTL2_II         | 1.30              | 1.42 | 1.55 | 1.88                | 1.86              | 2.00  | 2.20  | 2.82                | 1.86              | 2.00  | 2.20  | 2.82                | ns    |
| SSTL18_I         | 0.92              | 1.04 | 1.17 | 1.41                | 1.63              | 1.77  | 1.97  | 2.59                | 1.63              | 1.77  | 1.97  | 2.59                | ns    |
| SSTL18_II        | 0.92              | 1.04 | 1.17 | 1.41                | 1.66              | 1.80  | 2.00  | 2.62                | 1.66              | 1.80  | 2.00  | 2.62                | ns    |
| SSTL15_II        | 0.92              | 1.04 | 1.17 | 1.41                | 1.67              | 1.81  | 2.01  | 2.63                | 1.67              | 1.81  | 2.01  | 2.63                | ns    |
| DIFF_HSTL_I      | 0.94              | 1.06 | 1.19 | 1.46                | 1.77              | 1.91  | 2.11  | 2.62                | 1.77              | 1.91  | 2.11  | 2.62                | ns    |
| DIFF_HSTL_II     | 0.93              | 1.05 | 1.18 | 1.45                | 1.72              | 1.86  | 2.06  | 2.54                | 1.72              | 1.86  | 2.06  | 2.54                | ns    |
| DIFF_HSTL_III    | 0.93              | 1.05 | 1.18 | 1.46                | 1.69              | 1.83  | 2.03  | 2.53                | 1.69              | 1.83  | 2.03  | 2.53                | ns    |
| DIFF_HSTL_I_18   | 0.97              | 1.09 | 1.22 | 1.50                | 1.79              | 1.93  | 2.13  | 2.63                | 1.79              | 1.93  | 2.13  | 2.63                | ns    |
| DIFF_HSTL_II_18  | 0.97              | 1.09 | 1.22 | 1.49                | 1.69              | 1.83  | 2.03  | 2.51                | 1.69              | 1.83  | 2.03  | 2.51                | ns    |
| DIFF_HSTL_III_18 | 0.97              | 1.09 | 1.22 | 1.50                | 1.69              | 1.83  | 2.03  | 2.53                | 1.69              | 1.83  | 2.03  | 2.53                | ns    |
| DIFF_SSTL3_I     | 1.18              | 1.30 | 1.43 | 1.68                | 1.81              | 1.95  | 2.15  | 2.64                | 1.81              | 1.95  | 2.15  | 2.64                | ns    |
| DIFF_SSTL3_II    | 1.19              | 1.31 | 1.44 | 1.68                | 1.80              | 1.94  | 2.14  | 2.63                | 1.80              | 1.94  | 2.14  | 2.63                | ns    |
| DIFF_SSTL2_I     | 1.02              | 1.14 | 1.27 | 1.57                | 1.80              | 1.94  | 2.14  | 2.62                | 1.80              | 1.94  | 2.14  | 2.62                | ns    |
| DIFF_SSTL2_II    | 1.02              | 1.14 | 1.27 | 1.57                | 1.76              | 1.90  | 2.10  | 2.57                | 1.76              | 1.90  | 2.10  | 2.57                | ns    |
| DIFF_SSTL18_I    | 0.97              | 1.09 | 1.22 | 1.51                | 1.72              | 1.86  | 2.06  | 2.56                | 1.72              | 1.86  | 2.06  | 2.56                | ns    |
| DIFF_SSTL18_II   | 0.98              | 1.10 | 1.23 | 1.50                | 1.68              | 1.82  | 2.02  | 2.52                | 1.68              | 1.82  | 2.02  | 2.52                | ns    |
| DIFF_SSTL15_II   | 0.94              | 1.06 | 1.19 | 1.46                | 1.67              | 1.81  | 2.01  | 2.50                | 1.67              | 1.81  | 2.01  | 2.50                | ns    |
| DIFF_MOBILE_DDR  | 0.97              | 1.09 | 1.22 | 1.51                | 1.75              | 1.89  | 2.09  | 2.57                | 1.75              | 1.89  | 2.09  | 2.57                | ns    |

Table 28: IOB Switching Characteristics for the Commercial (XC) Spartan-6 Devices (Cont'd)

| I/O Standard                    | T <sub>IOPI</sub> |      |      |                    | T <sub>IOOP</sub> |      |      |                    | T <sub>IOTP</sub> |      |      |                    | Units |
|---------------------------------|-------------------|------|------|--------------------|-------------------|------|------|--------------------|-------------------|------|------|--------------------|-------|
|                                 | Speed Grade       |      |      |                    | Speed Grade       |      |      |                    | Speed Grade       |      |      |                    |       |
|                                 | -3                | -3N  | -2   | -1L <sup>(1)</sup> | -3                | -3N  | -2   | -1L <sup>(1)</sup> | -3                | -3N  | -2   | -1L <sup>(1)</sup> |       |
| LVC MOS15, Slow, 8 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 2.30              | 2.44 | 2.64 | 3.25               | 2.30              | 2.44 | 2.64 | 3.25               | ns    |
| LVC MOS15, Slow, 12 mA          | 0.98              | 1.10 | 1.23 | 1.79               | 2.03              | 2.17 | 2.37 | 2.99               | 2.03              | 2.17 | 2.37 | 2.99               | ns    |
| LVC MOS15, Slow, 16 mA          | 0.98              | 1.10 | 1.23 | 1.79               | 2.01              | 2.15 | 2.35 | 2.97               | 2.01              | 2.15 | 2.35 | 2.97               | ns    |
| LVC MOS15, Fast, 2 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 3.29              | 3.43 | 3.63 | 4.24               | 3.29              | 3.43 | 3.63 | 4.24               | ns    |
| LVC MOS15, Fast, 4 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 2.27              | 2.41 | 2.61 | 3.22               | 2.27              | 2.41 | 2.61 | 3.22               | ns    |
| LVC MOS15, Fast, 6 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 1.78              | 1.92 | 2.12 | 2.74               | 1.78              | 1.92 | 2.12 | 2.74               | ns    |
| LVC MOS15, Fast, 8 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 1.73              | 1.87 | 2.07 | 2.69               | 1.73              | 1.87 | 2.07 | 2.69               | ns    |
| LVC MOS15, Fast, 12 mA          | 0.98              | 1.10 | 1.23 | 1.79               | 1.73              | 1.87 | 2.07 | 2.64               | 1.73              | 1.87 | 2.07 | 2.64               | ns    |
| LVC MOS15, Fast, 16 mA          | 0.98              | 1.10 | 1.23 | 1.79               | 1.73              | 1.87 | 2.07 | 2.64               | 1.73              | 1.87 | 2.07 | 2.64               | ns    |
| LVC MOS15_JEDEC, QUIETIO, 2 mA  | 1.03              | 1.15 | 1.28 | 1.49               | 5.49              | 5.63 | 5.83 | 6.37               | 5.49              | 5.63 | 5.83 | 6.37               | ns    |
| LVC MOS15_JEDEC, QUIETIO, 4 mA  | 1.03              | 1.15 | 1.28 | 1.49               | 4.61              | 4.75 | 4.95 | 5.51               | 4.61              | 4.75 | 4.95 | 5.51               | ns    |
| LVC MOS15_JEDEC, QUIETIO, 6 mA  | 1.03              | 1.15 | 1.28 | 1.49               | 4.07              | 4.21 | 4.41 | 4.97               | 4.07              | 4.21 | 4.41 | 4.97               | ns    |
| LVC MOS15_JEDEC, QUIETIO, 8 mA  | 1.03              | 1.15 | 1.28 | 1.49               | 3.92              | 4.06 | 4.26 | 4.81               | 3.92              | 4.06 | 4.26 | 4.81               | ns    |
| LVC MOS15_JEDEC, QUIETIO, 12 mA | 1.03              | 1.15 | 1.28 | 1.49               | 3.54              | 3.68 | 3.88 | 4.51               | 3.54              | 3.68 | 3.88 | 4.51               | ns    |
| LVC MOS15_JEDEC, QUIETIO, 16 mA | 1.03              | 1.15 | 1.28 | 1.49               | 3.33              | 3.47 | 3.67 | 4.31               | 3.33              | 3.47 | 3.67 | 4.31               | ns    |
| LVC MOS15_JEDEC, Slow, 2 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 4.18              | 4.32 | 4.52 | 5.13               | 4.18              | 4.32 | 4.52 | 5.13               | ns    |
| LVC MOS15_JEDEC, Slow, 4 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 3.42              | 3.56 | 3.76 | 4.35               | 3.42              | 3.56 | 3.76 | 4.35               | ns    |
| LVC MOS15_JEDEC, Slow, 6 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 2.29              | 2.43 | 2.63 | 3.25               | 2.29              | 2.43 | 2.63 | 3.25               | ns    |
| LVC MOS15_JEDEC, Slow, 8 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 2.30              | 2.44 | 2.64 | 3.26               | 2.30              | 2.44 | 2.64 | 3.26               | ns    |
| LVC MOS15_JEDEC, Slow, 12 mA    | 1.03              | 1.15 | 1.28 | 1.49               | 2.01              | 2.15 | 2.35 | 2.97               | 2.01              | 2.15 | 2.35 | 2.97               | ns    |
| LVC MOS15_JEDEC, Slow, 16 mA    | 1.03              | 1.15 | 1.28 | 1.49               | 2.01              | 2.15 | 2.35 | 2.97               | 2.01              | 2.15 | 2.35 | 2.97               | ns    |
| LVC MOS15_JEDEC, Fast, 2 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 3.28              | 3.42 | 3.62 | 4.22               | 3.28              | 3.42 | 3.62 | 4.22               | ns    |
| LVC MOS15_JEDEC, Fast, 4 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 2.27              | 2.41 | 2.61 | 3.23               | 2.27              | 2.41 | 2.61 | 3.23               | ns    |
| LVC MOS15_JEDEC, Fast, 6 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 1.78              | 1.92 | 2.12 | 2.74               | 1.78              | 1.92 | 2.12 | 2.74               | ns    |
| LVC MOS15_JEDEC, Fast, 8 mA     | 1.03              | 1.15 | 1.28 | 1.49               | 1.73              | 1.87 | 2.07 | 2.69               | 1.73              | 1.87 | 2.07 | 2.69               | ns    |
| LVC MOS15_JEDEC, Fast, 12 mA    | 1.03              | 1.15 | 1.28 | 1.49               | 1.73              | 1.87 | 2.07 | 2.63               | 1.73              | 1.87 | 2.07 | 2.63               | ns    |
| LVC MOS15_JEDEC, Fast, 16 mA    | 1.03              | 1.15 | 1.28 | 1.49               | 1.73              | 1.87 | 2.07 | 2.63               | 1.73              | 1.87 | 2.07 | 2.63               | ns    |
| LVC MOS12, QUIETIO, 2 mA        | 0.91              | 1.03 | 1.16 | 1.51               | 6.40              | 6.54 | 6.74 | 7.30               | 6.40              | 6.54 | 6.74 | 7.30               | ns    |
| LVC MOS12, QUIETIO, 4 mA        | 0.91              | 1.03 | 1.16 | 1.51               | 4.98              | 5.12 | 5.32 | 5.90               | 4.98              | 5.12 | 5.32 | 5.90               | ns    |
| LVC MOS12, QUIETIO, 6 mA        | 0.91              | 1.03 | 1.16 | 1.51               | 4.65              | 4.79 | 4.99 | 5.55               | 4.65              | 4.79 | 4.99 | 5.55               | ns    |
| LVC MOS12, QUIETIO, 8 mA        | 0.91              | 1.03 | 1.16 | 1.51               | 4.23              | 4.37 | 4.57 | 5.21               | 4.23              | 4.37 | 4.57 | 5.21               | ns    |
| LVC MOS12, QUIETIO, 12 mA       | 0.91              | 1.03 | 1.16 | 1.51               | 3.98              | 4.12 | 4.32 | 4.94               | 3.98              | 4.12 | 4.32 | 4.94               | ns    |
| LVC MOS12, Slow, 2 mA           | 0.91              | 1.03 | 1.16 | 1.51               | 4.98              | 5.12 | 5.32 | 5.91               | 4.98              | 5.12 | 5.32 | 5.91               | ns    |
| LVC MOS12, Slow, 4 mA           | 0.91              | 1.03 | 1.16 | 1.51               | 2.84              | 2.98 | 3.18 | 3.81               | 2.84              | 2.98 | 3.18 | 3.81               | ns    |
| LVC MOS12, Slow, 6 mA           | 0.91              | 1.03 | 1.16 | 1.51               | 2.77              | 2.91 | 3.11 | 3.72               | 2.77              | 2.91 | 3.11 | 3.72               | ns    |
| LVC MOS12, Slow, 8 mA           | 0.91              | 1.03 | 1.16 | 1.51               | 2.34              | 2.48 | 2.68 | 3.31               | 2.34              | 2.48 | 2.68 | 3.31               | ns    |
| LVC MOS12, Slow, 12 mA          | 0.91              | 1.03 | 1.16 | 1.51               | 2.08              | 2.22 | 2.42 | 3.06               | 2.08              | 2.22 | 2.42 | 3.06               | ns    |

Table 29: IOB Switching Characteristics for the Automotive XA Spartan-6 and the Spartan-6Q Devices<sup>(1)</sup> (Cont'd)

| I/O Standard              | T <sub>IOPI</sub> |      | T <sub>IOOP</sub> |      | T <sub>IOTP</sub> |      | Units |
|---------------------------|-------------------|------|-------------------|------|-------------------|------|-------|
|                           | Speed Grade       |      | Speed Grade       |      | Speed Grade       |      |       |
|                           | -3                | -2   | -3                | -2   | -3                | -2   |       |
| LVC MOS33, Slow, 6 mA     | 1.41              | 1.59 | 2.79              | 2.99 | 2.79              | 2.99 | ns    |
| LVC MOS33, Slow, 8 mA     | 1.41              | 1.59 | 2.79              | 2.99 | 2.79              | 2.99 | ns    |
| LVC MOS33, Slow, 12 mA    | 1.41              | 1.59 | 2.53              | 2.73 | 2.53              | 2.73 | ns    |
| LVC MOS33, Slow, 16 mA    | 1.41              | 1.59 | 2.45              | 2.65 | 2.45              | 2.65 | ns    |
| LVC MOS33, Slow, 24 mA    | 1.41              | 1.59 | 2.42              | 2.62 | 2.42              | 2.62 | ns    |
| LVC MOS33, Fast, 2 mA     | 1.41              | 1.59 | 4.05              | 4.25 | 4.05              | 4.25 | ns    |
| LVC MOS33, Fast, 4 mA     | 1.41              | 1.59 | 2.66              | 2.86 | 2.66              | 2.86 | ns    |
| LVC MOS33, Fast, 6 mA     | 1.41              | 1.59 | 2.46              | 2.66 | 2.46              | 2.66 | ns    |
| LVC MOS33, Fast, 8 mA     | 1.41              | 1.59 | 2.21              | 2.41 | 2.21              | 2.41 | ns    |
| LVC MOS33, Fast, 12 mA    | 1.41              | 1.59 | 1.80              | 2.00 | 1.80              | 2.00 | ns    |
| LVC MOS33, Fast, 16 mA    | 1.41              | 1.59 | 1.80              | 2.00 | 1.80              | 2.00 | ns    |
| LVC MOS33, Fast, 24 mA    | 1.41              | 1.59 | 1.80              | 2.00 | 1.80              | 2.00 | ns    |
| LVC MOS25, QUIETIO, 2 mA  | 0.89              | 1.07 | 5.00              | 5.20 | 5.00              | 5.20 | ns    |
| LVC MOS25, QUIETIO, 4 mA  | 0.89              | 1.07 | 3.85              | 4.05 | 3.85              | 4.05 | ns    |
| LVC MOS25, QUIETIO, 6 mA  | 0.89              | 1.07 | 3.60              | 3.80 | 3.60              | 3.80 | ns    |
| LVC MOS25, QUIETIO, 8 mA  | 0.89              | 1.07 | 3.34              | 3.54 | 3.34              | 3.54 | ns    |
| LVC MOS25, QUIETIO, 12 mA | 0.89              | 1.07 | 2.98              | 3.18 | 2.98              | 3.18 | ns    |
| LVC MOS25, QUIETIO, 16 mA | 0.89              | 1.07 | 2.79              | 2.99 | 2.79              | 2.99 | ns    |
| LVC MOS25, QUIETIO, 24 mA | 0.89              | 1.07 | 2.64              | 2.84 | 2.64              | 2.84 | ns    |
| LVC MOS25, Slow, 2 mA     | 0.89              | 1.07 | 3.96              | 4.16 | 3.96              | 4.16 | ns    |
| LVC MOS25, Slow, 4 mA     | 0.89              | 1.07 | 2.96              | 3.16 | 2.96              | 3.16 | ns    |
| LVC MOS25, Slow, 6 mA     | 0.89              | 1.07 | 2.88              | 3.08 | 2.88              | 3.08 | ns    |
| LVC MOS25, Slow, 8 mA     | 0.89              | 1.07 | 2.63              | 2.83 | 2.63              | 2.83 | ns    |
| LVC MOS25, Slow, 12 mA    | 0.89              | 1.07 | 2.15              | 2.35 | 2.15              | 2.35 | ns    |
| LVC MOS25, Slow, 16 mA    | 0.89              | 1.07 | 2.15              | 2.35 | 2.15              | 2.35 | ns    |
| LVC MOS25, Slow, 24 mA    | 0.89              | 1.07 | 2.15              | 2.35 | 2.15              | 2.35 | ns    |
| LVC MOS25, Fast, 2 mA     | 0.89              | 1.07 | 3.52              | 3.72 | 3.52              | 3.72 | ns    |
| LVC MOS25, Fast, 4 mA     | 0.89              | 1.07 | 2.43              | 2.63 | 2.43              | 2.63 | ns    |
| LVC MOS25, Fast, 6 mA     | 0.89              | 1.07 | 2.23              | 2.43 | 2.23              | 2.43 | ns    |
| LVC MOS25, Fast, 8 mA     | 0.89              | 1.07 | 2.16              | 2.36 | 2.16              | 2.36 | ns    |
| LVC MOS25, Fast, 12 mA    | 0.89              | 1.07 | 1.70              | 1.90 | 1.70              | 1.90 | ns    |
| LVC MOS25, Fast, 16 mA    | 0.89              | 1.07 | 1.70              | 1.90 | 1.70              | 1.90 | ns    |
| LVC MOS25, Fast, 24 mA    | 0.89              | 1.07 | 1.70              | 1.90 | 1.70              | 1.90 | ns    |
| LVC MOS18, QUIETIO, 2 mA  | 1.25              | 1.43 | 6.11              | 6.31 | 6.11              | 6.31 | ns    |
| LVC MOS18, QUIETIO, 4 mA  | 1.25              | 1.43 | 4.88              | 5.08 | 4.88              | 5.08 | ns    |
| LVC MOS18, QUIETIO, 6 mA  | 1.25              | 1.43 | 4.20              | 4.40 | 4.20              | 4.40 | ns    |
| LVC MOS18, QUIETIO, 8 mA  | 1.25              | 1.43 | 3.86              | 4.06 | 3.86              | 4.06 | ns    |
| LVC MOS18, QUIETIO, 12 mA | 1.25              | 1.43 | 3.49              | 3.69 | 3.49              | 3.69 | ns    |



Table 29: IOB Switching Characteristics for the Automotive XA Spartan-6 and the Spartan-6Q Devices<sup>(1)</sup> (Cont'd)

| I/O Standard                    | T <sub>IOPI</sub> |      | T <sub>IOOP</sub> |      | T <sub>IOTP</sub> |      | Units |
|---------------------------------|-------------------|------|-------------------|------|-------------------|------|-------|
|                                 | Speed Grade       |      | Speed Grade       |      | Speed Grade       |      |       |
|                                 | -3                | -2   | -3                | -2   | -3                | -2   |       |
| LVC MOS15, QUIETIO, 2 mA        | 1.05              | 1.23 | 5.63              | 5.83 | 5.63              | 5.83 | ns    |
| LVC MOS15, QUIETIO, 4 mA        | 1.05              | 1.23 | 4.75              | 4.95 | 4.75              | 4.95 | ns    |
| LVC MOS15, QUIETIO, 6 mA        | 1.05              | 1.23 | 4.21              | 4.41 | 4.21              | 4.41 | ns    |
| LVC MOS15, QUIETIO, 8 mA        | 1.05              | 1.23 | 4.05              | 4.25 | 4.05              | 4.25 | ns    |
| LVC MOS15, QUIETIO, 12 mA       | 1.05              | 1.23 | 3.74              | 3.94 | 3.74              | 3.94 | ns    |
| LVC MOS15, QUIETIO, 16 mA       | 1.05              | 1.23 | 3.52              | 3.72 | 3.52              | 3.72 | ns    |
| LVC MOS15, Slow, 2 mA           | 1.05              | 1.23 | 4.32              | 4.52 | 4.32              | 4.52 | ns    |
| LVC MOS15, Slow, 4 mA           | 1.05              | 1.23 | 3.58              | 3.78 | 3.58              | 3.78 | ns    |
| LVC MOS15, Slow, 6 mA           | 1.05              | 1.23 | 2.45              | 2.65 | 2.45              | 2.65 | ns    |
| LVC MOS15, Slow, 8 mA           | 1.05              | 1.23 | 2.46              | 2.66 | 2.46              | 2.66 | ns    |
| LVC MOS15, Slow, 12 mA          | 1.05              | 1.23 | 2.17              | 2.37 | 2.17              | 2.37 | ns    |
| LVC MOS15, Slow, 16 mA          | 1.05              | 1.23 | 2.15              | 2.35 | 2.15              | 2.35 | ns    |
| LVC MOS15, Fast, 2 mA           | 1.05              | 1.23 | 3.43              | 3.63 | 3.43              | 3.63 | ns    |
| LVC MOS15, Fast, 4 mA           | 1.05              | 1.23 | 2.42              | 2.62 | 2.42              | 2.62 | ns    |
| LVC MOS15, Fast, 6 mA           | 1.05              | 1.23 | 1.92              | 2.12 | 1.92              | 2.12 | ns    |
| LVC MOS15, Fast, 8 mA           | 1.05              | 1.23 | 1.87              | 2.07 | 1.87              | 2.07 | ns    |
| LVC MOS15, Fast, 12 mA          | 1.05              | 1.23 | 1.87              | 2.07 | 1.87              | 2.07 | ns    |
| LVC MOS15, Fast, 16 mA          | 1.05              | 1.23 | 1.87              | 2.07 | 1.87              | 2.07 | ns    |
| LVC MOS15_JEDEC, QUIETIO, 2 mA  | 1.10              | 1.28 | 5.64              | 5.84 | 5.64              | 5.84 | ns    |
| LVC MOS15_JEDEC, QUIETIO, 4 mA  | 1.10              | 1.28 | 4.75              | 4.95 | 4.75              | 4.95 | ns    |
| LVC MOS15_JEDEC, QUIETIO, 6 mA  | 1.10              | 1.28 | 4.21              | 4.41 | 4.21              | 4.41 | ns    |
| LVC MOS15_JEDEC, QUIETIO, 8 mA  | 1.10              | 1.28 | 4.06              | 4.26 | 4.06              | 4.26 | ns    |
| LVC MOS15_JEDEC, QUIETIO, 12 mA | 1.10              | 1.28 | 3.75              | 3.95 | 3.75              | 3.95 | ns    |
| LVC MOS15_JEDEC, QUIETIO, 16 mA | 1.10              | 1.28 | 3.53              | 3.73 | 3.53              | 3.73 | ns    |
| LVC MOS15_JEDEC, Slow, 2 mA     | 1.10              | 1.28 | 4.32              | 4.52 | 4.32              | 4.52 | ns    |
| LVC MOS15_JEDEC, Slow, 4 mA     | 1.10              | 1.28 | 3.56              | 3.76 | 3.56              | 3.76 | ns    |
| LVC MOS15_JEDEC, Slow, 6 mA     | 1.10              | 1.28 | 2.44              | 2.64 | 2.44              | 2.64 | ns    |
| LVC MOS15_JEDEC, Slow, 8 mA     | 1.10              | 1.28 | 2.47              | 2.67 | 2.47              | 2.67 | ns    |
| LVC MOS15_JEDEC, Slow, 12 mA    | 1.10              | 1.28 | 2.15              | 2.35 | 2.15              | 2.35 | ns    |
| LVC MOS15_JEDEC, Slow, 16 mA    | 1.10              | 1.28 | 2.15              | 2.35 | 2.15              | 2.35 | ns    |
| LVC MOS15_JEDEC, Fast, 2 mA     | 1.10              | 1.28 | 3.43              | 3.63 | 3.43              | 3.63 | ns    |
| LVC MOS15_JEDEC, Fast, 4 mA     | 1.10              | 1.28 | 2.42              | 2.62 | 2.42              | 2.62 | ns    |
| LVC MOS15_JEDEC, Fast, 6 mA     | 1.10              | 1.28 | 1.92              | 2.12 | 1.92              | 2.12 | ns    |
| LVC MOS15_JEDEC, Fast, 8 mA     | 1.10              | 1.28 | 1.87              | 2.07 | 1.87              | 2.07 | ns    |
| LVC MOS15_JEDEC, Fast, 12 mA    | 1.10              | 1.28 | 1.87              | 2.07 | 1.87              | 2.07 | ns    |
| LVC MOS15_JEDEC, Fast, 16 mA    | 1.10              | 1.28 | 1.87              | 2.07 | 1.87              | 2.07 | ns    |
| LVC MOS12, QUIETIO, 2 mA        | 0.98              | 1.16 | 6.54              | 6.74 | 6.54              | 6.74 | ns    |
| LVC MOS12, QUIETIO, 4 mA        | 0.98              | 1.16 | 5.12              | 5.32 | 5.12              | 5.32 | ns    |

## I/O Standard Measurement Methodology

### Input Delay Measurements

Table 31 shows the test setup parameters used for measuring input delay.

Table 31: Input Delay Measurement Methodology

| Description                                                      | I/O Standard Attribute     | $V_L^{(1)}$           | $V_H^{(1)}$      | $V_{MEAS}^{(3)(4)}$ | $V_{REF}^{(2)(4)}$ |
|------------------------------------------------------------------|----------------------------|-----------------------|------------------|---------------------|--------------------|
| LVTTTL (Low-Voltage Transistor-Transistor Logic)                 | LVTTTL                     | 0                     | 3.0              | 1.4                 | —                  |
| LVC MOS (Low-Voltage CMOS), 3.3V                                 | LVC MOS33                  | 0                     | 3.3              | 1.65                | —                  |
| LVC MOS, 2.5V                                                    | LVC MOS25                  | 0                     | 2.5              | 1.25                | —                  |
| LVC MOS, 1.8V                                                    | LVC MOS18                  | 0                     | 1.8              | 0.9                 | —                  |
| LVC MOS, 1.5V                                                    | LVC MOS15                  | 0                     | 1.5              | 0.75                | —                  |
| LVC MOS, 1.2V                                                    | LVC MOS12                  | 0                     | 1.2              | 0.6                 | —                  |
| PCI (Peripheral Component Interface), 33 MHz and 66 MHz, 3.3V    | PCI33_3, PCI66_3           | Per PCI Specification |                  |                     | —                  |
| HSTL (High-Speed Transceiver Logic), Class I & II                | HSTL_I, HSTL_II            | $V_{REF} - 0.5$       | $V_{REF} + 0.5$  | $V_{REF}$           | 0.75               |
| HSTL, Class III                                                  | HSTL_III                   | $V_{REF} - 0.5$       | $V_{REF} + 0.5$  | $V_{REF}$           | 0.90               |
| HSTL, Class I & II, 1.8V                                         | HSTL_I_18, HSTL_II_18      | $V_{REF} - 0.5$       | $V_{REF} + 0.5$  | $V_{REF}$           | 0.90               |
| HSTL, Class III 1.8V                                             | HSTL_III_18                | $V_{REF} - 0.5$       | $V_{REF} + 0.5$  | $V_{REF}$           | 1.1                |
| SSTL (Stub Terminated Transceiver Logic), Class I & II, 3.3V     | SSTL3_I, SSTL3_II          | $V_{REF} - 0.75$      | $V_{REF} + 0.75$ | $V_{REF}$           | 1.5                |
| SSTL, Class I & II, 2.5V                                         | SSTL2_I, SSTL2_II          | $V_{REF} - 0.75$      | $V_{REF} + 0.75$ | $V_{REF}$           | 1.25               |
| SSTL, Class I & II, 1.8V                                         | SSTL18_I, SSTL18_II        | $V_{REF} - 0.5$       | $V_{REF} + 0.5$  | $V_{REF}$           | 0.90               |
| SSTL, Class II, 1.5V                                             | SSTL15_II                  | $V_{REF} - 0.2$       | $V_{REF} + 0.2$  | $V_{REF}$           | 0.75               |
| LVDS (Low-Voltage Differential Signaling), 2.5V & 3.3V           | LVDS_25, LVDS_33           | $1.25 - 0.125$        | $1.25 + 0.125$   | 0 <sup>(5)</sup>    | —                  |
| LVPECL (Low-Voltage Positive Emitter-Coupled Logic), 2.5V & 3.3V | LVPECL_25, LVPECL_33       | $1.2 - 0.3$           | $1.2 + 0.3$      | 0 <sup>(5)</sup>    | —                  |
| BLVDS (Bus LVDS), 2.5V                                           | BLVDS_25                   | $1.3 - 0.125$         | $1.3 + 0.125$    | 0 <sup>(5)</sup>    | —                  |
| Mini-LVDS, 2.5V & 3.3V                                           | MINI_LVDS_25, MINI_LVDS_33 | $1.2 - 0.125$         | $1.2 + 0.125$    | 0 <sup>(5)</sup>    | —                  |
| RS DS (Reduced Swing Differential Signaling), 2.5V & 3.3V        | RS DS_25, RS DS_33         | $1.2 - 0.1$           | $1.2 + 0.1$      | 0 <sup>(5)</sup>    | —                  |
| TMDS (Transition Minimized Differential Signaling), 3.3V         | TMDS_33                    | $3.0 - 0.1$           | $3.0 + 0.1$      | 0 <sup>(5)</sup>    | —                  |
| PPDS (Point-to-Point Differential Signaling), 2.5V & 3.3V        | PPDS_25, PPDS_33           | $1.25 - 0.1$          | $1.25 + 0.1$     | 0 <sup>(5)</sup>    | —                  |

#### Notes:

1. Input waveform switches between  $V_L$  and  $V_H$ .
2. Measurements are made at typical, minimum, and maximum  $V_{REF}$  values. Reported delays reflect worst case of these measurements.  $V_{REF}$  values listed are typical.
3. Input voltage level from which measurement starts.
4. This is an input voltage reference that bears no relation to the  $V_{REF}$  /  $V_{MEAS}$  parameters found in IBIS models and/or noted in Figure 4.
5. The value given is the differential input voltage.

Table 32: Output Delay Measurement Methodology (Cont'd)

| Description                                              | I/O Standard Attribute     | $R_{REF}$<br>( $\Omega$ ) | $C_{REF}^{(1)}$<br>(pF) | $V_{MEAS}$<br>(V) | $V_{REF}$<br>(V) |
|----------------------------------------------------------|----------------------------|---------------------------|-------------------------|-------------------|------------------|
| SSTL, Class II, 2.5V                                     | SSTL2_II                   | 25                        | 0                       | $V_{REF}$         | 1.25             |
| SSTL, Class II, 1.5V                                     | SSTL15_II                  | 25                        | 0                       | $V_{REF}$         | 0.75             |
| LVDS (Low-Voltage Differential Signaling), 2.5V & 3.3V   | LVDS_25, LVDS_33           | 100                       | 0                       | 0 <sup>(3)</sup>  | —                |
| BLVDS (Bus LVDS), 2.5V                                   | BLVDS_25                   | Note 4                    | 0                       | 0 <sup>(3)</sup>  | —                |
| Mini-LVDS, 2.5V & 3.3V                                   | MINI_LVDS_25, MINI_LVDS_33 | 100                       | 0                       | 0 <sup>(3)</sup>  | —                |
| RSDS (Reduced Swing Differential Signaling), 2.5V & 3.3V | RSDS_25, RSDS_33           | 100                       | 0                       | 0 <sup>(3)</sup>  | —                |
| TMDS (Transition Minimized Differential Signaling), 3.3V | TMDS_33                    | Note 5                    | 0                       | 0 <sup>(3)</sup>  | —                |
| PPDS (Point-to-Point Differential Signaling, 2.5V & 3.3V | PPDS_25, PPDS_33           | 100                       | 0                       | 0 <sup>(3)</sup>  | —                |

**Notes:**

1.  $C_{REF}$  is the capacitance of the probe, nominally 0 pF.
2. Per PCI specifications.
3. The value given is the differential output voltage.
4. See the *BLVDS Output Termination* section in [UG381](#), *Spartan-6 FPGA SelectIO Resources User Guide*.
5. See the *TMDS\_33 Termination* section in [UG381](#), *Spartan-6 FPGA SelectIO Resources User Guide*.

## Simultaneously Switching Outputs

Due to package electrical parasitics, a given package supports a limited number of simultaneous switching outputs (SSOs) when using fast, high-drive outputs. [Table 33](#) and [Table 34](#) provide guidelines for the recommended maximum allowable number of SSOs. These guidelines describe the maximum number of user I/O pins of an output signal standard that should simultaneously switch in the same direction, while maintaining a safe level of switching noise for that particular signal standard. Meeting these guidelines for the stated test conditions ensures that the FPGA operates free from the adverse effects of GND and power bounce.

For each device/package combination, [Table 33](#) provides the number of equivalent  $V_{CCO}$ /GND pairs per bank. For each output signal standard and drive strength, [Table 34](#) recommends the maximum number of SSOs, switching in the same direction, allowed per  $V_{CCO}$ /GND pair within an I/O bank. The guidelines are categorized by package style, slew rate, and output drive current. The number of SSOs are also specified by I/O bank. Multiply the appropriate numbers from each table to calculate the maximum number of SSOs allowed within an I/O bank. The guidelines assume that all pins within a bank use the same I/O standard. Exceeding these SSO guidelines can result in increased power or GND bounce, degraded signal integrity, or increased system jitter. For a given I/O standard, if the SSO limit per pair in [Table 34](#) is greater than the maximum I/O per pair in [Table 33](#), then there is no SSO limit for the exclusive use of that I/O standard.

The recommended maximum SSO values assume that the FPGA is soldered on a printed circuit board and that the board uses sound design practices. Due to the additional inductance introduced by the socket, the SSO values do not apply for FPGAs mounted in sockets. The SSO values assume that the  $V_{CCAUX}$  is powered at 3.3V. Setting  $V_{CCAUX}$  to 2.5V provides better SSO characteristics. For more detail, see [UG381](#): *Spartan-6 FPGA SelectIO Resources User Guide*.

Table 34: SSO Limit per  $V_{CCO}/GND$  Pair

| $V_{CCO}$ | I/O Standard             | Drive | Slew    | SSO Limit per $V_{CCO}/GND$ Pair                               |          |                                                                       |              |
|-----------|--------------------------|-------|---------|----------------------------------------------------------------|----------|-----------------------------------------------------------------------|--------------|
|           |                          |       |         | All TQG144, CPG196, CSG225, FT(G)256, and LX devices in CSG324 |          | All CS(G)484, FG(G)484, FG(G)676, FG(G)900, and LXT devices in CSG324 |              |
|           |                          |       |         | Bank 0/2                                                       | Bank 1/3 | Bank 0/2                                                              | Bank 1/3/4/5 |
| 1.2V      | LVCMOS12, LVCMOS12_JEDEC | 2     | Fast    | 30 <sup>(1)</sup>                                              | 35       | 30                                                                    | 35           |
|           |                          |       | Slow    | 51                                                             | 55       | 51                                                                    | 52           |
|           |                          |       | QuietIO | 71                                                             | 58       | 71                                                                    | 70           |
|           |                          | 4     | Fast    | 17                                                             | 17       | 17                                                                    | 19           |
|           |                          |       | Slow    | 23                                                             | 25       | 23                                                                    | 22           |
|           |                          |       | QuietIO | 35                                                             | 32       | 35                                                                    | 32           |
|           |                          | 6     | Fast    | 13                                                             | 15       | 13                                                                    | 14           |
|           |                          |       | Slow    | 19                                                             | 20       | 19                                                                    | 17           |
|           |                          |       | QuietIO | 26                                                             | 24       | 26                                                                    | 24           |
|           |                          | 8     | Fast    | N/A                                                            | 12       | N/A                                                                   | 12           |
|           |                          |       | Slow    | N/A                                                            | 15       | N/A                                                                   | 13           |
|           |                          |       | QuietIO | N/A                                                            | 20       | N/A                                                                   | 19           |
|           |                          | 12    | Fast    | N/A                                                            | 5        | N/A                                                                   | 4            |
|           |                          |       | Slow    | N/A                                                            | 8        | N/A                                                                   | 5            |
|           |                          |       | QuietIO | N/A                                                            | 11       | N/A                                                                   | 10           |

Table 34: SSO Limit per V<sub>CCO</sub>/GND Pair (Cont'd)

| V <sub>CCO</sub> | I/O Standard                   | Drive | Slew    | SSO Limit per V <sub>CCO</sub> /GND Pair                       |          |                                                                       |              |
|------------------|--------------------------------|-------|---------|----------------------------------------------------------------|----------|-----------------------------------------------------------------------|--------------|
|                  |                                |       |         | All TQG144, CPG196, CSG225, FT(G)256, and LX devices in CSG324 |          | All CS(G)484, FG(G)484, FG(G)676, FG(G)900, and LXT devices in CSG324 |              |
|                  |                                |       |         | Bank 0/2                                                       | Bank 1/3 | Bank 0/2                                                              | Bank 1/3/4/5 |
| 1.5V             | LVCMOS15, LVCMOS15_JEDEC       | 2     | Fast    | 33                                                             | 40       | 33                                                                    | 41           |
|                  |                                |       | Slow    | 57                                                             | 62       | 57                                                                    | 56           |
|                  |                                |       | QuietIO | 70                                                             | 67       | 70                                                                    | 66           |
|                  |                                | 4     | Fast    | 19                                                             | 21       | 19                                                                    | 21           |
|                  |                                |       | Slow    | 30                                                             | 30       | 30                                                                    | 24           |
|                  |                                |       | QuietIO | 38                                                             | 33       | 38                                                                    | 30           |
|                  |                                | 6     | Fast    | 14                                                             | 16       | 14                                                                    | 16           |
|                  |                                |       | Slow    | 18                                                             | 19       | 18                                                                    | 17           |
|                  |                                |       | QuietIO | 27                                                             | 24       | 27                                                                    | 21           |
|                  |                                | 8     | Fast    | 11                                                             | 13       | 11                                                                    | 12           |
|                  |                                |       | Slow    | 16                                                             | 16       | 16                                                                    | 14           |
|                  |                                |       | QuietIO | 23                                                             | 20       | 23                                                                    | 17           |
|                  |                                | 12    | Fast    | N/A                                                            | 5        | N/A                                                                   | 4            |
|                  |                                |       | Slow    | N/A                                                            | 8        | N/A                                                                   | 5            |
|                  |                                |       | QuietIO | N/A                                                            | 10       | N/A                                                                   | 9            |
|                  |                                | 16    | Fast    | N/A                                                            | 5        | N/A                                                                   | 4            |
|                  |                                |       | Slow    | N/A                                                            | 8        | N/A                                                                   | 8            |
|                  |                                |       | QuietIO | N/A                                                            | 10       | N/A                                                                   | 9            |
|                  | HSTL_I                         |       |         | 9                                                              | 10       | 9                                                                     | 10           |
|                  | HSTL_II                        |       |         | N/A                                                            | 5        | N/A                                                                   | 6            |
|                  | HSTL_III                       |       |         | 7                                                              | 9        | 7                                                                     | 9            |
|                  | DIFF_HSTL_I                    |       |         | 27                                                             | 30       | 27                                                                    | 30           |
|                  | DIFF_HSTL_II                   |       |         | N/A                                                            | 15       | N/A                                                                   | 18           |
|                  | DIFF_HSTL_III                  |       |         | 21                                                             | 27       | 21                                                                    | 27           |
|                  | SSTL_15_II <sup>(3)</sup>      |       |         | N/A                                                            | 5        | N/A                                                                   | 4            |
|                  | DIFF_SSTL_15_II <sup>(3)</sup> |       |         | N/A                                                            | 15       | N/A                                                                   | 12           |

Table 34: SSO Limit per  $V_{CCO}/GND$  Pair (Cont'd)

| $V_{CCO}$ | I/O Standard | Drive | Slew    | SSO Limit per $V_{CCO}/GND$ Pair                               |          |                                                                       |              |
|-----------|--------------|-------|---------|----------------------------------------------------------------|----------|-----------------------------------------------------------------------|--------------|
|           |              |       |         | All TQG144, CPG196, CSG225, FT(G)256, and LX devices in CSG324 |          | All CS(G)484, FG(G)484, FG(G)676, FG(G)900, and LXT devices in CSG324 |              |
|           |              |       |         | Bank 0/2                                                       | Bank 1/3 | Bank 0/2                                                              | Bank 1/3/4/5 |
| 3.3V      | LVCMOS33     | 2     | Fast    | 42                                                             | 46       | 42                                                                    | 44           |
|           |              |       | Slow    | 50                                                             | 55       | 50                                                                    | 49           |
|           |              |       | QuietIO | 60                                                             | 68       | 60                                                                    | 60           |
|           |              | 4     | Fast    | 21                                                             | 27       | 21                                                                    | 25           |
|           |              |       | Slow    | 32                                                             | 37       | 32                                                                    | 32           |
|           |              |       | QuietIO | 39                                                             | 42       | 39                                                                    | 37           |
|           |              | 6     | Fast    | 14                                                             | 19       | 14                                                                    | 17           |
|           |              |       | Slow    | 19                                                             | 25       | 19                                                                    | 22           |
|           |              |       | QuietIO | 29                                                             | 30       | 29                                                                    | 25           |
|           |              | 8     | Fast    | 11                                                             | 15       | 11                                                                    | 14           |
|           |              |       | Slow    | 15                                                             | 20       | 15                                                                    | 18           |
|           |              |       | QuietIO | 25                                                             | 24       | 25                                                                    | 20           |
|           |              | 12    | Fast    | 1                                                              | 3        | 1                                                                     | 1            |
|           |              |       | Slow    | 2                                                              | 5        | 2                                                                     | 2            |
|           |              |       | QuietIO | 4                                                              | 9        | 4                                                                     | 7            |
|           |              | 16    | Fast    | 1                                                              | 2        | 1                                                                     | 1            |
|           |              |       | Slow    | 1                                                              | 5        | 1                                                                     | 1            |
|           |              |       | QuietIO | 3                                                              | 10       | 3                                                                     | 8            |
|           |              | 24    | Fast    | 1                                                              | 2        | 1                                                                     | 1            |
|           |              |       | Slow    | 2                                                              | 5        | 2                                                                     | 1            |
|           |              |       | QuietIO | 7                                                              | 9        | 7                                                                     | 7            |

## Input/Output Delay Switching Characteristics

Table 39: IODELAY2 Switching Characteristics

| Symbol                                            | Description                                                                                                                     | Speed Grade    |                |                |                    | Units |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|----------------|--------------------|-------|
|                                                   |                                                                                                                                 | -3             | -3N            | -2             | -1L <sup>(3)</sup> |       |
| $T_{\text{IODCCK\_CAL}} / T_{\text{IODCKC\_CAL}}$ | CAL pin Setup/Hold with respect to CK                                                                                           | 0.28/<br>-0.13 | 0.33/<br>-0.13 | 0.48/<br>-0.13 | N/A                | ns    |
| $T_{\text{IODCCK\_CE}} / T_{\text{IODCKC\_CE}}$   | CE pin Setup/Hold with respect to CK                                                                                            | 0.17/<br>-0.03 | 0.17/<br>-0.03 | 0.25/<br>-0.02 | N/A                | ns    |
| $T_{\text{IODCCK\_INC}} / T_{\text{IODCKC\_INC}}$ | INC pin Setup/Hold with respect to CK                                                                                           | 0.10/<br>0.02  | 0.12/<br>0.03  | 0.18/<br>0.06  | N/A                | ns    |
| $T_{\text{IODCCK\_RST}} / T_{\text{IODCKC\_RST}}$ | RST pin Setup/Hold with respect to CK                                                                                           | 0.12/<br>-0.02 | 0.15/<br>-0.02 | 0.22/<br>-0.01 | N/A                | ns    |
| $T_{\text{TAP1}}$ <sup>(2)</sup>                  | Maximum tap 1 delay                                                                                                             | 8              | 14             | 16             | N/A                | ps    |
| $T_{\text{TAP2}}$                                 | Maximum tap 2 delay                                                                                                             | 40             | 66             | 77             | N/A                | ps    |
| $T_{\text{TAP3}}$                                 | Maximum tap 3 delay                                                                                                             | 95             | 120            | 140            | N/A                | ps    |
| $T_{\text{TAP4}}$                                 | Maximum tap 4 delay                                                                                                             | 108            | 141            | 166            | N/A                | ps    |
| $T_{\text{TAP5}}$                                 | Maximum tap 5 delay                                                                                                             | 171            | 194            | 231            | N/A                | ps    |
| $T_{\text{TAP6}}$                                 | Maximum tap 6 delay                                                                                                             | 207            | 249            | 292            | N/A                | ps    |
| $T_{\text{TAP7}}$                                 | Maximum tap 7 delay                                                                                                             | 212            | 276            | 343            | N/A                | ps    |
| $T_{\text{TAP8}}$                                 | Maximum tap 8 delay                                                                                                             | 322            | 341            | 424            | N/A                | ps    |
| $F_{\text{MINCAL}}$                               | Minimum allowed bit rate for calibration in variable mode: VARIABLE_FROM_ZERO, VARIABLE_FROM_HALF_MAX, and DIFF_PHASE_DETECTOR. | 188            | 188            | 188            | N/A                | Mb/s  |
| $T_{\text{IODDO\_IDATAIN}}$                       | Propagation delay through IODELAY2                                                                                              | Note 1         | Note 1         | Note 1         | Note 3             | —     |
| $T_{\text{IODDO\_ODATAIN}}$                       | Propagation delay through IODELAY2                                                                                              | Note 1         | Note 1         | Note 1         | Note 3             | —     |

### Notes:

- Delay depends on IODELAY2 tap setting. See TRACE report for actual values.
- Maximum delay = integer (number of taps/8)  $\times$   $T_{\text{TAP8}}$  +  $T_{\text{TAPn}}$  (where n equals the remainder). For minimum delay consult the TRACE setup and hold report. Minimum delay is typically greater than 30% of the maximum delay. Tap delays can vary by device and overall conditions. See TRACE report for actual values.
- Spartan-6 -1L devices only support tap 0. See TRACE report for actual values.

## DSP48A1 Switching Characteristics

Table 44: DSP48A1 Switching Characteristics

| Symbol                                                                         | Description                                               | Pre-adder | Multiplier | Post-adder | Speed Grade    |                |                |                 | Units |
|--------------------------------------------------------------------------------|-----------------------------------------------------------|-----------|------------|------------|----------------|----------------|----------------|-----------------|-------|
|                                                                                |                                                           |           |            |            | -3             | -3N            | -2             | -1L             |       |
| Setup and Hold Times of Data/Control Pins to the Input Register Clock          |                                                           |           |            |            |                |                |                |                 |       |
| T <sub>DSPDCK_A_A1REG</sub> /<br>T <sub>DSPCKD_A_A1REG</sub>                   | A input to A1 register CLK                                | N/A       | N/A        | N/A        | 0.15/<br>0.09  | 0.17/<br>0.09  | 0.17/<br>0.09  | 0.32/<br>0.09   | ns    |
| T <sub>DSPDCK_D_B1REG</sub> /<br>T <sub>DSPCKD_D_B1REG</sub>                   | D input to B1 register CLK                                | Yes       | N/A        | N/A        | 1.90/<br>−0.07 | 1.95/<br>−0.07 | 1.95/<br>−0.07 | 2.82/<br>−0.07  | ns    |
| T <sub>DSPDCK_C_CREG</sub> /<br>T <sub>DSPCKD_C_CREG</sub>                     | C input to C register CLK for XC devices                  | N/A       | N/A        | N/A        | 0.11/<br>0.15  | 0.13/<br>0.15  | 0.13/<br>0.15  | 0.24/<br>0.09   | ns    |
|                                                                                | C input to C register CLK for XA and XQ devices           |           |            |            | 0.11/<br>0.19  | N/A            | 0.13/<br>0.23  | 0.24/<br>0.09   |       |
| T <sub>DSPDCK_D_DREG</sub> /<br>T <sub>DSPCKD_D_DREG</sub>                     | D input to D register CLK for XC devices                  | N/A       | N/A        | N/A        | 0.09/<br>0.15  | 0.10/<br>0.15  | 0.10/<br>0.15  | 0.19/<br>0.12   | ns    |
|                                                                                | D input to D register CLK for XA and XQ devices           |           |            |            | 0.09/<br>0.23  | N/A            | 0.10/<br>0.27  | 0.19/<br>0.12   |       |
| T <sub>DSPDCK_OPMODE_B1REG</sub> /<br>T <sub>DSPCKD_OPMODE_B1REG</sub>         | OPMODE input to B1 register CLK                           | Yes       | N/A        | N/A        | 1.97/<br>0.01  | 2.00/<br>0.01  | 2.00/<br>0.01  | 2.85/<br>0.01   | ns    |
| T <sub>DSPDCK_OPMODE_OPMODEREG</sub> /<br>T <sub>DSPCKD_OPMODE_OPMODEREG</sub> | OPMODE input to OPMODE register CLK for XC devices        | N/A       | N/A        | N/A        | 0.18/<br>0.12  | 0.21/<br>0.12  | 0.21/<br>0.12  | 0.40/<br>0.12   | ns    |
|                                                                                | OPMODE input to OPMODE register CLK for XA and XQ devices |           |            |            | 0.18/<br>0.16  | N/A            | 0.21/<br>0.22  | 0.40/<br>0.12   |       |
| Setup and Hold Times of Data Pins to the Pipeline Register Clock               |                                                           |           |            |            |                |                |                |                 |       |
| T <sub>DSPDCK_A_MREG</sub> /<br>T <sub>DSPCKD_A_MREG</sub>                     | A input to M register CLK                                 | N/A       | Yes        | N/A        | 3.06/<br>−0.40 | 3.51/<br>−0.40 | 3.51/<br>−0.40 | 3.97/<br>−0.40  | ns    |
| T <sub>DSPDCK_B_MREG</sub> /<br>T <sub>DSPCKD_B_MREG</sub>                     | B input to M register CLK                                 | Yes       | Yes        | N/A        | 3.96/<br>−0.68 | 4.58/<br>−0.68 | 4.58/<br>−0.68 | 7.00/<br>−0.68  | ns    |
| T <sub>DSPDCK_D_MREG</sub> /<br>T <sub>DSPCKD_D_MREG</sub>                     | D input to M register CLK                                 | Yes       | Yes        | N/A        | 4.23/<br>−0.56 | 4.80/<br>−0.56 | 4.80/<br>−0.56 | 6.84/<br>−0.56  | ns    |
| T <sub>DSPDCK_OPMODE_MREG</sub> /<br>T <sub>DSPCKD_OPMODE_MREG</sub>           | OPMODE to M register CLK                                  | Yes       | Yes        | N/A        | 4.18/<br>−0.48 | 4.80/<br>−0.48 | 4.80/<br>−0.48 | 6.88/<br>−0.48  | ns    |
|                                                                                |                                                           | No        | Yes        | N/A        | 2.37/<br>−0.48 | 2.70/<br>−0.48 | 2.70/<br>−0.48 | 4.28/<br>−0.48  | ns    |
| Setup and Hold Times of Data/Control Pins to the Output Register Clock         |                                                           |           |            |            |                |                |                |                 |       |
| T <sub>DSPDCK_A_PREG</sub> /<br>T <sub>DSPCKD_A_PREG</sub>                     | A input to P register CLK                                 | N/A       | Yes        | Yes        | 4.32/<br>−0.76 | 5.06/<br>−0.76 | 5.06/<br>−0.76 | 7.52/<br>−0.76  | ns    |
| T <sub>DSPDCK_B_PREG</sub> /<br>T <sub>DSPCKD_B_PREG</sub>                     | B input to P register CLK                                 | Yes       | Yes        | Yes        | 5.87/<br>−0.59 | 6.87/<br>−0.59 | 6.87/<br>−0.59 | 10.55/<br>−0.59 | ns    |
|                                                                                |                                                           | No        | Yes        | Yes        | 4.14/<br>−0.93 | 4.68/<br>−0.93 | 4.68/<br>−0.93 | 8.12/<br>−0.93  | ns    |
| T <sub>DSPDCK_C_PREG</sub> /<br>T <sub>DSPCKD_C_PREG</sub>                     | C input to P register CLK                                 | N/A       | N/A        | Yes        | 2.20/<br>−0.23 | 2.25/<br>−0.23 | 2.25/<br>−0.23 | 3.27/<br>−0.23  | ns    |
| T <sub>DSPDCK_D_PREG</sub> /<br>T <sub>DSPCKD_D_PREG</sub>                     | D input to P register CLK                                 | Yes       | Yes        | Yes        | 5.90/<br>−0.92 | 6.91/<br>−0.92 | 6.91/<br>−0.92 | 10.39/<br>−0.92 | ns    |



Table 47: Configuration Switching Characteristics<sup>(1)</sup> (Cont'd)

| Symbol                                                     | Description                                                                                                     | Speed Grade |         |         |          | Units       |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------|---------|---------|----------|-------------|
|                                                            |                                                                                                                 | -3          | -3N     | -2      | -1L      |             |
| BPI Master Flash Mode Programming Switching <sup>(4)</sup> |                                                                                                                 |             |         |         |          |             |
| T <sub>BPICCO</sub> <sup>(5)</sup>                         | A[25:0], FCS_B, FOE_B, FWE_B, LDC outputs valid after CCLK falling edge                                         | 15          | 15      | 15      | 20       | ns, Max     |
| T <sub>BPIICCK</sub>                                       | Master BPI CCLK (output) delay                                                                                  | 10/100      | 10/100  | 10/100  | 10/130   | μs, Min/Max |
| T <sub>BPIDCC</sub> /T <sub>BPICCD</sub>                   | Setup/Hold on D[15:0] data input pins                                                                           | 5.0/1.0     | 5.0/1.0 | 5.0/1.0 | 6.0/2.0  | ns, Min     |
| SPI Master Flash Mode Programming Switching <sup>(6)</sup> |                                                                                                                 |             |         |         |          |             |
| T <sub>SPIDCC</sub> /T <sub>SPIDCCD</sub>                  | DIN, MISO0, MISO1, MISO2, MISO3, Setup/Hold before/after the rising CCLK edge                                   | 5.0/1.0     | 5.0/1.0 | 5.0/1.0 | 7.0/1.0  | ns, Min     |
| T <sub>SPIICCK</sub>                                       | Master SPI CCLK (output) delay                                                                                  | 0.4/7.0     | 0.4/7.0 | 0.4/7.0 | 0.4/10.0 | μs, Min/Max |
| T <sub>SPICCM</sub>                                        | MOSI clock to out                                                                                               | 13          | 13      | 13      | 19       | ns, Max     |
| T <sub>SPICCF</sub>                                        | CSO_B clock to out                                                                                              | 16          | 16      | 16      | 26       | ns, Max     |
| CCLK Output (Master Modes)                                 |                                                                                                                 |             |         |         |          |             |
| T <sub>MCCKL</sub>                                         | Master CCLK clock duty cycle Low                                                                                | 40/60       |         |         |          | %, Min/Max  |
| T <sub>MCCKH</sub>                                         | Master CCLK clock duty cycle High                                                                               | 40/60       |         |         |          | %, Min/Max  |
| F <sub>MCCK</sub>                                          | Maximum frequency, serial mode (Master Serial/SPI)<br>All devices                                               | 40          | 40      | 40      | 30       | MHz, Max    |
|                                                            | Maximum frequency, parallel mode (Master SelectMAP/BPI)<br>LX9, LX16, LX25, LX25T, LX45, LX45T, LX75, and LX75T | 40          | 40      | 40      | 25       | MHz, Max    |
|                                                            | Maximum frequency, parallel mode (Master SelectMAP/BPI)<br>LX100 and LX100T in x8 mode, LX150, and LX150T       | 40          | 40      | 40      | 20       | MHz, Max    |
|                                                            | Maximum frequency, parallel mode (Master SelectMAP/BPI)<br>LX100 and LX100T in x16 mode                         | 35          | 35      | 35      | 20       | MHz, Max    |
| F <sub>MCCKTOL</sub>                                       | Frequency Tolerance, master mode                                                                                | ±50         | ±50     | ±50     | ±50      | %           |
| CCLK Input (Slave Modes)                                   |                                                                                                                 |             |         |         |          |             |
| T <sub>SCCKL</sub>                                         | Slave CCLK clock minimum Low time                                                                               | 5           | 5       | 5       | 8        | ns, Min     |
| T <sub>SCCKH</sub>                                         | Slave CCLK clock minimum High time                                                                              | 5           | 5       | 5       | 8        | ns, Min     |
| USERCCLK Input                                             |                                                                                                                 |             |         |         |          |             |
| T <sub>USERCCKL</sub>                                      | USERCCLK clock minimum Low time                                                                                 | 12          | 12      | 12      | 16       | ns, Min     |
| T <sub>USERCCKH</sub>                                      | USERCCLK clock minimum High time                                                                                | 12          | 12      | 12      | 16       | ns, Min     |
| F <sub>USERCCLK</sub>                                      | Maximum USERCCLK frequency                                                                                      | 40          | 40      | 40      | 30       | MHz, Max    |

**Notes:**

- Maximum frequency and setup/hold timing parameters are for 3.3V and 2.5V configuration voltages.
- To support longer delays in configuration, use the design solutions described in [UG380: Spartan-6 FPGA Configuration User Guide](#).
- [Table 6](#) specifies the power supply ramp time.
- BPI mode is not supported in:
  - LX4, LX25, or LX25T devices
  - LX9 devices in the TQG144 package
  - LX9 or LX16 devices in the CPG196 package.
- Only during configuration, the last edge is determined by a weak pull-up/pull-down resistor in the I/O.
- Defense-grade Spartan-6Q -2Q devices configure in single default SPI Master (x1) mode at T<sub>j</sub> = -55°C. During operation and when using all other configuration functions, the minimum operating temperature is -40°C.

## Clock Buffers and Networks

Table 48: Global Clock Switching Characteristics (BUFGMUX)

| Symbol            | Description                   | Devices     | Speed Grade |      |      |      | Units |
|-------------------|-------------------------------|-------------|-------------|------|------|------|-------|
|                   |                               |             | -3          | -3N  | -2   | -1L  |       |
| T <sub>GSI</sub>  | S pin Setup to I0/I1 inputs   | LX devices  | 0.25        | 0.31 | 0.48 | 0.48 | ns    |
|                   |                               | LXT devices | 0.25        | 0.31 | 0.48 | N/A  | ns    |
| T <sub>GIO</sub>  | BUFGMUX delay from I0/I1 to O | LX devices  | 0.21        | 0.21 | 0.21 | 0.21 | ns    |
|                   |                               | LXT devices | 0.21        | 0.21 | 0.21 | N/A  | ns    |
| Maximum Frequency |                               |             |             |      |      |      |       |
| F <sub>MAX</sub>  | Global clock tree (BUFGMUX)   | LX devices  | 400         | 400  | 375  | 250  | MHz   |
|                   |                               | LXT devices | 400         | 400  | 375  | N/A  | MHz   |

Table 49: Input/Output Clock Switching Characteristics (BUFIO2)

| Symbol               | Description                    | Devices     | Speed Grade |      |      |      | Units |
|----------------------|--------------------------------|-------------|-------------|------|------|------|-------|
|                      |                                |             | -3          | -3N  | -2   | -1L  |       |
| T <sub>BUFCO_O</sub> | Clock to out delay from I to O | LX devices  | 0.67        | 0.82 | 1.09 | 1.50 | ns    |
|                      |                                | LXT devices | 0.67        | 0.82 | 1.09 | N/A  | ns    |
| Maximum Frequency    |                                |             |             |      |      |      |       |
| F <sub>MAX</sub>     | I/O clock tree (BUFIO2)        | LX devices  | 540         | 525  | 500  | 300  | MHz   |
|                      |                                | LXT devices | 540         | 525  | 500  | N/A  | MHz   |

Table 50: Input/Output Clock Switching Characteristics (BUFIO2FB)

| Symbol            | Description               | Devices     | Speed Grade |      |     |     | Units |
|-------------------|---------------------------|-------------|-------------|------|-----|-----|-------|
|                   |                           |             | -3          | -3N  | -2  | -1L |       |
| Maximum Frequency |                           |             |             |      |     |     |       |
| F <sub>MAX</sub>  | I/O clock tree (BUFIO2FB) | LX devices  | 1080        | 1050 | 950 | 500 | MHz   |
|                   |                           | LXT devices | 1080        | 1050 | 950 | N/A | MHz   |

Table 51: Input/Output Clock Switching Characteristics (BUFPLL)

| Symbol            | Description                | Devices     | Speed Grade |      |     |     | Units |
|-------------------|----------------------------|-------------|-------------|------|-----|-----|-------|
|                   |                            |             | -3          | -3N  | -2  | -1L |       |
| Maximum Frequency |                            |             |             |      |     |     |       |
| F <sub>MAX</sub>  | BUFPLL clock tree (BUFPLL) | LX devices  | 1080        | 1050 | 950 | 500 | MHz   |
|                   |                            | LXT devices | 1080        | 1050 | 950 | N/A | MHz   |

## PLL Switching Characteristics

Table 52: PLL Specification

| Symbol      | Description                                     | Device <sup>(1)</sup> | Speed Grade |     |     |     | Units |
|-------------|-------------------------------------------------|-----------------------|-------------|-----|-----|-----|-------|
|             |                                                 |                       | -3          | -3N | -2  | -1L |       |
| $F_{INMAX}$ | Maximum Input Clock Frequency from I/O Clock    | LX devices            | 540         | 525 | 450 | 300 | MHz   |
|             |                                                 | LXT devices           | 540         | 525 | 450 | N/A | MHz   |
|             | Maximum Input Clock Frequency from Global Clock | LX devices            | 400         | 400 | 375 | 250 | MHz   |
|             |                                                 | LXT devices           | 400         | 400 | 375 | N/A | MHz   |

Table 69: Global Clock Input to Output Delay With DCM and PLL in Source-Synchronous Mode

| Symbol                                                                                                                                                        | Description                             | Device     | Speed Grade |      |      |      | Units |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------|-------------|------|------|------|-------|
|                                                                                                                                                               |                                         |            | -3          | -3N  | -2   | -1L  |       |
| LVCMOS25 Global Clock Input to Output Delay using Output Flip-Flop, 12mA, Fast Slew Rate, <i>with</i> DCM in Source-Synchronous Mode and PLL in DCM2PLL Mode. |                                         |            |             |      |      |      |       |
| T <sub>ICKOFDCM0_PLL</sub>                                                                                                                                    | Global Clock and OUTFF with DCM and PLL | XC6SLX4    | 5.58        | N/A  | 7.42 | 8.54 | ns    |
|                                                                                                                                                               |                                         | XC6SLX9    | 5.58        | 6.19 | 7.42 | 8.54 | ns    |
|                                                                                                                                                               |                                         | XC6SLX16   | 5.50        | 6.06 | 7.05 | 8.24 | ns    |
|                                                                                                                                                               |                                         | XC6SLX25   | 5.57        | 6.04 | 7.02 | 8.33 | ns    |
|                                                                                                                                                               |                                         | XC6SLX25T  | 5.57        | 6.04 | 7.02 | N/A  | ns    |
|                                                                                                                                                               |                                         | XC6SLX45   | 5.53        | 5.97 | 6.96 | 8.32 | ns    |
|                                                                                                                                                               |                                         | XC6SLX45T  | 5.53        | 5.97 | 6.96 | N/A  | ns    |
|                                                                                                                                                               |                                         | XC6SLX75   | 5.55        | 6.00 | 6.99 | 8.54 | ns    |
|                                                                                                                                                               |                                         | XC6SLX75T  | 5.55        | 6.00 | 6.99 | N/A  | ns    |
|                                                                                                                                                               |                                         | XC6SLX100  | 5.58        | 6.03 | 7.02 | 9.11 | ns    |
|                                                                                                                                                               |                                         | XC6SLX100T | 5.62        | 6.03 | 7.02 | N/A  | ns    |
|                                                                                                                                                               |                                         | XC6SLX150  | 5.32        | 5.70 | 6.41 | 8.26 | ns    |
|                                                                                                                                                               |                                         | XC6SLX150T | 5.32        | 5.70 | 6.41 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX4    | 5.87        | N/A  | 7.28 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX9    | 5.87        | N/A  | 7.28 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX16   | 6.02        | N/A  | 6.87 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX25   | 5.88        | N/A  | 6.90 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX25T  | 5.88        | N/A  | 7.00 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX45   | 5.82        | N/A  | 6.81 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX45T  | 5.82        | N/A  | 6.81 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX75   | 5.81        | N/A  | 6.80 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX75T  | 5.81        | N/A  | 6.80 | N/A  | ns    |
|                                                                                                                                                               |                                         | XA6SLX100  | N/A         | N/A  | 6.88 | N/A  | ns    |
|                                                                                                                                                               |                                         | XQ6SLX75   | N/A         | N/A  | 6.80 | 8.54 | ns    |
|                                                                                                                                                               |                                         | XQ6SLX75T  | 5.81        | N/A  | 6.80 | N/A  | ns    |
|                                                                                                                                                               |                                         | XQ6SLX150  | N/A         | N/A  | 6.41 | 8.26 | ns    |
|                                                                                                                                                               |                                         | XQ6SLX150T | 5.90        | N/A  | 6.41 | N/A  | ns    |

**Notes:**

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. DCM and PLL output jitter are already included in the timing calculation.

Table 78: Duty Cycle Distortion and Clock-Tree Skew (Cont'd)

| Symbol                 | Description                                 | Device <sup>(1)</sup> | Speed Grade |      |      |      | Units |
|------------------------|---------------------------------------------|-----------------------|-------------|------|------|------|-------|
|                        |                                             |                       | -3          | -3N  | -2   | -1L  |       |
| T <sub>BUFIOSKEW</sub> | I/O clock tree skew across one clock region | LX4                   | 0.06        | N/A  | 0.06 | 0.07 | ns    |
|                        |                                             | LX9                   | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX16                  | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX25                  | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX25T                 | 0.06        | 0.06 | 0.06 | N/A  | ns    |
|                        |                                             | LX45                  | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX45T                 | 0.06        | 0.06 | 0.06 | N/A  | ns    |
|                        |                                             | LX75                  | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX75T                 | 0.06        | 0.06 | 0.06 | N/A  | ns    |
|                        |                                             | LX100                 | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX100T                | 0.06        | 0.06 | 0.06 | N/A  | ns    |
|                        |                                             | LX150                 | 0.06        | 0.06 | 0.06 | 0.07 | ns    |
|                        |                                             | LX150T                | 0.06        | 0.06 | 0.06 | N/A  | ns    |

**Notes:**

1. LXT devices are not available with a -1L speed grade. The LX4 is not available in -3N speed grade.
2. These parameters represent the worst-case duty cycle distortion observable at the pins of the device using LVDS output buffers. For cases where other I/O standards are used, IBIS can be used to calculate any additional duty cycle distortion that might be caused by asymmetrical rise/fall times.
3. The T<sub>CKSKEW</sub> value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx FPGA Editor and Timing Analyzer tools to evaluate clock skew specific to your application.
4. The T<sub>CKSKEW</sub> is 0.43 ns for the XA6SLX100 device using a -2 speed grade and 0.22 ns for the XC6SLX100 devices using the -2 speed grade.

Table 79: Package Skew

| Symbol               | Description                 | Device | Package <sup>(2)</sup> | Value | Units |
|----------------------|-----------------------------|--------|------------------------|-------|-------|
| T <sub>PKGSKEW</sub> | Package Skew <sup>(1)</sup> | LX4    | TQG144                 | N/A   | ps    |
|                      |                             |        | CPG196                 | 23    | ps    |
|                      |                             |        | CSG225                 | 58    | ps    |
|                      |                             | LX9    | TQG144                 | N/A   | ps    |
|                      |                             |        | CPG196                 | 23    | ps    |
|                      |                             |        | CSG225                 | 58    | ps    |
|                      |                             |        | FT(G)256               | 88    | ps    |
|                      |                             |        | CSG324                 | 64    | ps    |
|                      |                             | LX16   | CPG196                 | 19    | ps    |
|                      |                             |        | CSG225                 | 70    | ps    |
|                      |                             |        | FT(G)256               | 71    | ps    |
|                      |                             |        | CSG324                 | 54    | ps    |
|                      |                             | LX25   | FT(G)256               | 90    | ps    |
|                      |                             |        | CSG324                 | 61    | ps    |
|                      |                             |        | FG(G)484               | 84    | ps    |
|                      |                             | LX25T  | CSG324                 | 48    | ps    |
|                      |                             |        | FG(G)484               | 112   | ps    |

## Revision History

The following table shows the revision history for this document.

| Date     | Version | Description of Revisions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 06/24/09 | 1.0     | Initial Xilinx release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 08/26/09 | 1.1     | Added $V_{FS}$ to <a href="#">Table 1</a> and <a href="#">Table 2</a> . Added $R_{FUSE}$ to <a href="#">Table 2</a> . Added XC6SLX75 and XC6SLX75T to $V_{BATT}$ and $I_{BATT}$ in <a href="#">Table 1</a> , <a href="#">Table 2</a> , and <a href="#">Table 4</a> . Corrected the quiescent supply current for the XC6SLX4 in <a href="#">Table 5</a> . Updated <a href="#">Table 11</a> . Removed $DV_{PPIN}$ from <a href="#">Figure 2</a> . Removed $F_{PCIECORE}$ from <a href="#">Table 24</a> and added values to $F_{PCIEUSER}$ . Added more networking applications to <a href="#">Table 25</a> . Updated values for $T_{SUSPENDLOW\_AWAKE}$ , $T_{SUSPEND\_ENABLE}$ , and $T_{SCP\_AWAKE}$ in <a href="#">Table 46</a> . Numerous changes to <a href="#">Table 47</a> , <a href="#">page 54</a> including the addition of new values to various specifications, revising the $T_{SMCKCSO}$ description, and changing the units of $T_{POR}$ . Also, removed <i>Dynamic Reconfiguration Port (DRP) for DCM and PLL Before and After DCLK</i> section from <a href="#">Table 47</a> and updated all the notes. In <a href="#">Table 52</a> , added to $F_{INMAX}$ , revised $F_{OUTMAX}$ , and removed PLL Maximum Output Frequency for BUFIO2. Revised values for DCM_DELAY_STEP in <a href="#">Table 54</a> . Updated CLKIN_FREQ_FX values in <a href="#">Table 55</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 01/04/10 | 1.2     | Added -4 speed grade to entire document. Updated speed specification of -4, -3, -2 speed grades to version 1.03. Added -1L speed grade numbers per speed specification 1.00. Updated $T_{SOL}$ in <a href="#">Table 1</a> . Added -1L rows for LVCMOS12, LVCMOS15, and LVCMOS18 in <a href="#">Table 9</a> . Revised much of the detail in <a href="#">GTP Transceiver Specifications</a> in <a href="#">Table 12</a> through <a href="#">Table 23</a> . Added -2 data to <a href="#">Table 25</a> . Updated $F_{MAX}$ in <a href="#">Table 44</a> . Updated descriptions for $T_{DNACKL}$ and $T_{DNACKH}$ in <a href="#">Table 45</a> and revised values for all parameters. Removed $T_{INITADDR}$ from <a href="#">Table 47</a> and added new data. Updated values in <a href="#">Table 48</a> through <a href="#">Table 62</a> . Added <a href="#">Table 51</a> (BUFPLL) and <a href="#">Table 57</a> (DCM_CLKGEN). Removed $T_{LOCKMAX}$ note from <a href="#">Table 52</a> . Updated note 3 in <a href="#">Table 53</a> . In <a href="#">Table 79</a> : removed XC6SLX75CSG324 and XC6SLX75TCSG324; added XC6SLX75FG(G)484 and XC6SLX75FG(G)484.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 02/22/10 | 1.3     | Production release of XC6SLX16 -2 speed grade devices. The changes to <a href="#">Table 26</a> and <a href="#">Table 27</a> includes updating this data sheet to the data in ISE v11.5 software with speed specification v1.06. Updated maximum of $V_{IN}$ and $V_{TS}$ and note 2 in <a href="#">Table 1</a> . In <a href="#">Table 2</a> , changed $V_{IN}$ , added $I_{IN}$ and note 5, revised notes 1, 6, and 7, and added note 8 to $R_{FUSE}$ . In <a href="#">Table 4</a> , removed previous note 1 and added data to $I_{RPU}$ , $I_{RPD}$ , and $I_{BATT}$ , changed $C_{IN}$ , added $R_{DT}$ and $R_{IN\_TERM}$ , and added note 2 and 3. Updated $V_{CCO2}$ in <a href="#">Table 6</a> . Added <a href="#">Table 7</a> and <a href="#">Table 8</a> . Removed PCI66_3 from <a href="#">Table 9</a> . Updated PCI33_3 and I2C in <a href="#">Table 9</a> . Updated the description of <a href="#">Table 11</a> . Completely updated <a href="#">Table 25</a> . Updated <a href="#">Table 28</a> including adding values for PCI33_3. Updated $V_{REF}$ value for HSTL_III_18 in <a href="#">Table 31</a> . Updates missing $V_{REF}$ values in <a href="#">Table 32</a> . Added <a href="#">Simultaneously Switching Outputs</a> , <a href="#">page 36</a> . Removed $T_{GSRQ}$ and $T_{RPW}$ from <a href="#">Table 35</a> and <a href="#">Table 36</a> . Also removed $T_{DOQ}$ from <a href="#">Table 36</a> . Removed $T_{ISDO\_DO}$ and note 1 from <a href="#">Table 37</a> . Removed $T_{OSCK\_S}$ and combinatorial section from <a href="#">Table 38</a> . In <a href="#">Table 39</a> , removed $T_{IODDO\_T}$ and added new tap parameters and note 2. In <a href="#">Table 40</a> , <a href="#">Table 41</a> , and <a href="#">Table 42</a> , made typographical edits and removed notes. Removed clock CLK section in <a href="#">Table 41</a> . Removed clock CLK section and $T_{REG\_MUX}$ and $T_{REG\_M31}$ in <a href="#">Table 42</a> . Added block RAM $F_{MAX}$ values to <a href="#">Table 43</a> . Updated values and added note 2 to <a href="#">Table 45</a> . Added values to <a href="#">Table 46</a> and removed note 1. Numerous changes to <a href="#">Table 47</a> . Completely updated <a href="#">Table 57</a> . Revised data in <a href="#">Table 62</a> . Removed note 3 from <a href="#">Table 71</a> . Added values to <a href="#">Table 79</a> . Added data to <a href="#">Table 80</a> and <a href="#">Table 81</a> . |
| 03/10/10 | 1.4     | Production release of XC6SLX45 -2 speed grade devices, which includes changes to <a href="#">Table 26</a> and <a href="#">Table 27</a> updating this data sheet to the data in ISE v11.5 software with speed specification v1.07. Fixed $R_{IN\_TERM}$ description in <a href="#">Table 4</a> . Added PCI66_3 to <a href="#">Table 7</a> and replaced note 1. Corrected note 1 and the V, Max for TMDS_33 in <a href="#">Table 8</a> . In <a href="#">Table 10</a> , added note 1 to LVPECL_33 and TMDS_33. Also updated specifications for TMDS_33. Updated the <a href="#">GTP Transceiver Specifications</a> section including adding values to <a href="#">Table 16</a> , <a href="#">Table 17</a> , and <a href="#">Table 20</a> through <a href="#">Table 23</a> . Added PCI66_3 back into <a href="#">Table 9</a> , <a href="#">Table 28</a> , <a href="#">Table 31</a> , <a href="#">Table 32</a> , and <a href="#">Table 34</a> . Updated note 3 on <a href="#">Table 32</a> . In <a href="#">Table 34</a> , corrected some typographical errors and fixed SSO limits for bank1/3 in FG(G)484 package. Corrected $T_{OSCK\_OCE}$ in <a href="#">Table 38</a> . In <a href="#">Table 57</a> , updated CLKFX_FREEZE_VAR and CLKFX_FREEZE_TEMP_SLOPE and added typical values to $T_{CENTER\_LOW\_SPREAD}$ and $T_{CENTER\_HIGH\_SPREAD}$ . Updated and added values to <a href="#">Table 63</a> through <a href="#">Table 78</a> , and <a href="#">Table 81</a> . In <a href="#">Table 79</a> , revised the XC6SLX16-CSG324 and the XC6SLX45-CSG484 and FG(G)484 values.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |