



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                |
| Number of LABs/CLBs            | 715                                                                                                                                     |
| Number of Logic Elements/Cells | 9152                                                                                                                                    |
| Total RAM Bits                 | 589824                                                                                                                                  |
| Number of I/O                  | 186                                                                                                                                     |
| Number of Gates                | -                                                                                                                                       |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                           |
| Mounting Type                  | Surface Mount                                                                                                                           |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                         |
| Package / Case                 | 256-LBGA                                                                                                                                |
| Supplier Device Package        | 256-FTBGA (17x17)                                                                                                                       |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/xilinx/xc6slx9-n3ft256c">https://www.e-xfl.com/product-detail/xilinx/xc6slx9-n3ft256c</a> |

## SelectIO™ Interface DC Input and Output Levels

Table 7: Recommended Operating Conditions for User I/Os Using Single-Ended Standards

| I/O Standard           | V <sub>CCO</sub> for Drivers <sup>(1)</sup> |        |        | V <sub>REF</sub> for Inputs                          |        |        |
|------------------------|---------------------------------------------|--------|--------|------------------------------------------------------|--------|--------|
|                        | V, Min                                      | V, Nom | V, Max | V, Min                                               | V, Nom | V, Max |
| LVTTTL                 | 3.0                                         | 3.3    | 3.45   | V <sub>REF</sub> is not used for these I/O standards |        |        |
| LVC MOS33              | 3.0                                         | 3.3    | 3.45   |                                                      |        |        |
| LVC MOS25              | 2.3                                         | 2.5    | 2.7    |                                                      |        |        |
| LVC MOS18              | 1.65                                        | 1.8    | 1.95   |                                                      |        |        |
| LVC MOS18_JEDEC        | 1.65                                        | 1.8    | 1.95   |                                                      |        |        |
| LVC MOS15              | 1.4                                         | 1.5    | 1.6    |                                                      |        |        |
| LVC MOS15_JEDEC        | 1.4                                         | 1.5    | 1.6    |                                                      |        |        |
| LVC MOS12              | 1.1                                         | 1.2    | 1.3    |                                                      |        |        |
| LVC MOS12_JEDEC        | 1.1                                         | 1.2    | 1.3    |                                                      |        |        |
| PCI33_3 <sup>(2)</sup> | 3.0                                         | 3.3    | 3.45   |                                                      |        |        |
| PCI66_3 <sup>(2)</sup> | 3.0                                         | 3.3    | 3.45   |                                                      |        |        |
| I2C                    | 2.7                                         | 3.0    | 3.45   |                                                      |        |        |
| SMBUS                  | 2.7                                         | 3.0    | 3.45   |                                                      |        |        |
| SDIO                   | 3.0                                         | 3.3    | 3.45   |                                                      |        |        |
| MOBILE_DDR             | 1.7                                         | 1.8    | 1.9    |                                                      |        |        |
| HSTL_I                 | 1.4                                         | 1.5    | 1.6    | 0.68                                                 | 0.75   | 0.9    |
| HSTL_II                | 1.4                                         | 1.5    | 1.6    | 0.68                                                 | 0.75   | 0.9    |
| HSTL_III               | 1.4                                         | 1.5    | 1.6    | –                                                    | 0.9    | –      |
| HSTL_I_18              | 1.7                                         | 1.8    | 1.9    | 0.8                                                  | 0.9    | 1.1    |
| HSTL_II_18             | 1.7                                         | 1.8    | 1.9    | –                                                    | 0.9    | –      |
| HSTL_III_18            | 1.7                                         | 1.8    | 1.9    | –                                                    | 1.1    | –      |
| SSTL3_I                | 3.0                                         | 3.3    | 3.45   | 1.3                                                  | 1.5    | 1.7    |
| SSTL3_II               | 3.0                                         | 3.3    | 3.45   | 1.3                                                  | 1.5    | 1.7    |
| SSTL2_I                | 2.3                                         | 2.5    | 2.7    | 1.13                                                 | 1.25   | 1.38   |
| SSTL2_II               | 2.3                                         | 2.5    | 2.7    | 1.13                                                 | 1.25   | 1.38   |
| SSTL18_I               | 1.7                                         | 1.8    | 1.9    | 0.833                                                | 0.9    | 0.969  |
| SSTL18_II              | 1.7                                         | 1.8    | 1.9    | 0.833                                                | 0.9    | 0.969  |
| SSTL15_II              | 1.425                                       | 1.5    | 1.575  | 0.69                                                 | 0.75   | 0.81   |

### Notes:

- V<sub>CCO</sub> range required when using I/O standard for an output. Also required for MOBILE\_DDR, PCI33\_3, LVC MOS18\_JEDEC, LVC MOS15\_JEDEC, and LVC MOS12\_JEDEC inputs, and for LVC MOS25 inputs when V<sub>CCAUX</sub> = 3.3V.
- For PCI systems, the transmitter and receiver should have common supplies for V<sub>CCO</sub>.

Table 14: GTP Transceiver Current Supply (per Lane)

| Symbol                  | Description                                                       | Typ <sup>(1)</sup>  | Max    | Units |
|-------------------------|-------------------------------------------------------------------|---------------------|--------|-------|
| I <sub>MGTAVCC</sub>    | GTP transceiver internal analog supply current                    | 40.4                | Note 2 | mA    |
| I <sub>MGTAVTTTX</sub>  | GTP transmitter termination supply current                        | 27.4                |        | mA    |
| I <sub>MGTAVTTRX</sub>  | GTP receiver termination supply current                           | 13.6                |        | mA    |
| I <sub>MGTAVCCPLL</sub> | GTP transmitter and receiver PLL supply current                   | 28.7                |        | mA    |
| R <sub>MGTRREF</sub>    | Precision reference resistor for internal calibration termination | 50.0 ± 1% tolerance |        | Ω     |

**Notes:**

- Typical values are specified at nominal voltage, 25°C, with a 2.5 Gb/s line rate, with a shared PLL use mode.
- Values for currents of other transceiver configurations and conditions can be obtained by using the XPOWER Estimator (XPE) or XPOWER Analyzer (XPA) tools.

Table 15: GTP Transceiver Quiescent Supply Current (per Lane)<sup>(1)(2)(3)(4)</sup>

| Symbol                   | Description                         | Typ <sup>(5)</sup> | Max    | Units |
|--------------------------|-------------------------------------|--------------------|--------|-------|
| I <sub>MGTAVCCQ</sub>    | Quiescent MGTAVCC supply current    | 1.7                | Note 2 | mA    |
| I <sub>MGTAVTTTXQ</sub>  | Quiescent MGTAVTTTX supply current  | 0.1                |        | mA    |
| I <sub>MGTAVTTRXQ</sub>  | Quiescent MGTAVTTRX supply current  | 1.2                |        | mA    |
| I <sub>MGTAVCCPLLQ</sub> | Quiescent MGTAVCCPLL supply current | 1.0                |        | mA    |

**Notes:**

- Device powered and unconfigured.
- Currents for conditions other than values specified in this table can be obtained by using the XPOWER Estimator (XPE) or XPOWER Analyzer (XPA) tools.
- GTP transceiver quiescent supply current for an entire device can be calculated by multiplying the values in this table by the number of available GTP transceivers.
- Does not include power-up MGTAVTTRCAL supply current during device configuration.
- Typical values are specified at nominal voltage, 25°C.

Table 17: GTP Transceiver Clock DC Input Level Specification

| Symbol      | DC Parameter                            | Min | Typ | Max  | Units    |
|-------------|-----------------------------------------|-----|-----|------|----------|
| $V_{IDIFF}$ | Differential peak-to-peak input voltage | 200 | 800 | 2000 | mV       |
| $R_{IN}$    | Differential input resistance           | 80  | 100 | 120  | $\Omega$ |
| $C_{EXT}$   | Required external AC coupling capacitor | –   | 100 | –    | nF       |

## GTP Transceiver Switching Characteristics

Consult [UG386](#): *Spartan-6 FPGA GTP Transceivers User Guide* for further information.

Table 18: GTP Transceiver Performance

| Symbol          | Description                                               | Speed Grade  |              |              |     | Units |
|-----------------|-----------------------------------------------------------|--------------|--------------|--------------|-----|-------|
|                 |                                                           | -3           | -3N          | -2           | -1L |       |
| $F_{GTPMAX}$    | Maximum GTP transceiver data rate                         | 3.2          | 3.2          | 2.7          | N/A | Gb/s  |
| $F_{GTPRANGE1}$ | GTP transceiver data rate range when PLL_TXDIVSEL_OUT = 1 | 1.88 to 3.2  | 1.88 to 3.2  | 1.88 to 2.7  | N/A | Gb/s  |
| $F_{GTPRANGE2}$ | GTP transceiver data rate range when PLL_TXDIVSEL_OUT = 2 | 0.94 to 1.62 | 0.94 to 1.62 | 0.94 to 1.62 | N/A | Gb/s  |
| $F_{GTPRANGE3}$ | GTP transceiver data rate range when PLL_TXDIVSEL_OUT = 4 | 0.6 to 0.81  | 0.6 to 0.81  | 0.6 to 0.81  | N/A | Gb/s  |
| $F_{GPLLMAX}$   | Maximum PLL frequency                                     | 1.62         | 1.62         | 1.62         | N/A | GHz   |
| $F_{GPLLMIN}$   | Minimum PLL frequency                                     | 0.94         | 0.94         | 0.94         | N/A | GHz   |

Table 19: GTP Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics

| Symbol         | Description                                        | Speed Grade |     |     |     | Units |
|----------------|----------------------------------------------------|-------------|-----|-----|-----|-------|
|                |                                                    | -3          | -3N | -2  | -1L |       |
| $F_{GTPDRCLK}$ | GTP transceiver DCLK (DRP clock) maximum frequency | 125         | 125 | 100 | N/A | MHz   |

Table 20: GTP Transceiver Reference Clock Switching Characteristics

| Symbol      | Description                               | Conditions                                               | All LXT Speed Grades |     |     | Units   |
|-------------|-------------------------------------------|----------------------------------------------------------|----------------------|-----|-----|---------|
|             |                                           |                                                          | Min                  | Typ | Max |         |
| $F_{GCLK}$  | Reference clock frequency range           |                                                          | 60                   | –   | 160 | MHz     |
| $T_{RCLK}$  | Reference clock rise time                 | 20% – 80%                                                | –                    | 200 | –   | ps      |
| $T_{FCLK}$  | Reference clock fall time                 | 80% – 20%                                                | –                    | 200 | –   | ps      |
| $T_{DCREF}$ | Reference clock duty cycle                | Transceiver PLL only                                     | 45                   | 50  | 55  | %       |
| $T_{LOCK}$  | Clock recovery frequency acquisition time | Initial PLL lock                                         | –                    | –   | 1   | ms      |
| $T_{PHASE}$ | Clock recovery phase acquisition time     | Lock to data after PLL has locked to the reference clock | –                    | –   | 200 | $\mu$ s |

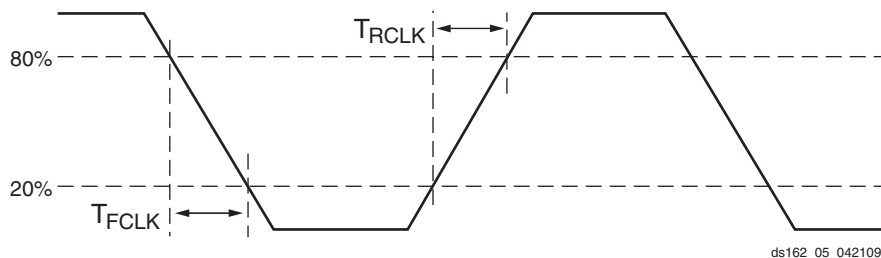


Figure 3: Reference Clock Timing Parameters

Table 28: IOB Switching Characteristics for the Commercial (XC) Spartan-6 Devices (Cont'd)

| I/O Standard                    | T <sub>IOPI</sub> |      |      |                    | T <sub>IOOP</sub> |      |      |                    | T <sub>IOTP</sub> |      |      |                    | Units |
|---------------------------------|-------------------|------|------|--------------------|-------------------|------|------|--------------------|-------------------|------|------|--------------------|-------|
|                                 | Speed Grade       |      |      |                    | Speed Grade       |      |      |                    | Speed Grade       |      |      |                    |       |
|                                 | -3                | -3N  | -2   | -1L <sup>(1)</sup> | -3                | -3N  | -2   | -1L <sup>(1)</sup> | -3                | -3N  | -2   | -1L <sup>(1)</sup> |       |
| LVC MOS18, Slow, 24 mA          | 1.18              | 1.30 | 1.43 | 2.04               | 1.99              | 2.13 | 2.33 | 2.95               | 1.99              | 2.13 | 2.33 | 2.95               | ns    |
| LVC MOS18, Fast, 2 mA           | 1.18              | 1.30 | 1.43 | 2.04               | 3.59              | 3.73 | 3.93 | 4.53               | 3.59              | 3.73 | 3.93 | 4.53               | ns    |
| LVC MOS18, Fast, 4 mA           | 1.18              | 1.30 | 1.43 | 2.04               | 2.39              | 2.53 | 2.73 | 3.35               | 2.39              | 2.53 | 2.73 | 3.35               | ns    |
| LVC MOS18, Fast, 6 mA           | 1.18              | 1.30 | 1.43 | 2.04               | 1.88              | 2.02 | 2.22 | 2.84               | 1.88              | 2.02 | 2.22 | 2.84               | ns    |
| LVC MOS18, Fast, 8 mA           | 1.18              | 1.30 | 1.43 | 2.04               | 1.81              | 1.95 | 2.15 | 2.77               | 1.81              | 1.95 | 2.15 | 2.77               | ns    |
| LVC MOS18, Fast, 12 mA          | 1.18              | 1.30 | 1.43 | 2.04               | 1.71              | 1.85 | 2.05 | 2.67               | 1.71              | 1.85 | 2.05 | 2.67               | ns    |
| LVC MOS18, Fast, 16 mA          | 1.18              | 1.30 | 1.43 | 2.04               | 1.71              | 1.85 | 2.05 | 2.67               | 1.71              | 1.85 | 2.05 | 2.67               | ns    |
| LVC MOS18, Fast, 24 mA          | 1.18              | 1.30 | 1.43 | 2.04               | 1.71              | 1.85 | 2.05 | 2.67               | 1.71              | 1.85 | 2.05 | 2.67               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 2 mA  | 0.94              | 1.06 | 1.19 | 1.41               | 5.91              | 6.05 | 6.25 | 6.79               | 5.91              | 6.05 | 6.25 | 6.79               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 4 mA  | 0.94              | 1.06 | 1.19 | 1.41               | 4.75              | 4.89 | 5.09 | 5.64               | 4.75              | 4.89 | 5.09 | 5.64               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 6 mA  | 0.94              | 1.06 | 1.19 | 1.41               | 4.04              | 4.18 | 4.38 | 4.96               | 4.04              | 4.18 | 4.38 | 4.96               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 8 mA  | 0.94              | 1.06 | 1.19 | 1.41               | 3.71              | 3.85 | 4.05 | 4.62               | 3.71              | 3.85 | 4.05 | 4.62               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 12 mA | 0.94              | 1.06 | 1.19 | 1.41               | 3.35              | 3.49 | 3.69 | 4.28               | 3.35              | 3.49 | 3.69 | 4.28               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 16 mA | 0.94              | 1.06 | 1.19 | 1.41               | 3.20              | 3.34 | 3.54 | 4.13               | 3.20              | 3.34 | 3.54 | 4.13               | ns    |
| LVC MOS18_JEDEC, QUIETIO, 24 mA | 0.94              | 1.06 | 1.19 | 1.41               | 2.96              | 3.10 | 3.30 | 3.98               | 2.96              | 3.10 | 3.30 | 3.98               | ns    |
| LVC MOS18_JEDEC, Slow, 2 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 4.59              | 4.73 | 4.93 | 5.54               | 4.59              | 4.73 | 4.93 | 5.54               | ns    |
| LVC MOS18_JEDEC, Slow, 4 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 3.69              | 3.83 | 4.03 | 4.60               | 3.69              | 3.83 | 4.03 | 4.60               | ns    |
| LVC MOS18_JEDEC, Slow, 6 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 3.00              | 3.14 | 3.34 | 3.94               | 3.00              | 3.14 | 3.34 | 3.94               | ns    |
| LVC MOS18_JEDEC, Slow, 8 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 2.19              | 2.33 | 2.53 | 3.18               | 2.19              | 2.33 | 2.53 | 3.18               | ns    |
| LVC MOS18_JEDEC, Slow, 12 mA    | 0.94              | 1.06 | 1.19 | 1.41               | 1.99              | 2.13 | 2.33 | 2.95               | 1.99              | 2.13 | 2.33 | 2.95               | ns    |
| LVC MOS18_JEDEC, Slow, 16 mA    | 0.94              | 1.06 | 1.19 | 1.41               | 1.99              | 2.13 | 2.33 | 2.95               | 1.99              | 2.13 | 2.33 | 2.95               | ns    |
| LVC MOS18_JEDEC, Slow, 24 mA    | 0.94              | 1.06 | 1.19 | 1.41               | 1.99              | 2.13 | 2.33 | 2.95               | 1.99              | 2.13 | 2.33 | 2.95               | ns    |
| LVC MOS18_JEDEC, Fast, 2 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 3.57              | 3.71 | 3.91 | 4.52               | 3.57              | 3.71 | 3.91 | 4.52               | ns    |
| LVC MOS18_JEDEC, Fast, 4 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 2.39              | 2.53 | 2.73 | 3.35               | 2.39              | 2.53 | 2.73 | 3.35               | ns    |
| LVC MOS18_JEDEC, Fast, 6 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 1.88              | 2.02 | 2.22 | 2.84               | 1.88              | 2.02 | 2.22 | 2.84               | ns    |
| LVC MOS18_JEDEC, Fast, 8 mA     | 0.94              | 1.06 | 1.19 | 1.41               | 1.80              | 1.94 | 2.14 | 2.76               | 1.80              | 1.94 | 2.14 | 2.76               | ns    |
| LVC MOS18_JEDEC, Fast, 12 mA    | 0.94              | 1.06 | 1.19 | 1.41               | 1.72              | 1.86 | 2.06 | 2.68               | 1.72              | 1.86 | 2.06 | 2.68               | ns    |
| LVC MOS18_JEDEC, Fast, 16 mA    | 0.94              | 1.06 | 1.19 | 1.41               | 1.72              | 1.86 | 2.06 | 2.68               | 1.72              | 1.86 | 2.06 | 2.68               | ns    |
| LVC MOS18_JEDEC, Fast, 24 mA    | 0.94              | 1.06 | 1.19 | 1.41               | 1.72              | 1.86 | 2.06 | 2.68               | 1.72              | 1.86 | 2.06 | 2.68               | ns    |
| LVC MOS15, QUIETIO, 2 mA        | 0.98              | 1.10 | 1.23 | 1.79               | 5.47              | 5.61 | 5.81 | 6.38               | 5.47              | 5.61 | 5.81 | 6.38               | ns    |
| LVC MOS15, QUIETIO, 4 mA        | 0.98              | 1.10 | 1.23 | 1.79               | 4.61              | 4.75 | 4.95 | 5.51               | 4.61              | 4.75 | 4.95 | 5.51               | ns    |
| LVC MOS15, QUIETIO, 6 mA        | 0.98              | 1.10 | 1.23 | 1.79               | 4.07              | 4.21 | 4.41 | 4.97               | 4.07              | 4.21 | 4.41 | 4.97               | ns    |
| LVC MOS15, QUIETIO, 8 mA        | 0.98              | 1.10 | 1.23 | 1.79               | 3.91              | 4.05 | 4.25 | 4.81               | 3.91              | 4.05 | 4.25 | 4.81               | ns    |
| LVC MOS15, QUIETIO, 12 mA       | 0.98              | 1.10 | 1.23 | 1.79               | 3.53              | 3.67 | 3.87 | 4.51               | 3.53              | 3.67 | 3.87 | 4.51               | ns    |
| LVC MOS15, QUIETIO, 16 mA       | 0.98              | 1.10 | 1.23 | 1.79               | 3.32              | 3.46 | 3.66 | 4.31               | 3.32              | 3.46 | 3.66 | 4.31               | ns    |
| LVC MOS15, Slow, 2 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 4.18              | 4.32 | 4.52 | 5.11               | 4.18              | 4.32 | 4.52 | 5.11               | ns    |
| LVC MOS15, Slow, 4 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 3.42              | 3.56 | 3.76 | 4.34               | 3.42              | 3.56 | 3.76 | 4.34               | ns    |
| LVC MOS15, Slow, 6 mA           | 0.98              | 1.10 | 1.23 | 1.79               | 2.29              | 2.43 | 2.63 | 3.24               | 2.29              | 2.43 | 2.63 | 3.24               | ns    |

Table 29: IOB Switching Characteristics for the Automotive XA Spartan-6 and the Spartan-6Q Devices<sup>(1)</sup> (Cont'd)

| I/O Standard                    | T <sub>IOPI</sub> |      | T <sub>IOOP</sub> |      | T <sub>IOTP</sub> |      | Units |
|---------------------------------|-------------------|------|-------------------|------|-------------------|------|-------|
|                                 | Speed Grade       |      | Speed Grade       |      | Speed Grade       |      |       |
|                                 | -3                | -2   | -3                | -2   | -3                | -2   |       |
| LVC MOS12, QUIETIO, 6 mA        | 0.98              | 1.16 | 4.79              | 4.99 | 4.79              | 4.99 | ns    |
| LVC MOS12, QUIETIO, 8 mA        | 0.98              | 1.16 | 4.43              | 4.63 | 4.43              | 4.63 | ns    |
| LVC MOS12, QUIETIO, 12 mA       | 0.98              | 1.16 | 4.18              | 4.38 | 4.18              | 4.38 | ns    |
| LVC MOS12, Slow, 2 mA           | 0.98              | 1.16 | 5.12              | 5.32 | 5.12              | 5.32 | ns    |
| LVC MOS12, Slow, 4 mA           | 0.98              | 1.16 | 3.00              | 3.20 | 3.00              | 3.20 | ns    |
| LVC MOS12, Slow, 6 mA           | 0.98              | 1.16 | 2.91              | 3.11 | 2.91              | 3.11 | ns    |
| LVC MOS12, Slow, 8 mA           | 0.98              | 1.16 | 2.51              | 2.71 | 2.51              | 2.71 | ns    |
| LVC MOS12, Slow, 12 mA          | 0.98              | 1.16 | 2.25              | 2.45 | 2.25              | 2.45 | ns    |
| LVC MOS12, Fast, 2 mA           | 0.98              | 1.16 | 3.60              | 3.80 | 3.60              | 3.80 | ns    |
| LVC MOS12, Fast, 4 mA           | 0.98              | 1.16 | 2.49              | 2.69 | 2.49              | 2.69 | ns    |
| LVC MOS12, Fast, 6 mA           | 0.98              | 1.16 | 1.94              | 2.14 | 1.94              | 2.14 | ns    |
| LVC MOS12, Fast, 8 mA           | 0.98              | 1.16 | 1.82              | 2.02 | 1.82              | 2.02 | ns    |
| LVC MOS12, Fast, 12 mA          | 0.98              | 1.16 | 1.80              | 2.00 | 1.80              | 2.00 | ns    |
| LVC MOS12_JEDEC, QUIETIO, 2 mA  | 1.57              | 1.75 | 6.53              | 6.73 | 6.53              | 6.73 | ns    |
| LVC MOS12_JEDEC, QUIETIO, 4 mA  | 1.57              | 1.75 | 5.12              | 5.32 | 5.12              | 5.32 | ns    |
| LVC MOS12_JEDEC, QUIETIO, 6 mA  | 1.57              | 1.75 | 4.81              | 5.01 | 4.81              | 5.01 | ns    |
| LVC MOS12_JEDEC, QUIETIO, 8 mA  | 1.57              | 1.75 | 4.44              | 4.64 | 4.44              | 4.64 | ns    |
| LVC MOS12_JEDEC, QUIETIO, 12 mA | 1.57              | 1.75 | 4.20              | 4.40 | 4.20              | 4.40 | ns    |
| LVC MOS12_JEDEC, Slow, 2 mA     | 1.57              | 1.75 | 5.14              | 5.34 | 5.14              | 5.34 | ns    |
| LVC MOS12_JEDEC, Slow, 4 mA     | 1.57              | 1.75 | 2.99              | 3.19 | 2.99              | 3.19 | ns    |
| LVC MOS12_JEDEC, Slow, 6 mA     | 1.57              | 1.75 | 2.90              | 3.10 | 2.90              | 3.10 | ns    |
| LVC MOS12_JEDEC, Slow, 8 mA     | 1.57              | 1.75 | 2.50              | 2.70 | 2.50              | 2.70 | ns    |
| LVC MOS12_JEDEC, Slow, 12 mA    | 1.57              | 1.75 | 2.26              | 2.46 | 2.26              | 2.46 | ns    |
| LVC MOS12_JEDEC, Fast, 2 mA     | 1.57              | 1.75 | 3.60              | 3.80 | 3.60              | 3.80 | ns    |
| LVC MOS12_JEDEC, Fast, 4 mA     | 1.57              | 1.75 | 2.49              | 2.69 | 2.49              | 2.69 | ns    |
| LVC MOS12_JEDEC, Fast, 6 mA     | 1.57              | 1.75 | 1.94              | 2.14 | 1.94              | 2.14 | ns    |
| LVC MOS12_JEDEC, Fast, 8 mA     | 1.57              | 1.75 | 1.83              | 2.03 | 1.83              | 2.03 | ns    |
| LVC MOS12_JEDEC, Fast, 12 mA    | 1.57              | 1.75 | 1.80              | 2.00 | 1.80              | 2.00 | ns    |

**Notes:**

1. The Spartan-6Q FPGA -1L values are listed in Table 28.

Table 30 summarizes the value of T<sub>IOTPHZ</sub>. T<sub>IOTPHZ</sub> is described as the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is enabled (i.e., a high impedance state). These delays are measured using LVC MOS25, Fast, 12 mA.

Table 30: IOB 3-state ON Output Switching Characteristics (T<sub>IOTPHZ</sub>)

| Symbol              | Description                   | Speed Grade |      |      |      | Units |
|---------------------|-------------------------------|-------------|------|------|------|-------|
|                     |                               | -3          | -3N  | -2   | -1L  |       |
| T <sub>IOTPHZ</sub> | T input to Pad high-impedance | 1.39        | 1.59 | 1.59 | 1.91 | ns    |

## Output Delay Measurements

Output delays are measured using a Tektronix P6245 TDS500/600 probe (< 1 pF) across approximately 4" of FR4 microstrip trace. Standard termination was used for all testing. The propagation delay of the 4" trace is characterized separately and subtracted from the final measurement, and is therefore not included in the generalized test setups shown in Figure 4 and Figure 5.


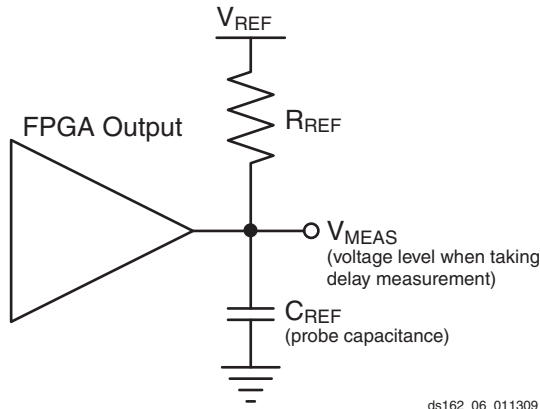


Figure 4: Single-Ended Test Setup

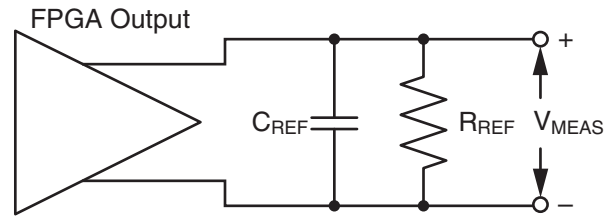

ds162\_07\_011309

Figure 5: Differential Test Setup

Measurements and test conditions are reflected in the IBIS models except where the IBIS format precludes it. Parameters  $V_{REF}$ ,  $R_{REF}$ ,  $C_{REF}$ , and  $V_{MEAS}$  fully describe the test conditions for each I/O standard. The most accurate prediction of propagation delay in any given application can be obtained through IBIS simulation, using the following method:

1. Simulate the output driver of choice into the generalized test setup, using values from Table 32.
2. Record the time to  $V_{MEAS}$ .
3. Simulate the output driver of choice into the actual PCB trace and load, using the appropriate IBIS model or capacitance value to represent the load.
4. Record the time to  $V_{MEAS}$ .
5. Compare the results of steps 2 and 4. The increase or decrease in delay yields the actual propagation delay of the PCB trace.

Table 32: Output Delay Measurement Methodology

| Description                                                     | I/O Standard Attribute          | $R_{REF}$ ( $\Omega$ ) | $C_{REF}^{(1)}$ (pF) | $V_{MEAS}$ (V) | $V_{REF}$ (V) |
|-----------------------------------------------------------------|---------------------------------|------------------------|----------------------|----------------|---------------|
| LVTTTL (Low-Voltage Transistor-Transistor Logic)                | LVTTTL (all)                    | 1M                     | 0                    | 1.4            | 0             |
| LVC MOS (Low-Voltage CMOS), 3.3V                                | LVC MOS33                       | 1M                     | 0                    | 1.65           | 0             |
| LVC MOS, 2.5V                                                   | LVC MOS25                       | 1M                     | 0                    | 1.25           | 0             |
| LVC MOS, 1.8V                                                   | LVC MOS18                       | 1M                     | 0                    | 0.9            | 0             |
| LVC MOS, 1.5V                                                   | LVC MOS15                       | 1M                     | 0                    | 0.75           | 0             |
| LVC MOS, 1.2V                                                   | LVC MOS12                       | 1M                     | 0                    | 0.6            | 0             |
| PCI (Peripheral Component Interface)<br>33 MHz and 66 MHz, 3.3V | PCI33_3, PCI66_3 (rising edge)  | 25                     | 10 <sup>(2)</sup>    | 0.94           | 0             |
|                                                                 | PCI33_3, PCI66_3 (falling edge) | 25                     | 10 <sup>(2)</sup>    | 2.03           | 3.3           |
| HSTL (High-Speed Transceiver Logic), Class I                    | HSTL_I                          | 50                     | 0                    | $V_{REF}$      | 0.75          |
| HSTL, Class II                                                  | HSTL_II                         | 25                     | 0                    | $V_{REF}$      | 0.75          |
| HSTL, Class III                                                 | HSTL_III                        | 50                     | 0                    | 0.9            | 1.5           |
| HSTL, Class I, 1.8V                                             | HSTL_I_18                       | 50                     | 0                    | $V_{REF}$      | 0.9           |
| HSTL, Class II, 1.8V                                            | HSTL_II_18                      | 25                     | 0                    | $V_{REF}$      | 0.9           |
| HSTL, Class III, 1.8V                                           | HSTL_III_18                     | 50                     | 0                    | 1.1            | 1.8           |
| SSTL (Stub Series Terminated Logic), Class I, 1.8V              | SSTL18_I                        | 50                     | 0                    | $V_{REF}$      | 0.9           |
| SSTL, Class II, 1.8V                                            | SSTL18_II                       | 25                     | 0                    | $V_{REF}$      | 0.9           |
| SSTL, Class I, 2.5V                                             | SSTL2_I                         | 50                     | 0                    | $V_{REF}$      | 1.25          |

Table 32: Output Delay Measurement Methodology (Cont'd)

| Description                                              | I/O Standard Attribute     | $R_{REF}$ ( $\Omega$ ) | $C_{REF}^{(1)}$ (pF) | $V_{MEAS}$ (V)   | $V_{REF}$ (V) |
|----------------------------------------------------------|----------------------------|------------------------|----------------------|------------------|---------------|
| SSTL, Class II, 2.5V                                     | SSTL2_II                   | 25                     | 0                    | $V_{REF}$        | 1.25          |
| SSTL, Class II, 1.5V                                     | SSTL15_II                  | 25                     | 0                    | $V_{REF}$        | 0.75          |
| LVDS (Low-Voltage Differential Signaling), 2.5V & 3.3V   | LVDS_25, LVDS_33           | 100                    | 0                    | 0 <sup>(3)</sup> | —             |
| BLVDS (Bus LVDS), 2.5V                                   | BLVDS_25                   | Note 4                 | 0                    | 0 <sup>(3)</sup> | —             |
| Mini-LVDS, 2.5V & 3.3V                                   | MINI_LVDS_25, MINI_LVDS_33 | 100                    | 0                    | 0 <sup>(3)</sup> | —             |
| RSDS (Reduced Swing Differential Signaling), 2.5V & 3.3V | RSDS_25, RSDS_33           | 100                    | 0                    | 0 <sup>(3)</sup> | —             |
| TMDS (Transition Minimized Differential Signaling), 3.3V | TMDS_33                    | Note 5                 | 0                    | 0 <sup>(3)</sup> | —             |
| PPDS (Point-to-Point Differential Signaling, 2.5V & 3.3V | PPDS_25, PPDS_33           | 100                    | 0                    | 0 <sup>(3)</sup> | —             |

**Notes:**

1.  $C_{REF}$  is the capacitance of the probe, nominally 0 pF.
2. Per PCI specifications.
3. The value given is the differential output voltage.
4. See the *BLVDS Output Termination* section in [UG381](#), *Spartan-6 FPGA SelectIO Resources User Guide*.
5. See the *TMDS\_33 Termination* section in [UG381](#), *Spartan-6 FPGA SelectIO Resources User Guide*.

## Simultaneously Switching Outputs

Due to package electrical parasitics, a given package supports a limited number of simultaneous switching outputs (SSOs) when using fast, high-drive outputs. [Table 33](#) and [Table 34](#) provide guidelines for the recommended maximum allowable number of SSOs. These guidelines describe the maximum number of user I/O pins of an output signal standard that should simultaneously switch in the same direction, while maintaining a safe level of switching noise for that particular signal standard. Meeting these guidelines for the stated test conditions ensures that the FPGA operates free from the adverse effects of GND and power bounce.

For each device/package combination, [Table 33](#) provides the number of equivalent  $V_{CCO}$ /GND pairs per bank. For each output signal standard and drive strength, [Table 34](#) recommends the maximum number of SSOs, switching in the same direction, allowed per  $V_{CCO}$ /GND pair within an I/O bank. The guidelines are categorized by package style, slew rate, and output drive current. The number of SSOs are also specified by I/O bank. Multiply the appropriate numbers from each table to calculate the maximum number of SSOs allowed within an I/O bank. The guidelines assume that all pins within a bank use the same I/O standard. Exceeding these SSO guidelines can result in increased power or GND bounce, degraded signal integrity, or increased system jitter. For a given I/O standard, if the SSO limit per pair in [Table 34](#) is greater than the maximum I/O per pair in [Table 33](#), then there is no SSO limit for the exclusive use of that I/O standard.

The recommended maximum SSO values assume that the FPGA is soldered on a printed circuit board and that the board uses sound design practices. Due to the additional inductance introduced by the socket, the SSO values do not apply for FPGAs mounted in sockets. The SSO values assume that the  $V_{CCAUX}$  is powered at 3.3V. Setting  $V_{CCAUX}$  to 2.5V provides better SSO characteristics. For more detail, see [UG381](#): *Spartan-6 FPGA SelectIO Resources User Guide*.

Table 34: SSO Limit per  $V_{CCO}/GND$  Pair (Cont'd)

| V <sub>CCO</sub> | I/O Standard                  | Drive                        | Slew    | SSO Limit per V <sub>CCO</sub> /GND Pair                       |          |                                                                       |              |     |    |
|------------------|-------------------------------|------------------------------|---------|----------------------------------------------------------------|----------|-----------------------------------------------------------------------|--------------|-----|----|
|                  |                               |                              |         | All TQG144, CPG196, CSG225, FT(G)256, and LX devices in CSG324 |          | All CS(G)484, FG(G)484, FG(G)676, FG(G)900, and LXT devices in CSG324 |              |     |    |
|                  |                               |                              |         | Bank 0/2                                                       | Bank 1/3 | Bank 0/2                                                              | Bank 1/3/4/5 |     |    |
| 2.5V             | LVCMOS25                      | 2                            | Fast    | 38                                                             | 43       | 38                                                                    | 43           |     |    |
|                  |                               |                              | Slow    | 46                                                             | 52       | 46                                                                    | 48           |     |    |
|                  |                               |                              | QuietIO | 57                                                             | 64       | 57                                                                    | 59           |     |    |
|                  |                               | 4                            | Fast    | 21                                                             | 24       | 21                                                                    | 23           |     |    |
|                  |                               |                              | Slow    | 26                                                             | 31       | 26                                                                    | 27           |     |    |
|                  |                               |                              | QuietIO | 33                                                             | 32       | 33                                                                    | 30           |     |    |
|                  |                               | 6                            | Fast    | 15                                                             | 17       | 15                                                                    | 16           |     |    |
|                  |                               |                              | Slow    | 19                                                             | 22       | 19                                                                    | 19           |     |    |
|                  |                               |                              | QuietIO | 25                                                             | 23       | 25                                                                    | 19           |     |    |
|                  |                               | 8                            | Fast    | 12                                                             | 15       | 12                                                                    | 14           |     |    |
|                  |                               |                              | Slow    | 15                                                             | 18       | 15                                                                    | 16           |     |    |
|                  |                               |                              | QuietIO | 21                                                             | 19       | 21                                                                    | 16           |     |    |
|                  |                               | 12                           | Fast    | 1                                                              | 3        | 1                                                                     | 1            |     |    |
|                  |                               |                              | Slow    | 2                                                              | 7        | 2                                                                     | 4            |     |    |
|                  |                               |                              | QuietIO | 3                                                              | 8        | 3                                                                     | 8            |     |    |
|                  |                               | 16                           | Fast    | 1                                                              | 3        | 1                                                                     | 1            |     |    |
|                  |                               |                              | Slow    | 3                                                              | 7        | 3                                                                     | 3            |     |    |
|                  |                               |                              | QuietIO | 4                                                              | 9        | 4                                                                     | 8            |     |    |
|                  |                               | 24                           | Fast    | N/A                                                            | 3        | N/A                                                                   | 1            |     |    |
|                  |                               |                              | Slow    | N/A                                                            | 5        | N/A                                                                   | 2            |     |    |
|                  |                               |                              | QuietIO | N/A                                                            | 8        | N/A                                                                   | 6            |     |    |
|                  |                               | SSTL_2_I <sup>(3)</sup>      |         |                                                                |          | 10                                                                    | 11           | 10  | 11 |
|                  |                               | SSTL_2_II <sup>(3)</sup>     |         |                                                                |          | N/A                                                                   | 7            | N/A | 7  |
|                  |                               | DIFF_SSTL_2_I <sup>(3)</sup> |         |                                                                |          | 30                                                                    | 33           | 30  | 33 |
|                  | DIFF_SSTL_2_II <sup>(3)</sup> |                              |         |                                                                | N/A      | 21                                                                    | N/A          | 24  |    |

Table 34: SSO Limit per V<sub>CCO</sub>/GND Pair (Cont'd)

| V <sub>CCO</sub> | I/O Standard | Drive | Slew    | SSO Limit per V <sub>CCO</sub> /GND Pair                       |          |                                                                       |              |
|------------------|--------------|-------|---------|----------------------------------------------------------------|----------|-----------------------------------------------------------------------|--------------|
|                  |              |       |         | All TQG144, CPG196, CSG225, FT(G)256, and LX devices in CSG324 |          | All CS(G)484, FG(G)484, FG(G)676, FG(G)900, and LXT devices in CSG324 |              |
|                  |              |       |         | Bank 0/2                                                       | Bank 1/3 | Bank 0/2                                                              | Bank 1/3/4/5 |
| 3.3V             | LVCMOS33     | 2     | Fast    | 42                                                             | 46       | 42                                                                    | 44           |
|                  |              |       | Slow    | 50                                                             | 55       | 50                                                                    | 49           |
|                  |              |       | QuietIO | 60                                                             | 68       | 60                                                                    | 60           |
|                  |              | 4     | Fast    | 21                                                             | 27       | 21                                                                    | 25           |
|                  |              |       | Slow    | 32                                                             | 37       | 32                                                                    | 32           |
|                  |              |       | QuietIO | 39                                                             | 42       | 39                                                                    | 37           |
|                  |              | 6     | Fast    | 14                                                             | 19       | 14                                                                    | 17           |
|                  |              |       | Slow    | 19                                                             | 25       | 19                                                                    | 22           |
|                  |              |       | QuietIO | 29                                                             | 30       | 29                                                                    | 25           |
|                  |              | 8     | Fast    | 11                                                             | 15       | 11                                                                    | 14           |
|                  |              |       | Slow    | 15                                                             | 20       | 15                                                                    | 18           |
|                  |              |       | QuietIO | 25                                                             | 24       | 25                                                                    | 20           |
|                  |              | 12    | Fast    | 1                                                              | 3        | 1                                                                     | 1            |
|                  |              |       | Slow    | 2                                                              | 5        | 2                                                                     | 2            |
|                  |              |       | QuietIO | 4                                                              | 9        | 4                                                                     | 7            |
|                  |              | 16    | Fast    | 1                                                              | 2        | 1                                                                     | 1            |
|                  |              |       | Slow    | 1                                                              | 5        | 1                                                                     | 1            |
|                  |              |       | QuietIO | 3                                                              | 10       | 3                                                                     | 8            |
|                  |              | 24    | Fast    | 1                                                              | 2        | 1                                                                     | 1            |
|                  |              |       | Slow    | 2                                                              | 5        | 2                                                                     | 1            |
|                  |              |       | QuietIO | 7                                                              | 9        | 7                                                                     | 7            |

Table 34: SSO Limit per  $V_{CCO}/GND$  Pair (Cont'd)

| $V_{CCO}$ | I/O Standard | Drive | Slew | SSO Limit per $V_{CCO}/GND$ Pair                               |          |                                                                       |              |
|-----------|--------------|-------|------|----------------------------------------------------------------|----------|-----------------------------------------------------------------------|--------------|
|           |              |       |      | All TQG144, CPG196, CSG225, FT(G)256, and LX devices in CSG324 |          | All CS(G)484, FG(G)484, FG(G)676, FG(G)900, and LXT devices in CSG324 |              |
|           |              |       |      | Bank 0/2                                                       | Bank 1/3 | Bank 0/2                                                              | Bank 1/3/4/5 |
| Various   | LVDS_33      |       |      | 16                                                             | N/A      | 16                                                                    | N/A          |
|           | LVDS_25      |       |      | 20                                                             | N/A      | 20                                                                    | N/A          |
|           | BLVDS_25     |       |      | 20                                                             | 48       | 20                                                                    | 20           |
|           | MINI_LVDS_33 |       |      | 13                                                             | N/A      | 13                                                                    | N/A          |
|           | MINI_LVDS_25 |       |      | 18                                                             | N/A      | 18                                                                    | N/A          |
|           | RSDS_33      |       |      | 12                                                             | N/A      | 12                                                                    | N/A          |
|           | RSDS_25      |       |      | 15                                                             | N/A      | 15                                                                    | N/A          |
|           | TMDS_33      |       |      | 83                                                             | N/A      | 83                                                                    | N/A          |
|           | PPDS_33      |       |      | 12                                                             | N/A      | 12                                                                    | N/A          |
|           | PPDS_25      |       |      | 16                                                             | N/A      | 16                                                                    | N/A          |
|           | DISPLAY_PORT |       |      | 42                                                             | 40       | 42                                                                    | 30           |
|           | I2C          |       |      | 47                                                             | 55       | 47                                                                    | 42           |
|           | SMBUS        |       |      | 44                                                             | 52       | 44                                                                    | 40           |

**Notes:**

- SSO limits greater than the number of I/O per  $V_{CCO}/GND$  pair (Table 33) indicate No Limit for the given I/O standard. They are provided in this table to calculate limits when using multiple I/O standards in a bank.
- Not available (N/A) indicates that the I/O standard is not available in the given bank.
- When used with the MCB, these signals are exempt from SSO analysis due to the known activity of the MCB switching patterns. SSO performance is validated for all MCB instances. MCB outputs can, in some cases, exceed the SSO limits.

## Input/Output Logic Switching Characteristics

Table 35: ILOGIC2 Switching Characteristics

| Symbol                                   | Description                                                    | Speed Grade    |                |                |                | Units |
|------------------------------------------|----------------------------------------------------------------|----------------|----------------|----------------|----------------|-------|
|                                          |                                                                | -3             | -3N            | -2             | -1L            |       |
| Setup/Hold                               |                                                                |                |                |                |                |       |
| T <sub>ICE0CK</sub> /T <sub>ICKCE0</sub> | CE0 pin Setup/Hold with respect to CLK                         | 0.56/<br>−0.30 | 0.56/<br>−0.25 | 0.79/<br>−0.22 | 1.21/<br>−0.52 | ns    |
| T <sub>ISRCK</sub> /T <sub>ICKSR</sub>   | SR pin Setup/Hold with respect to CLK                          | 0.74/<br>−0.23 | 0.74/<br>−0.22 | 0.98/<br>−0.20 | 1.31/<br>−0.45 | ns    |
| T <sub>IDOCK</sub> /T <sub>IOCKD</sub>   | D pin Setup/Hold with respect to CLK without Delay             | 1.19/<br>−0.83 | 1.36/<br>−0.83 | 1.73/<br>−0.83 | 2.18/<br>−1.77 | ns    |
| T <sub>IDOCKD</sub> /T <sub>IOCKDD</sub> | DDLY pin Setup/Hold with respect to CLK (using IODELAY2)       | 0.31/<br>0.00  | 0.47/<br>0.00  | 0.54/<br>0.00  | 0.63/<br>−0.39 | ns    |
| Combinatorial                            |                                                                |                |                |                |                |       |
| T <sub>IDI</sub>                         | D pin to O pin propagation delay, no Delay                     | 0.95           | 1.28           | 1.53           | 2.25           | ns    |
| T <sub>IDID</sub>                        | DDLY pin to O pin propagation delay (using IODELAY2)           | 0.23           | 0.39           | 0.44           | 0.74           | ns    |
| Sequential Delays                        |                                                                |                |                |                |                |       |
| T <sub>IDLO</sub>                        | D pin to Q pin using flip-flop as a latch without Delay        | 1.56           | 1.86           | 2.39           | 3.49           | ns    |
| T <sub>IDLOD</sub>                       | DDLY pin to Q1 pin using flip-flop as a latch (using IODELAY2) | 0.68           | 0.97           | 1.20           | 1.94           | ns    |
| T <sub>ICKQ</sub>                        | CLK to Q outputs for XC devices                                | 1.03           | 1.24           | 1.43           | 2.11           | ns    |
|                                          | CLK to Q outputs for XA and XQ devices                         | 1.38           | N/A            | 1.78           | 2.11           | ns    |
| T <sub>RQ_ILOGIC2</sub>                  | SR pin to Q outputs                                            | 1.81           | 1.81           | 2.50           | 3.05           | ns    |

Table 36: OLOGIC2 Switching Characteristics

| Symbol                                   | Description                               | Speed Grade    |                |                |                | Units |
|------------------------------------------|-------------------------------------------|----------------|----------------|----------------|----------------|-------|
|                                          |                                           | -3             | -3N            | -2             | -1L            |       |
| Setup/Hold                               |                                           |                |                |                |                |       |
| T <sub>ODCK</sub> /T <sub>OCKD</sub>     | D1/D2 pins Setup/Hold with respect to CLK | 0.81/<br>−0.05 | 0.86/<br>−0.05 | 1.18/<br>0.00  | 1.73/<br>−0.27 | ns    |
| T <sub>OOCECK</sub> /T <sub>OCKOCE</sub> | OCE pin Setup/Hold with respect to CLK    | 0.75/<br>−0.10 | 0.75/<br>−0.10 | 1.01/<br>−0.05 | 1.66/<br>−0.23 | ns    |
| T <sub>OSRCK</sub> /T <sub>OCKSR</sub>   | SR pin Setup/Hold with respect to CLK     | 0.70/<br>−0.28 | 0.79/<br>−0.28 | 1.03/<br>−0.23 | 1.39/<br>−0.47 | ns    |
| T <sub>OTCK</sub> /T <sub>OCKT</sub>     | T1/T2 pins Setup/Hold with respect to CLK | 0.24/<br>−0.08 | 0.56/<br>−0.06 | 0.83/<br>−0.01 | 0.99/<br>−0.19 | ns    |
| T <sub>OTCECK</sub> /T <sub>OCKTCE</sub> | TCE pin Setup/Hold with respect to CLK    | 0.58/<br>−0.06 | 0.72/<br>−0.06 | 1.18/<br>−0.01 | 1.51/<br>−0.13 | ns    |
| Sequential Delays                        |                                           |                |                |                |                |       |
| T <sub>OCKQ</sub>                        | CLK to OQ/TQ out for XC devices           | 0.48           | 0.51           | 0.74           | 0.74           | ns    |
|                                          | CLK to OQ/TQ out for XA and XQ devices    | 0.85           | N/A            | 1.16           | 0.74           | ns    |
| T <sub>RQ_OLOGIC2</sub>                  | SR pin to OQ/TQ out                       | 1.81           | 1.81           | 2.50           | 3.05           | ns    |

## CLB Switching Characteristics (SLICEM Only)

Table 40: CLB Switching Characteristics (SLICEM Only)

| Symbol                                                        | Description                                                          | Speed Grade    |                |                |                | Units   |
|---------------------------------------------------------------|----------------------------------------------------------------------|----------------|----------------|----------------|----------------|---------|
|                                                               |                                                                      | -3             | -3N            | -2             | -1L            |         |
| Combinatorial Delays                                          |                                                                      |                |                |                |                |         |
| T <sub>ILO</sub>                                              | An – Dn LUT inputs to A to D outputs                                 | 0.21           | 0.26           | 0.26           | 0.46           | ns, Max |
|                                                               | An – Dn LUT inputs through F7AMUX/F7BMUX to AMUX/CMUX output         | 0.37           | 0.43           | 0.43           | 0.77           | ns, Max |
| T <sub>OPAB</sub>                                             | An – Dn LUT inputs through F7AMUX or F7BMUX and F8MUX to BMUX output | 0.37           | 0.46           | 0.46           | 0.84           | ns, Max |
| T <sub>ITO</sub>                                              | An – Dn LUT inputs through latch to AQ – DQ outputs                  | 0.82           | 0.95           | 0.95           | 1.64           | ns, Max |
| T <sub>TITO_LOGIC</sub>                                       | An – Dn LUT inputs to AQ – DQ outputs (latch as logic)               | 0.82           | 0.95           | 0.95           | 1.64           | ns, Max |
| T <sub>OPCYA</sub>                                            | An LUT inputs to COUT output                                         | 0.38           | 0.48           | 0.48           | 0.69           | ns, Max |
| T <sub>OPCYB</sub>                                            | Bn LUT inputs to COUT output                                         | 0.38           | 0.49           | 0.49           | 0.71           | ns, Max |
| T <sub>OPCYC</sub>                                            | Cn LUT inputs to COUT output                                         | 0.28           | 0.33           | 0.33           | 0.55           | ns, Max |
| T <sub>OPCYD</sub>                                            | Dn LUT inputs to COUT output                                         | 0.28           | 0.35           | 0.35           | 0.52           | ns, Max |
| T <sub>AXCY</sub>                                             | AX input to COUT output                                              | 0.21           | 0.26           | 0.26           | 0.36           | ns, Max |
| T <sub>BXCY</sub>                                             | BX input to COUT output                                              | 0.13           | 0.16           | 0.16           | 0.18           | ns, Max |
| T <sub>CXCY</sub>                                             | CX input to COUT output                                              | 0.10           | 0.12           | 0.12           | 0.09           | ns, Max |
| T <sub>DXCY</sub>                                             | DX input to COUT output                                              | 0.09           | 0.11           | 0.11           | 0.09           | ns, Max |
| T <sub>BYP</sub>                                              | CIN input to COUT output                                             | 0.08           | 0.10           | 0.10           | 0.06           | ns, Max |
| T <sub>CINA</sub>                                             | CIN input to AMUX output                                             | 0.21           | 0.22           | 0.22           | 0.47           | ns, Max |
| T <sub>CINB</sub>                                             | CIN input to BMUX output                                             | 0.30           | 0.31           | 0.31           | 0.57           | ns, Max |
| T <sub>CINC</sub>                                             | CIN input to CMUX output                                             | 0.29           | 0.31           | 0.31           | 0.58           | ns, Max |
| T <sub>CIND</sub>                                             | CIN input to DMUX output                                             | 0.31           | 0.32           | 0.32           | 0.68           | ns, Max |
| Sequential Delays                                             |                                                                      |                |                |                |                |         |
| T <sub>CKO</sub>                                              | Clock to AQ – DQ outputs                                             | 0.45           | 0.53           | 0.53           | 0.74           | ns, Max |
| Setup and Hold Times of CLB Flip-Flops Before/After Clock CLK |                                                                      |                |                |                |                |         |
| T <sub>DICK</sub> /T <sub>CKDI</sub>                          | AX – DX input to CLK on A – D flip-flops                             | 0.42/<br>0.28  | 0.47/<br>0.39  | 0.47/<br>0.39  | 0.90/<br>0.56  | ns, Min |
| T <sub>CECK</sub> /T <sub>CKCE</sub>                          | CE input to CLK on A – D flip-flops                                  | 0.31/<br>–0.07 | 0.37/<br>–0.07 | 0.37/<br>–0.07 | 0.59/<br>–0.27 | ns, Min |
| T <sub>SRCK</sub> /T <sub>CKSR</sub>                          | SR input to CLK on A – D flip-flops for XC devices                   | 0.41/<br>0.02  | 0.42/<br>0.02  | 0.42/<br>0.02  | 0.68/<br>–0.29 | ns, Min |
|                                                               | SR input to CLK on A – D flip-flops for XA and XQ devices            | 0.41/<br>0.02  | N/A            | 0.44/<br>0.02  | 0.68/<br>–0.29 | ns, Min |
| T <sub>CINCK</sub> /T <sub>CKCIN</sub>                        | CIN input to CLK on A – D flip-flops                                 | 0.31/<br>–0.17 | 0.31/<br>–0.13 | 0.31/<br>–0.13 | 0.81/<br>–0.42 | ns, Min |
| Set/Reset                                                     |                                                                      |                |                |                |                |         |
| T <sub>RPW</sub>                                              | SR input minimum pulse width                                         | 0.41           | 0.48           | 0.48           | 1.37           | ns, Min |
| T <sub>RQ</sub>                                               | Delay from SR input to AQ – DQ flip-flops                            | 0.60           | 0.70           | 0.70           | 0.88           | ns, Max |
| T <sub>CEO</sub>                                              | Delay from CE input to AQ – DQ flip-flops                            | 0.60           | 0.65           | 0.65           | 0.90           | ns, Max |
| F <sub>TOG</sub>                                              | Toggle frequency (for export control)                                | 862            | 806            | 667            | 500            | MHz     |

## DSP48A1 Switching Characteristics

Table 44: DSP48A1 Switching Characteristics

| Symbol                                                                         | Description                                               | Pre-adder | Multiplier | Post-adder | Speed Grade    |                |                |                 | Units |
|--------------------------------------------------------------------------------|-----------------------------------------------------------|-----------|------------|------------|----------------|----------------|----------------|-----------------|-------|
|                                                                                |                                                           |           |            |            | -3             | -3N            | -2             | -1L             |       |
| Setup and Hold Times of Data/Control Pins to the Input Register Clock          |                                                           |           |            |            |                |                |                |                 |       |
| T <sub>DSPDCK_A_A1REG</sub> /<br>T <sub>DSPCKD_A_A1REG</sub>                   | A input to A1 register CLK                                | N/A       | N/A        | N/A        | 0.15/<br>0.09  | 0.17/<br>0.09  | 0.17/<br>0.09  | 0.32/<br>0.09   | ns    |
| T <sub>DSPDCK_D_B1REG</sub> /<br>T <sub>DSPCKD_D_B1REG</sub>                   | D input to B1 register CLK                                | Yes       | N/A        | N/A        | 1.90/<br>−0.07 | 1.95/<br>−0.07 | 1.95/<br>−0.07 | 2.82/<br>−0.07  | ns    |
| T <sub>DSPDCK_C_CREG</sub> /<br>T <sub>DSPCKD_C_CREG</sub>                     | C input to C register CLK for XC devices                  | N/A       | N/A        | N/A        | 0.11/<br>0.15  | 0.13/<br>0.15  | 0.13/<br>0.15  | 0.24/<br>0.09   | ns    |
|                                                                                | C input to C register CLK for XA and XQ devices           |           |            |            | 0.11/<br>0.19  | N/A            | 0.13/<br>0.23  | 0.24/<br>0.09   |       |
| T <sub>DSPDCK_D_DREG</sub> /<br>T <sub>DSPCKD_D_DREG</sub>                     | D input to D register CLK for XC devices                  | N/A       | N/A        | N/A        | 0.09/<br>0.15  | 0.10/<br>0.15  | 0.10/<br>0.15  | 0.19/<br>0.12   | ns    |
|                                                                                | D input to D register CLK for XA and XQ devices           |           |            |            | 0.09/<br>0.23  | N/A            | 0.10/<br>0.27  | 0.19/<br>0.12   |       |
| T <sub>DSPDCK_OPMODE_B1REG</sub> /<br>T <sub>DSPCKD_OPMODE_B1REG</sub>         | OPMODE input to B1 register CLK                           | Yes       | N/A        | N/A        | 1.97/<br>0.01  | 2.00/<br>0.01  | 2.00/<br>0.01  | 2.85/<br>0.01   | ns    |
| T <sub>DSPDCK_OPMODE_OPMODEREG</sub> /<br>T <sub>DSPCKD_OPMODE_OPMODEREG</sub> | OPMODE input to OPMODE register CLK for XC devices        | N/A       | N/A        | N/A        | 0.18/<br>0.12  | 0.21/<br>0.12  | 0.21/<br>0.12  | 0.40/<br>0.12   | ns    |
|                                                                                | OPMODE input to OPMODE register CLK for XA and XQ devices |           |            |            | 0.18/<br>0.16  | N/A            | 0.21/<br>0.22  | 0.40/<br>0.12   |       |
| Setup and Hold Times of Data Pins to the Pipeline Register Clock               |                                                           |           |            |            |                |                |                |                 |       |
| T <sub>DSPDCK_A_MREG</sub> /<br>T <sub>DSPCKD_A_MREG</sub>                     | A input to M register CLK                                 | N/A       | Yes        | N/A        | 3.06/<br>−0.40 | 3.51/<br>−0.40 | 3.51/<br>−0.40 | 3.97/<br>−0.40  | ns    |
| T <sub>DSPDCK_B_MREG</sub> /<br>T <sub>DSPCKD_B_MREG</sub>                     | B input to M register CLK                                 | Yes       | Yes        | N/A        | 3.96/<br>−0.68 | 4.58/<br>−0.68 | 4.58/<br>−0.68 | 7.00/<br>−0.68  | ns    |
| T <sub>DSPDCK_D_MREG</sub> /<br>T <sub>DSPCKD_D_MREG</sub>                     | D input to M register CLK                                 | Yes       | Yes        | N/A        | 4.23/<br>−0.56 | 4.80/<br>−0.56 | 4.80/<br>−0.56 | 6.84/<br>−0.56  | ns    |
| T <sub>DSPDCK_OPMODE_MREG</sub> /<br>T <sub>DSPCKD_OPMODE_MREG</sub>           | OPMODE to M register CLK                                  | Yes       | Yes        | N/A        | 4.18/<br>−0.48 | 4.80/<br>−0.48 | 4.80/<br>−0.48 | 6.88/<br>−0.48  | ns    |
|                                                                                |                                                           | No        | Yes        | N/A        | 2.37/<br>−0.48 | 2.70/<br>−0.48 | 2.70/<br>−0.48 | 4.28/<br>−0.48  | ns    |
| Setup and Hold Times of Data/Control Pins to the Output Register Clock         |                                                           |           |            |            |                |                |                |                 |       |
| T <sub>DSPDCK_A_PREG</sub> /<br>T <sub>DSPCKD_A_PREG</sub>                     | A input to P register CLK                                 | N/A       | Yes        | Yes        | 4.32/<br>−0.76 | 5.06/<br>−0.76 | 5.06/<br>−0.76 | 7.52/<br>−0.76  | ns    |
| T <sub>DSPDCK_B_PREG</sub> /<br>T <sub>DSPCKD_B_PREG</sub>                     | B input to P register CLK                                 | Yes       | Yes        | Yes        | 5.87/<br>−0.59 | 6.87/<br>−0.59 | 6.87/<br>−0.59 | 10.55/<br>−0.59 | ns    |
|                                                                                |                                                           | No        | Yes        | Yes        | 4.14/<br>−0.93 | 4.68/<br>−0.93 | 4.68/<br>−0.93 | 8.12/<br>−0.93  | ns    |
| T <sub>DSPDCK_C_PREG</sub> /<br>T <sub>DSPCKD_C_PREG</sub>                     | C input to P register CLK                                 | N/A       | N/A        | Yes        | 2.20/<br>−0.23 | 2.25/<br>−0.23 | 2.25/<br>−0.23 | 3.27/<br>−0.23  | ns    |
| T <sub>DSPDCK_D_PREG</sub> /<br>T <sub>DSPCKD_D_PREG</sub>                     | D input to P register CLK                                 | Yes       | Yes        | Yes        | 5.90/<br>−0.92 | 6.91/<br>−0.92 | 6.91/<br>−0.92 | 10.39/<br>−0.92 | ns    |

Table 54: Switching Characteristics for the Delay-Locked Loop (DLL)<sup>(1)</sup> (Cont'd)

| Symbol                        | Description                                                                                                                                                                                                               | Speed Grade |      |     |      |     |      |     |      | Units |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------|-----|------|-----|------|-----|------|-------|
|                               |                                                                                                                                                                                                                           | -3          |      | -3N |      | -2  |      | -1L |      |       |
|                               |                                                                                                                                                                                                                           | Min         | Max  | Min | Max  | Min | Max  | Min | Max  |       |
| LOCK_DLL <sup>(3)</sup>       | When using the DLL alone: The time from deassertion at the DCM's reset input to the rising transition at its LOCKED output. When the DCM is locked, the CLKIN and CLKFB signals are in phase.<br>CLKIN_FREQ_DLL < 50 MHz. | –           | 5    | –   | 5    | –   | 5    | –   | 5    | ms    |
|                               | When using the DLL alone: The time from deassertion at the DCM's reset input to the rising transition at its LOCKED output. When the DCM is locked, the CLKIN and CLKFB signals are in phase.<br>CLKIN_FREQ_DLL > 50 MHz  | –           | 0.60 | –   | 0.60 | –   | 0.60 | –   | 0.60 | ms    |
| Delay Lines                   |                                                                                                                                                                                                                           |             |      |     |      |     |      |     |      |       |
| DCM_DELAY_STEP <sup>(5)</sup> | Finest delay resolution, averaged over all steps.                                                                                                                                                                         | 10          | 40   | 10  | 40   | 10  | 40   | 10  | 40   | ps    |

**Notes:**

1. The values in this table are based on the operating conditions described in Table 2 and Table 53.
2. Indicates the maximum amount of output jitter that the DCM adds to the jitter on the CLKIN input.
3. For optimal jitter tolerance and faster LOCK time, use the CLKIN\_PERIOD attribute.
4. Some jitter and duty-cycle specifications include 1% of input clock period or 0.01 UI. For example, this data sheet specifies a maximum jitter of  $\pm(1\% \text{ of CLKIN period} + 150 \text{ ps})$ . Assuming that the CLKIN frequency is 100 MHz, the equivalent CLKIN period is 10 ns. Since 1% of 10 ns is 0.1 ns or 100 ps, the maximum jitter is  $\pm(100 \text{ ps} + 150 \text{ ps}) = \pm250 \text{ ps}$ .
5. A typical delay step size is 23 ps.
6. The timing analysis tools use the CLK\_FEEDBACK = 1X condition for the CLKIN\_CLKFB\_PHASE value (reported as phase error). When using CLK\_FEEDBACK = 2X, add 100 ps to the phase error for the CLKIN\_CLKFB\_PHASE value (as shown in this table).

Table 55: Recommended Operating Conditions for the Digital Frequency Synthesizer (DFS)<sup>(1)</sup>

| Symbol                                      | Description                                                                                  | Speed Grade |                    |     |                    |     |                    |     |                    | Units |
|---------------------------------------------|----------------------------------------------------------------------------------------------|-------------|--------------------|-----|--------------------|-----|--------------------|-----|--------------------|-------|
|                                             |                                                                                              | -3          |                    | -3N |                    | -2  |                    | -1L |                    |       |
|                                             |                                                                                              | Min         | Max                | Min | Max                | Min | Max                | Min | Max                |       |
| Input Frequency Ranges <sup>(2)</sup>       |                                                                                              |             |                    |     |                    |     |                    |     |                    |       |
| CLKIN_FREQ_FX                               | Frequency for the CLKIN input. Also described as F <sub>CLKIN</sub> .                        | 0.5         | 375 <sup>(3)</sup> | 0.5 | 375 <sup>(3)</sup> | 0.5 | 333 <sup>(3)</sup> | 0.5 | 200 <sup>(3)</sup> | MHz   |
| Input Clock Jitter Tolerance <sup>(4)</sup> |                                                                                              |             |                    |     |                    |     |                    |     |                    |       |
| CLKIN_CYC_JITT_FX_LF                        | Cycle-to-cycle jitter at the CLKIN input, based on CLKFX output frequency: FCLKFX < 150 MHz. | –           | ±300               | –   | ±300               | –   | ±300               | –   | ±300               | ps    |
| CLKIN_CYC_JITT_FX_HF                        | Cycle-to-cycle jitter at the CLKIN input, based on CLKFX output frequency: FCLKFX > 150 MHz. | –           | ±150               | –   | ±150               | –   | ±150               | –   | ±150               | ps    |
| CLKIN_PER_JITT_FX                           | Period jitter at the CLKIN input.                                                            | –           | ±1                 | –   | ±1                 | –   | ±1                 | –   | ±1                 | ns    |

**Notes:**

1. DFS specifications apply when using either of the DFS outputs (CLKFX or CLKFX180).
2. When using both DFS and DLL outputs on the same DCM, follow the more restrictive CLKIN\_FREQ\_DLL specifications in Table 53.
3. The CLKIN\_DIVIDE\_BY\_2 attribute increases the effective input frequency range. When set to TRUE, the input clock frequency is divided by two as it enters the DCM. Input clock frequencies for the clock buffer being used can be increased up to the  $F_{\text{MAX}}$  (see Table 48 and Table 49 for BUFG and BUFGIO limits).
4. CLKIN input jitter beyond these limits can cause the DCM to lose LOCK.

Table 73: Global Clock Setup and Hold With DCM in Source-Synchronous Mode

| Symbol                                                                                     | Description                                                             | Device     | Speed Grade |           |           |           | Units |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|------------|-------------|-----------|-----------|-----------|-------|
|                                                                                            |                                                                         |            | -3          | -3N       | -2        | -1L       |       |
| Input Setup and Hold Time Relative to Global Clock Input Signal for LVC MOS25 Standard.(1) |                                                                         |            |             |           |           |           |       |
| T <sub>PSDCM0</sub> / T <sub>PHDCM0</sub>                                                  | No Delay Global Clock and IFF(2)<br>with DCM in Source-Synchronous Mode | XC6SLX4    | 0.71/0.65   | N/A       | 0.72/1.22 | 1.58/1.18 | ns    |
|                                                                                            |                                                                         | XC6SLX9    | 0.71/0.69   | 0.71/1.19 | 0.72/1.36 | 1.58/1.18 | ns    |
|                                                                                            |                                                                         | XC6SLX16   | 0.86/0.52   | 0.92/0.57 | 1.04/0.60 | 1.02/1.06 | ns    |
|                                                                                            |                                                                         | XC6SLX25   | 0.84/0.58   | 0.90/0.59 | 1.01/0.59 | 1.58/1.07 | ns    |
|                                                                                            |                                                                         | XC6SLX25T  | 0.84/0.58   | 0.90/0.59 | 1.01/0.59 | N/A       | ns    |
|                                                                                            |                                                                         | XC6SLX45   | 0.85/0.70   | 0.90/0.76 | 0.98/0.79 | 1.34/1.34 | ns    |
|                                                                                            |                                                                         | XC6SLX45T  | 0.85/0.70   | 0.90/0.76 | 0.98/0.79 | N/A       | ns    |
|                                                                                            |                                                                         | XC6SLX75   | 1.00/0.62   | 1.06/0.63 | 1.15/0.63 | 1.65/1.46 | ns    |
|                                                                                            |                                                                         | XC6SLX75T  | 1.00/0.71   | 1.06/0.72 | 1.15/0.72 | N/A       | ns    |
|                                                                                            |                                                                         | XC6SLX100  | 0.81/0.68   | 0.81/0.69 | 0.94/0.69 | 1.42/2.07 | ns    |
|                                                                                            |                                                                         | XC6SLX100T | 0.81/0.68   | 0.81/0.69 | 0.94/0.69 | N/A       | ns    |
|                                                                                            |                                                                         | XC6SLX150  | 0.68/0.98   | 0.69/0.99 | 0.79/0.99 | 1.45/1.60 | ns    |
|                                                                                            |                                                                         | XC6SLX150T | 0.68/0.98   | 0.69/0.99 | 0.79/0.99 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX4    | 0.81/0.74   | N/A       | 0.72/1.36 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX9    | 0.81/0.74   | N/A       | 0.72/1.36 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX16   | 1.01/0.56   | N/A       | 1.04/0.60 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX25   | 0.94/0.76   | N/A       | 1.06/0.77 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX25T  | 0.94/0.76   | N/A       | 1.14/0.77 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX45   | 0.86/0.74   | N/A       | 0.98/0.78 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX45T  | 0.86/0.74   | N/A       | 0.98/0.78 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX75   | 1.02/0.71   | N/A       | 1.15/0.72 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX75T  | 1.02/0.71   | N/A       | 1.15/0.72 | N/A       | ns    |
|                                                                                            |                                                                         | XA6SLX100  | N/A         | N/A       | 1.37/0.75 | N/A       | ns    |
|                                                                                            |                                                                         | XQ6SLX75   | N/A         | N/A       | 1.15/0.72 | 1.65/1.46 | ns    |
|                                                                                            |                                                                         | XQ6SLX75T  | 1.02/0.71   | N/A       | 1.15/0.72 | N/A       | ns    |
|                                                                                            |                                                                         | XQ6SLX150  | N/A         | N/A       | 0.79/1.15 | 1.45/1.60 | ns    |
|                                                                                            |                                                                         | XQ6SLX150T | 0.73/1.15   | N/A       | 0.79/1.15 | N/A       | ns    |

**Notes:**

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage. These measurements include DCM CLK0 jitter.
- IFF = Input Flip-Flop or Latch
- Use IBIS to determine any duty-cycle distortion incurred using various standards.

## Source-Synchronous Switching Characteristics

The parameters in this section provide the necessary values for calculating timing budgets for Spartan-6 FPGA source-synchronous transmitter and receiver data-valid windows.

Table 78: Duty Cycle Distortion and Clock-Tree Skew

| Symbol                  | Description                                            | Device <sup>(1)</sup>    | Speed Grade |      |      |      | Units |
|-------------------------|--------------------------------------------------------|--------------------------|-------------|------|------|------|-------|
|                         |                                                        |                          | -3          | -3N  | -2   | -1L  |       |
| T <sub>DCD_CLK</sub>    | Global Clock Tree Duty Cycle Distortion <sup>(2)</sup> | LX4                      | 0.20        | N/A  | 0.20 | 0.35 | ns    |
|                         |                                                        | LX9                      | 0.20        | 0.20 | 0.20 | 0.35 | ns    |
|                         |                                                        | LX16                     | 0.20        | 0.20 | 0.20 | 0.35 | ns    |
|                         |                                                        | LX25                     | 0.20        | 0.20 | 0.20 | 0.35 | ns    |
|                         |                                                        | LX25T                    | 0.20        | 0.20 | 0.20 | N/A  | ns    |
|                         |                                                        | LX45                     | 0.20        | 0.20 | 0.20 | 0.35 | ns    |
|                         |                                                        | LX45T                    | 0.20        | 0.20 | 0.20 | N/A  | ns    |
|                         |                                                        | LX75                     | 0.20        | 0.20 | 0.20 | 0.35 | ns    |
|                         |                                                        | LX75T                    | 0.20        | 0.20 | 0.20 | N/A  | ns    |
|                         |                                                        | LX100                    | 0.20        | 0.20 | 0.20 | 0.35 | ns    |
|                         |                                                        | LX100T                   | 0.20        | 0.20 | 0.20 | N/A  | ns    |
|                         |                                                        | LX150                    | 0.35        | 0.35 | 0.35 | 0.35 | ns    |
|                         |                                                        | LX150T                   | 0.35        | 0.35 | 0.35 | N/A  | ns    |
| T <sub>CKSKEW</sub>     | Global Clock Tree Skew <sup>(3)</sup>                  | LX4                      | 0.25        | N/A  | 0.25 | 0.29 | ns    |
|                         |                                                        | LX9                      | 0.25        | 0.25 | 0.25 | 0.29 | ns    |
|                         |                                                        | LX16                     | 0.15        | 0.15 | 0.15 | 0.22 | ns    |
|                         |                                                        | LX25                     | 0.26        | 0.26 | 0.26 | 0.41 | ns    |
|                         |                                                        | LX25T                    | 0.26        | 0.26 | 0.26 | N/A  | ns    |
|                         |                                                        | LX45                     | 0.20        | 0.20 | 0.20 | 0.28 | ns    |
|                         |                                                        | LX45T                    | 0.20        | 0.20 | 0.20 | N/A  | ns    |
|                         |                                                        | LX75                     | 0.56        | 0.56 | 0.56 | 0.50 | ns    |
|                         |                                                        | LX75T                    | 0.56        | 0.56 | 0.56 | N/A  | ns    |
|                         |                                                        | XC6SLX100 <sup>(4)</sup> | 0.22        | 0.22 | 0.22 | 0.21 | ns    |
|                         |                                                        | XA6SLX100 <sup>(4)</sup> | N/A         | N/A  | 0.43 | N/A  | ns    |
|                         |                                                        | LX100T                   | 0.22        | 0.22 | 0.22 | N/A  | ns    |
|                         |                                                        | LX150                    | 0.48        | 0.48 | 0.48 | 0.35 | ns    |
|                         |                                                        | LX150T                   | 0.48        | 0.48 | 0.48 | N/A  | ns    |
| T <sub>DCD_BUFIO2</sub> | I/O clock tree duty cycle distortion                   | LX devices               | 0.25        | 0.25 | 0.25 | 0.50 | ns    |
|                         |                                                        | LXT devices              | 0.25        | 0.25 | 0.25 | N/A  | ns    |

Table 81: Source-Synchronous Pin-to-Pin Setup/Hold and Clock-to-Out Using BUFIO2

| Symbol                                                                               | Description                       | Device     | Speed Grade |           |           |            | Units |
|--------------------------------------------------------------------------------------|-----------------------------------|------------|-------------|-----------|-----------|------------|-------|
|                                                                                      |                                   |            | -3          | -3N       | -2        | -1L        |       |
| Data Input Setup and Hold Times Relative to a Forwarded Clock Input Pin Using BUFIO2 |                                   |            |             |           |           |            |       |
| T <sub>PSCS</sub> /T <sub>PHCS</sub>                                                 | IFF setup/hold using BUFIO2 clock | XC6SLX4    | 0.57/0.94   | N/A       | 0.95/1.12 | 0.27/1.56  | ns    |
|                                                                                      |                                   | XC6SLX9    | 0.40/0.95   | 0.50/0.96 | 0.60/1.12 | 0.27/1.56  | ns    |
|                                                                                      |                                   | XC6SLX16   | 0.48/0.74   | 0.55/0.75 | 0.69/0.83 | 1.27/1.31  | ns    |
|                                                                                      |                                   | XC6SLX25   | 0.28/1.02   | 0.28/1.12 | 0.28/1.24 | 0.15/1.78  | ns    |
|                                                                                      |                                   | XC6SLX25T  | 0.28/1.02   | 0.28/1.12 | 0.28/1.24 | N/A        | ns    |
|                                                                                      |                                   | XC6SLX45   | 0.42/1.19   | 0.44/1.29 | 0.50/1.40 | 0.12/1.83  | ns    |
|                                                                                      |                                   | XC6SLX45T  | 0.42/1.19   | 0.44/1.29 | 0.50/1.40 | N/A        | ns    |
|                                                                                      |                                   | XC6SLX75   | 0.38/1.48   | 0.38/1.63 | 0.38/1.84 | 0.05/2.78  | ns    |
|                                                                                      |                                   | XC6SLX75T  | 0.38/1.48   | 0.38/1.63 | 0.38/1.84 | N/A        | ns    |
|                                                                                      |                                   | XC6SLX100  | 0.06/1.48   | 0.06/1.63 | 0.06/1.87 | −0.03/2.72 | ns    |
|                                                                                      |                                   | XC6SLX100T | 0.06/1.48   | 0.06/1.63 | 0.06/1.87 | N/A        | ns    |
|                                                                                      |                                   | XC6SLX150  | 0.04/1.73   | 0.04/1.75 | 0.04/1.98 | −0.08/3.07 | ns    |
|                                                                                      |                                   | XC6SLX150T | 0.04/1.73   | 0.04/1.75 | 0.04/1.98 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX4    | 0.64/0.96   | N/A       | 0.97/1.12 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX9    | 0.44/0.99   | N/A       | 0.62/1.16 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX16   | 0.50/0.78   | N/A       | 0.69/0.83 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX25   | 0.28/1.04   | N/A       | 0.28/1.25 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX25T  | 0.28/1.04   | N/A       | 0.28/1.25 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX45   | 0.43/1.21   | N/A       | 0.50/1.40 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX45T  | 0.43/1.21   | N/A       | 0.50/1.40 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX75   | 0.38/1.49   | N/A       | 0.38/1.84 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX75T  | 0.38/1.49   | N/A       | 0.38/1.84 | N/A        | ns    |
|                                                                                      |                                   | XA6SLX100  | N/A         | N/A       | 1.01/1.63 | N/A        | ns    |
|                                                                                      |                                   | XQ6SLX75   | N/A         | N/A       | 0.38/1.84 | 0.05/2.78  | ns    |
|                                                                                      |                                   | XQ6SLX75T  | 0.38/1.49   | N/A       | 0.38/1.84 | N/A        | ns    |
|                                                                                      |                                   | XQ6SLX150  | N/A         | N/A       | 0.04/1.98 | −0.08/3.07 | ns    |
|                                                                                      |                                   | XQ6SLX150T | 0.04/1.75   | N/A       | 0.04/1.98 | N/A        | ns    |

Table 81: Source-Synchronous Pin-to-Pin Setup/Hold and Clock-to-Out Using BUFIO2 (Cont'd)

| Symbol                               | Description                         | Device     | Speed Grade |      |      |      | Units |
|--------------------------------------|-------------------------------------|------------|-------------|------|------|------|-------|
|                                      |                                     |            | -3          | -3N  | -2   | -1L  |       |
| Pin-to-Pin Clock-to-Out Using BUFIO2 |                                     |            |             |      |      |      |       |
| T <sub>ICKO</sub> FCS                | OFF clock-to-out using BUFIO2 clock | XC6SLX4    | 5.51        | N/A  | 6.95 | 8.45 | ns    |
|                                      |                                     | XC6SLX9    | 5.51        | 5.89 | 6.95 | 8.45 | ns    |
|                                      |                                     | XC6SLX16   | 5.31        | 5.70 | 6.67 | 8.21 | ns    |
|                                      |                                     | XC6SLX25   | 5.53        | 6.00 | 7.02 | 8.72 | ns    |
|                                      |                                     | XC6SLX25T  | 5.53        | 6.00 | 7.02 | N/A  | ns    |
|                                      |                                     | XC6SLX45   | 5.76        | 6.18 | 7.22 | 8.77 | ns    |
|                                      |                                     | XC6SLX45T  | 5.76        | 6.18 | 7.22 | N/A  | ns    |
|                                      |                                     | XC6SLX75   | 5.94        | 6.46 | 7.57 | 9.72 | ns    |
|                                      |                                     | XC6SLX75T  | 5.94        | 6.46 | 7.57 | N/A  | ns    |
|                                      |                                     | XC6SLX100  | 6.09        | 6.53 | 7.60 | 9.66 | ns    |
|                                      |                                     | XC6SLX100T | 6.09        | 6.53 | 7.60 | N/A  | ns    |
|                                      |                                     | XC6SLX150  | 6.29        | 6.69 | 7.81 | 9.94 | ns    |
|                                      |                                     | XC6SLX150T | 6.29        | 6.69 | 7.81 | N/A  | ns    |
|                                      |                                     | XA6SLX4    | 5.83        | N/A  | 6.95 | N/A  | ns    |
|                                      |                                     | XA6SLX9    | 5.83        | N/A  | 6.95 | N/A  | ns    |
|                                      |                                     | XA6SLX16   | 5.65        | N/A  | 6.68 | N/A  | ns    |
|                                      |                                     | XA6SLX25   | 5.85        | N/A  | 7.03 | N/A  | ns    |
|                                      |                                     | XA6SLX25T  | 5.85        | N/A  | 7.03 | N/A  | ns    |
|                                      |                                     | XA6SLX45   | 6.07        | N/A  | 7.25 | N/A  | ns    |
|                                      |                                     | XA6SLX45T  | 6.07        | N/A  | 7.25 | N/A  | ns    |
|                                      |                                     | XA6SLX75   | 6.26        | N/A  | 7.57 | N/A  | ns    |
|                                      |                                     | XA6SLX75T  | 6.26        | N/A  | 7.57 | N/A  | ns    |
|                                      |                                     | XA6SLX100  | N/A         | N/A  | 7.48 | N/A  | ns    |
|                                      |                                     | XQ6SLX75   | N/A         | N/A  | 7.57 | 9.72 | ns    |
|                                      |                                     | XQ6SLX75T  | 6.26        | N/A  | 7.57 | N/A  | ns    |
|                                      |                                     | XQ6SLX150  | N/A         | N/A  | 7.81 | 9.94 | ns    |
|                                      |                                     | XQ6SLX150T | 6.62        | N/A  | 7.81 | N/A  | ns    |

| Date     | Version | Description of Revisions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 06/14/10 | 1.5     | <p>In <a href="#">Table 2</a>, added note 5 and added temperature range to <math>V_{FS}</math> and <math>R_{FUSE}</math>. Removed speed grade delineation, revised <math>I_{RPD}</math> description, and updated note 2 in <a href="#">Table 4</a>. Added note 2 to <a href="#">Table 7</a>. Added <math>DIFF\_MOBILE\_DDR</math> to <a href="#">Table 8</a> and <a href="#">Table 10</a>. Added note 4 to <a href="#">Table 15</a>. Changed minimum <math>DV_{PPIN}</math> in <a href="#">Table 16</a>. Updated <math>F_{GTPDRCLK}</math> in <a href="#">Table 19</a>. Increased maximum <math>T_{LLSKEW}</math> in <a href="#">Table 22</a>. Updated descriptions and added data to <a href="#">Table 23</a>. Removed note 1 and added new data to the Networking Applications section in <a href="#">Table 25</a>. Updated <a href="#">Table 26</a> and <a href="#">Table 27</a> to the data in ISE v12.1 software with speed specification v1.08. In <a href="#">Table 28</a>, added <math>DIFF\_MOBILE\_DDR</math> and updated -4 speed grade data. Updated the maximum I/O pairs per bank in <a href="#">Table 33</a>. Updated note 2 on <a href="#">Table 39</a>. Revised the <math>F_{MAX}</math> in <a href="#">Table 44</a>. In <a href="#">Table 47</a>, updated description for <math>T_{SMCKCSO}</math>, revised values for <math>T_{POR}</math> and added Min value, added <math>T_{BPIICCK}</math> and <math>T_{SPIICCK}</math>. Also in <a href="#">Table 47</a>, added device dependencies to <math>F_{SMCKCK}</math> and <math>F_{RBCKCK}</math>. Updated and added data to <a href="#">Table 63</a> through <a href="#">Table 78</a>, and <a href="#">Table 81</a>. In <a href="#">Table 79</a>, added data on the XC6SLX45-FG(G)676 and revised the XC6SLX45T and XC6SLX150T values.</p> <p>The following changes to this specification are addressed in the product change notice <a href="#">XC6SLX45-FG(G)676</a>, <i>MCB Performance and JTAG Revision Code for Spartan-6 LX16 and LX45 FPGAs</i>. In <a href="#">Table 2</a>, revised the <math>V_{CCINT}</math> to add the memory controller block extended performance specifications. In <a href="#">Table 25</a>, changed the standard specifications and added extended performance specifications for the memory controller block and note 2. Added note 4 and updated values in <a href="#">Table 34</a>.</p> |
| 06/24/10 | 1.6     | <p>Production release of XC6SLX45T (-2 and -3 speed grades), XC6SLX16 and XC6SLX45 (-3 speed grade) devices which includes changes to <a href="#">Table 26</a> and <a href="#">Table 27</a> (ISE v12.1 software with speed specification v1.08).</p> <p>Added the -3N speed grade, which designates Spartan-6 devices that do not support MCB functionality. This includes changes to <a href="#">Table 2</a> (note 2), <a href="#">Table 25</a> (note 4), and <a href="#">Switching Characteristics</a> (<a href="#">Table 26</a>).</p> <p>Updated <a href="#">Simultaneously Switching Outputs</a> discussion. Added -3 speed grade values for <math>T_{TAP}</math> and <math>F_{MINCAL}</math> values in <a href="#">Table 39</a>. In <a href="#">Table 40</a>, updated <math>T_{RPW}</math> (-2 and -3 speed grade) values and <math>F_{TOG}</math> (-3 speed grade) values. In <a href="#">Table 48</a>, updated <math>T_{GIO}</math> (-2 and -3 speed grade) values. Updated -3 values in spread spectrum section of <a href="#">Table 57</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 07/16/10 | 1.7     | <p>Production release of specific devices listed in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v12.2 software with speed specification v1.11. Added note 4 advising designers of the patch which contains v1.11. Also updated the -1L speed specification to v1.04. Updated numerous -4 and -1L values. Added -4 <math>T_{TAP}</math> values and <math>F_{MINCAL}</math> to <a href="#">Table 39</a>. Revised <math>T_{CINCK}/T_{CKCIN}</math> in <a href="#">Table 40</a>. In <a href="#">Table 41</a>, revised <math>T_{SHCKO}</math>. In <a href="#">Table 42</a>, revised <math>T_{REQ}</math>. Added new -1L values to <a href="#">Table 47</a>. Added and updated values in <a href="#">Table 79</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 07/26/10 | 1.8     | <p>Production release of XC6SLX25, XC6SLX25T, XC6SLX100 and XC6SLX100T in the specific speed grades listed in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v12.2 software with speed specification v1.11. Added note 7 to <a href="#">Table 2</a> and moved <math>V_{FS}</math> and <math>R_{FUSE}</math> to a new <a href="#">Table 3</a>. Added <math>I_{HS}</math> and note 4 to <a href="#">Table 4</a>. Added note 1 to <a href="#">Table 28</a>. Added and updated SSO limits per <math>V_{CCO}/GND</math> pairs in <a href="#">Table 34</a>. Added note 3 to <a href="#">Table 47</a>. In <a href="#">Table 54</a>, removed -1L specifications for <math>CLKOUT\_PER\_JITT\_DV1/2</math> and revised <math>CLKIN\_CLKFB\_PHASE</math> and <math>CLKOUT\_PHASE\_DLL</math> values. Updated note 3 in both <a href="#">Table 56</a> and <a href="#">Table 57</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 08/23/10 | 1.9     | <p>Updated values for <math>F_{GTPRANGE1}</math>, <math>F_{GTPRANGE2}</math>, and <math>F_{GPLLMIN}</math> in <a href="#">Table 18</a>. Revised -3 and -4 values in <a href="#">Table 21</a>. Removed the -1L speed grade readback support restriction and note 3 in <a href="#">Table 47</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 11/05/10 | 1.10    | <p>Production release of XC6SLX4 and XC6SLX9 in the specific speed grades listed in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v12.3 software with speed specification v1.12 for the -2 speed grade available in the 12.3 <i>Speed Files Patch</i>. Added note 3 advising designers of the patch which contains v1.12.</p> <p>In <a href="#">Table 2</a>, added note 4. In <a href="#">Table 4</a>, added note 2. In <a href="#">Table 10</a>, added notes 2 and 3. In <a href="#">Table 44</a>, added note 2. In <a href="#">Table 47</a>, updated symbol for <math>T_{SMWCKCK}/T_{SMCKCKW}</math>, changed -1L values for <math>T_{USERCCLKH}</math> and <math>T_{USERCCLKL}</math>, and added and revised the modes for <math>F_{MCKCK}</math> and <math>F_{SMCKCK}</math>. In <a href="#">Table 53</a>, redefined and expanded description for <math>CLKIN\_FREQ\_DLL</math> and rewrote note 3. Updated title of <a href="#">Table 58</a>. Also in <a href="#">Table 78</a>, revised <math>T_{DCD\_CLK}</math> for XC6SLX150 and XC6SLX150T. Changed description of <math>T_{PSFD}/T_{PHFD}</math> in <a href="#">Table 71</a>.</p> <p>For the -1L speed grade, updated data sheet to ISE 12.3 software with speed specification v1.05 which revised the values in the following tables: <a href="#">Table 25</a>, <a href="#">Table 28</a>, <a href="#">Table 35</a>, <a href="#">Table 36</a>, <a href="#">Table 37</a>, <a href="#">Table 40</a> through <a href="#">Table 43</a>, <a href="#">Table 48</a> through <a href="#">Table 56</a>, <a href="#">Table 62</a> through <a href="#">Table 78</a>, <a href="#">Table 80</a>, and <a href="#">Table 81</a>. Updated <a href="#">Notice of Disclaimer</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

| Date     | Version | Description of Revisions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 01/10/11 | 1.11    | <p>Production release of XC6SLX4 and XC6SLX9 in the specific speed grades listed in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v12.4 software with speed specification v1.15 for the -4, -3, -3N, and -2 speed grades. Added note 3 to <a href="#">Table 27</a>. Also updated the -1L speed grade requirements to ISE v12.4 software with speed specification v1.06. Revised -3N definition throughout the document.</p> <p>Added note 4 to <a href="#">Table 2</a> and updated note 5. Added information on <math>V_{CCINT}</math> to note 1 in <a href="#">Table 5</a>. Updated Networking Applications -3 values in <a href="#">Table 25</a> to match improvements made in ISE v12.4. In <a href="#">Table 28</a>, added note 1 and revised the <math>T_{IOTP}</math> values for LVDS_33, LVDS_25, MINI_LVDS_33, MINI_LVDS_25, RSDS_33, RSDS_25, TMDS_33, PPDS_33, and PPDS_25. Added note 3 to <a href="#">Table 55</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 02/11/11 | 1.12    | <p>As described in <a href="#">XCEN11008: Product Discontinuation Notice For Spartan-6 LXT -4 Devices</a>, the -4 speed specifications have been discontinued. As outlined in page 2 of the XCN, designers currently using -4 speed specifications should rerun timing analysis using the new -3 speed specifications before moving to a replacement device.</p> <p>Updated the networking applications section of <a href="#">Table 25</a>. Updated -2 speed specifications throughout document and added note 3 to <a href="#">Table 27</a> advising designers to use the -2 speed specification update (v1.17) with the ISE 12.4 software patch. Added <math>F_{CLKDIV}</math> to <a href="#">Table 37</a> and <a href="#">Table 38</a>. Updated note 2 in <a href="#">Table 39</a>. Updated units for <math>T_{SMCKCSO}</math> and <math>T_{BPICCO}</math> in <a href="#">Table 47</a>. Updated -1L in <a href="#">Table 71</a>. Removed Note 2: <i>Package delay information is available for these device/package combinations. This information can be used to deskew the package</i> from <a href="#">Table 79</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 03/31/11 | 2.0     | <p>Production release of XC6SLX45 in the -1L speed grades listed in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v13.1 software with -1L speed specification v1.06.</p> <p>In <a href="#">Table 39</a>, removed values in the -1L column and added note 3 as IODELAY2 only supports Tap0 for lower-power devices. Updated copyright <a href="#">page 1</a> and <a href="#">Notice of Disclaimer</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 05/20/11 | 2.1     | <p>Production release of XC6SLX100 and XC6SLX150 in the specific speed grades listed in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v13.1 software with -1L speed specification v1.06. Updated <a href="#">Table 27</a> and <a href="#">Note 7</a> with changes per <a href="#">XCEN11012: Speed File Change for -3N Devices</a>. Revised <a href="#">Switching Characteristics</a> section for speed specifications: v1.18 for -3, -3N, and -2; including improvements in <a href="#">Table 73</a> through <a href="#">Table 77</a> and <a href="#">Table 81</a>.</p> <p>Removed <i>Memory Controller Block</i> from the performance heading in <a href="#">Table 2</a> and revised <a href="#">Note 2</a>. In <a href="#">Table 4</a>, added <a href="#">Note 1</a> to <math>C_{IN}</math> and updated the description of <math>R_{IN\_TERM}</math>. Updated <a href="#">Note 1</a> in <a href="#">Table 5</a>. Updated <a href="#">Note 1</a> of <a href="#">Table 7</a>. In <a href="#">Table 25</a>, added and removed -1L specifications, increased the standard performance DDR3 specifications, removed the extended performance DDR3 row and updated <a href="#">Note 3</a> and <a href="#">Note 4</a>. Clarified the introductory information for <a href="#">Table 28</a> and <a href="#">Table 30</a>.</p> <p>In <a href="#">Table 32</a>: Revised <math>V_{MEAS}</math> value for LVCMOS12; revised <math>V_{REF}</math> for LVDS_25, LVDS_33, BLVDS_25, MINI_LVDS_25, MINI_LVDS_33, RSDS_25, and RSDS_33; revised <math>R_{REF}</math> for BLVDS_25 and TMDS_33; and added <a href="#">Note 4</a> and <a href="#">Note 5</a>. Updated <a href="#">Note 2</a> and <a href="#">Note 3</a> in <a href="#">Table 39</a>.</p> <p>In <a href="#">Table 47</a>, revised the values and description of <math>T_{POR}</math> including adding <a href="#">Note 3</a>. Also in <a href="#">Table 47</a>, augmented the description and added specifications for <math>F_{RBCK}</math> and removed XC6SLX4 from <math>F_{MCCK}</math> (maximum frequency, parallel mode (Master SelectMAP/BPI)). Added BUFGMUX to <a href="#">Table 48</a> title. Added <a href="#">Table 50</a>.</p> <p>In <a href="#">Table 52</a>, revised specifications for <math>T_{EXTFVAR}</math> and <math>F_{INJITTER}</math>. In <a href="#">Table 54</a> removed the 5 MHz &lt; CLKIN_FREQ_DLL parameter in the LOCK_DLL description. In both <a href="#">Table 56</a> and <a href="#">Table 57</a>, removed the 5 MHz &lt; <math>F_{CLKIN}</math> parameter in the LOCK_FX description. In <a href="#">Table 58</a>, updated description for PSCLK_FREQ and PSCLK_PULSE.</p> <p>Revised title and symbol of <a href="#">Table 70</a>, added new speed specifications for -1L, and added <a href="#">Note 2</a>. Added <a href="#">Table 71</a>.</p> |
| 07/11/11 | 2.2     | <p>Added the Automotive XA Spartan-6 and Defense-grade Spartan-6Q devices to all appropriate tables while sometimes removing the XC6S nomenclature. Added expanded temperature range (Q) to all appropriate tables. Updated <math>T_{SOL}</math> packages in <a href="#">Table 1</a>. Added <math>R_{OUT\_TERM}</math> to <a href="#">Table 4</a>. Updated <a href="#">Note 2</a> on <a href="#">Table 13</a>.</p> <p>Production release of the XC6SLX4, XC6SLX9, XC6SLX16, XC6SLX25, XC6SLX75, XQ6SLX75, and XQ6SLX150 in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v13.2 software with -1L speed specification v1.07.</p> <p>Production release of the XA6SLX16, XA6SLX25T, XA6SLX45, XA6SLX45T, XQ6SLX75, XQ6SLX75T, XQ6SLX150, and XQ6SLX150T in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v13.2 software with -2 and -3 speed specification v1.19.</p> <p>Added <a href="#">Table 29: IOB Switching Characteristics for the Automotive XA Spartan-6 and the Spartan-6Q Devices(1)</a>. Updated CS(G)484 from CSG484 throughout data sheet. Clarified <a href="#">Note 3</a> in <a href="#">Table 39</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 08/08/11 | 2.3     | <p>Production release of the XA6SLX25, XA6SLX75, and XA6SLX75T in <a href="#">Table 26</a> and <a href="#">Table 27</a> using ISE v13.2 software with -2 and -3 speed specification v1.19.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |