



Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

### Details

|                                |                                                                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                                          |
| Number of LABs/CLBs            | 858                                                                                                                                                                             |
| Number of Logic Elements/Cells | 6864                                                                                                                                                                            |
| Total RAM Bits                 | 245760                                                                                                                                                                          |
| Number of I/O                  | 114                                                                                                                                                                             |
| Number of Gates                | -                                                                                                                                                                               |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                                   |
| Mounting Type                  | Surface Mount                                                                                                                                                                   |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                                                                 |
| Package / Case                 | 144-LQFP                                                                                                                                                                        |
| Supplier Device Package        | 144-TQFP (20x20)                                                                                                                                                                |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lcmx02-7000he-6tg144c">https://www.e-xfl.com/product-detail/lattice-semiconductor/lcmx02-7000he-6tg144c</a> |

**Table 1-1. MachXO2™ Family Selection Guide**

|                                                         |                 | XO2-256   | XO2-640 | XO2-640U <sup>1</sup> | XO2-1200 | XO2-1200U <sup>1</sup> | XO2-2000 | XO2-2000U <sup>1</sup> | XO2-4000 | XO2-7000 |
|---------------------------------------------------------|-----------------|-----------|---------|-----------------------|----------|------------------------|----------|------------------------|----------|----------|
| LUTs                                                    |                 | 256       | 640     | 640                   | 1280     | 1280                   | 2112     | 2112                   | 4320     | 6864     |
| Distributed RAM (kbits)                                 |                 | 2         | 5       | 5                     | 10       | 10                     | 16       | 16                     | 34       | 54       |
| EBR SRAM (kbits)                                        |                 | 0         | 18      | 64                    | 64       | 74                     | 74       | 92                     | 92       | 240      |
| Number of EBR SRAM Blocks (9 kbits/block)               |                 | 0         | 2       | 7                     | 7        | 8                      | 8        | 10                     | 10       | 26       |
| UFM (kbits)                                             |                 | 0         | 24      | 64                    | 64       | 80                     | 80       | 96                     | 96       | 256      |
| Device Options:                                         | HC <sup>2</sup> | Yes       | Yes     | Yes                   | Yes      | Yes                    | Yes      | Yes                    | Yes      | Yes      |
|                                                         | HE <sup>3</sup> |           |         |                       |          |                        | Yes      | Yes                    | Yes      | Yes      |
|                                                         | ZE <sup>4</sup> | Yes       | Yes     |                       | Yes      |                        | Yes      |                        | Yes      | Yes      |
| Number of PLLs                                          |                 | 0         | 0       | 1                     | 1        | 1                      | 1        | 2                      | 2        | 2        |
| Hardened Functions:                                     | I2C             | 2         | 2       | 2                     | 2        | 2                      | 2        | 2                      | 2        | 2        |
|                                                         | SPI             | 1         | 1       | 1                     | 1        | 1                      | 1        | 1                      | 1        | 1        |
|                                                         | Timer/Counter   | 1         | 1       | 1                     | 1        | 1                      | 1        | 1                      | 1        | 1        |
| <b>Packages</b>                                         |                 | <b>IO</b> |         |                       |          |                        |          |                        |          |          |
| 25-ball WLCSP <sup>5</sup><br>(2.5 mm x 2.5 mm, 0.4 mm) |                 |           |         |                       | 18       |                        |          |                        |          |          |
| 32 QFN <sup>6</sup><br>(5 mm x 5 mm, 0.5 mm)            |                 | 21        |         |                       | 21       |                        |          |                        |          |          |
| 48 QFN <sup>8,9</sup><br>(7 mm x 7 mm, 0.5 mm)          |                 | 40        | 40      |                       |          |                        |          |                        |          |          |
| 49-ball WLCSP <sup>5</sup><br>(3.2 mm x 3.2 mm, 0.4 mm) |                 |           |         |                       |          |                        | 38       |                        |          |          |
| 64-ball ucBGA<br>(4 mm x 4 mm, 0.4 mm)                  |                 | 44        |         |                       |          |                        |          |                        |          |          |
| 84 QFN <sup>7</sup><br>(7 mm x 7 mm, 0.5 mm)            |                 |           |         |                       |          |                        |          |                        | 68       |          |
| 100-pin TQFP<br>(14 mm x 14 mm)                         |                 | 55        | 78      |                       | 79       |                        | 79       |                        |          |          |
| 132-ball csBGA<br>(8 mm x 8 mm, 0.5 mm)                 |                 | 55        | 79      |                       | 104      |                        | 104      |                        | 104      |          |
| 144-pin TQFP<br>(20 mm x 20 mm)                         |                 |           |         | 107                   | 107      |                        | 111      |                        | 114      | 114      |
| 184-ball csBGA <sup>7</sup><br>(8 mm x 8 mm, 0.5 mm)    |                 |           |         |                       |          |                        |          |                        | 150      |          |
| 256-ball caBGA<br>(14 mm x 14 mm, 0.8 mm)               |                 |           |         |                       |          |                        | 206      |                        | 206      | 206      |
| 256-ball ftBGA<br>(17 mm x 17 mm, 1.0 mm)               |                 |           |         |                       |          | 206                    | 206      |                        | 206      | 206      |
| 332-ball caBGA<br>(17 mm x 17 mm, 0.8 mm)               |                 |           |         |                       |          |                        |          |                        | 274      | 278      |
| 484-ball ftBGA<br>(23 mm x 23 mm, 1.0 mm)               |                 |           |         |                       |          |                        | 278      |                        | 278      | 334      |

1. Ultra high I/O device.
2. High performance with regulator – VCC = 2.5 V, 3.3 V
3. High performance without regulator – V<sub>CC</sub> = 1.2 V
4. Low power without regulator – V<sub>CC</sub> = 1.2 V
5. WLCSP package only available for ZE devices.
6. 32 QFN package only available for HC and ZE devices.
7. 184 csBGA package only available for HE devices.
8. 48-pin QFN information is 'Advanced'.
9. 48 QFN package only available for HC devices.

**Table 2-4. PLL Signal Descriptions (Continued)**

| Port Name     | I/O | Description                                                                                       |
|---------------|-----|---------------------------------------------------------------------------------------------------|
| CLKOP         | O   | Primary PLL output clock (with phase shift adjustment)                                            |
| CLKOS         | O   | Secondary PLL output clock (with phase shift adjust)                                              |
| CLKOS2        | O   | Secondary PLL output clock2 (with phase shift adjust)                                             |
| CLKOS3        | O   | Secondary PLL output clock3 (with phase shift adjust)                                             |
| LOCK          | O   | PLL LOCK, asynchronous signal. Active high indicates PLL is locked to input and feedback signals. |
| DPHSRC        | O   | Dynamic Phase source – ports or WISHBONE is active                                                |
| STDBY         | I   | Standby signal to power down the PLL                                                              |
| RST           | I   | PLL reset without resetting the M-divider. Active high reset.                                     |
| RESETM        | I   | PLL reset - includes resetting the M-divider. Active high reset.                                  |
| RESETC        | I   | Reset for CLKOS2 output divider only. Active high reset.                                          |
| RESETD        | I   | Reset for CLKOS3 output divider only. Active high reset.                                          |
| ENCLKOP       | I   | Enable PLL output CLKOP                                                                           |
| ENCLKOS       | I   | Enable PLL output CLKOS when port is active                                                       |
| ENCLKOS2      | I   | Enable PLL output CLKOS2 when port is active                                                      |
| ENCLKOS3      | I   | Enable PLL output CLKOS3 when port is active                                                      |
| PLLCLK        | I   | PLL data bus clock input signal                                                                   |
| PLLIRST       | I   | PLL data bus reset. This resets only the data bus not any register values.                        |
| PLLSTB        | I   | PLL data bus strobe signal                                                                        |
| PLLWE         | I   | PLL data bus write enable signal                                                                  |
| PLLADDR [4:0] | I   | PLL data bus address                                                                              |
| PLLDATI [7:0] | I   | PLL data bus data input                                                                           |
| PLLDATO [7:0] | O   | PLL data bus data output                                                                          |
| PLLACK        | O   | PLL data bus acknowledge signal                                                                   |


## sysMEM Embedded Block RAM Memory

The MachXO2-640/U and larger devices contain sysMEM Embedded Block RAMs (EBRs). The EBR consists of a 9-kbit RAM, with dedicated input and output registers. This memory can be used for a wide variety of purposes including data buffering, PROM for the soft processor and FIFO.

### sysMEM Memory Block

The sysMEM block can implement single port, dual port, pseudo dual port, or FIFO memories. Each block can be used in a variety of depths and widths as shown in Table 2-5.

**Figure 2-8. sysMEM Memory Primitives**

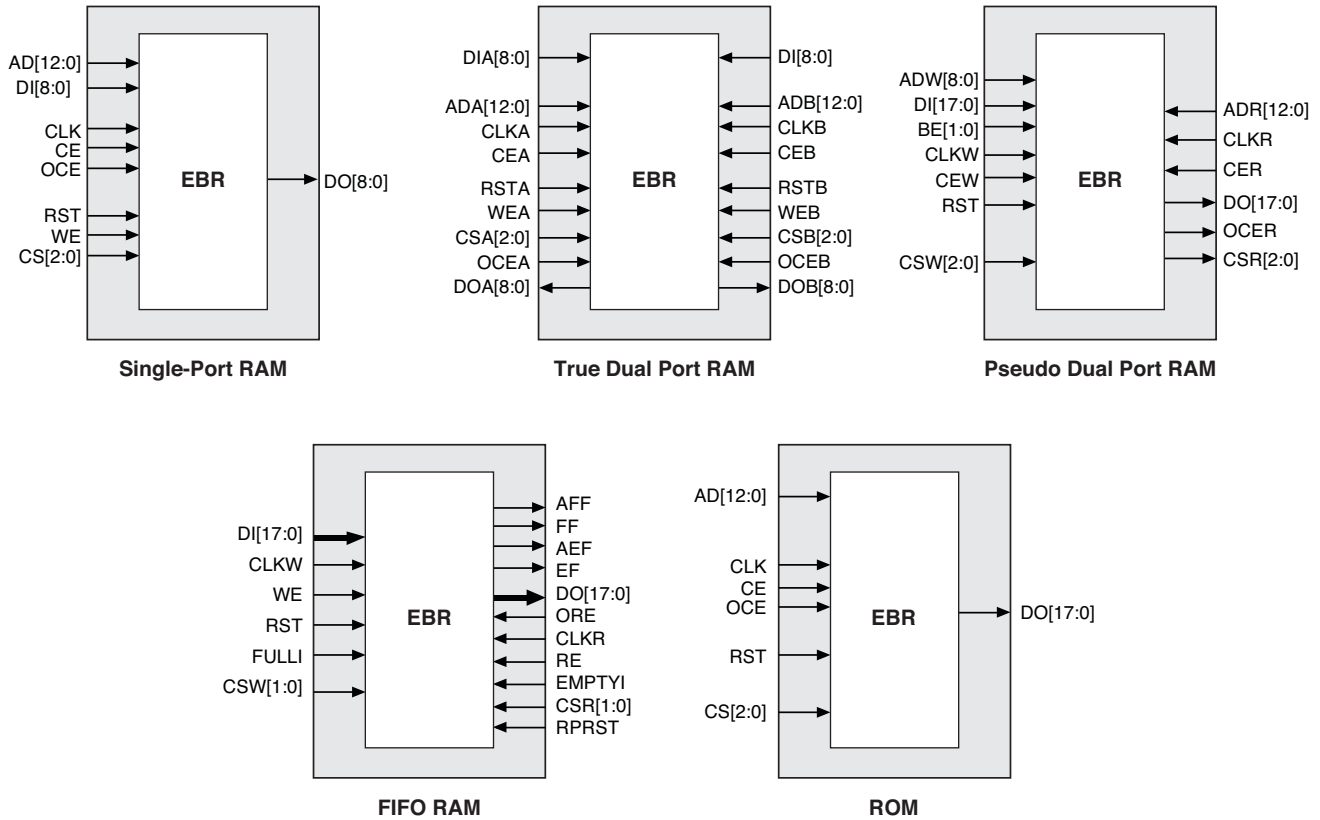

**Table 2-6. EBR Signal Descriptions**

| Port Name        | Description                 | Active State      |
|------------------|-----------------------------|-------------------|
| CLK              | Clock                       | Rising Clock Edge |
| CE               | Clock Enable                | Active High       |
| OCE <sup>1</sup> | Output Clock Enable         | Active High       |
| RST              | Reset                       | Active High       |
| BE <sup>1</sup>  | Byte Enable                 | Active High       |
| WE               | Write Enable                | Active High       |
| AD               | Address Bus                 | —                 |
| DI               | Data In                     | —                 |
| DO               | Data Out                    | —                 |
| CS               | Chip Select                 | Active High       |
| AFF              | FIFO RAM Almost Full Flag   | —                 |
| FF               | FIFO RAM Full Flag          | —                 |
| AEF              | FIFO RAM Almost Empty Flag  | —                 |
| EF               | FIFO RAM Empty Flag         | —                 |
| RPRST            | FIFO RAM Read Pointer Reset | —                 |

1. Optional signals.


2. For dual port EBR primitives a trailing 'A' or 'B' in the signal name specifies the EBR port A or port B respectively.

3. For FIFO RAM mode primitive, a trailing 'R' or 'W' in the signal name specifies the FIFO read port or write port respectively.

4. For FIFO RAM mode primitive FULLI has the same function as CSW(2) and EMPTYI has the same function as CSR(2).

5. In FIFO mode, CLKW is the write port clock, CSW is the write port chip select, CLKR is the read port clock, CSR is the read port chip select, ORE is the output read enable.

**Figure 2-11. Group of Four Programmable I/O Cells**

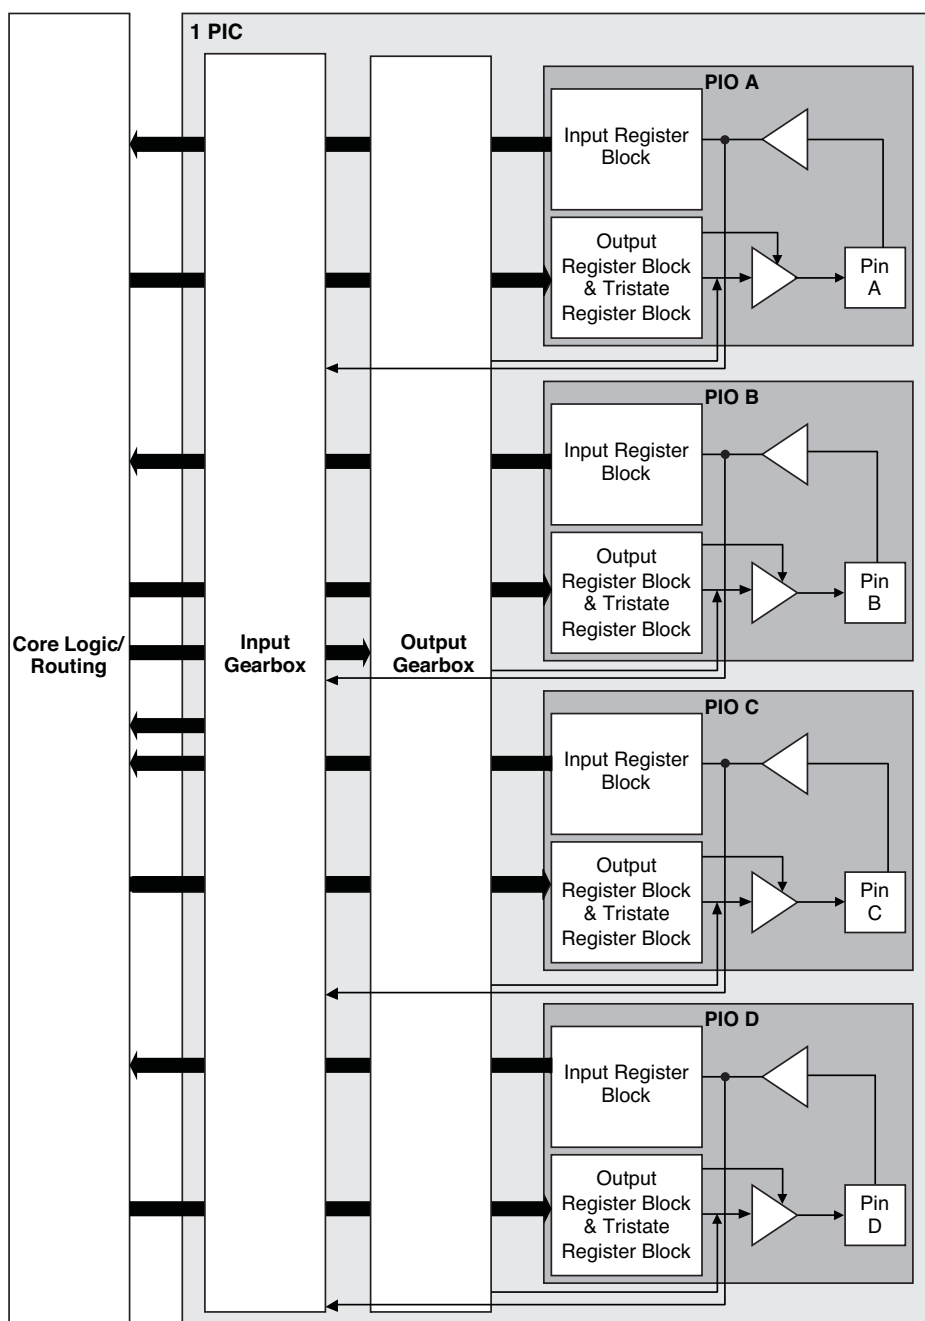

**Notes:**

1. Input gearbox is available only in PIC on the bottom edge of MachXO2-640U, MachXO2-1200/U and larger devices.
2. Output gearbox is available only in PIC on the top edge of MachXO2-640U, MachXO2-1200/U and larger devices.

---

## DDR Memory Support

Certain PICs on the right edge of MachXO2-640U, MachXO2-1200/U and larger devices, have additional circuitry to allow the implementation of DDR memory interfaces. There are two groups of 14 or 12 PIOs each on the right edge with additional circuitry to implement DDR memory interfaces. This capability allows the implementation of up to 16-bit wide memory interfaces. One PIO from each group contains a control element, the DQS Read/Write Block, to facilitate the generation of clock and control signals (DQSR90, DQSW90, DDRCLKPOL and DATAVALID). These clock and control signals are distributed to the other PIO in the group through dedicated low skew routing.

### DQS Read Write Block

Source synchronous interfaces generally require the input clock to be adjusted in order to correctly capture data at the input register. For most interfaces a PLL is used for this adjustment. However, in DDR memories the clock (referred to as DQS) is not free-running so this approach cannot be used. The DQS Read Write block provides the required clock alignment for DDR memory interfaces. DQSR90 and DQSW90 signals are generated by the DQS Read Write block from the DQS input.

In a typical DDR memory interface design, the phase relationship between the incoming delayed DQS strobe and the internal system clock (during the read cycle) is unknown. The MachXO2 family contains dedicated circuits to transfer data between these domains. To prevent set-up and hold violations, at the domain transfer between DQS (delayed) and the system clock, a clock polarity selector is used. This circuit changes the edge on which the data is registered in the synchronizing registers in the input register block. This requires evaluation at the start of each read cycle for the correct clock polarity. Prior to the read operation in DDR memories, DQS is in tri-state (pulled by termination). The DDR memory device drives DQS low at the start of the preamble state. A dedicated circuit in the DQS Read Write block detects the first DQS rising edge after the preamble state and generates the DDRCLKPOL signal. This signal is used to control the polarity of the clock to the synchronizing registers.

The temperature, voltage and process variations of the DQS delay block are compensated by a set of calibration signals (6-bit bus) from a DLL on the right edge of the device. The DLL loop is compensated for temperature, voltage and process variations by the system clock and feedback loop.

### sysIO Buffer

Each I/O is associated with a flexible buffer referred to as a sysIO buffer. These buffers are arranged around the periphery of the device in groups referred to as banks. The sysIO buffers allow users to implement a wide variety of standards that are found in today's systems including LVCMOS, TTL, PCI, SSTL, HSTL, LVDS, BLVDS, MLVDS and LVPECL.

Each bank is capable of supporting multiple I/O standards. In the MachXO2 devices, single-ended output buffers, ratioed input buffers (LVTTL, LVCMOS and PCI), differential (LVDS) and referenced input buffers (SSTL and HSTL) are powered using I/O supply voltage ( $V_{CCIO}$ ). Each sysIO bank has its own  $V_{CCIO}$ . In addition, each bank has a voltage reference,  $V_{REF}$  which allows the use of referenced input buffers independent of the bank  $V_{CCIO}$ .

MachXO2-256 and MachXO2-640 devices contain single-ended ratioed input buffers and single-ended output buffers with complementary outputs on all the I/O banks. Note that the single-ended input buffers on these devices do not contain PCI clamps. In addition to the single-ended I/O buffers these two devices also have differential and referenced input buffers on all I/Os. The I/Os are arranged in pairs, the two pads in the pair are described as "T" and "C", where the true pad is associated with the positive side of the differential input buffer and the comp (complementary) pad is associated with the negative side of the differential input buffer.

MachXO2-640U, MachXO2-1200/U, MachXO2-2000/U, MachXO2-4000 and MachXO2-7000 devices contain three types of sysIO buffer pairs.

**1. Left and Right sysIO Buffer Pairs**

The sysIO buffer pairs in the left and right banks of the device consist of two single-ended output drivers and two single-ended input buffers (for ratioed inputs such as LVCMOS and LVTTL). The I/O pairs on the left and right of the devices also have differential and referenced input buffers.

**2. Bottom sysIO Buffer Pairs**

The sysIO buffer pairs in the bottom bank of the device consist of two single-ended output drivers and two single-ended input buffers (for ratioed inputs such as LVCMOS and LVTTL). The I/O pairs on the bottom also have differential and referenced input buffers. Only the I/Os on the bottom banks have programmable PCI clamps and differential input termination. The PCI clamp is enabled after  $V_{CC}$  and  $V_{CCIO}$  are at valid operating levels and the device has been configured.

**3. Top sysIO Buffer Pairs**

The sysIO buffer pairs in the top bank of the device consist of two single-ended output drivers and two single-ended input buffers (for ratioed inputs such as LVCMOS and LVTTL). The I/O pairs on the top also have differential and referenced I/O buffers. Half of the sysIO buffer pairs on the top edge have true differential outputs. The sysIO buffer pair comprising of the A and B PIOs in every PIC on the top edge have a differential output driver. The referenced input buffer can also be configured as a differential input buffer.

## Typical I/O Behavior During Power-up

The internal power-on-reset (POR) signal is deactivated when  $V_{CC}$  and  $V_{CCIO0}$  have reached  $V_{PORUP}$  level defined in the Power-On-Reset Voltage table in the DC and Switching Characteristics section of this data sheet. After the POR signal is deactivated, the FPGA core logic becomes active. It is the user's responsibility to ensure that all  $V_{CCIO}$  banks are active with valid input logic levels to properly control the output logic states of all the I/O banks that are critical to the application. The default configuration of the I/O pins in a blank device is tri-state with a weak pull-down to GND (some pins such as PROGRAMN and the JTAG pins have weak pull-up to  $V_{CCIO}$  as the default functionality). The I/O pins will maintain the blank configuration until  $V_{CC}$  and  $V_{CCIO}$  (for I/O banks containing configuration I/Os) have reached  $V_{PORUP}$  levels at which time the I/Os will take on the user-configured settings only after a proper download/configuration.

## Supported Standards

The MachXO2 sysIO buffer supports both single-ended and differential standards. Single-ended standards can be further subdivided into LVCMOS, LVTTL, and PCI. The buffer supports the LVTTL, PCI, LVCMOS 1.2, 1.5, 1.8, 2.5, and 3.3 V standards. In the LVCMOS and LVTTL modes, the buffer has individually configurable options for drive strength, bus maintenance (weak pull-up, weak pull-down, bus-keeper latch or none) and open drain. BLVDS, MLVDS and LVPECL output emulation is supported on all devices. The MachXO2-640U, MachXO2-1200/U and higher devices support on-chip LVDS output buffers on approximately 50% of the I/Os on the top bank. Differential receivers for LVDS, BLVDS, MLVDS and LVPECL are supported on all banks of MachXO2 devices. PCI support is provided in the bottom bank of the MachXO2-640U, MachXO2-1200/U and higher density devices. Table 2-11 summarizes the I/O characteristics of the MachXO2 PLDs.

Tables 2-11 and 2-12 show the I/O standards (together with their supply and reference voltages) supported by the MachXO2 devices. For further information on utilizing the sysIO buffer to support a variety of standards please see TN1202, [MachXO2 sysIO Usage Guide](#).

When implementing background programming of the on-chip Flash, care must be taken for the operation of the PLL. For devices that have two PLLs (XO2-2000U, -4000 and -7000), the system must put the RPLL (Right-side PLL) in reset state during the background Flash programming. More detailed description can be found in TN1204, [MachXO2 Programming and Configuration Usage Guide](#).

### **Security and One-Time Programmable Mode (OTP)**

For applications where security is important, the lack of an external bitstream provides a solution that is inherently more secure than SRAM-based FPGAs. This is further enhanced by device locking. MachXO2 devices contain security bits that, when set, prevent the readback of the SRAM configuration and non-volatile Flash memory spaces. The device can be in one of two modes:

1. Unlocked – Readback of the SRAM configuration and non-volatile Flash memory spaces is allowed.
2. Permanently Locked – The device is permanently locked.

Once set, the only way to clear the security bits is to erase the device. To further complement the security of the device, a One Time Programmable (OTP) mode is available. Once the device is set in this mode it is not possible to erase or re-program the Flash and SRAM OTP portions of the device. For more details, refer to TN1204, [MachXO2 Programming and Configuration Usage Guide](#).

### **Dual Boot**

MachXO2 devices can optionally boot from two patterns, a primary bitstream and a golden bitstream. If the primary bitstream is found to be corrupt while being downloaded into the SRAM, the device shall then automatically re-boot from the golden bitstream. Note that the primary bitstream must reside in the on-chip Flash. The golden image MUST reside in an external SPI Flash. For more details, refer to TN1204, [MachXO2 Programming and Configuration Usage Guide](#).

### **Soft Error Detection**

The SED feature is a CRC check of the SRAM cells after the device is configured. This check ensures that the SRAM cells were configured successfully. This feature is enabled by a configuration bit option. The Soft Error Detection can also be initiated in user mode via an input to the fabric. The clock for the Soft Error Detection circuit is generated using a dedicated divider. The undivided clock from the on-chip oscillator is the input to this divider. For low power applications users can switch off the Soft Error Detection circuit. For more details, refer to TN1206, [MachXO2 Soft Error Detection Usage Guide](#).

### **TraceID**

Each MachXO2 device contains a unique (per device), TraceID that can be used for tracking purposes or for IP security applications. The TraceID is 64 bits long. Eight out of 64 bits are user-programmable, the remaining 56 bits are factory-programmed. The TraceID is accessible through the EFB WISHBONE interface and can also be accessed through the SPI, I<sup>2</sup>C, or JTAG interfaces.

### **Density Shifting**

The MachXO2 family has been designed to enable density migration within the same package. Furthermore, the architecture ensures a high success rate when performing design migration from lower density devices to higher density devices. In many cases, it is also possible to shift a lower utilization design targeted for a high-density device to a lower density device. However, the exact details of the final resource utilization will impact the likely success in each case. When migrating from lower to higher density or higher to lower density, ensure to review all the power supplies and NC pins of the chosen devices. For more details refer to the [MachXO2 migration files](#).



### Power-On-Reset Voltage Levels<sup>1, 2, 3, 4, 5</sup>

| Symbol             | Parameter                                                                                            | Min. | Typ. | Max. | Units |
|--------------------|------------------------------------------------------------------------------------------------------|------|------|------|-------|
| $V_{PORUP}$        | Power-On-Reset ramp up trip point (band gap based circuit monitoring $V_{CCINT}$ and $V_{CCIO0}$ )   | 0.9  | —    | 1.06 | V     |
| $V_{PORUPEXT}$     | Power-On-Reset ramp up trip point (band gap based circuit monitoring external $V_{CC}$ power supply) | 1.5  | —    | 2.1  | V     |
| $V_{PORDNBG}$      | Power-On-Reset ramp down trip point (band gap based circuit monitoring $V_{CCINT}$ )                 | 0.75 | —    | 0.93 | V     |
| $V_{PORDNBGEXT}$   | Power-On-Reset ramp down trip point (band gap based circuit monitoring $V_{CC}$ )                    | 0.98 | —    | 1.33 | V     |
| $V_{PORDNSRAM}$    | Power-On-Reset ramp down trip point (SRAM based circuit monitoring $V_{CCINT}$ )                     | —    | 0.6  | —    | V     |
| $V_{PORDNSRAMEXT}$ | Power-On-Reset ramp down trip point (SRAM based circuit monitoring $V_{CC}$ )                        | —    | 0.96 | —    | V     |

1. These POR trip points are only provided for guidance. Device operation is only characterized for power supply voltages specified under recommended operating conditions.
2. For devices without voltage regulators  $V_{CCINT}$  is the same as the  $V_{CC}$  supply voltage. For devices with voltage regulators,  $V_{CCINT}$  is regulated from the  $V_{CC}$  supply voltage.
3. Note that  $V_{PORUP}$  (min.) and  $V_{PORDNBG}$  (max.) are in different process corners. For any given process corner  $V_{PORDNBG}$  (max.) is always 12.0 mV below  $V_{PORUP}$  (min.).
4.  $V_{PORUPEXT}$  is for HC devices only. In these devices a separate POR circuit monitors the external  $V_{CC}$  power supply.
5.  $V_{CCIO0}$  does not have a Power-On-Reset ramp down trip point.  $V_{CCIO0}$  must remain within the Recommended Operating Conditions to ensure proper operation.

### Programming/Erase Specifications

| Symbol          | Parameter                                     | Min. | Max. <sup>1</sup> | Units  |
|-----------------|-----------------------------------------------|------|-------------------|--------|
| $N_{PROG}$      | Flash Programming cycles per $t_{RETENTION}$  | —    | 10,000            | Cycles |
|                 | Flash functional programming cycles           | —    | 100,000           |        |
| $t_{RETENTION}$ | Data retention at 100 °C junction temperature | 10   | —                 | Years  |
|                 | Data retention at 85 °C junction temperature  | 20   | —                 |        |

1. Maximum Flash memory reads are limited to 7.5E13 cycles over the lifetime of the product.

### Hot Socketing Specifications<sup>1, 2, 3</sup>

| Symbol   | Parameter                    | Condition                   | Max.    | Units   |
|----------|------------------------------|-----------------------------|---------|---------|
| $I_{DK}$ | Input or I/O leakage Current | $0 < V_{IN} < V_{IH}$ (MAX) | +/-1000 | $\mu A$ |

1. Insensitive to sequence of  $V_{CC}$  and  $V_{CCIO}$ . However, assumes monotonic rise/fall rates for  $V_{CC}$  and  $V_{CCIO}$ .
2.  $0 < V_{CC} < V_{CC} (MAX)$ ,  $0 < V_{CCIO} < V_{CCIO} (MAX)$ .
3.  $I_{DK}$  is additive to  $I_{PU}$ ,  $I_{PD}$  or  $I_{BH}$ .

### ESD Performance

Please refer to the [MachXO2 Product Family Qualification Summary](#) for complete qualification data, including ESD performance.

| Input/Output Standard | $V_{IL}$              |                 | $V_{IH}$        |          | $V_{OL}$ Max. (V) | $V_{OH}$ Min. (V) | $I_{OL}$ Max. <sup>4</sup> (mA) | $I_{OH}$ Max. <sup>4</sup> (mA) |
|-----------------------|-----------------------|-----------------|-----------------|----------|-------------------|-------------------|---------------------------------|---------------------------------|
|                       | Min. (V) <sup>3</sup> | Max. (V)        | Min. (V)        | Max. (V) |                   |                   |                                 |                                 |
| LVC MOS10R25          | -0.3                  | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | 3.6      | 0.40              | NA Open Drain     | 16, 12, 8, 4                    | NA Open Drain                   |

1. MachXO2 devices allow LVC MOS inputs to be placed in I/O banks where  $V_{CCIO}$  is different from what is specified in the applicable JEDEC specification. This is referred to as a ratioed input buffer. In a majority of cases this operation follows or exceeds the applicable JEDEC specification. The cases where MachXO2 devices do not meet the relevant JEDEC specification are documented in the table below.
2. MachXO2 devices allow for LVC MOS referenced I/Os which follow applicable JEDEC specifications. For more details about mixed mode operation please refer to please refer to TN1202, [MachXO2 sysIO Usage Guide](#).
3. The dual function I<sup>2</sup>C pins SCL and SDA are limited to a  $V_{IL}$  min of -0.25 V or to -0.3 V with a duration of <10 ns.
4. For electromigration, the average DC current sourced or sinked by I/O pads between two consecutive  $V_{CCIO}$  or GND pad connections, or between the last  $V_{CCIO}$  or GND in an I/O bank and the end of an I/O bank, as shown in the Logic Signal Connections table (also shown as I/O grouping) shall not exceed a maximum of  $n * 8$  mA. "n" is the number of I/O pads between the two consecutive bank  $V_{CCIO}$  or GND connections or between the last  $V_{CCIO}$  and GND in a bank and the end of a bank. IO Grouping can be found in the Data Sheet Pin Tables, which can also be generated from the Lattice Diamond software.

| Input Standard | $V_{CCIO}$ (V) | $V_{IL}$ Max. (V) |
|----------------|----------------|-------------------|
| LVC MOS 33     | 1.5            | 0.685             |
| LVC MOS 25     | 1.5            | 0.687             |
| LVC MOS 18     | 1.5            | 0.655             |

## sysIO Differential Electrical Characteristics

The LVDS differential output buffers are available on the top side of MachXO2-640U, MachXO2-1200/U and higher density devices in the MachXO2 PLD family.

## LVDS

### Over Recommended Operating Conditions

| Parameter Symbol    | Parameter Description                        | Test Conditions                         | Min.  | Typ.  | Max.  | Units |
|---------------------|----------------------------------------------|-----------------------------------------|-------|-------|-------|-------|
| $V_{INP}$ $V_{INM}$ | Input Voltage                                | $V_{CCIO} = 3.3$ V                      | 0     | —     | 2.605 | V     |
|                     |                                              | $V_{CCIO} = 2.5$ V                      | 0     | —     | 2.05  | V     |
| $V_{THD}$           | Differential Input Threshold                 |                                         | ±100  | —     |       | mV    |
| $V_{CM}$            | Input Common Mode Voltage                    | $V_{CCIO} = 3.3$ V                      | 0.05  | —     | 2.6   | V     |
|                     |                                              | $V_{CCIO} = 2.5$ V                      | 0.05  | —     | 2.0   | V     |
| $I_{IN}$            | Input current                                | Power on                                | —     | —     | ±10   | μA    |
| $V_{OH}$            | Output high voltage for $V_{OP}$ or $V_{OM}$ | $R_T = 100$ Ohm                         | —     | 1.375 | —     | V     |
| $V_{OL}$            | Output low voltage for $V_{OP}$ or $V_{OM}$  | $R_T = 100$ Ohm                         | 0.90  | 1.025 | —     | V     |
| $V_{OD}$            | Output voltage differential                  | $(V_{OP} - V_{OM})$ , $R_T = 100$ Ohm   | 250   | 350   | 450   | mV    |
| $\Delta V_{OD}$     | Change in $V_{OD}$ between high and low      |                                         | —     | —     | 50    | mV    |
| $V_{OS}$            | Output voltage offset                        | $(V_{OP} + V_{OM})/2$ , $R_T = 100$ Ohm | 1.125 | 1.20  | 1.395 | V     |
| $\Delta V_{OS}$     | Change in $V_{OS}$ between H and L           |                                         | —     | —     | 50    | mV    |
| $I_{OSD}$           | Output short circuit current                 | $V_{OD} = 0$ V driver outputs shorted   | —     | —     | 24    | mA    |


| Parameter                                                 | Description                                                    | Device              | -6    |      | -5    |      | -4    |      | Units |
|-----------------------------------------------------------|----------------------------------------------------------------|---------------------|-------|------|-------|------|-------|------|-------|
|                                                           |                                                                |                     | Min.  | Max. | Min.  | Max. | Min.  | Max. |       |
| t <sub>SU_DEL</sub>                                       | Clock to Data Setup – PIO Input Register with Data Input Delay | MachXO2-256HC-HE    | 1.42  | —    | 1.59  | —    | 1.96  | —    | ns    |
|                                                           |                                                                | MachXO2-640HC-HE    | 1.41  | —    | 1.58  | —    | 1.96  | —    | ns    |
|                                                           |                                                                | MachXO2-1200HC-HE   | 1.63  | —    | 1.79  | —    | 2.17  | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | 1.61  | —    | 1.76  | —    | 2.13  | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | 1.66  | —    | 1.81  | —    | 2.19  | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | 1.53  | —    | 1.67  | —    | 2.03  | —    | ns    |
| t <sub>H_DEL</sub>                                        | Clock to Data Hold – PIO Input Register with Input Data Delay  | MachXO2-256HC-HE    | –0.24 | —    | –0.24 | —    | –0.24 | —    | ns    |
|                                                           |                                                                | MachXO2-640HC-HE    | –0.23 | —    | –0.23 | —    | –0.23 | —    | ns    |
|                                                           |                                                                | MachXO2-1200HC-HE   | –0.24 | —    | –0.24 | —    | –0.24 | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | –0.23 | —    | –0.23 | —    | –0.23 | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | –0.25 | —    | –0.25 | —    | –0.25 | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | –0.21 | —    | –0.21 | —    | –0.21 | —    | ns    |
| f <sub>MAX_IO</sub>                                       | Clock Frequency of I/O and PFU Register                        | All MachXO2 devices | —     | 388  | —     | 323  | —     | 269  | MHz   |
| General I/O Pin Parameters (Using Edge Clock without PLL) |                                                                |                     |       |      |       |      |       |      |       |
| t <sub>COE</sub>                                          | Clock to Output – PIO Output Register                          | MachXO2-1200HC-HE   | —     | 7.53 | —     | 7.76 | —     | 8.10 | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | —     | 7.53 | —     | 7.76 | —     | 8.10 | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | —     | 7.45 | —     | 7.68 | —     | 8.00 | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | —     | 7.53 | —     | 7.76 | —     | 8.10 | ns    |
| t <sub>SUE</sub>                                          | Clock to Data Setup – PIO Input Register                       | MachXO2-1200HC-HE   | –0.19 | —    | –0.19 | —    | –0.19 | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | –0.19 | —    | –0.19 | —    | –0.19 | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | –0.16 | —    | –0.16 | —    | –0.16 | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | –0.19 | —    | –0.19 | —    | –0.19 | —    | ns    |
| t <sub>HE</sub>                                           | Clock to Data Hold – PIO Input Register                        | MachXO2-1200HC-HE   | 1.97  | —    | 2.24  | —    | 2.52  | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | 1.97  | —    | 2.24  | —    | 2.52  | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | 1.89  | —    | 2.16  | —    | 2.43  | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | 1.97  | —    | 2.24  | —    | 2.52  | —    | ns    |
| t <sub>SU_DELE</sub>                                      | Clock to Data Setup – PIO Input Register with Data Input Delay | MachXO2-1200HC-HE   | 1.56  | —    | 1.69  | —    | 2.05  | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | 1.56  | —    | 1.69  | —    | 2.05  | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | 1.74  | —    | 1.88  | —    | 2.25  | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | 1.66  | —    | 1.81  | —    | 2.17  | —    | ns    |
| t <sub>H_DELE</sub>                                       | Clock to Data Hold – PIO Input Register with Input Data Delay  | MachXO2-1200HC-HE   | –0.23 | —    | –0.23 | —    | –0.23 | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | –0.23 | —    | –0.23 | —    | –0.23 | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | –0.34 | —    | –0.34 | —    | –0.34 | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | –0.29 | —    | –0.29 | —    | –0.29 | —    | ns    |
| General I/O Pin Parameters (Using Primary Clock with PLL) |                                                                |                     |       |      |       |      |       |      |       |
| t <sub>COPLL</sub>                                        | Clock to Output – PIO Output Register                          | MachXO2-1200HC-HE   | —     | 5.97 | —     | 6.00 | —     | 6.13 | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | —     | 5.98 | —     | 6.01 | —     | 6.14 | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | —     | 5.99 | —     | 6.02 | —     | 6.16 | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | —     | 6.02 | —     | 6.06 | —     | 6.20 | ns    |
| t <sub>SUPLL</sub>                                        | Clock to Data Setup – PIO Input Register                       | MachXO2-1200HC-HE   | 0.36  | —    | 0.36  | —    | 0.65  | —    | ns    |
|                                                           |                                                                | MachXO2-2000HC-HE   | 0.36  | —    | 0.36  | —    | 0.63  | —    | ns    |
|                                                           |                                                                | MachXO2-4000HC-HE   | 0.35  | —    | 0.35  | —    | 0.62  | —    | ns    |
|                                                           |                                                                | MachXO2-7000HC-HE   | 0.34  | —    | 0.34  | —    | 0.59  | —    | ns    |

| Parameter                                                                                                                           | Description                                                | Device                                                          | –6    |       | –5    |       | –4    |       | Units |
|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                                                                                                                                     |                                                            |                                                                 | Min.  | Max.  | Min.  | Max.  | Min.  | Max.  |       |
| Generic DDRX2 Outputs with Clock and Data Centered at Pin Using PCLK Pin for Clock Input – GDDRX2_TX.ECLK.Centered <sup>9, 12</sup> |                                                            |                                                                 |       |       |       |       |       |       |       |
| t <sub>DVB</sub>                                                                                                                    | Output Data Valid Before CLK Output                        | MachXO2-640U, MachXO2-1200/U and larger devices, top side only. | 0.535 | —     | 0.670 | —     | 0.830 | —     | ns    |
| t <sub>DVA</sub>                                                                                                                    | Output Data Valid After CLK Output                         |                                                                 | 0.535 | —     | 0.670 | —     | 0.830 | —     | ns    |
| f <sub>DATA</sub>                                                                                                                   | DDRX2 Serial Output Data Speed                             |                                                                 | —     | 664   | —     | 554   | —     | 462   | Mbps  |
| f <sub>DDRX2</sub>                                                                                                                  | DDRX2 ECLK Frequency (minimum limited by PLL)              |                                                                 | —     | 332   | —     | 277   | —     | 231   | MHz   |
| f <sub>SCLK</sub>                                                                                                                   | SCLK Frequency                                             |                                                                 | —     | 166   | —     | 139   | —     | 116   | MHz   |
| Generic DDRX4 Outputs with Clock and Data Aligned at Pin Using PCLK Pin for Clock Input – GDDRX4_TX.ECLK.Aligned <sup>9, 12</sup>   |                                                            |                                                                 |       |       |       |       |       |       |       |
| t <sub>DIA</sub>                                                                                                                    | Output Data Invalid After CLK Output                       | MachXO2-640U, MachXO2-1200/U and larger devices, top side only. | —     | 0.200 | —     | 0.215 | —     | 0.230 | ns    |
| t <sub>DIB</sub>                                                                                                                    | Output Data Invalid Before CLK Output                      |                                                                 | —     | 0.200 | —     | 0.215 | —     | 0.230 | ns    |
| f <sub>DATA</sub>                                                                                                                   | DDRX4 Serial Output Data Speed                             |                                                                 | —     | 756   | —     | 630   | —     | 524   | Mbps  |
| f <sub>DDRX4</sub>                                                                                                                  | DDRX4 ECLK Frequency                                       |                                                                 | —     | 378   | —     | 315   | —     | 262   | MHz   |
| f <sub>SCLK</sub>                                                                                                                   | SCLK Frequency                                             |                                                                 | —     | 95    | —     | 79    | —     | 66    | MHz   |
| Generic DDRX4 Outputs with Clock and Data Centered at Pin Using PCLK Pin for Clock Input – GDDRX4_TX.ECLK.Centered <sup>9, 12</sup> |                                                            |                                                                 |       |       |       |       |       |       |       |
| t <sub>DVB</sub>                                                                                                                    | Output Data Valid Before CLK Output                        | MachXO2-640U, MachXO2-1200/U and larger devices, top side only. | 0.455 | —     | 0.570 | —     | 0.710 | —     | ns    |
| t <sub>DVA</sub>                                                                                                                    | Output Data Valid After CLK Output                         |                                                                 | 0.455 | —     | 0.570 | —     | 0.710 | —     | ns    |
| f <sub>DATA</sub>                                                                                                                   | DDRX4 Serial Output Data Speed                             |                                                                 | —     | 756   | —     | 630   | —     | 524   | Mbps  |
| f <sub>DDRX4</sub>                                                                                                                  | DDRX4 ECLK Frequency (minimum limited by PLL)              |                                                                 | —     | 378   | —     | 315   | —     | 262   | MHz   |
| f <sub>SCLK</sub>                                                                                                                   | SCLK Frequency                                             |                                                                 | —     | 95    | —     | 79    | —     | 66    | MHz   |
| 7:1 LVDS Outputs – GDDR71_TX.ECLK.7:1 <sup>9, 12</sup>                                                                              |                                                            |                                                                 |       |       |       |       |       |       |       |
| t <sub>DIB</sub>                                                                                                                    | Output Data Invalid Before CLK Output                      | MachXO2-640U, MachXO2-1200/U and larger devices, top side only. | —     | 0.160 | —     | 0.180 | —     | 0.200 | ns    |
| t <sub>DIA</sub>                                                                                                                    | Output Data Invalid After CLK Output                       |                                                                 | —     | 0.160 | —     | 0.180 | —     | 0.200 | ns    |
| f <sub>DATA</sub>                                                                                                                   | DDR71 Serial Output Data Speed                             |                                                                 | —     | 756   | —     | 630   | —     | 524   | Mbps  |
| f <sub>DDR71</sub>                                                                                                                  | DDR71 ECLK Frequency                                       |                                                                 | —     | 378   | —     | 315   | —     | 262   | MHz   |
| f <sub>CLKOUT</sub>                                                                                                                 | 7:1 Output Clock Frequency (SCLK) (minimum limited by PLL) |                                                                 | —     | 108   | —     | 90    | —     | 75    | MHz   |


| Parameter              | Description                           | Device                                                            | -6    |       | -5    |       | -4    |       | Units |
|------------------------|---------------------------------------|-------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                        |                                       |                                                                   | Min.  | Max.  | Min.  | Max.  | Min.  | Max.  |       |
| LPDDR <sup>9, 12</sup> |                                       |                                                                   |       |       |       |       |       |       |       |
| t <sub>DVADQ</sub>     | Input Data Valid After DQS Input      | MachXO2-1200/U and larger devices, right side only. <sup>13</sup> | —     | 0.369 | —     | 0.395 | —     | 0.421 | UI    |
| t <sub>DVEDQ</sub>     | Input Data Hold After DQS Input       |                                                                   | 0.529 | —     | 0.530 | —     | 0.527 | —     | UI    |
| t <sub>DQVBS</sub>     | Output Data Invalid Before DQS Output |                                                                   | 0.25  | —     | 0.25  | —     | 0.25  | —     | UI    |
| t <sub>DQVAS</sub>     | Output Data Invalid After DQS Output  |                                                                   | 0.25  | —     | 0.25  | —     | 0.25  | —     | UI    |
| f <sub>DATA</sub>      | MEM LPDDR Serial Data Speed           |                                                                   | —     | 280   | —     | 250   | —     | 208   | Mbps  |
| f <sub>SCLK</sub>      | SCLK Frequency                        |                                                                   | —     | 140   | —     | 125   | —     | 104   | MHz   |
| f <sub>LPDDR</sub>     | LPDDR Data Transfer Rate              |                                                                   | 0     | 280   | 0     | 250   | 0     | 208   | Mbps  |
| DDR <sup>9, 12</sup>   |                                       |                                                                   |       |       |       |       |       |       |       |
| t <sub>DVADQ</sub>     | Input Data Valid After DQS Input      | MachXO2-1200/U and larger devices, right side only. <sup>13</sup> | —     | 0.350 | —     | 0.387 | —     | 0.414 | UI    |
| t <sub>DVEDQ</sub>     | Input Data Hold After DQS Input       |                                                                   | 0.545 | —     | 0.538 | —     | 0.532 | —     | UI    |
| t <sub>DQVBS</sub>     | Output Data Invalid Before DQS Output |                                                                   | 0.25  | —     | 0.25  | —     | 0.25  | —     | UI    |
| t <sub>DQVAS</sub>     | Output Data Invalid After DQS Output  |                                                                   | 0.25  | —     | 0.25  | —     | 0.25  | —     | UI    |
| f <sub>DATA</sub>      | MEM DDR Serial Data Speed             |                                                                   | —     | 300   | —     | 250   | —     | 208   | Mbps  |
| f <sub>SCLK</sub>      | SCLK Frequency                        |                                                                   | —     | 150   | —     | 125   | —     | 104   | MHz   |
| f <sub>MEM_DDR</sub>   | MEM DDR Data Transfer Rate            |                                                                   | N/A   | 300   | N/A   | 250   | N/A   | 208   | Mbps  |
| DDR2 <sup>9, 12</sup>  |                                       |                                                                   |       |       |       |       |       |       |       |
| t <sub>DVADQ</sub>     | Input Data Valid After DQS Input      | MachXO2-1200/U and larger devices, right side only. <sup>13</sup> | —     | 0.360 | —     | 0.378 | —     | 0.406 | UI    |
| t <sub>DVEDQ</sub>     | Input Data Hold After DQS Input       |                                                                   | 0.555 | —     | 0.549 | —     | 0.542 | —     | UI    |
| t <sub>DQVBS</sub>     | Output Data Invalid Before DQS Output |                                                                   | 0.25  | —     | 0.25  | —     | 0.25  | —     | UI    |
| t <sub>DQVAS</sub>     | Output Data Invalid After DQS Output  |                                                                   | 0.25  | —     | 0.25  | —     | 0.25  | —     | UI    |
| f <sub>DATA</sub>      | MEM DDR Serial Data Speed             |                                                                   | —     | 300   | —     | 250   | —     | 208   | Mbps  |
| f <sub>SCLK</sub>      | SCLK Frequency                        |                                                                   | —     | 150   | —     | 125   | —     | 104   | MHz   |
| f <sub>MEM_DDR2</sub>  | MEM DDR2 Data Transfer Rate           |                                                                   | N/A   | 300   | N/A   | 250   | N/A   | 208   | Mbps  |

- Exact performance may vary with device and design implementation. Commercial timing numbers are shown at 85 °C and 1.14 V. Other operating conditions, including industrial, can be extracted from the Diamond software.
- General I/O timing numbers based on LVCMOS 2.5, 8 mA, 0pf load, fast slew rate.
- Generic DDR timing numbers based on LVDS I/O (for input, output, and clock ports).
- DDR timing numbers based on SSTL25. DDR2 timing numbers based on SSTL18. LPDDR timing numbers based in LVCMOS18.
- 7:1 LVDS (GDDR71) uses the LVDS I/O standard (for input, output, and clock ports).
- For Generic DDRX1 mode  $t_{SU} = t_{HO} = (t_{DVE} - t_{DVA} - 0.03 \text{ ns})/2$ .
- The  $t_{SU\_DEL}$  and  $t_{H\_DEL}$  values use the SCLK\_ZERHOLD default step size. Each step is 105 ps (–6), 113 ps (–5), 120 ps (–4).
- This number for general purpose usage. Duty cycle tolerance is +/- 10%.
- Duty cycle is +/-5% for system usage.
- The above timing numbers are generated using the Diamond design tool. Exact performance may vary with the device selected.
- High-speed DDR and LVDS not supported in SG32 (32 QFN) packages.
- Advance information for MachXO2 devices in 48 QFN packages.
- DDR memory interface not supported in QN84 (84 QFN) and SG32 (32 QFN) packages.


**Figure 3-5. Receiver RX.CLK.Aligned and MEM DDR Input Waveforms**

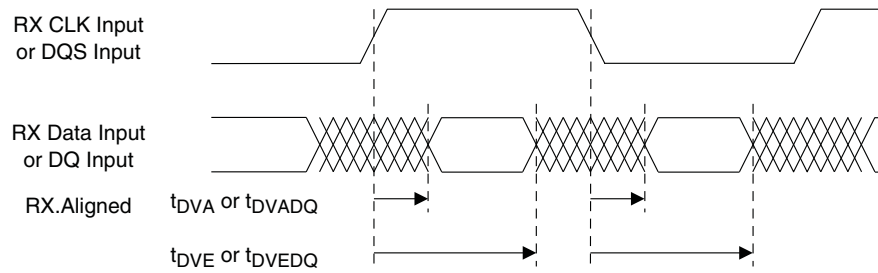


**Figure 3-6. Receiver RX.CLK.Centered Waveforms**

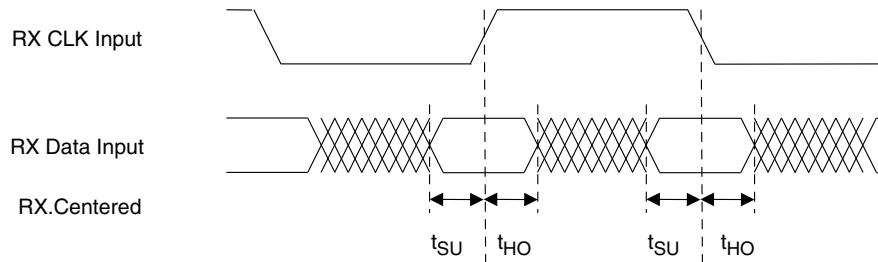

**Figure 3-7. Transmitter TX.CLK.Aligned Waveforms**

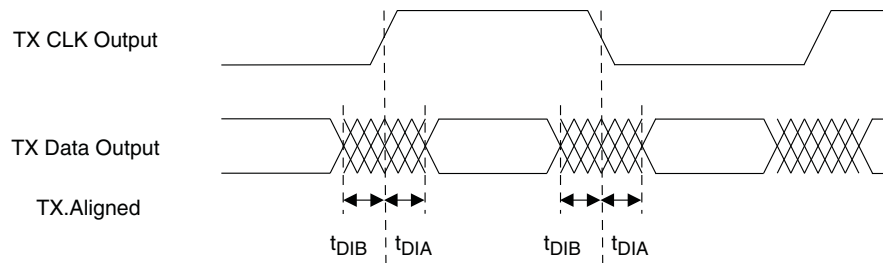

**Figure 3-8. Transmitter TX.CLK.Centered and MEM DDR Output Waveforms**

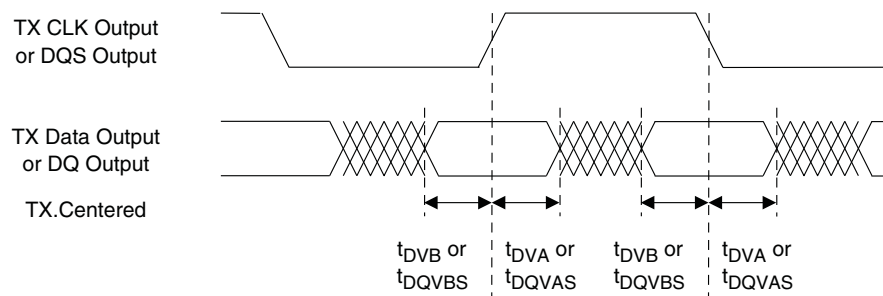

### Pinout Information Summary

|                                                        | MachXO2-256         |                     |          |          |           | MachXO2-640         |          |           | MachXO2-640U |
|--------------------------------------------------------|---------------------|---------------------|----------|----------|-----------|---------------------|----------|-----------|--------------|
|                                                        | 32 QFN <sup>1</sup> | 48 QFN <sup>3</sup> | 64 ucBGA | 100 TQFP | 132 csBGA | 48 QFN <sup>3</sup> | 100 TQFP | 132 csBGA | 144 TQFP     |
| <b>General Purpose I/O per Bank</b>                    |                     |                     |          |          |           |                     |          |           |              |
| Bank 0                                                 | 8                   | 10                  | 9        | 13       | 13        | 10                  | 18       | 19        | 27           |
| Bank 1                                                 | 2                   | 10                  | 12       | 14       | 14        | 10                  | 20       | 20        | 26           |
| Bank 2                                                 | 9                   | 10                  | 11       | 14       | 14        | 10                  | 20       | 20        | 28           |
| Bank 3                                                 | 2                   | 10                  | 12       | 14       | 14        | 10                  | 20       | 20        | 26           |
| Bank 4                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 0            |
| Bank 5                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 0            |
| Total General Purpose Single Ended I/O                 | 21                  | 40                  | 44       | 55       | 55        | 40                  | 78       | 79        | 107          |
| <b>Differential I/O per Bank</b>                       |                     |                     |          |          |           |                     |          |           |              |
| Bank 0                                                 | 4                   | 5                   | 5        | 7        | 7         | 5                   | 9        | 10        | 14           |
| Bank 1                                                 | 1                   | 5                   | 6        | 7        | 7         | 5                   | 10       | 10        | 13           |
| Bank 2                                                 | 4                   | 5                   | 5        | 7        | 7         | 5                   | 10       | 10        | 14           |
| Bank 3                                                 | 1                   | 5                   | 6        | 7        | 7         | 5                   | 10       | 10        | 13           |
| Bank 4                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 0            |
| Bank 5                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 0            |
| Total General Purpose Differential I/O                 | 10                  | 20                  | 22       | 28       | 28        | 20                  | 39       | 40        | 54           |
| <b>Dual Function I/O</b>                               |                     |                     |          |          |           |                     |          |           |              |
|                                                        | 22                  | 25                  | 27       | 29       | 29        | 25                  | 29       | 29        | 33           |
| <b>High-speed Differential I/O</b>                     |                     |                     |          |          |           |                     |          |           |              |
| Bank 0                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 7            |
| <b>Gearboxes</b>                                       |                     |                     |          |          |           |                     |          |           |              |
| Number of 7:1 or 8:1 Output Gearbox Available (Bank 0) | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 7            |
| Number of 7:1 or 8:1 Input Gearbox Available (Bank 2)  | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 7            |
| <b>DQS Groups</b>                                      |                     |                     |          |          |           |                     |          |           |              |
| Bank 1                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 2            |
| <b>VCCIO Pins</b>                                      |                     |                     |          |          |           |                     |          |           |              |
| Bank 0                                                 | 2                   | 2                   | 2        | 2        | 2         | 2                   | 2        | 2         | 3            |
| Bank 1                                                 | 1                   | 1                   | 2        | 2        | 2         | 1                   | 2        | 2         | 3            |
| Bank 2                                                 | 2                   | 2                   | 2        | 2        | 2         | 2                   | 2        | 2         | 3            |
| Bank 3                                                 | 1                   | 1                   | 2        | 2        | 2         | 1                   | 2        | 2         | 3            |
| Bank 4                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 0            |
| Bank 5                                                 | 0                   | 0                   | 0        | 0        | 0         | 0                   | 0        | 0         | 0            |
| VCC                                                    | 2                   | 2                   | 2        | 2        | 2         | 2                   | 2        | 2         | 4            |
| GND <sup>2</sup>                                       | 2                   | 1                   | 8        | 8        | 8         | 1                   | 8        | 10        | 12           |
| NC                                                     | 0                   | 0                   | 1        | 26       | 58        | 0                   | 3        | 32        | 8            |
| Reserved for Configuration                             | 1                   | 1                   | 1        | 1        | 1         | 1                   | 1        | 1         | 1            |
| Total Count of Bonded Pins                             | 32                  | 49                  | 64       | 100      | 132       | 49                  | 100      | 132       | 144          |

1. Lattice recommends soldering the central thermal pad onto the top PCB ground for improved thermal resistance.
2. For 48 QFN package, exposed die pad is the device ground.
3. 48-pin QFN information is 'Advanced'.

**Ultra Low Power Commercial Grade Devices, Halogen Free (RoHS) Packaging**

| Part Number          | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|----------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-256ZE-1SG32C  | 256  | 1.2 V          | –1    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-256ZE-2SG32C  | 256  | 1.2 V          | –2    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-256ZE-3SG32C  | 256  | 1.2 V          | –3    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-256ZE-1UMG64C | 256  | 1.2 V          | –1    | Halogen-Free ucBGA | 64    | COM   |
| LCMXO2-256ZE-2UMG64C | 256  | 1.2 V          | –2    | Halogen-Free ucBGA | 64    | COM   |
| LCMXO2-256ZE-3UMG64C | 256  | 1.2 V          | –3    | Halogen-Free ucBGA | 64    | COM   |
| LCMXO2-256ZE-1TG100C | 256  | 1.2 V          | –1    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-256ZE-2TG100C | 256  | 1.2 V          | –2    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-256ZE-3TG100C | 256  | 1.2 V          | –3    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-256ZE-1MG132C | 256  | 1.2 V          | –1    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-256ZE-2MG132C | 256  | 1.2 V          | –2    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-256ZE-3MG132C | 256  | 1.2 V          | –3    | Halogen-Free csBGA | 132   | COM   |

| Part Number          | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|----------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-640ZE-1TG100C | 640  | 1.2 V          | –1    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-640ZE-2TG100C | 640  | 1.2 V          | –2    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-640ZE-3TG100C | 640  | 1.2 V          | –3    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-640ZE-1MG132C | 640  | 1.2 V          | –1    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-640ZE-2MG132C | 640  | 1.2 V          | –2    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-640ZE-3MG132C | 640  | 1.2 V          | –3    | Halogen-Free csBGA | 132   | COM   |

| Part Number           | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|-----------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-1200ZE-1SG32C  | 1280 | 1.2 V          | –1    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-1200ZE-2SG32C  | 1280 | 1.2 V          | –2    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-1200ZE-3SG32C  | 1280 | 1.2 V          | –3    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-1200ZE-1TG100C | 1280 | 1.2 V          | –1    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-1200ZE-2TG100C | 1280 | 1.2 V          | –2    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-1200ZE-3TG100C | 1280 | 1.2 V          | –3    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-1200ZE-1MG132C | 1280 | 1.2 V          | –1    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-1200ZE-2MG132C | 1280 | 1.2 V          | –2    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-1200ZE-3MG132C | 1280 | 1.2 V          | –3    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-1200ZE-1TG144C | 1280 | 1.2 V          | –1    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-1200ZE-2TG144C | 1280 | 1.2 V          | –2    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-1200ZE-3TG144C | 1280 | 1.2 V          | –3    | Halogen-Free TQFP  | 144   | COM   |



| Part Number           | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|-----------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-1200HC-4SG32C  | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-1200HC-5SG32C  | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-1200HC-6SG32C  | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free QFN   | 32    | COM   |
| LCMXO2-1200HC-4TG100C | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-1200HC-5TG100C | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-1200HC-6TG100C | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-1200HC-4MG132C | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-1200HC-5MG132C | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-1200HC-6MG132C | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-1200HC-4TG144C | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-1200HC-5TG144C | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-1200HC-6TG144C | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 144   | COM   |

| Part Number             | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|-------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-1200UHC-4FTG256C | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-1200UHC-5FTG256C | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-1200UHC-6FTG256C | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free ftBGA | 256   | COM   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-2000HC-4TG100C  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-2000HC-5TG100C  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-2000HC-6TG100C  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 100   | COM   |
| LCMXO2-2000HC-4MG132C  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-2000HC-5MG132C  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-2000HC-6MG132C  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-2000HC-4TG144C  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-2000HC-5TG144C  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-2000HC-6TG144C  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-2000HC-4BG256C  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-2000HC-5BG256C  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-2000HC-6BG256C  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-2000HC-4FTG256C | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-2000HC-5FTG256C | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-2000HC-6FTG256C | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free ftBGA | 256   | COM   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-2000UHC-4FG484C | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-2000UHC-5FG484C | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-2000UHC-6FG484C | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free fpBGA | 484   | COM   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-4000HC-4QN84C   | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free QFN   | 84    | COM   |
| LCMXO2-4000HC-5QN84C   | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free QFN   | 84    | COM   |
| LCMXO2-4000HC-6QN84C   | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free QFN   | 84    | COM   |
| LCMXO2-4000HC-4MG132C  | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-4000HC-5MG132C  | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-4000HC-6MG132C  | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free csBGA | 132   | COM   |
| LCMXO2-4000HC-4TG144C  | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-4000HC-5TG144C  | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-4000HC-6TG144C  | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-4000HC-4BG256C  | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-4000HC-5BG256C  | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-4000HC-6BG256C  | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-4000HC-4FTG256C | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-4000HC-5FTG256C | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-4000HC-6FTG256C | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-4000HC-4BG332C  | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-4000HC-5BG332C  | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-4000HC-6BG332C  | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-4000HC-4FG484C  | 4320 | 2.5 V / 3.3 V  | –4    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-4000HC-5FG484C  | 4320 | 2.5 V / 3.3 V  | –5    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-4000HC-6FG484C  | 4320 | 2.5 V / 3.3 V  | –6    | Halogen-Free fpBGA | 484   | COM   |

| Part Number           | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|-----------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-4000HE-6BG332C | 4320 | 1.2 V          | –6    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-4000HE-4FG484C | 4320 | 1.2 V          | –4    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-4000HE-5FG484C | 4320 | 1.2 V          | –5    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-4000HE-6FG484C | 4320 | 1.2 V          | –6    | Halogen-Free fpBGA | 484   | COM   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-7000HE-4TG144C  | 6864 | 1.2 V          | –4    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-7000HE-5TG144C  | 6864 | 1.2 V          | –5    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-7000HE-6TG144C  | 6864 | 1.2 V          | –6    | Halogen-Free TQFP  | 144   | COM   |
| LCMXO2-7000HE-4BG256C  | 6864 | 1.2 V          | –4    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-7000HE-5BG256C  | 6864 | 1.2 V          | –5    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-7000HE-6BG256C  | 6864 | 1.2 V          | –6    | Halogen-Free caBGA | 256   | COM   |
| LCMXO2-7000HE-4FTG256C | 6864 | 1.2 V          | –4    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-7000HE-5FTG256C | 6864 | 1.2 V          | –5    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-7000HE-6FTG256C | 6864 | 1.2 V          | –6    | Halogen-Free ftBGA | 256   | COM   |
| LCMXO2-7000HE-4BG332C  | 6864 | 1.2 V          | –4    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-7000HE-5BG332C  | 6864 | 1.2 V          | –5    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-7000HE-6BG332C  | 6864 | 1.2 V          | –6    | Halogen-Free caBGA | 332   | COM   |
| LCMXO2-7000HE-4FG484C  | 6864 | 1.2 V          | –4    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-7000HE-5FG484C  | 6864 | 1.2 V          | –5    | Halogen-Free fpBGA | 484   | COM   |
| LCMXO2-7000HE-6FG484C  | 6864 | 1.2 V          | –6    | Halogen-Free fpBGA | 484   | COM   |

| Part Number           | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|-----------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-1200HC-4SG32I  | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free QFN   | 32    | IND   |
| LCMXO2-1200HC-5SG32I  | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free QFN   | 32    | IND   |
| LCMXO2-1200HC-6SG32I  | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free QFN   | 32    | IND   |
| LCMXO2-1200HC-4TG100I | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 100   | IND   |
| LCMXO2-1200HC-5TG100I | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 100   | IND   |
| LCMXO2-1200HC-6TG100I | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 100   | IND   |
| LCMXO2-1200HC-4MG132I | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-1200HC-5MG132I | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-1200HC-6MG132I | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-1200HC-4TG144I | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-1200HC-5TG144I | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-1200HC-6TG144I | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 144   | IND   |

| Part Number             | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|-------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-1200UHC-4FTG256I | 1280 | 2.5 V / 3.3 V  | –4    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-1200UHC-5FTG256I | 1280 | 2.5 V / 3.3 V  | –5    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-1200UHC-6FTG256I | 1280 | 2.5 V / 3.3 V  | –6    | Halogen-Free ftBGA | 256   | IND   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-2000HC-4TG100I  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 100   | IND   |
| LCMXO2-2000HC-5TG100I  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 100   | IND   |
| LCMXO2-2000HC-6TG100I  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 100   | IND   |
| LCMXO2-2000HC-4MG132I  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-2000HC-5MG132I  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-2000HC-6MG132I  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-2000HC-4TG144I  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-2000HC-5TG144I  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-2000HC-6TG144I  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-2000HC-4BG256I  | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-2000HC-5BG256I  | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-2000HC-6BG256I  | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-2000HC-4FTG256I | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-2000HC-5FTG256I | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-2000HC-6FTG256I | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free ftBGA | 256   | IND   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-2000UHC-4FG484I | 2112 | 2.5 V / 3.3 V  | –4    | Halogen-Free fpBGA | 484   | IND   |
| LCMXO2-2000UHC-5FG484I | 2112 | 2.5 V / 3.3 V  | –5    | Halogen-Free fpBGA | 484   | IND   |
| LCMXO2-2000UHC-6FG484I | 2112 | 2.5 V / 3.3 V  | –6    | Halogen-Free fpBGA | 484   | IND   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-4000HE-4MG132I  | 4320 | 1.2 V          | –4    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-4000HE-5MG132I  | 4320 | 1.2 V          | –5    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-4000HE-6MG132I  | 4320 | 1.2 V          | –6    | Halogen-Free csBGA | 132   | IND   |
| LCMXO2-4000HE-4TG144I  | 4320 | 1.2 V          | –4    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-4000HE-5TG144I  | 4320 | 1.2 V          | –5    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-4000HE-6TG144I  | 4320 | 1.2 V          | –6    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-4000HE-4MG184I  | 4320 | 1.2 V          | –4    | Halogen-Free csBGA | 184   | IND   |
| LCMXO2-4000HE-5MG184I  | 4320 | 1.2 V          | –5    | Halogen-Free csBGA | 184   | IND   |
| LCMXO2-4000HE-6MG184I  | 4320 | 1.2 V          | –6    | Halogen-Free csBGA | 184   | IND   |
| LCMXO2-4000HE-4BG256I  | 4320 | 1.2 V          | –4    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-4000HE-5BG256I  | 4320 | 1.2 V          | –5    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-4000HE-6BG256I  | 4320 | 1.2 V          | –6    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-4000HE-4FTG256I | 4320 | 1.2 V          | –4    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-4000HE-5FTG256I | 4320 | 1.2 V          | –5    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-4000HE-6FTG256I | 4320 | 1.2 V          | –6    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-4000HE-4BG332I  | 4320 | 1.2 V          | –4    | Halogen-Free caBGA | 332   | IND   |
| LCMXO2-4000HE-5BG332I  | 4320 | 1.2 V          | –5    | Halogen-Free caBGA | 332   | IND   |
| LCMXO2-4000HE-6BG332I  | 4320 | 1.2 V          | –6    | Halogen-Free caBGA | 332   | IND   |
| LCMXO2-4000HE-4FG484I  | 4320 | 1.2 V          | –4    | Halogen-Free fpBGA | 484   | IND   |
| LCMXO2-4000HE-5FG484I  | 4320 | 1.2 V          | –5    | Halogen-Free fpBGA | 484   | IND   |
| LCMXO2-4000HE-6FG484I  | 4320 | 1.2 V          | –6    | Halogen-Free fpBGA | 484   | IND   |

| Part Number            | LUTs | Supply Voltage | Grade | Package            | Leads | Temp. |
|------------------------|------|----------------|-------|--------------------|-------|-------|
| LCMXO2-7000HE-4TG144I  | 6864 | 1.2 V          | –4    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-7000HE-5TG144I  | 6864 | 1.2 V          | –5    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-7000HE-6TG144I  | 6864 | 1.2 V          | –6    | Halogen-Free TQFP  | 144   | IND   |
| LCMXO2-7000HE-4BG256I  | 6864 | 1.2 V          | –4    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-7000HE-5BG256I  | 6864 | 1.2 V          | –5    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-7000HE-6BG256I  | 6864 | 1.2 V          | –6    | Halogen-Free caBGA | 256   | IND   |
| LCMXO2-7000HE-4FTG256I | 6864 | 1.2 V          | –4    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-7000HE-5FTG256I | 6864 | 1.2 V          | –5    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-7000HE-6FTG256I | 6864 | 1.2 V          | –6    | Halogen-Free ftBGA | 256   | IND   |
| LCMXO2-7000HE-4BG332I  | 6864 | 1.2 V          | –4    | Halogen-Free caBGA | 332   | IND   |
| LCMXO2-7000HE-5BG332I  | 6864 | 1.2 V          | –5    | Halogen-Free caBGA | 332   | IND   |
| LCMXO2-7000HE-6BG332I  | 6864 | 1.2 V          | –6    | Halogen-Free caBGA | 332   | IND   |
| LCMXO2-7000HE-4FG484I  | 6864 | 1.2 V          | –4    | Halogen-Free fpBGA | 484   | IND   |
| LCMXO2-7000HE-5FG484I  | 6864 | 1.2 V          | –5    | Halogen-Free fpBGA | 484   | IND   |
| LCMXO2-7000HE-6FG484I  | 6864 | 1.2 V          | –6    | Halogen-Free fpBGA | 484   | IND   |