



Welcome to [E-XFL.COM](#)

What is "[Embedded - Microcontrollers](#)"?


"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Obsolete
Core Processor	F ² MC-8FX
Core Size	8-Bit
Speed	16MHz
Connectivity	LINbus, UART/USART
Peripherals	LVD, POR, PWM, WDT
Number of I/O	13
Program Memory Size	12KB (12K x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	496 x 8
Voltage - Supply (Vcc/Vdd)	2.4V ~ 5.5V
Data Converters	A/D 5x8/10b
Oscillator Type	External
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	16-TSSOP (0.173", 4.40mm Width)
Supplier Device Package	16-TSSOP
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/mb95f583knpft-g-sne2

Consumer and Industrial MCU Core Roadmap

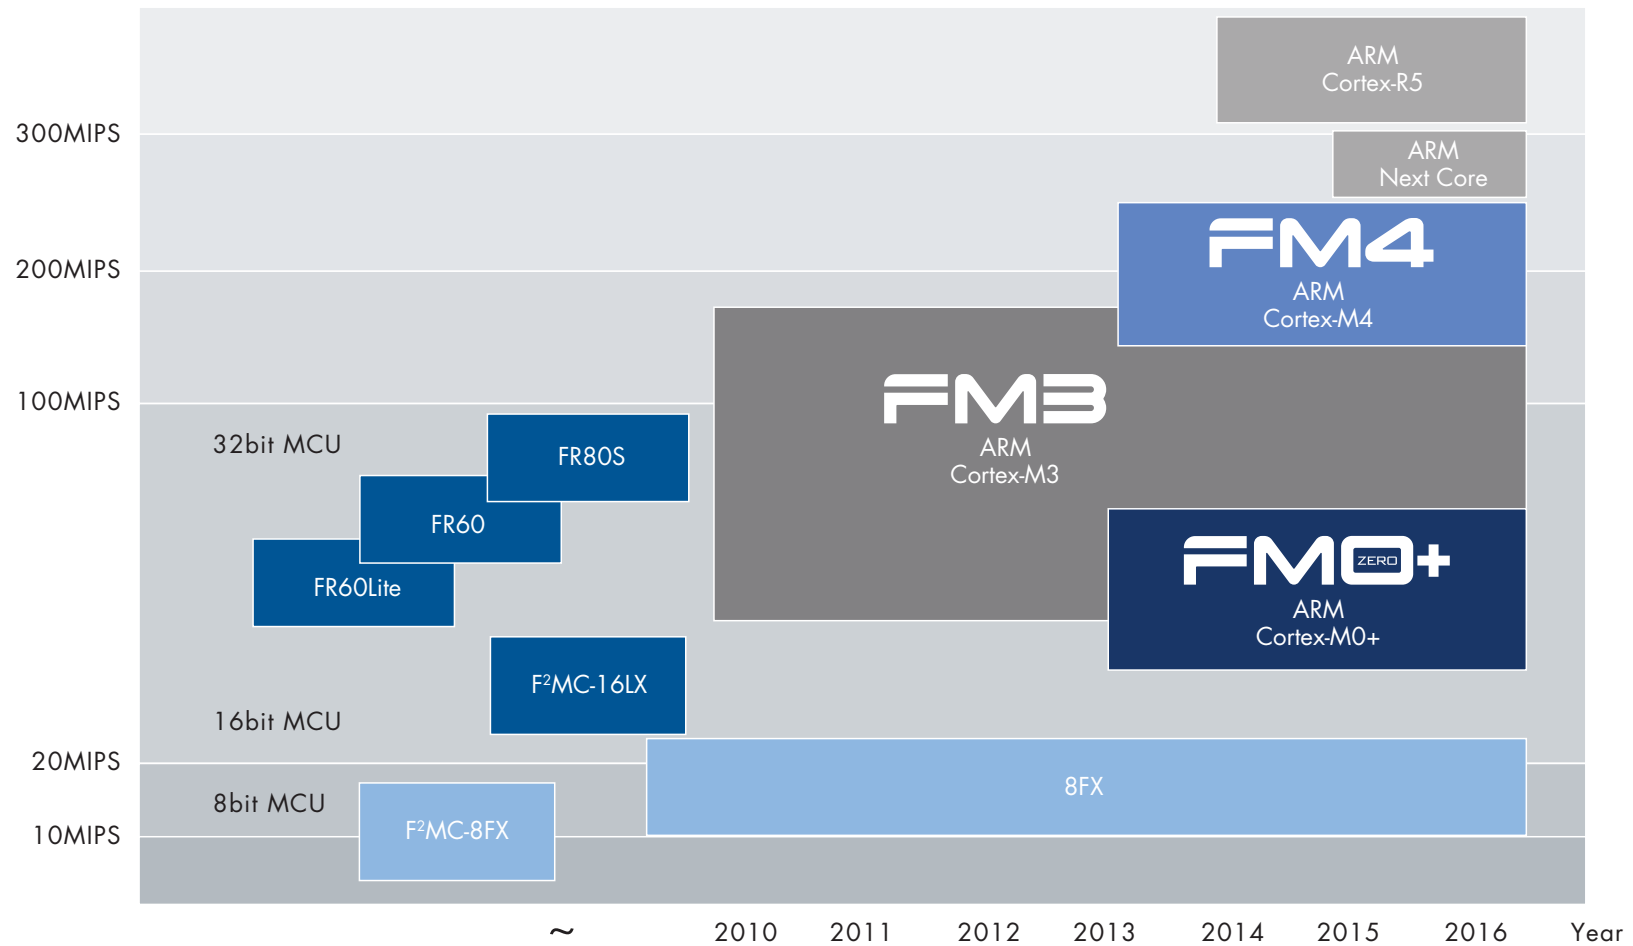

Consumer and Industrial MCU Family




FM4 FAMILY

Cypress ARM® Cortex®-M4F microcontroller family is a high range line providing maximum CPU frequency of 200MHz, a high speed flash memory with DSP and FPU hardware instructions. Customers can select the best fitting device from a range of products, coming in packages from 48 pin to 216 pin and flash memory densities between 256KB and 2MB. The wide operation supply voltage range up to 5.5V which improves the signal to noise ratio, results in a robust design and is unique among Cortex-M4F microcontroller families. The MCUs are designed for applications that require advanced, high-speed computing performance such as general-purpose inverters, servomotors, PLCs and other industrial equipment, as well as inverter-based home appliances such as washing machines and air conditioners.



FM3 FAMILY

Cypress ARM Cortex-M3 microcontroller family is a scalable platform for many industrial applications. Customers can select the best fitting device from a range of products, coming in packages from 32 pin to 176 pin and flash memory densities between 32KB and 1MB. With a maximum CPU frequency of 144MHz and high speed flash memory, FM3 supports the fastest ARM Cortex-M3 devices on the market. The wide operation supply voltage range up to 5.5V, which improves the signal to noise ratio, results in a robust design and is quite unique among Cortex-M3 microcontroller families. The FM3 MCU family is split into four groups: high performance, basic, low power and ultra low leakage groups. The main differences between the groups are CPU operation frequency and supply voltage. All products are based on the same architecture (software compatible), use the same peripherals and are pin compatible in most cases. The ultra low leakage line products are based on an optimized low leakage process technology. Development tools and evaluation boards are offered from different vendors and Cypress.




FM0+ FAMILY

The Cypress FM0+ family, which is based on the ARM Cortex-M0+ core, is designed for low power and cost-sensitive applications such as white goods, sensors, meters, HMI systems, power tools and Internet of Things (IoT) battery powered or energy harvesting wearable devices. These microcontrollers can be easily embedded into systems adopting 8-, 16- or 32-bit MCUs, accelerating product development and reducing development costs. The FM0+ family includes two groups for ultra-low-power and cost-effective applications. The devices in the ultra-low-power group have an operating voltage range of 1.65V to 3.6V, and a maximum CPU clock frequency of 40MHz, a RUN mode current of 70 μ A/MHz, an RTC mode current of 0.7 μ A and wake-up time of approximately 40 μ s.

8FX FAMILY

Cypress 8FX MCU family is a high-performance 8-bit microcontroller utilizing a different embedded flash memory size. This series uses the F2MC-8FX CISC CPU, which offers industry leading class performance of an 8-bit microcontroller unit enabling more instructions to be executed per cycle. On top of delivering industry class performance MCUs, the 8FX family also delivers low power efficient MCU products for the customer's usage. This series also features a variety of on-chip timers, A/D converters, analog and digital peripheral and communication interfaces such as LIN-UART (Local Interconnect Network Universal Asynchronous Receiver-Transmitter), CAN (controller area network) and I2C (Inter-Integrated Circuit) interface for various application usages. For easy development, the 8FX family also employs a 1-line on-chip debug that uses only one pin on the microcontroller, thereby minimizing the number of pins used for debugging in product development. Cypress also provides easy to use and cost competitive development starter kits and development environments for this MCU series.

Automotive MCU Core Roadmap

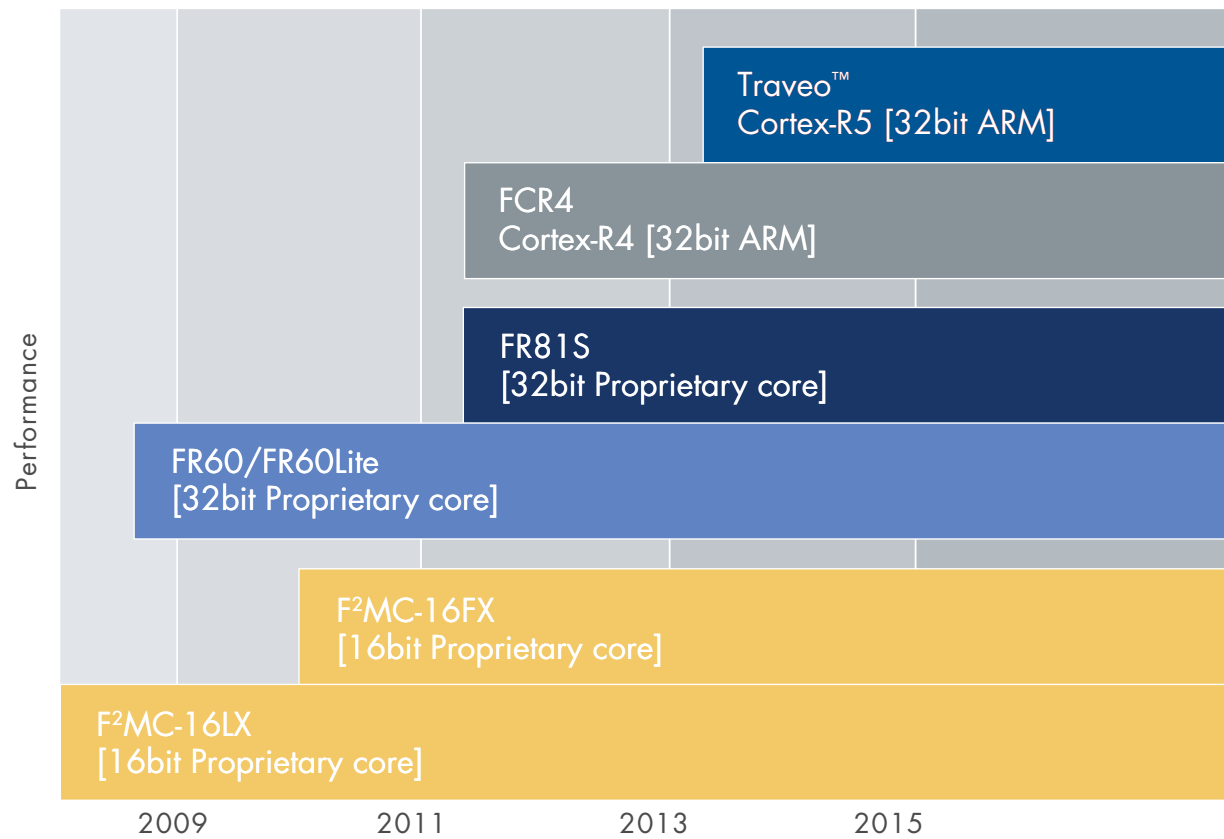

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch](unit)	12bit AD Converter [ch](unit)	DA Converter [bit x ch]	Timer								Serial			Communication		Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]		
S6E2HG	S6E2HG6E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HG6F0A		LQFP-100																									80	24 (3)		
	S6E2HG6G0A		LQFP-120 BGA-121																									100			
	S6E2HG4E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HG4F0A		LQFP-100																									80	24 (3)		
S6E2HG4G0A	LQFP-120 BGA-121		100																												
S6E2HE	S6E2HE6E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HE6F0A		LQFP-100																									80	24 (3)		
	S6E2HE6G0A		LQFP-120 BGA-121																									100			
	S6E2HE4E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch, SDC	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2HE4F0A		LQFP-100																									80	24 (3)		
S6E2HE4G0A	LQFP-120 BGA-121		100																												
S6E2H4	S6E2H46E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H46F0A		LQFP-100																									80	24 (3)		
	S6E2H46G0A		LQFP-120 BGA-121																									100			
	S6E2H44E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	2	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H44F0A		LQFP-100																									80	24 (3)		
S6E2H44G0A	LQFP-120 BGA-121		100																												
S6E2H1	S6E2H16E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K + 32K	64K	-	8	16	✓	63	-	16 (3)	-	Multi-Function Timer x3units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/Waveform Generator 3ch/ AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ETM)				
	S6E2H16F0A		LQFP-100																									80	24 (3)		
	S6E2H16G0A		LQFP-120 BGA-121																									100			
	S6E2H14E0A	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	256K + 32K	32K	-	8	16	✓	63	-	16 (3)	-	AD Activation Compare 6ch Selectable), PPG 9ch	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 3	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Timer Clock, Unique ID, DSTC x 256ch	On-Chip Debug (SWJ-DP/ ET				

CYPRESS SEMICONDUCTOR | MICROCONTROLLER PRODUCT SELECTOR GUIDE

* In development; **Planning

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch](unit)	12bit AD Converter [ch](unit)	DA Converter [bit x ch]	Timer									Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
MB9B160R	MB9BF166M	160	LQFP-80	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	16	✓	63	-	16(3)	12 x 2	Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	-	✓	Dual Timer, Real Time Clock, DSTC x 128ch, Unique ID, SD Card I/F	On-chip Debug (SWJ-DP/ETM)							
	80		24(3)																																
	100																																		
	MB9BF166R		LQFP-120 BGA-144				63	16(3)																											
	MB9BF167M		LQFP-80				80	24(3)																											
	MB9BF167N		LQFP-100 QFP-100 BGA-112				100																												
	MB9BF167R		LQFP-120 BGA-144				63	16(3)																											
	MB9BF168M		LQFP-80				80	24(3)																											
	MB9BF168N		LQFP-100 QFP-100 BGA-112				100																												
MB9BF168R	LQFP-120 BGA-144																																		
MB9B560L	MB9BF564K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	15	-	33	-	8(2)	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I ² C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)								
	48		15(2)																																
	MB9BF564L		LQFP-64 QFN-64				16	48			15(2)																								
	MB9BF565K		LQFP-48 QFN-48				15	33			8(2)																								
	MB9BF565L	LQFP-64 QFN-64	16	48	15(2)																														
	MB9BF566K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	512K +32K	64K	-	8	15	-	33	-	8(2)		12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I ² C/LIN Selectable)	1	1ch (USB-Host/ USB-Function Selectable)	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)							
	MB9BF566L		LQFP-64 QFN-64										16		48														15(2)						

FM4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer									Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]	USB-Function [ch]																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
MB9B460L	MB9BF464K	160	LQFP-48 QFN-48	2.7 to 5.5	✓	Main Flash +Work Flash	256K +32K	32K	-	8	-	-	-	-	12 x 2		Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
	MB9BF464L		LQFP-64 QFN-64																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	MB9BF465K		LQFP-48 QFN-48				384K +32K	48K																					-	8	-	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	MB9BF465L		LQFP-64 QFN-64																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	MB9BF466K		LQFP-48 QFN-48				512K +32K	64K																																								-	8	-	-	-	-	12 x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 6ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 6ch (UART/CSIO/I2C/LIN Selectable)	1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, Real Time Clock, Unique ID, DSTC x 128ch	On-chip Debug (SWJ-DP)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
	MB9BF466L		LQFP-64 QFN-64																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/ISI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]			USB-Function [ch]
BASIC GROUP																																		
MB9B320M	MB9BF321K	72	LQFP-48 QFN-48	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	14	-	35	-	14(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	1	QPRC x 1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)				
	MB9BF321L		LQFP-64 QFN-64																		19	50	23(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF321M		LQFP-80 BGA-96																		23	65	26(2)	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF322K		LQFP-48 QFN-48																		14	35	14(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF322L		LQFP-64 QFN-64				19	50			23(2)		14(2)		26(2)					65	26(2)	QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF322M		LQFP-80 BGA-96				23	65			26(2)												Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF324K		LQFP-48 QFN-48				14	35			14(2)												Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF324L		LQFP-64 QFN-64				19	50			23(2)												Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF324M		LQFP-80 BGA-96				23	65			26(2)																							
MB9B120M	MB9BF121K	72	LQFP-48 QFN-48	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	14	-	35	-	14(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	1	QPRC x 1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	-	-	-	✓	Dual Timer, Unique ID, Real Time Clock	On-chip Debug (SWJ-DP)			
	MB9BF121L		LQFP-64 QFN-64																		19	50	23(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF121M		LQFP-80 BGA-96																		23	65	26(2)	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF122K		LQFP-48 QFN-48																		14	35	14(2)	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)										
	MB9BF122L		LQFP-64 QFN-64				19	50			23(2)		14(2)		26(2)					65	26(2)	QPRC x 2	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF122M		LQFP-80 BGA-96				23	65			26(2)												Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF124K		LQFP-48 QFN-48				14	35			14(2)												Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)											
	MB9BF124L		LQFP-64 QFN-64				19	50			23(2)																							
	MB9BF124M		LQFP-80 BGA-96				23	65			26(2)																							
MB9B120J	MB9BF121J	72	LQFP-32 QFN-32	2.7 to 5.5	✓	FLASH	64K	8K	-	4	7	-	23	-	8(1)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 4ch (UART/CSIO/I2C/LIN Selectable)				-	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID	On-chip Debug (SW-DP)			
MB9B520T	MB9BF528S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	122	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)				1	1ch (USB-Host/ USB-Function Selectable)		-	✓	CAN: 32Msg-buffer, Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID		On-chip Debug (SWJ-DP/ETM)		
	MB9BF528T*		LQFP-176 BGA-192				154	QPRC x 2																										
	MB9BF529S*		LQFP-144				122	QPRC x 1																										
	MB9BF529T*		LQFP-176 BGA-192				154	QPRC x 2																										
MB9B420T	MB9BF428S*	60	LQFP-144	2.7 to 5.5	✓	Dual Op. Flash (Main area + Work area)	1M +64K	160K	-	8	32	✓	122	-	24(2)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 16ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 16ch (UART/CSIO/I2C/LIN Selectable)				1	-	-	-	✓	CAN: 32Msg-buffer, Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID		On-chip Debug (SWJ-DP/ETM)		
	MB9BF428T*		LQFP-176 BGA-192				154	QPRC x 2																										
	MB9BF429S*		LQFP-144				122	QPRC x 1																										
	MB9BF429T*		LQFP-176 BGA-192				154	QPRC x 2																										

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch(unit)]	12bit AD Converter [ch(unit)]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]
BASIC GROUP																																			
MB9A310A	MB9AF311LA	40	LQFP-64 QFN-64	2.7 to 5.5	✓	FLASH		-	8	-	51			9(2)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable) Multi-Function Timer x 2units (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)								Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 2	1	Multi Function Serial x 8ch (UART/CSIO/I2C/LIN Selectable)			-	1ch (USB-Host/ USB-Function Selectable)	-	✓	Dual Timer	On-chip Debug (SWJ-DP)
	MB9AF311MA		LQFP-80																																On-chip Debug (SWJ-DP/ETM)
	MB9AF311NA		LQFP-100 QFP-100 BGA-112																																On-chip Debug (SWJ-DP/ETM)
	MB9AF312LA		LQFP-64 QFN-64																																On-chip Debug (SWJ-DP)
	MB9AF312MA		LQFP-80																																On-chip Debug (SWJ-DP/ETM)
	MB9AF312NA		LQFP-100 QFP-100 BGA-112																																On-chip Debug (SWJ-DP/ETM)
	MB9AF314LA		LQFP-64 QFN-64																																On-chip Debug (SWJ-DP)
	MB9AF314MA		LQFP-80																																On-chip Debug (SWJ-DP/ETM)
	MB9AF314NA		LQFP-100 QFP-100 BGA-112																																On-chip Debug (SWJ-DP)
	MB9AF315MA		LQFP-80																																On-chip Debug (SWJ-DP)
	MB9AF315NA		LQFP-100 QFP-100 BGA-112**																																On-chip Debug (SWJ-DP/ETM)
	MB9AF316MA		LQFP-80																																On-chip Debug (SWJ-DP)
	MB9AF316NA		LQFP-100 QFP-100 BGA-112**																																On-chip Debug (SWJ-DP/ETM)

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bitAD Converter [ch/unit]	12bitAD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device													
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]												
LOW-POWER GROUP																																																
MB9A150R	MB9AF154MA	40	LQFP-80 BGA-96	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	256K +32K	32K	-	8	23	66	-	17(2)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	QPRC x 2	1	Base Timer x 15ch (Reload/PPG/PWM/ PWC Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)												
	MB9AF154NA		LQFP-100 BGA-112																																	On-chip Debug (SWJ-DP/ETM)												
	MB9AF154RA		LQFP-120																																	On-chip Debug (SWJ-DP)												
	MB9AF155MA		LQFP-80 BGA-96				384K +32K	48K		-	8	23		66																						17(2)	-	24(2)	Base Timer x 15ch (Reload/PPG/PWM/ PWC Selectable)	Base Timer x 15ch (Reload/PPG/PWM/ PWC Selectable)	Multi Function Serial x 10ch (UART/CSIO/I2C Selectable)	-	-	-	-	✓	On-chip Debug (SWJ-DP)	
	MB9AF155NA		LQFP-100 BGA-112																																													On-chip Debug (SWJ-DP/ETM)
	MB9AF155RA		LQFP-120																																													On-chip Debug (SWJ-DP/ETM)
	MB9AF156MA		LQFP-80 BGA-96				512K +32K	64K		23	66	17(2)		-																						24(2)	Base Timer x 15ch (Reload/PPG/PWM/ PWC Selectable)	Base Timer x 15ch (Reload/PPG/PWM/ PWC Selectable)	Multi Function Serial x 10ch (UART/CSIO/I2C Selectable)	-	-	-	-	✓	On-chip Debug (SWJ-DP)			
	MB9AF156NA		LQFP-100 BGA-112																																											On-chip Debug (SWJ-DP/ETM)		
	MB9AF156RA		LQFP-120																																											On-chip Debug (SWJ-DP/ETM)		
MB9AB40NA	MB9AFB41LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	-	51	12(2)	-	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)													
	MB9AFB41MB		LQFP-80 BGA-96																																11	66	17(2)	20 x 8										
	MB9AFB41NB		LQFP-100 QFP-100 BGA-112																																16	✓	83	24(2)	33 x 8									
	MB9AFB42LB		LQFP-64 QFN-64				8			-	51	12(2)																							40 x 8													
	MB9AFB42MB		LQFP-80 BGA-96				11			66	17(2)	20 x 8																																				
	MB9AFB42NB		LQFP-100 QFP-100 BGA-112				16			✓	83	24(2)																							33 x 8													
	MB9AFB44LB		LQFP-64 QFN-64				8	-		51	12(2)	40 x 8																																				
	MB9AFB44MB		LQFP-80 BGA-96				11	66		17(2)	20 x 8																																					
	MB9AFB44NB		LQFP-100 QFP-100 BGA-112				16	✓		83	24(2)	33 x 8																																				
MB9AA40NA	MB9AFA41LB	40	LQFP-64 QFN-64	1.65 to 3.6	✓	Dual Op. Flash (Main area + Work area)	64K +32K	16K	-	8	-	51	12(2)	-	-	-	-	-	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Dual Timer, HDMI-CEC/Remote Control Reception x 2, Real Time Clock, Unique ID	On-chip Debug (SWJ-DP)													
	MB9AFA41MB		LQFP-80 BGA-96																																11	66	17(2)	20 x 8										
	MB9AFA41NB		LQFP-100 QFP-100 BGA-112																																16	✓	83	24(2)	33 x 8									
	MB9AFA42LB		LQFP-64 QFN-64				8			-	51	12(2)																							40 x 8													
	MB9AFA42MB		LQFP-80 BGA-96				11			66	17(2)	20 x 8																																				
	MB9AFA42NB		LQFP-100 QFP-100 BGA-112				16			✓	83	24(2)																							33 x 8													
	MB9AFA44LB		LQFP-64 QFN-64				8	-		51	12(2)	40 x 8																																				
	MB9AFA44MB		LQFP-80 BGA-96				11	66		17(2)	20 x 8																																					
	MB9AFA44NB		LQFP-100 QFP-100 BGA-112				16	✓		83	24(2)	33 x 8																																				

FM3 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [bit]	Ext. Interrupt [bit]	External Bus	Maximum I/O port [bit]	10bit AD Converter [bit(unif)]	12bit AD Converter [bit(unif)]	DA Converter [bit x bit]	Timer							Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [bit]	Free-Run Timer [bit]	Input Capture [bit]	Reload Timer [bit]	PWM Timer [bit]	PWC Timer [bit]	PPG Timer [bit]	Up/Down Counter [bit]	Other timers [bit]	i ² C [bit]	UART/S ⁱ [bit]	SIO [bit]	LIN/UART/SIO [bit]				
ULTRA LOW LEAK GROUP																																	
MB9AAA0N	MB9AFAA1L	20	LQFP-64 QFN-64	1.8 to 5.5	✓	FLASH	64K	12K	-	-	-	-	-	-	9(1)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	-	Multi Function Serial x 8ch (UART/CSIO/i ² C Selectable)	-	-	-	24 x 4 or 20 x 8 37 x 4 or 33 x 8 44 x 4 or 40 x 8 24 x 4 or 20 x 8 37 x 4 or 33 x 8 44 x 4 or 40 x 8	✓	HDMI-CEC/Remote Control Reception x 2, Real Time Clock	On-chip Debug (SWJ-DP)					
	MB9AFAA1M		LQFP-80																														
	MB9AFAA1N		LQFP-100 QFP-100																														
	MB9AFAA2L		LQFP-64 QFN-64				128K	16K							11														67	84	9(1)		
	MB9AFAA2M		LQFP-80																														
	MB9AFAA2N		LQFP-100 QFP-100																														
MB9A1A0N	MB9AF1A1L	20	LQFP-64 QFN-64	1.8 to 5.5	✓	FLASH	64K	12K	-	-	-	-	-	9(1)	10bit x 2	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	-	Multi Function Serial x 8ch (UART/CSIO/i ² C Selectable)	-	-	-	-	✓	HDMI-CEC/Remote Control Reception x 2, Real Time Clock	On-chip Debug (SWJ-DP)						
	MB9AF1A1M		LQFP-80																														
	MB9AF1A1N		LQFP-100 QFP-100																														
	MB9AF1A2L		LQFP-64 QFN-64				128K	16K						8														52	9(1)				
	MB9AF1A2M		LQFP-80																														
	MB9AF1A2N		LQFP-100 QFP-100																														
MB9A130LA	MB9AF131LB	20	LQFP-64 QFN-64	1.8 to 5.5	✓	FLASH	64K	8K	-	-	-	-	37	-	8(1)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 8ch (Reload/PPG/PWM/ PWC Selectable)	-	-	Multi Function Serial x 8ch (UART/CSIO/i ² C Selectable)	-	-	-	-	✓	Real Time Clock	On-chip Debug (SWJ-DP)					
	MB9AF131KB		LQFP-48 QFN-48																														
	MB9AF132LB		LQFP-64 QFN-64				128K	6					52		8(1)																		
	MB9AF132KB		LQFP-48 QFN-48																														

FM0 + Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
S6E1A	S6E1A11B0A	40	LQFP-32 QFN-32	2.7 to 5.5	✓	Flash	56K	6K	-	2	8	-	23	-	5(1)	-	Multi-Function Timer x 1unit (Free-Run 3ch/ Output Compare 6ch/ Input Capture 4ch/ PPG 3ch/ Waveform Generator 3ch/ AD Activation Compare 3ch Selectable)	Base Timer x 4ch (Reload/PPG/PWM/ PWC Selectable)	QPRC x 1	1	Multi Function Serial x 3ch (UART/CSIO/I ² C/LIN Selectable)	-	-	-	✓	Dual Timer, Real Time Clock, Unique ID, Fast I/O	On-chip Debug (SW-DP/MTB)							
	S6E1A11C0A		LQFP-48 QFN-52 QFN-48				37						8(1)																					
	S6E1A12B0A		LQFP-32 QFN-32				23						5(1)																					
	S6E1A12C0A		LQFP-48 QFP-52 QFN-48				37						8(1)																					
S6E1B8 w/security	S6E1B86GHA	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I2C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F, Chipper	On-Chip Debug (SWJ-DP/ Boundary SCAN)							
	S6E1B84GHA		256K + 40K				32K	32 SEG x 8 COM / 36 SEG x 4 COM																										
	S6E1B86FHA		512K + 40K				64K	20 SEG x 8 COM / 24 SEG x 4 COM																										
	S6E1B84FHA		256K + 40K				32K																											
	S6E1B86EHA		512K + 40K				64K																											
	S6E1B84EHA		256K + 40K				32K																											
S6E1B8	S6E1B86G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I2C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	40 SEG x 8 COM / 44 SEG x 4 COM	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP/ Boundary SCAN)							
	S6E1B84G0A		256K + 40K				32K	32 SEG x 8 COM / 36 SEG x 4 COM																										
	S6E1B86F0A		512K + 40K				64K	20 SEG x 8 COM / 24 SEG x 4 COM																										
	S6E1B84F0A		256K + 40K				32K																											
	S6E1B86E0A		512K + 40K				64K																											
	S6E1B84E0A		256K + 40K				32K																											
S6E1B3	S6E1B36G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I2C Selectable)	-	1ch (USB-Host/ USB-Function Selectable)	-	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP/ Boundary SCAN)							
	S6E1B34G0A		256K + 40K				32K	-																										
	S6E1B36F0A		512K + 40K				64K	-																										
	S6E1B34F0A		256K + 40K				32K	-																										
	S6E1B36E0A		512K + 40K				64K	-																										
	S6E1B34E0A		256K + 40K				32K	-																										
S6E1B1	S6E1B16G0A	40	LQFP-120	1.65 to 3.6	✓	Main Flash +Work Flash	512K + 40K	64K	-	-	24	-	102	-	24	-	Multi-Function Timer x 1units (Free-Run 3ch/Output Compare 6ch/Input Capture 4ch /PPG3ch/Waveform Generator 3ch /AD Activation Compare 6ch Selectable), PPG3ch	Base Timer x 8ch (Reload/PPG/PWM/PWC Selectable)	-	1	Multi Function Serial x 8ch (UART/CSIO/I2C Selectable)	-	-	-	-	Dual Timer, Real Timer Clock, Unique ID, DSTC x 64ch, Tiny I2S, HDMI-CEC 2ch, CRC, Smart Card I/F	On-Chip Debug (SWJ-DP/ Boundary SCAN)							
	S6E1B14G0A		256K + 40K				32K	-																										
	S6E1B16F0A		512K + 40K				64K	-																										
	S6E1B14F0A		256K + 40K				32K	-																										
	S6E1B16E0A		512K + 40K				64K	-																										
	S6E1B14E0A		256K + 40K				32K	-																										

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	16bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SIO [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
LCD CONTROLLERS																																		
MB95610H	MB95F613H	16	LQFP-80	2.4 to 5.5	✓	Dual Op. Flash	12K	512	-	-	8	-	40	4(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	2	-	-	1	2	-	-	-	-	-	52 x 4 or 48 x 8	-	Clock Supervisor		On-chip Debug	
	MB95F613K							Low-voltage Detection Reset, Clock Supervisor																										
	MB95F614H							Clock Supervisor																										
	MB95F614K							Low-voltage Detection Reset, Clock Supervisor																										
	MB95F616H							Clock Supervisor																										
MB95616K	MB95F616K	36K	1024	41	Low-voltage Detection Reset, Clock Supervisor																													
	MB95F616K	41	Low-voltage Detection Reset, Clock Supervisor																															
	MB95F714J	16	LQFP-80	1.8 to 5.5	✓	Dual Op. Flash	20K	512	-	-	8	-	75	8(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	2	-	-	1	3	-	-	-	-	40 x 4 or 36 x 8	-	Clock Supervisor		On-chip Debug		
	MB95F714M							Low-voltage Detection Reset, Clock Supervisor																										
	MB95F716J							Clock Supervisor																										
MB95F716M	Low-voltage Detection Reset, Clock Supervisor																																	
MB95F718J	Clock Supervisor																																	
MB95770M	MB95F718M	60K	2K	75	Low-voltage Detection Reset, Clock Supervisor																													
	MB95F774J	16	LQFP-64	1.8 to 5.5	✓	Dual Op. Flash	20K	512	-	-	8	-	59	8(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	2	-	-	1	3	-	-	-	-	32 x 4 or 28 x 8	-	Clock Supervisor		On-chip Debug		
	MB95F774M							Low-voltage Detection Reset, Clock Supervisor																										
	MB95F776J							Clock Supervisor																										
	MB95F776M							Low-voltage Detection Reset, Clock Supervisor																										
MB95F778J	Clock Supervisor																																	
MB95778M	MB95F778M	60K	2K	59	Low-voltage Detection Reset, Clock Supervisor																													
	MB95F778M	58	Clock Supervisor																															
	MB95F632H	16	LQFP-32 SH-DIP-32 QFN-32	2.4 to 5.5	✓	Dual Op. Flash	8K	256	-	-	10	-	28	8(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	3	-	1	1	1	-	1	-	-	-	-	✓	Low-voltage Detection Reset, Multi-pulse Generator (Reload/PPG/Waveform Sequencer), Clock Supervisor		On-chip Debug	
	MB95F632K							Clock Supervisor																										
	MB95F633H							Low-voltage Detection Reset, Clock Supervisor																										
MB95F633K	Clock Supervisor																																	
MB95F634H	Low-voltage Detection Reset, Clock Supervisor																																	
MB95690K	MB95F634K	20K	1024	29	Clock Supervisor																													
	MB95F636H	28	Low-voltage Detection Reset, Clock Supervisor																															
	MB95F636K	29	Clock Supervisor																															
	MB95F694K	16	LQFP-44 LQFP-48 LQFP-52 QFN-48	2.88 to 5.5	✓	Dual Op. Flash	20K	512	-	-	8	-	45 LQFP44 only: 41	12(1) LQFP44 only: 8(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	3	-	1	1	1	-	1	-	-	-	-	✓	Low-voltage Detection Reset, Multi-pulse Generator (Reload/PPG/Waveform Sequencer), Clock Supervisor		On-chip Debug	
	MB95F696K							36K																							1K	Clock Supervisor		
MB95F698K	60K							2K																							Clock Supervisor			
STANDARD																																		
MB95560H	MB95F562H	16	SOP-20 TSSOP-20 QFN-32	2.4 to 5.5	✓	Dual Op. Flash	8K	240	-	-	6	-	16	6(1)	-	-	-	8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	-	-	-	-	-	-	1	-	-	-	-	-	-	Clock Supervisor		On-chip Debug
	MB95F562K							Low-voltage Detection Reset, Clock Supervisor																										
	MB95F563H							Clock Supervisor																										
	MB95F563K							Low-voltage Detection Reset, Clock Supervisor																										
	MB95F564H							Clock Supervisor																										
MB95570H	MB95F564K	20K	496	16	Low-voltage Detection Reset, Clock Supervisor																													
	MB95F564K	17	Clock Supervisor																															
	MB95F572H	16	SOP-8	2.4 to 5.5	✓	Dual Op. Flash	8K	240	-	-	2	-	4	2(1)	-																			

8FX – 8bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]					USB-Host [ch]
STANDARD																																			
MB95650L	MB95F652E	16	TSSOP-24 SOP-24 QFN-32	1.8 to 5.5	✓	Dual Op. Flash	8K	256	-	-	6	-	21	-	6(1)	-	-	8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	-	-	-	2	1	-	1	-	-	-	-	-	-	-	-	Low-voltage Detection Reset, Clock Supervisor	On-chip Debug
	MB95F652L							20																											
	MB95F653E							21																											
	MB95F653L							20																											
	MB95F654E							21																											
	MB95F654L							20																											
	MB95F656E							21																											
	MB95F656L							20																											
MB95810K	MB95F814K	16	LQFP-64	2.88 to 5.5	✓	Dual Op. Flash	20K	512	-	-	12	-	58	12(1)	-	-	-	Reload Timer x 1ch + 8/16bit Compound Timer x 2ch (Interval Timer/PWM/PWC/ Input Capture Selectable)	4	-	-	-	1	-	1	-	-	-	-	-	-	Low-voltage Detection Reset, Clock Supervisor	On-chip Debug		
	MB95F816K						36K	1K																											
	MB95F818K						60K	2K																											

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch](unit)]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer										Serial			Communication		LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device		
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SIO [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]	
CAN/AUTOMOTIVE																																					
MB9D560	MB9DF564MA	200	TEQFP -208	1.1 to 1.3 4.5 to 5.5	-	Main Flash +Work Flash	(640K +64K) x2	64K x2	-	16	8	-	125	32(1)	8(2)	10bit x 2	32bitFree-Run Timer x 5ch 32bitInput Capture x 3unit 6ch 16bitFree-Run Timer x 20ch 16bit Input Capture x 8unit 15ch 16bitOutput Compare x 12unit 24ch Waveform Generator x 4unit 24ch					16bit Base Timer x 12ch (PWM/PPG/Reload/PWC Selectable)					Multi Function Serial x 5ch (LIN/UART/SIO Selectable)			3	-	-	-	✓	ARM Cortex-R5 CAN: 64msb, RDC x 2unit Motor vector accelaretor x 2unit Models with A suffix on part number have no built-in FlexRay. Models with G suffix on part number have built-in FlexRay. ARM Cortex-R5 Motor vector accelaretor x 2unit Models with L suffix on part number have no built-in FlexRay. Models with Q suffix on part number have built-in FlexRay.		On-Chip Debug
	MB9DF564MG						(896K +64K) x2	96K x2																													
	MB9DF565MA						(1152K +64K) x2	128K x2																													
	MB9DF565MG						(640K +64K) x 2	64K x 2																													
	MB9DF566MA						(896K +64K) x 2	96K x 2																													
	MB9DF566MG						(1152K +64K) x2	128K x 2																													
	MB9DF564ML						(640K +64K) x 2	64K x 2																													
	MB9DF564MQ						(896K +64K) x 2	96K x 2																													
	MB9DF565ML						(1152K +64K) x 2	128K x 2																													
	MB9DF565MQ						(640K +64K) x 2	64K x 2																													
	MB9DF566ML						(896K +64K) x 2	96K x 2																													
	MB9DF566MQ						(1152K +64K) x 2	128K x 2																													
	MB9DF564LA		TEQFP -176				(640K +64K) x 2	64K x 2																													
	MB9DF564LG						(896K +64K) x 2	96K x 2																													
	MB9DF565LA						(1152K +64K) x 2	128K x 2																													
	MB9DF565LG						(640K +64K) x 2	64K x 2																													
	MB9DF566LA						(896K +64K) x 2	96K x 2																													
	MB9DF566LG						(1152K +64K) x 2	128K x 2																													
	MB9DF564LL						(640K +64K) x 2	64K x 2																													
	MB9DF564LQ						(896K +64K) x 2	96K x 2																													
	MB9DF565LL						(1152K +64K) x 2	128K x 2																													
	MB9DF565LQ						(640K +64K) x 2	64K x 2																													
	MB9DF566LL						(896K +64K) x 2	96K x 2																													
	MB9DF566LQ						(1152K +64K) x 2	128K x 2																													

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch](unit)]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer								Serial		Communication			Three-phase Inverter	Note	Evaluation Device		
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]				CAN [ch]	USB-Host [ch]
CAN/AUTOMOTIVE																																		
S6J3120	S6J3128HA	112	TEQFP -144	4.5 to 5.25	-	Main Flash +Work Flash	576K + 48K	TC-RAM: 32KB System -RAM: 16KB Backup -RAM: 8KB	Instruction: 16 Data: 16	16	16	A24/D16	112	50(2)	-	-	12	6	12	16bit Base Timer x 30ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 10ch (LIN/UART/SIO Selectable)	CAN-FD x 3ch	-	-	32 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 4ch, Sound generator x 3ch	On-Chip Debug				
	S6J3129HA		832K + 48K	TC-RAM: 48KB System -RAM: 16KB Backup -RAM: 8KB																														
	S6J312AHA		1088K +112K	TC-RAM: 64KB System -RAM: 16KB Backup -RAM: 8KB																														
S6J3200	S6J32AAKS	160	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	1088K + 112K	TC-RAM: 64KB System -RAM: 128KB Backup -RAM: 16KB VRAM: 1024KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPG/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	-	ARM Cortex-R5, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 1ch	On-Chip Debug				
	S6J32AAKU		TEQFP -216 (0.4mm pitch)																								32 x 4							
	S6J32AALS																										30 x 4							
	S6J32AALU		TEQFP -208																								30 x 4							
	S6J32BAKS		TEQFP -208																								TEQFP -216 (0.4mm pitch)		32 x 4					
	S6J32BAKU		32 x 4																															
	S6J32BALS		TEQFP -216 (0.4mm pitch)																								32 x 4							
	S6J32BALU		TEQFP -208																								30 x 4							
	S6J32CAKS		TEQFP -208																								30 x 4							
	S6J32CAKU		TEQFP -216 (0.4mm pitch)																								32 x 4							
	S6J32CALS		TEQFP -208																								30 x 4							
	S6J32CALU		TEQFP -216 (0.4mm pitch)																								32 x 4							
	S6J32DAKS		TEQFP -208																								30 x 4							
	S6J32DAKU		TEQFP -216 (0.4mm pitch)																								32 x 4							
	S6J32DALS		TEQFP -208																								30 x 4							
S6J32DALU	TEQFP -216 (0.4mm pitch)	32 x 4																																

Traveo Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	12bit AD Converter [ch/unit]	12bit AD Converter with 4ch sample & hold	DA Converter [bit x ch]	Timer								Serial			Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]				
CAN/AUTOMOTIVE																																		
S6J3200	S6J323CKS	240	TEQFP -208	1.1 to 1.3 3.0 to 3.6 4.5 to 5.5	✓	Main Flash +Work Flash	2112K + 112K	TC-RAM: 128KB System - RAM: 128KB Backup - RAM: 16KB VRAM: 2048KB	Instruction: 16 Data: 16	16	16	-	120	46(1)	-	-	24	12	24	Reload Timer x 14ch 16bit Base Timer x 24ch (PWM/PPC/Reload/PWC Selectable)	2	RTC x 1ch	Multi Function Serial x 12ch (LIN/UART/SIO/I2C Selectable)	CAN-FD x 4ch	-	-	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch,	On-Chip Debug					
	S6J323CKU		TEQFP -216 (0.4mm pitch)																											32 x 4	SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch,			
	S6J323CLS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J324CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system,			
	S6J325CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch,			
	S6J325CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch,			
	S6J325CLS		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch,			
	S6J326CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J326CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J326CLS		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J326CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J327CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J327CKU		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system,			
	S6J327CLS		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system			
	S6J327CLU		TEQFP -216 (0.4mm pitch)																											32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D Graphic Engine, Display Output x 2ch, Sound system			
	S6J328CKS		TEQFP -208																											30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system			
S6J328CKU	TEQFP -208	30 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system																															
S6J328CLS	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system																															
S6J328CLU	TEQFP -216 (0.4mm pitch)	32 x 4	ARM Cortex-R5, Ethernet AVB, Media-LB, SHE(Secure Hardware Extension), SMC x 6ch, Sound generator x 4ch, 2D+3D Graphic Engine, Display Output x 2ch, FPD-Link, Sound system																															

FCR4 Family – 32bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer										Serial		Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I2C [ch]	UART/SPI [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]				
HYBRID AUTOMOTIVE INSTRUMENTS CLUSTER																																			
MB9DF125	MB9DF125PMC	128	LQFP-176	1.1 to 1.3 3.0 to 5.5	✓	FLASH	1088	128	8	8	32	-	123	50(1)	-	-	8	8	8	10	-	-	24	2	-	1	2	3	2	2	-	-	-	ARM Cortex R4, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 4 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 1 ch, NMI (intern/extern): 32/1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug
	MB9DF125EPMC																																ARM Cortex R4, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 6 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 1 ch, NMI (intern/extern): 32/1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug	
MB9DF126	MB9DF126BPMC	128	LQFP-176	1.1 to 1.3 3.0 to 5.5	✓	FLASH	2176	208	16	8	32	-	110	50(1)	-	-	8	8	8	10	-	-	24	2	-	1	2	3	2	3	-	-	-	ARM Cortex R4, APIX Remote handler with 2 ch AIC (APIX Inter Connect), APIX1 Phy: 1 ch, Real Time Clock, Stepper Motor Controller (SMC): 6 ch, Data Flash: 64KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 1 ch, NMI (intern/extern): 32/1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug
MB9EF226	MB9EF226PMC	128	LQFP-176	1.1 to 1.3 3.0 to 5.5	✓	FLASH	2176	128	16	8	32	-	117	50(1)	-	-	8	8	8	10	-	-	24	2	-	1	2	3	2	2	-	-	-	ARM Cortex R4, 2D Graphics Engine: scaler, color palette, gamma correction, blending, raster operation, various alpha blending modes, run-length decoding, hor/ver flip and rotation, affine transformations, Embedded Video-RAM: 1MB, TFT Output Interface: RGB888/RSDS Output, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 4 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 2 ch(1 ch for MCU and 1 ch for Graphic), NMI (intern/extern): 32/1 ch, MediaLB (3 wire): 1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug
	MB9EF226EPMC																																	ARM Cortex R4, 2D Graphics Engine: scaler, color palette, gamma correction, blending, raster operation, various alpha blending modes, run-length decoding, hor/ver flip and rotation, affine transformations, Embedded Video-RAM: 1MB, TFT Output Interface: RGB888/RSDS Output, SHE (Secure Hardware Extension), Real Time Clock, Stepper Motor Controller (SMC): 6 ch, Data Flash: 48KB, Windows Watchdog, Clock supervisor, Sound Generator, I2S: 2 ch, Quad SPI Flash Interface: 2 ch(1 ch for MCU and 1 ch for Graphic), NMI (intern/extern): 32/1 ch, MediaLB (3 wire): 1 ch, CRC Hardware Module: 1 ch, Protection Unit: MPU, PPU, TPU, various Power Down modes	On-chip Debug

F²MC-16FX – 16bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer										Serial		Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device																																							
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/Sl [ch]	SIO [ch]	LIN/UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]																																						
AUTOMOTIVE																																																																										
MB96340	MB96345RS	56	LQFP-100	3.0 to 5.5	-	MASK	160K	8K	-	6	16	✓	24(1)	-	-	8	2	8	4 +1 (Dedicated for PPG)	-	16	-	-	-	2	-	-	7	2	-	-	-	-	Option without CAN	MB96V300C																																							
	MB96345RW				✓		288K	16K																					80																																													
	MB96346RS				-																								82																																													
	MB96346RW				✓																								80																																													
	MB96F345DS	40			-	FLASH	160K +64K	8K																					82							2	-	-	-	-	-	2	-	-	4	1																												
	MB96F345DW				✓																								80																																													
	MB96F346AS				-																								82																																													
	MB96F346AW				✓																								80																																													
	MB96F346RS				-																								82																																													
	MB96F346RW				✓																								80																																													
	MB96F347AS				-																								82																																													
	MB96F347AW				✓																								80																																													
	MB96F347RS				-																								82																																													
	MB96F347RW				✓																								80																																													
	MB96F348AS				-																								82																																													
	MB96F348AW				✓																								80																																													
	MB96F348RS				-																								82																																													
	MB96F348RW				✓																								80																																													
	MB96F348HS				-																								82																																													
	MB96F348HW				✓																								80																																													
MB96F348HW	4	2																																																																								
MB96350	MB96F353AS	56	LQFP-64	3.0 to 5.5	-	FLASH	96K	8K	-	4	13	✓	15(1)	-	-	4	4	6 +3 (Dedicated for LIN)	4 +1 (Dedicated for PPG)	-	-	20	-	-	1	-	-	4	1	-	-	-	-	Option without CAN	MB96V300C																																							
	MB96F353AW				✓																								49																																													
	MB96F353RS				-																								51																																													
	MB96F353RW				✓																								49																																													
	MB96F355AS				-																								51																																													
	MB96F355AW				✓																								49																																													
	MB96F355RS				-																								51																																													
	MB96F355RW				✓																								49																																													
	MB96F356AS				-																								51																																													
	MB96F356AW				✓																								49																																													
	MB96F356RS				-																								51																																													
	MB96F356RW				✓																								49																																													
	MB96F378HS				40		LQFP-144	3.0 to 5.5																					-							FLASH	544K +32K	28K	-	7	8	✓	22(1)	-	-	6	2	8	4 +1 (Dedicated for PPG)	-	-	12	-	-	2	-	-	6	2	-	-	72 x 4	-	SMC x 6ch Sound generator x 2ch	MB96V300C									
	MB96F378HW																												✓																														118															
MB96F379RS	-			120																																																																						
MB96F379RW	✓			118																																																																						
MB96380	MB96384RS	56	LQFP-120	3.0 to 5.5	-	MASK	128K	6K	-	7	8	✓	16(1)	-	-	4	2	8	4 +1 (Dedicated for PPG)	5	-	8	-	-	1	-	-	5	1	-	-	65 x 4	-	SMC x 5ch Sound generator x 2ch	MB96V300C																																							
	MB96384RW				✓																								96																																													
	MB96385RS				-																								94																																													
	MB96385RW				✓																								96																																													
	MB96F385RS	40			-	FLASH	160K	6K																					96							2	-	-	-	-	1	-	-	3	2																													
	MB96F385RW				✓																								94																																													
	MB96F386RS				-																								96																																													
	MB96F386RW				✓																								94																																													
	MB96F387RS				-																								96																																													
	MB96F387RW				✓																								94																																													
	MB96F388HS				-																								96																																													
	MB96F388HW				✓																								94																																													
	MB96F389RS	40			-	FLASH	544K +32K	28K																					96							2	-	-	-	-	1	-	-	3	1																													
	MB96F389RW				✓																								94																																													
	MB96393RS				40		LQFP-100	3.0 to 5.5																					-																MASK	96K	5K	-	-	8	-	11(1)	-	-	4	2	4	4 +1 (Dedicated for PPG)	4	-	4	-	-	1	-	-	3	1	-	-	49 x 4	-	SMC x 4ch Sound generator x 1ch	MB96V300C
	MB96393RW																												✓																																							76						
MB96395RS	-			74																																																																						
MB96395RW	✓			76																																																																						
MB96F395RS	40	-	FLASH	160K	8K	76	2	-	-	8	-	76	2	-	-	4	2	4	4 +1 (Dedicated for PPG)	4	-	4	-	-	1	-	-	3	1	-	-	49 x 4	-	SMC x 4ch Sound generator x 1ch	MB96V300C																																							
MB96F395RW		✓				74																																																																				

F²MC-16FX – 16bit Microcontrollers

Series Name	Product Name	Maximum Internal Clock Frequency [MHz]	Package [pin]	Operating Voltage: VCC [V]	Sub Clock	Memory Type	ROM [byte]	RAM [byte]	Cache [Kbyte]	DMAC [ch]	Ext. Interrupt [ch]	External Bus	Maximum I/O port [ch]	10bit AD Converter [ch/unit]	12bit AD Converter [ch/unit]	DA Converter [bit x ch]	Timer								Serial				Communication			LCD Controller [seg x com]	Three-phase Inverter	Note	Evaluation Device	
																	Output Compare [ch]	Free-Run Timer [ch]	Input Capture [ch]	Reload Timer [ch]	PWM Timer [ch]	PWC Timer [ch]	PPG Timer [ch]	Up/Down Counter [ch]	Other timers [ch]	I ² C [ch]	UART/SI [ch]	SIO [ch]	LIN UART/SIO [ch]	CAN [ch]	USB-Host [ch]					USB-Function [ch]
AUTOMOTIVE																																				
MB96610	MB96F612A	32	LQFP-48	2.7 to 5.5	✓	Dual Op. Flash	32.5K +32K	4K	-	2	11	-	37 (Single clock) 35 (Dual clock)	16(1)	-	-	5	4	4 +3 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	-	QPRC x 2	-	-	-	3	-	-	-	-	-	Option without CAN	On-chip Debug
	MB96F612R																																			
	MB96F613A																																			
	MB96F613R																																			
	MB96F615A																																			
MB96620	MB96F615R	32	LQFP-64	2.7 to 5.5	✓	Dual Op. Flash	128.5K +32K	4K	-	2	13	-	52 (Single clock) 50 (Dual clock)	21(1)	-	-	6	4	6 +2 (Dedicated for LIN)	2 +1 (Dedicated for PPG)	-	-	8bit x 16 16bit x 8	-	QPRC x 2	1	-	-	3	-	-	-	-	-	Option without CAN	On-chip Debug
	MB96F622A																																			
	MB96F622R																																			
	MB96F623A																																			
	MB96F623R																																			
MB96630	MB96F625A	32	LQFP-80	2.7 to 5.5	✓	Dual Op. Flash	128.5K +32K	10K	-	4	15	-	64 (Single clock) 66 (Dual clock)	21(1)	-	-	7	3	6 +1 (Dedicated for LIN)	3	-	-	8bit x 20 16bit x 15	-	QPRC x 2	2	-	-	5	-	-	-	-	-	Option without CAN	On-chip Debug
	MB96F625R																																			
	MB96F633A																																			
	MB96F633R																																			
	MB96F635A																																			
MB96640	MB96F635R	32	LQFP-100	2.7 to 5.5	✓	Dual Op. Flash	256.5K +32K	16K	-	4	16	-	81 (Single clock) 79 (Dual clock)	24(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 24 16bit x 16	-	QPRC x 2	2	-	-	6	-	-	-	-	-	Option without CAN	On-chip Debug
	MB96F636R																																			
	MB96F637R																																			
	MB96F643A																																			
	MB96F643R																																			
MB96650	MB96F645A	32	LQFP-120	2.7 to 5.5	✓	Dual Op. Flash	128.5K +32K	10K	-	4	16	-	101 (Single clock) 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	-	QPRC x 2	2	-	-	6	-	-	-	-	-	Option without CAN	On-chip Debug
	MB96F645R																																			
	MB96F646R																																			
	MB96F647R																																			
	MB96F653A																																			
MB96670	MB96F653R	32	LQFP-64	2.7 to 5.5	✓	Dual Op. Flash	128.5K +32K	16K	-	4	16	-	101 (Single clock) 99 (Dual clock)	29(1)	-	-	7	3	6 +1 (Dedicated for LIN)	5	-	-	8bit x 32 16bit x 16	-	QPRC x 2	2	-	-	6	-	-	-	-	-	Option without CAN	On-chip Debug
	MB96F655A																																			
	MB96F655R																																			
	MB96F656R																																			
	MB96F657R																																			
MB96680	MB96F657R	32	LQFP-80	2.7 to 5.5	✓	Dual Op. Flash	64.5K +32K	4K	-	2	7	-	65 (Single clock) 63 (Dual clock)	14(1)	-	-	-	2	4	3	-	-	8bit x 8 16bit x 4	-	-	1	-	-	2	-	-	-	32 x 4	-	SMC x 2ch Sound generator Option without CAN	On-chip Debug
	MB96F673A																																			
	MB96F673R																																			
	MB96F675A																																			
MB96690	MB96F675R	32	LQFP-100	2.7 to 5.5	✓	Dual Op. Flash	128.5K +32K	8K	-	4	16	-	79 (Single clock) 77 (Dual clock)	27(1)	-	-	4	2	6	5	-	-	8bit x 14 16bit x 10	-	-	1	-	-	5	-	-	-	36 x 4	-	SMC x 4ch Sound generator x 2ch Option without CAN	On-chip Debug
	MB96F683A																																			
	MB96F683R																																			
	MB96F685A																																			
MB966A0	MB96F685R	32	LQFP-120	2.7 to 5.5	✓	Dual Op. Flash	256.5K +32K	16K	-	4	16	-	97 (Single clock) 95 (Dual clock)	32(1)	-	-	4	2	8	5	-	-	8bit x 24 16bit x 12	-	-	1	-	-	5	-	-	-	44 x 4	-	SMC x 5ch Sound generator x 2ch Option without CAN	On-chip Debug
	MB96F6A5A																																			
	MB96F6A5R																																			
MB966B0	MB96F6A6R	32	LQFP-100	2.7 to 5.5	✓	Dual Op. Flash	128.5K +32K	8K	-	4	16	-	79 (Single clock) 77 (Dual clock)	27(1)	-	-	4	2	6	5	-	-	8bit x 16 16bit x 12	-	QPRC x 2	1	-	-	5	-	-	-	36 x 4	-	Sound generator x 2ch Option without CAN	On-chip Debug
	MB96F6B5A																																			
	MB96F6B5R																																			
MB966C0	MB96F6B6R	32	LQFP-120	2.7 to 5.5	✓	Dual Op. Flash	256.5K +32K	16K	-	4	16	-	99 (Single clock) 97 (Dual clock)	32(1)	-	-	4	2	8	5	-	-	8bit x 16 16bit x 12	-	QPRC x 2	1	-	-	5	-	-	-	44 x 4	-	Sound generator x 2ch Option without CAN	On-chip Debug
	MB96F6C5A																																			
	MB96F6C5R																																			
	MB96F6C6R						128.5K +32K	8K		4	16																									
	256.5K +32K																																			