


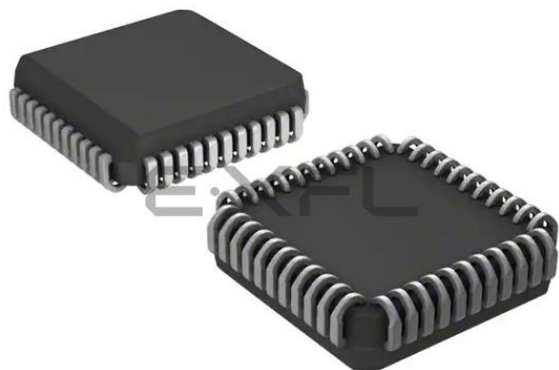

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                            |
| Number of LABs/CLBs            | -                                                                                                                                                                 |
| Number of Logic Elements/Cells | -                                                                                                                                                                 |
| Total RAM Bits                 | -                                                                                                                                                                 |
| Number of I/O                  | 34                                                                                                                                                                |
| Number of Gates                | 3000                                                                                                                                                              |
| Voltage - Supply               | 3V ~ 3.6V, 4.5V ~ 5.5V                                                                                                                                            |
| Mounting Type                  | Surface Mount                                                                                                                                                     |
| Operating Temperature          | -40°C ~ 85°C (TA)                                                                                                                                                 |
| Package / Case                 | 44-LCC (J-Lead)                                                                                                                                                   |
| Supplier Device Package        | 44-PLCC (16.59x16.59)                                                                                                                                             |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a40mx02-1plg44i">https://www.e-xfl.com/product-detail/microchip-technology/a40mx02-1plg44i</a> |

# Figures

|           |                                                                                                                               |     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------|-----|
| Figure 1  | Ordering Information                                                                                                          | 3   |
| Figure 2  | 42MX C-Module Implementation                                                                                                  | 7   |
| Figure 3  | 42MX C-Module Implementation                                                                                                  | 7   |
| Figure 4  | 42MX S-Module Implementation                                                                                                  | 8   |
| Figure 5  | A42MX24 and A42MX36 D-Module Implementation                                                                                   | 9   |
| Figure 6  | A42MX36 Dual-Port SRAM Block                                                                                                  | 9   |
| Figure 7  | MX Routing Structure                                                                                                          | 10  |
| Figure 8  | Clock Networks of 42MX Devices                                                                                                | 11  |
| Figure 9  | Quadrant Clock Network of A42MX36 Devices                                                                                     | 11  |
| Figure 10 | 42MX I/O Module                                                                                                               | 12  |
| Figure 11 | PCI Output Structure of A42MX24 and A42MX36 Devices                                                                           | 12  |
| Figure 12 | Silicon Explorer II Setup with 40MX                                                                                           | 16  |
| Figure 13 | Silicon Explorer II Setup with 42MX                                                                                           | 17  |
| Figure 14 | 42MX IEEE 1149.1 Boundary Scan Circuitry                                                                                      | 18  |
| Figure 15 | Device Selection Wizard                                                                                                       | 19  |
| Figure 16 | Typical Output Drive Characteristics (Based Upon Measured Data)                                                               | 28  |
| Figure 17 | 40MX Timing Model*                                                                                                            | 30  |
| Figure 18 | 42MX Timing Model                                                                                                             | 30  |
| Figure 19 | 42MX Timing Model (Logic Functions Using Quadrant Clocks)                                                                     | 31  |
| Figure 20 | 42MX Timing Model (SRAM Functions)                                                                                            | 32  |
| Figure 21 | Output Buffer Delays                                                                                                          | 32  |
| Figure 22 | AC Test Loads                                                                                                                 | 33  |
| Figure 23 | Input Buffer Delays                                                                                                           | 33  |
| Figure 24 | Module Delays                                                                                                                 | 33  |
| Figure 25 | Flip-Flops and Latches                                                                                                        | 34  |
| Figure 26 | Input Buffer Latches                                                                                                          | 34  |
| Figure 27 | Output Buffer Latches                                                                                                         | 35  |
| Figure 28 | Decode Module Timing                                                                                                          | 35  |
| Figure 29 | SRAM Timing Characteristics                                                                                                   | 35  |
| Figure 30 | 42MX SRAM Write Operation                                                                                                     | 36  |
| Figure 31 | 42MX SRAM Synchronous Read Operation                                                                                          | 36  |
| Figure 32 | 42MX SRAM Asynchronous Read Operation—Type 1 (Read Address Controlled)                                                        | 36  |
| Figure 33 | 42MX SRAM Asynchronous Read Operation—Type 2 (Write Address Controlled)                                                       | 37  |
| Figure 34 | 42MX Junction Temperature and Voltage Derating Curves<br>(Normalized to $T_J = 25^\circ\text{C}$ , $V_{CCA} = 5.0\text{ V}$ ) | 38  |
| Figure 35 | 40MX Junction Temperature and Voltage Derating Curves<br>(Normalized to $T_J = 25^\circ\text{C}$ , $V_{CC} = 5.0\text{ V}$ )  | 39  |
| Figure 36 | 42MX Junction Temperature and Voltage Derating Curves<br>(Normalized to $T_J = 25^\circ\text{C}$ , $V_{CCA} = 3.3\text{ V}$ ) | 39  |
| Figure 37 | 40MX Junction Temperature and Voltage Derating Curves<br>(Normalized to $T_J = 25^\circ\text{C}$ , $V_{CC} = 3.3\text{ V}$ )  | 40  |
| Figure 38 | PL44                                                                                                                          | 86  |
| Figure 39 | PL68                                                                                                                          | 88  |
| Figure 40 | PL84                                                                                                                          | 90  |
| Figure 41 | PQ100                                                                                                                         | 93  |
| Figure 42 | PQ144                                                                                                                         | 97  |
| Figure 43 | PQ160                                                                                                                         | 102 |
| Figure 44 | PQ208                                                                                                                         | 107 |
| Figure 45 | PQ240                                                                                                                         | 113 |
| Figure 46 | VQ80                                                                                                                          | 120 |
| Figure 47 | VQ100                                                                                                                         | 123 |
| Figure 48 | TQ176                                                                                                                         | 126 |
| Figure 49 | CQ208                                                                                                                         | 131 |
| Figure 50 | CQ256                                                                                                                         | 138 |

### 3.9.1 Mixed 5.0V/3.3V Electrical Specifications

**Table 22 • Mixed 5.0V/3.3V Electrical Specifications**

| Symbol                                                                                                                                                                                                | Parameter        | Commercial |            | Commercial –F |            | Industrial |            | Military  |            | Units |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------|------------|---------------|------------|------------|------------|-----------|------------|-------|
|                                                                                                                                                                                                       |                  | Min.       | Max.       | Min.          | Max.       | Min.       | Max.       | Min.      | Max.       |       |
| VOH <sup>1</sup>                                                                                                                                                                                      | IOH = –10 mA     | 2.4        |            | 2.4           |            |            |            |           |            | V     |
|                                                                                                                                                                                                       | IOH = –4 mA      |            |            |               |            | 2.4        |            | 2.4       |            | V     |
| VOL <sup>1</sup>                                                                                                                                                                                      | IOL = 10 mA      | 0.5        |            | 0.5           |            |            |            |           |            | V     |
|                                                                                                                                                                                                       | IOL = 6 mA       |            |            |               |            | 0.4        |            | 0.4       |            | V     |
| VIL                                                                                                                                                                                                   |                  | –0.3       | 0.8        | –0.3          | 0.8        | –0.3       | 0.8        | –0.3      | 0.8        | V     |
| VIH <sup>2</sup>                                                                                                                                                                                      |                  | 2.0        | VCCA + 0.3 | 2.0           | VCCA + 0.3 | 2.0        | VCCA + 0.3 | 2.0       | VCCA + 0.3 | V     |
| IL                                                                                                                                                                                                    | VIN = 0.5 V      | –10        |            | –10           |            | –10        |            | –10       |            | μA    |
| IH                                                                                                                                                                                                    | VIN = 2.7 V      | –10        |            | –10           |            | –10        |            | –10       |            | μA    |
| Input Transition Time, TR and TF                                                                                                                                                                      |                  | 500        |            | 500           |            | 500        |            | 500       |            | ns    |
| C <sub>IO</sub> I/O Capacitance                                                                                                                                                                       |                  | 10         |            | 10            |            | 10         |            | 10        |            | pF    |
| Standby Current, ICC <sup>3</sup>                                                                                                                                                                     | A42MX09          | 5          |            | 25            |            | 25         |            | 25        |            | mA    |
|                                                                                                                                                                                                       | A42MX16          | 6          |            | 25            |            | 25         |            | 25        |            | mA    |
|                                                                                                                                                                                                       | A42MX24, A42MX36 | 20         |            | 25            |            | 25         |            | 25        |            | mA    |
| Low Power Mode Standby Current                                                                                                                                                                        |                  | 0.5        |            | ICC – 5.0     |            | ICC – 5.0  |            | ICC – 5.0 |            | mA    |
| I/O I/O source sink current Can be derived from the <i>IBIS model</i> ( <a href="http://www.microsemi.com/soc/techdocs/models/ibis.html">http://www.microsemi.com/soc/techdocs/models/ibis.html</a> ) |                  |            |            |               |            |            |            |           |            |       |

1. Only one output tested at a time. VCCI = min.

2. VIH(Min) is 2.4V for A42MX36 family. This applies only to VCCI of 5V and is not applicable to VCCI of 3.3V

3. All outputs unloaded. All inputs = VCCI or GND

### 3.9.2 Output Drive Characteristics for 5.0 V PCI Signaling

MX PCI device I/O drivers were designed specifically for high-performance PCI systems. Figure 16, page 28 shows the typical output drive characteristics of the MX devices. MX output drivers are compliant with the PCI Local Bus Specification.

**Table 23 • DC Specification (5.0 V PCI Signaling)<sup>1</sup>**

| Symbol           | Parameter                  | Condition                    | PCI  |           | MX   |                   | Units |
|------------------|----------------------------|------------------------------|------|-----------|------|-------------------|-------|
|                  |                            |                              | Min. | Max.      | Min. | Max.              |       |
| VCCI             | Supply Voltage for I/Os    |                              | 4.75 | 5.25      | 4.75 | 5.25 <sup>2</sup> | V     |
| VIH <sup>3</sup> | Input High Voltage         |                              | 2.0  | VCC + 0.5 | 2.0  | VCCI + 0.3        | V     |
| VIL              | Input Low Voltage          |                              | –0.5 | 0.8       | –0.3 | 0.8               | V     |
| IIH              | Input High Leakage Current | VIN = 2.7 V                  |      | 70        | —    | 10                | μA    |
| IIL              | Input Low Leakage Current  | VIN=0.5 V                    |      | –70       | —    | –10               | μA    |
| VOH              | Output High Voltage        | IOUT = –2 mA<br>IOUT = –6 mA | 2.4  |           | 3.84 |                   | V     |
| VOL              | Output Low Voltage         | IOUT = 3 mA, 6 mA            |      | 0.55      | —    | 0.33              | V     |

A sample calculation of the absolute maximum power dissipation allowed for a TQ176 package at commercial temperature and still air is given in the following equation

$$\text{MaximumPowerAllowed} = \frac{\text{Max} \cdot \text{junction temp} \cdot (^\circ\text{C}) - \text{Max} \cdot \text{ambient temp} \cdot (^\circ\text{C})}{\theta_{ja}(^\circ\text{C}/\text{W})} = \frac{150^\circ\text{C} - 70^\circ\text{C}}{(28^\circ\text{C})/\text{W}} = 2.86\text{W}$$

EQ 5


The maximum power dissipation for military-grade devices is a function of  $\theta_{jc}$ . A sample calculation of the absolute maximum power dissipation allowed for CQFP 208-pin package at military temperature and still air is given in the following equation

$$\text{MaximumPowerAllowed} = \frac{\text{Max} \cdot \text{junction temp} \cdot (^\circ\text{C}) - \text{Max} \cdot \text{ambient temp} \cdot (^\circ\text{C})}{\theta_{jc}(^\circ\text{C}/\text{W})} = \frac{150^\circ\text{C} - 125^\circ\text{C}}{(6.3^\circ\text{C})/\text{W}} = 3.97\text{W}$$

EQ 6

**Table 27 • Package Thermal Characteristics**


| Plastic Packages                 | Pin Count | $\theta_{jc}$ | $\theta_{ja}$ |                        |                        | Units                     |
|----------------------------------|-----------|---------------|---------------|------------------------|------------------------|---------------------------|
|                                  |           |               | Still Air     | 1.0 m/s<br>200 ft/min. | 2.5 m/s<br>500 ft/min. |                           |
| Plastic Quad Flat Pack           | 100       | 12.0          | 27.8          | 23.4                   | 21.2                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 144       | 10.0          | 26.2          | 22.8                   | 21.1                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 160       | 10.0          | 26.2          | 22.8                   | 21.1                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 208       | 8.0           | 26.1          | 22.5                   | 20.8                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 240       | 8.5           | 25.6          | 22.3                   | 20.8                   | $^\circ\text{C}/\text{W}$ |
| Plastic Leaded Chip Carrier      | 44        | 16.0          | 20.0          | 24.5                   | 22.0                   | $^\circ\text{C}/\text{W}$ |
| Plastic Leaded Chip Carrier      | 68        | 13.0          | 25.0          | 21.0                   | 19.4                   | $^\circ\text{C}/\text{W}$ |
| Plastic Leaded Chip Carrier      | 84        | 12.0          | 22.5          | 18.9                   | 17.6                   | $^\circ\text{C}/\text{W}$ |
| Thin Plastic Quad Flat Pack      | 176       | 11.0          | 24.7          | 19.9                   | 18.0                   | $^\circ\text{C}/\text{W}$ |
| Very Thin Plastic Quad Flat Pack | 80        | 12.0          | 38.2          | 31.9                   | 29.4                   | $^\circ\text{C}/\text{W}$ |
| Very Thin Plastic Quad Flat Pack | 100       | 10.0          | 35.3          | 29.4                   | 27.1                   | $^\circ\text{C}/\text{W}$ |
| Plastic Ball Grid Array          | 272       | 3.0           | 18.3          | 14.9                   | 13.9                   | $^\circ\text{C}/\text{W}$ |
| <b>Ceramic Packages</b>          |           |               |               |                        |                        |                           |
| Ceramic Pin Grid Array           | 132       | 4.8           | 25.0          | 20.6                   | 18.7                   | $^\circ\text{C}/\text{W}$ |
| Ceramic Quad Flat Pack           | 208       | 2.0           | 22.0          | 19.8                   | 18.0                   | $^\circ\text{C}/\text{W}$ |
| Ceramic Quad Flat Pack           | 256       | 2.0           | 20.0          | 16.5                   | 15.0                   | $^\circ\text{C}/\text{W}$ |

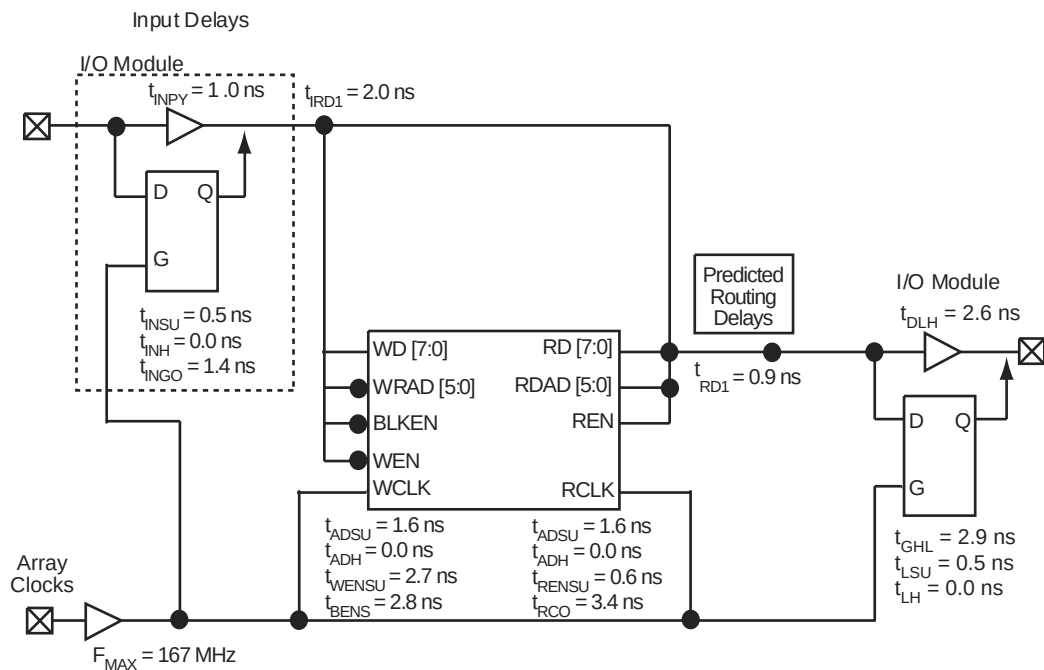**Figure 20 • 42MX Timing Model (SRAM Functions)**

**Note:** Values are shown for A42MX36 –3 at 5.0 V worst-case commercial conditions.

### 3.10.1 Parameter Measurement


The following figures show parameter measurement details.

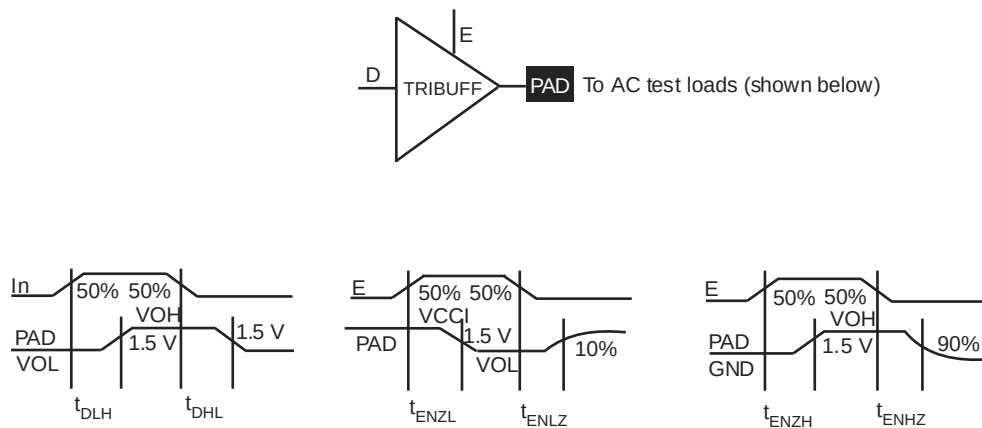**Figure 21 • Output Buffer Delays**

### 3.10.2 Sequential Module Timing Characteristics

The following figure shows sequential module timing characteristics.

**Figure 25 • Flip-Flops and Latches**

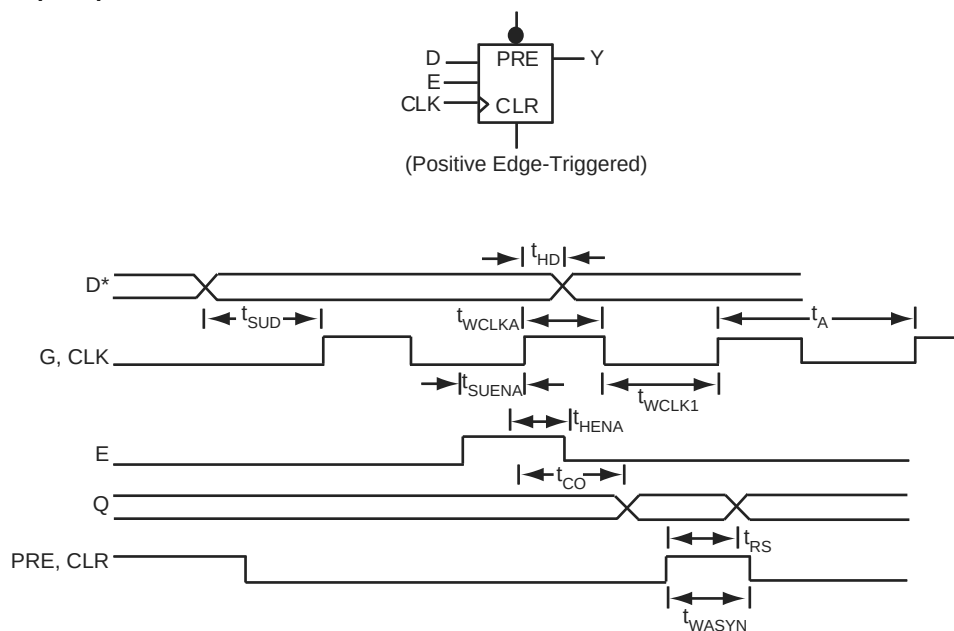



**Note:** \*D represents all data functions involving A, B, and S for multiplexed flip-flops.

### 3.10.3 Sequential Timing Characteristics

The following figures show sequential timing characteristics.

**Figure 26 • Input Buffer Latches**

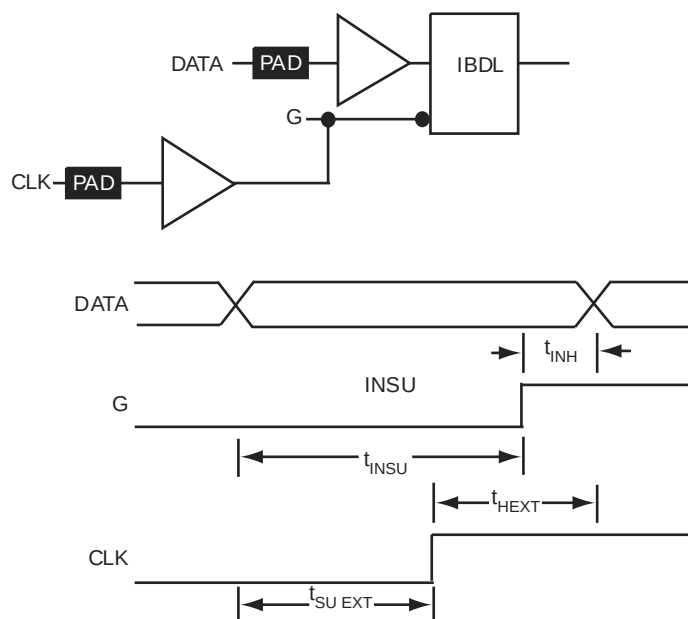


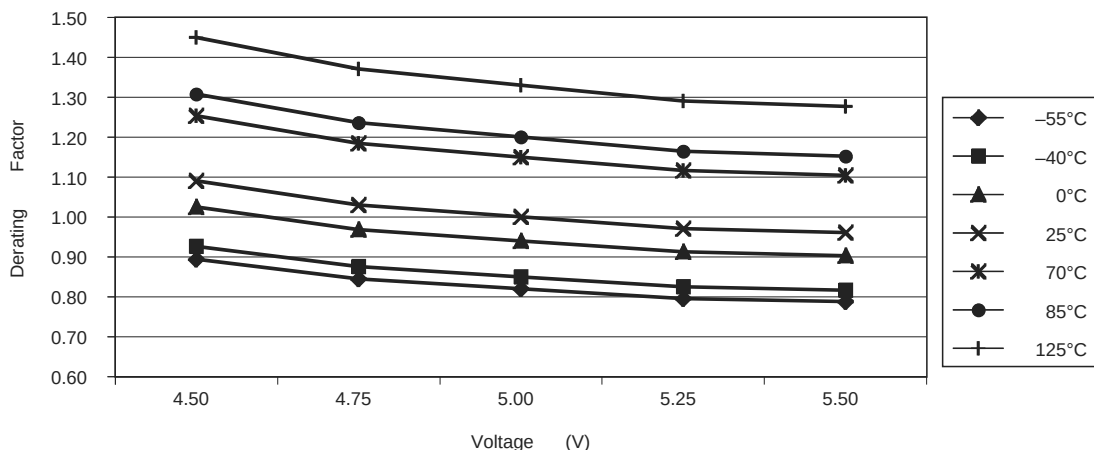**Figure 35 • 40MX Junction Temperature and Voltage Derating Curves (Normalized to  $T_J = 25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V}$ )**

**Note:** This derating factor applies to all routing and propagation delays

**Table 30 • 42MX Temperature and Voltage Derating Factors (Normalized to  $T_J = 25^\circ\text{C}$ ,  $V_{CCA} = 3.3\text{ V}$ )**

| 42MX Voltage | Temperature |       |      |      |      |      |       |
|--------------|-------------|-------|------|------|------|------|-------|
|              | -55°C       | -40°C | 0°C  | 25°C | 70°C | 85°C | 125°C |
| 3.00         | 0.97        | 1.00  | 1.10 | 1.15 | 1.32 | 1.36 | 1.45  |
| 3.30         | 0.84        | 0.87  | 0.96 | 1.00 | 1.15 | 1.18 | 1.26  |
| 3.60         | 0.81        | 0.84  | 0.92 | 0.96 | 1.10 | 1.13 | 1.21  |

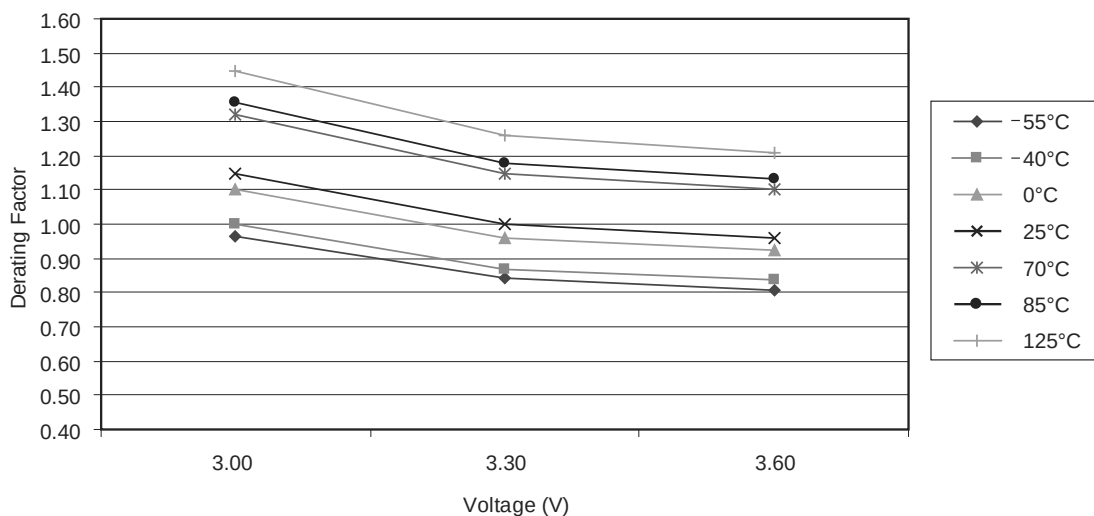**Figure 36 • 42MX Junction Temperature and Voltage Derating Curves (Normalized to  $T_J = 25^\circ\text{C}$ ,  $V_{CCA} = 3.3\text{ V}$ )**

**Note:** This derating factor applies to all routing and propagation delays

**Table 31 • 40MX Temperature and Voltage Derating Factors (Normalized to  $T_J = 25^\circ\text{C}$ ,  $V_{CC} = 3.3\text{ V}$ )**

| 40MX Voltage | Temperature |       |      |      |      |      |       |
|--------------|-------------|-------|------|------|------|------|-------|
|              | -55°C       | -40°C | 0°C  | 25°C | 70°C | 85°C | 125°C |
| 3.00         | 1.08        | 1.12  | 1.21 | 1.26 | 1.50 | 1.64 | 2.00  |
| 3.30         | 0.86        | 0.89  | 0.96 | 1.00 | 1.19 | 1.30 | 1.59  |

**Table 35 • A40MX02 Timing Characteristics (Nominal 3.3 V Operation) (continued)**  
**(Worst-Case Commercial Conditions, VCC = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description               |                      |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|---------------------------------------|----------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                       |                      |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| t <sub>p</sub>                        | Minimum Period       | FO = 16  | 6.5      |      | 7.5      |      | 8.5      |      | 10.1      |      | 14.1     |      | ns    |
|                                       |                      | FO = 128 | 6.8      |      | 7.8      |      | 8.9      |      | 10.4      |      | 14.6     |      |       |
| f <sub>MAX</sub>                      | Maximum Frequency    | FO = 16  |          | 113  |          | 105  |          | 96   |           | 83   |          | 50   | MHz   |
|                                       |                      | FO = 128 |          | 109  |          | 101  |          | 92   |           | 80   |          | 48   |       |
| TTL Output Module Timing <sup>4</sup> |                      |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                      | Data-to-Pad HIGH     |          |          | 4.7  |          | 5.4  |          | 6.1  |           | 7.2  |          | 10.0 | ns    |
| t <sub>DHL</sub>                      | Data-to-Pad LOW      |          |          | 5.6  |          | 6.4  |          | 7.3  |           | 8.6  |          | 12.0 | ns    |
| t <sub>ENZH</sub>                     | Enable Pad Z to HIGH |          |          | 5.2  |          | 6.0  |          | 6.8  |           | 8.1  |          | 11.3 | ns    |
| t <sub>ENZL</sub>                     | Enable Pad Z to LOW  |          |          | 6.6  |          | 7.6  |          | 8.6  |           | 10.1 |          | 14.1 | ns    |
| t <sub>ENHZ</sub>                     | Enable Pad HIGH to Z |          |          | 11.1 |          | 12.8 |          | 14.5 |           | 17.1 |          | 23.9 | ns    |
| t <sub>ENLZ</sub>                     | Enable Pad LOW to Z  |          |          | 8.2  |          | 9.5  |          | 10.7 |           | 12.6 |          | 17.7 | ns    |
| d <sub>TLH</sub>                      | Delta LOW to HIGH    |          |          | 0.03 |          | 0.03 |          | 0.04 |           | 0.04 |          | 0.06 | ns/pF |
| d <sub>THL</sub>                      | Delta HIGH to LOW    |          |          | 0.04 |          | 0.04 |          | 0.05 |           | 0.06 |          | 0.08 | ns/pF |



**Table 36 • A40MX04 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCC = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                                              |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|----------------------------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                                              |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| t <sub>HENA</sub>                                  | Flip-Flop (Latch) Enable Hold                |          | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>WCLKA</sub>                                 | Flip-Flop (Latch) Clock Active Pulse Width   |          | 3.3      |      | 3.8      |      | 4.3      |      | 5.0       |      | 7.0      |      | ns    |
| t <sub>WASYN</sub>                                 | Flip-Flop (Latch) Asynchronous Pulse Width   |          | 3.3      |      | 3.8      |      | 4.3      |      | 5.0       |      | 7.0      |      | ns    |
| t <sub>A</sub>                                     | Flip-Flop Clock Input Period                 |          | 4.8      |      | 5.6      |      | 6.3      |      | 7.5       |      | 10.4     |      | ns    |
| f <sub>MAX</sub>                                   | Flip-Flop (Latch) Clock Frequency (FO = 128) |          |          | 181  |          | 167  |          | 154  |           | 134  |          | 80   | MHz   |
| Input Module Propagation Delays                    |                                              |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>INYH</sub>                                  | Pad-to-Y HIGH                                |          |          | 0.7  |          | 0.8  |          | 0.9  |           | 1.1  |          | 1.5  | ns    |
| t <sub>INYL</sub>                                  | Pad-to-Y LOW                                 |          |          | 0.6  |          | 0.7  |          | 0.8  |           | 1.0  |          | 1.3  | ns    |
| Input Module Predicted Routing Delays <sup>1</sup> |                                              |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay                         |          |          | 2.1  |          | 2.4  |          | 2.2  |           | 3.2  |          | 4.5  | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay                         |          |          | 2.6  |          | 3.0  |          | 3.4  |           | 4.0  |          | 5.6  | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay                         |          |          | 3.1  |          | 3.6  |          | 4.1  |           | 4.8  |          | 6.7  | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay                         |          |          | 3.6  |          | 4.2  |          | 4.8  |           | 5.6  |          | 7.8  | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay                         |          |          | 5.7  |          | 6.6  |          | 7.5  |           | 8.8  |          | 12.4 | ns    |
| Global Clock Network                               |                                              |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input Low to HIGH                            | FO = 16  |          | 4.6  |          | 5.3  |          | 6.0  |           | 7.0  |          | 9.8  | ns    |
|                                                    |                                              | FO = 128 |          | 4.6  |          | 5.3  |          | 6.0  |           | 7.0  |          | 9.8  |       |
| t <sub>CKL</sub>                                   | Input High to LOW                            | FO = 16  |          | 4.8  |          | 5.6  |          | 6.3  |           | 7.4  |          | 10.4 | ns    |
|                                                    |                                              | FO = 128 |          | 4.8  |          | 5.6  |          | 6.3  |           | 7.4  |          | 10.4 |       |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH                     | FO = 16  | 2.2      |      | 2.6      |      | 2.9      |      | 3.4       |      | 4.8      |      | ns    |
|                                                    |                                              | FO = 128 | 2.4      |      | 2.7      |      | 3.1      |      | 3.6       |      | 5.1      |      |       |
| t <sub>PWL</sub>                                   | Minimum Pulse Width LOW                      | FO = 16  | 2.2      |      | 2.6      |      | 2.9      |      | 3.4       |      | 4.8      |      | ns    |
|                                                    |                                              | FO = 128 | 2.4      |      | 2.7      |      | 3.01     |      | 3.6       |      | 5.1      |      |       |
| t <sub>CKSW</sub>                                  | Maximum Skew                                 | FO = 16  |          | 0.4  |          | 0.5  |          | 0.5  |           | 0.6  |          | 0.8  | ns    |
|                                                    |                                              | FO = 128 |          | 0.5  |          | 0.6  |          | 0.7  |           | 0.8  |          | 1.2  |       |
| t <sub>P</sub>                                     | Minimum Period                               | FO = 16  | 4.7      |      | 5.4      |      | 6.1      |      | 7.2       |      | 10.0     |      | ns    |
|                                                    |                                              | FO = 128 | 4.8      |      | 5.6      |      | 6.3      |      | 7.5       |      | 10.4     |      |       |
| f <sub>MAX</sub>                                   | Maximum Frequency                            | FO = 16  |          | 188  |          | 175  |          | 160  |           | 139  |          | 83   | MHz   |
|                                                    |                                              | FO = 128 |          | 181  |          | 168  |          | 154  |           | 134  |          | 80   |       |
| TTL Output Module Timing <sup>4</sup>              |                                              |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                                   | Data-to-Pad HIGH                             |          |          | 3.3  |          | 3.8  |          | 4.3  |           | 5.1  |          | 7.2  | ns    |
| t <sub>DHL</sub>                                   | Data-to-Pad LOW                              |          |          | 4.0  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>ENZH</sub>                                  | Enable Pad Z to HIGH                         |          |          | 3.7  |          | 4.3  |          | 4.9  |           | 5.8  |          | 8.0  | ns    |
| t <sub>ENZL</sub>                                  | Enable Pad Z to LOW                          |          |          | 4.7  |          | 5.4  |          | 6.1  |           | 7.2  |          | 10.1 | ns    |
| t <sub>ENHZ</sub>                                  | Enable Pad HIGH to Z                         |          |          | 7.9  |          | 9.1  |          | 10.4 |           | 12.2 |          | 17.1 | ns    |

**Table 36 • A40MX04 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCC = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                |                      | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------|----------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                      | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| CMOS Output Module Timing <sup>1</sup> |                      |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH     |          | 3.9  |          | 4.5  |          | 5.1  |           | 6.05 |          | 8.5  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW      |          | 3.4  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH |          | 3.4  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW  |          | 4.9  |          | 5.6  |          | 6.4  |           | 7.5  |          | 10.5 | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z |          | 7.9  |          | 9.1  |          | 10.4 |           | 12.2 |          | 17.0 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z  |          | 5.9  |          | 6.8  |          | 7.7  |           | 9.0  |          | 12.6 | ns    |
| d <sub>TLH</sub>                       | Delta LOW to HIGH    |          | 0.03 |          | 0.04 |          | 0.04 |           | 0.05 |          | 0.07 | ns/pF |
| d <sub>THL</sub>                       | Delta HIGH to LOW    |          | 0.02 |          | 0.02 |          | 0.03 |           | 0.03 |          | 0.04 | ns/pF |

1. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
2. Set-up times assume fanout of 3. Further testing information can be obtained from the Timer utility
3. The hold time for the DFME1A macro may be greater than 0 ns. Use the Timer utility from the Designer software to check the hold time for this macro.
4. Delays based on 35 pF loading

**Table 37 • A40MX04 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, VCC = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                                     | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|-------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                                     | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Propagation Delays                    |                                     |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>PD1</sub>                                   | Single Module                       |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>PD2</sub>                                   | Dual-Module Macros                  |          | 3.7  |          | 4.3  |          | 4.9  |           | 5.7  |          | 8.0  | ns    |
| t <sub>CO</sub>                                    | Sequential Clock-to-Q               |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>GO</sub>                                    | Latch G-to-Q                        |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>RS</sub>                                    | Flip-Flop (Latch) Reset-to-Q        |          | 1.7  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| Logic Module Predicted Routing Delays <sup>1</sup> |                                     |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>RD1</sub>                                   | FO = 1 Routing Delay                |          | 1.9  |          | 2.2  |          | 2.5  |           | 3.0  |          | 4.2  | ns    |
| t <sub>RD2</sub>                                   | FO = 2 Routing Delay                |          | 2.7  |          | 3.1  |          | 3.5  |           | 4.1  |          | 5.7  | ns    |
| t <sub>RD3</sub>                                   | FO = 3 Routing Delay                |          | 3.4  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
| t <sub>RD4</sub>                                   | FO = 4 Routing Delay                |          | 4.1  |          | 4.8  |          | 5.4  |           | 6.3  |          | 8.9  | ns    |
| t <sub>RD8</sub>                                   | FO = 8 Routing Delay                |          | 7.1  |          | 8.1  |          | 9.2  |           | 10.9 |          | 15.2 | ns    |
| Logic Module Sequential Timing <sup>2</sup>        |                                     |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>SUD</sub>                                   | Flip-Flop (Latch) Data Input Set-Up |          | 4.3  |          | 5.0  |          | 5.6  |           | 6.6  |          | 9.2  | ns    |
| t <sub>HD</sub> <sup>3</sup>                       | Flip-Flop (Latch) Data Input Hold   | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>SUENA</sub>                                 | Flip-Flop (Latch) Enable Set-Up     |          | 4.3  |          | 5.0  |          | 5.6  |           | 6.6  |          | 9.2  | ns    |
| t <sub>HENA</sub>                                  | Flip-Flop (Latch) Enable Hold       | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |

**Table 45 • A42MX36 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                                       | -3 Speed |      | -2 Speed |      | -1 Speed |      | Std Speed |      | -F Speed |      | Units |
|---------------------------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                               | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| t <sub>ACO</sub> Array Latch Clock-to-Out (Pad-to-Pad) 32 I/O |          | 10.9 |          | 12.1 |          | 13.7 |           | 16.1 |          | 22.5 | ns    |
| d <sub>TLH</sub> Capacitive Loading, LOW to HIGH              |          | 0.10 |          | 0.11 |          | 0.12 |           | 0.14 |          | 0.20 | ns/pF |
| d <sub>THL</sub> Capacitive Loading, HIGH to LOW              |          | 0.10 |          | 0.11 |          | 0.12 |           | 0.14 |          | 0.20 | ns/pF |
| <b>CMOS Output Module Timing<sup>5</sup></b>                  |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub> Data-to-Pad HIGH                             |          | 4.9  |          | 5.5  |          | 6.2  |           | 7.3  |          | 10.3 | ns    |
| t <sub>DHL</sub> Data-to-Pad LOW                              |          | 3.4  |          | 3.8  |          | 4.3  |           | 5.1  |          | 7.1  | ns    |
| t <sub>ENZH</sub> Enable Pad Z to HIGH                        |          | 3.7  |          | 4.1  |          | 4.7  |           | 5.5  |          | 7.7  | ns    |
| t <sub>ENZL</sub> Enable Pad Z to LOW                         |          | 4.1  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.5  | ns    |
| t <sub>ENHZ</sub> Enable Pad HIGH to Z                        |          | 7.4  |          | 8.2  |          | 9.3  |           | 10.9 |          | 15.3 | ns    |
| t <sub>ENLZ</sub> Enable Pad LOW to Z                         |          | 6.9  |          | 7.6  |          | 8.7  |           | 10.2 |          | 14.3 | ns    |
| t <sub>GLH</sub> G-to-Pad HIGH                                |          | 7.0  |          | 7.8  |          | 8.9  |           | 10.4 |          | 14.6 | ns    |
| t <sub>GHL</sub> G-to-Pad LOW                                 |          | 7.0  |          | 7.8  |          | 8.9  |           | 10.4 |          | 14.6 | ns    |
| t <sub>LSU</sub> I/O Latch Set-Up                             | 0.7      |      | 0.7      |      | 0.8      |      | 1.0       |      | 1.4      |      | ns    |
| t <sub>LH</sub> I/O Latch Hold                                | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub> I/O Latch Clock-to-Out (Pad-to-Pad) 32 I/O   |          | 7.9  |          | 8.8  |          | 10.0 |           | 11.8 |          | 16.5 | ns    |

1. For dual-module macros, use t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, t<sub>CO</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, or t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>SUD</sub>, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
3. Data applies to macros based on the S-module. Timing parameters for sequential macros constructed from C-modules can be obtained from the Timer utility.
4. Set-up and hold timing parameters for the Input Buffer Latch are defined with respect to the PAD and the D input. External setup/hold timing parameters must account for delay from an external PAD signal to the G inputs. Delay from an external PAD signal to the G input subtracts (adds) to the internal setup (hold) time.
5. Delays based on 35 pF loading.

## 3.12 Pin Descriptions

This section lists the pin descriptions for 40MX and 42MX series FPGAs.

### CLK/A/B, I/O Global Clock

Clock inputs for clock distribution networks. CLK is for 40MX while CLKA and CLKB are for 42MX devices. The clock input is buffered prior to clocking the logic modules. This pin can also be used as an I/O.

### DCLK, I/O Diagnostic Clock

Clock input for diagnostic probe and device programming. DCLK is active when the MODE pin is HIGH. This pin functions as an I/O when the MODE pin is LOW.

### GND, Ground

Input LOW supply voltage.

### I/O, Input/Output

# 4 Package Pin Assignments

The following figures and tables give the details of the package pin assignments.

Figure 38 • PL44

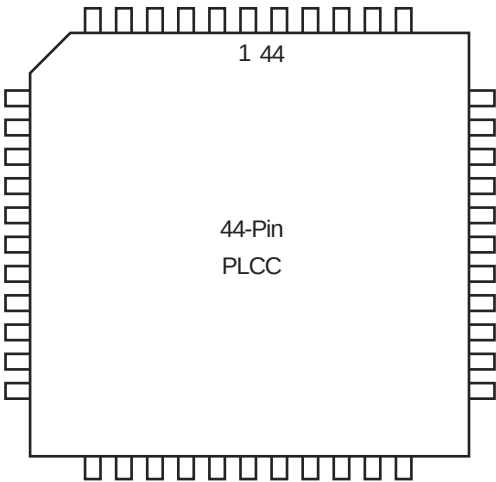


Table 47 • PL44

| PL44       |                  |                  |
|------------|------------------|------------------|
| Pin Number | A40MX02 Function | A40MX04 Function |
| 1          | I/O              | I/O              |
| 2          | I/O              | I/O              |
| 3          | VCC              | VCC              |
| 4          | I/O              | I/O              |
| 5          | I/O              | I/O              |
| 6          | I/O              | I/O              |
| 7          | I/O              | I/O              |
| 8          | I/O              | I/O              |
| 9          | I/O              | I/O              |
| 10         | GND              | GND              |
| 11         | I/O              | I/O              |
| 12         | I/O              | I/O              |
| 13         | I/O              | I/O              |
| 14         | VCC              | VCC              |
| 15         | I/O              | I/O              |
| 16         | VCC              | VCC              |
| 17         | I/O              | I/O              |
| 18         | I/O              | I/O              |
| 19         | I/O              | I/O              |
| 20         | I/O              | I/O              |

Table 48 • PL68

| PL68       |                  |                  |
|------------|------------------|------------------|
| Pin Number | A40MX02 Function | A40MX04 Function |
| 61         | I/O              | I/O              |
| 62         | I/O              | I/O              |
| 63         | I/O              | I/O              |
| 64         | I/O              | I/O              |
| 65         | I/O              | I/O              |
| 66         | GND              | GND              |
| 67         | I/O              | I/O              |
| 68         | I/O              | I/O              |

Figure 40 • PL84

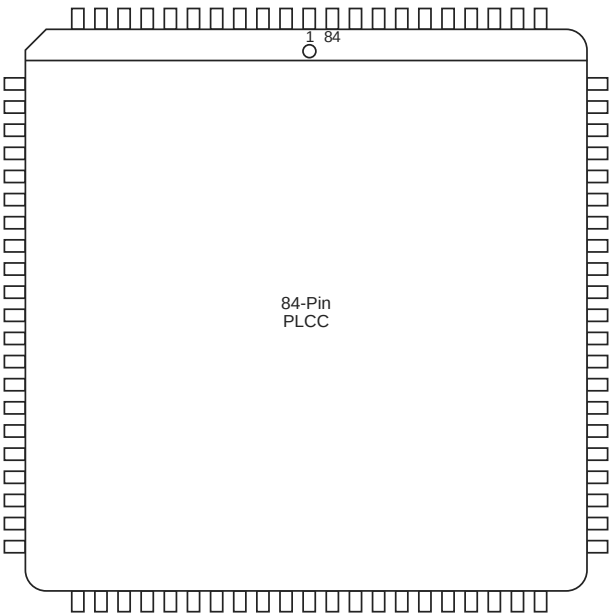


Table 49 • PL84

| PL84       |                  |                  |                  |                  |
|------------|------------------|------------------|------------------|------------------|
| Pin Number | A40MX04 Function | A42MX09 Function | A42MX16 Function | A42MX24 Function |
| 1          | I/O              | I/O              | I/O              | I/O              |
| 2          | I/O              | CLKB, I/O        | CLKB, I/O        | CLKB, I/O        |
| 3          | I/O              | I/O              | I/O              | I/O              |
| 4          | VCC              | PRB, I/O         | PRB, I/O         | PRB, I/O         |
| 5          | I/O              | I/O              | I/O              | WD, I/O          |
| 6          | I/O              | GND              | GND              | GND              |
| 7          | I/O              | I/O              | I/O              | I/O              |
| 8          | I/O              | I/O              | I/O              | WD, I/O          |
| 9          | I/O              | I/O              | I/O              | WD, I/O          |

Figure 42 • PQ144

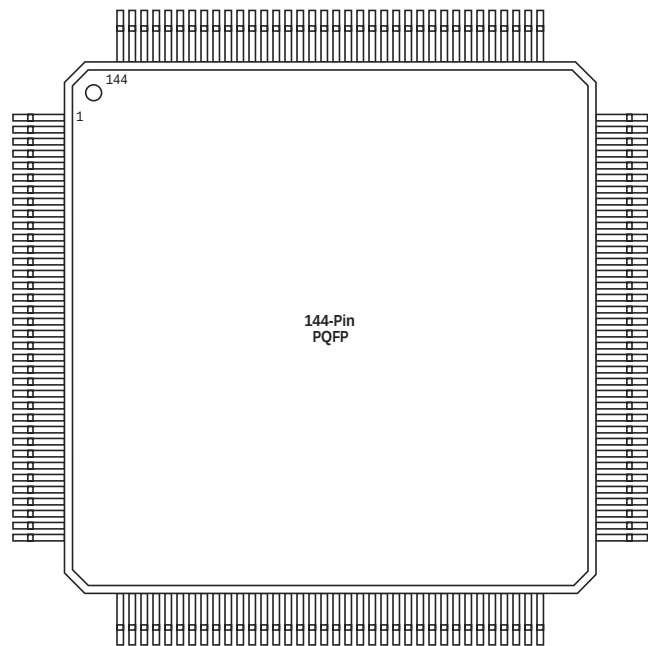


Table 51 • PQ144

| PQ144      |                  |
|------------|------------------|
| Pin Number | A42MX09 Function |
| 1          | I/O              |
| 2          | MODE             |
| 3          | I/O              |
| 4          | I/O              |
| 5          | I/O              |

**Table 51 • PQ144**

| <b>PQ144</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> |
| 6                 | I/O                     |
| 7                 | I/O                     |
| 8                 | I/O                     |
| 9                 | GNDQ                    |
| 10                | GNDI                    |
| 11                | NC                      |
| 12                | I/O                     |
| 13                | I/O                     |
| 14                | I/O                     |
| 15                | I/O                     |
| 16                | I/O                     |
| 17                | I/O                     |
| 18                | VSV                     |
| 19                | VCC                     |
| 20                | VCCI                    |
| 21                | NC                      |
| 22                | I/O                     |
| 23                | I/O                     |
| 24                | I/O                     |
| 25                | I/O                     |
| 26                | I/O                     |
| 27                | I/O                     |
| 28                | GND                     |
| 29                | GNDI                    |
| 30                | NC                      |
| 31                | I/O                     |
| 32                | I/O                     |
| 33                | I/O                     |
| 34                | I/O                     |
| 35                | I/O                     |
| 36                | I/O                     |
| 37                | BININ                   |
| 38                | BINOUT                  |
| 39                | I/O                     |
| 40                | I/O                     |
| 41                | I/O                     |
| 42                | I/O                     |

**Table 51 • PQ144**

| <b>PQ144</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> |
| 80                | GNDI                    |
| 81                | NC                      |
| 82                | I/O                     |
| 83                | I/O                     |
| 84                | I/O                     |
| 85                | I/O                     |
| 86                | I/O                     |
| 87                | I/O                     |
| 88                | VKS                     |
| 89                | VPP                     |
| 90                | VCC                     |
| 91                | VCCI                    |
| 92                | NC                      |
| 93                | VSV                     |
| 94                | I/O                     |
| 95                | I/O                     |
| 96                | I/O                     |
| 97                | I/O                     |
| 98                | I/O                     |
| 99                | I/O                     |
| 100               | GND                     |
| 101               | GNDI                    |
| 102               | NC                      |
| 103               | I/O                     |
| 104               | I/O                     |
| 105               | I/O                     |
| 106               | I/O                     |
| 107               | I/O                     |
| 108               | I/O                     |
| 109               | I/O                     |
| 110               | SDI                     |
| 111               | I/O                     |
| 112               | I/O                     |
| 113               | I/O                     |
| 114               | I/O                     |
| 115               | I/O                     |
| 116               | GNDQ                    |



**Table 53 • PQ208**

| <b>PQ208</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> | <b>A42MX36 Function</b> |
| 132               | VCCI                    | VCCI                    | VCCI                    |
| 133               | VCCA                    | VCCA                    | VCCA                    |
| 134               | I/O                     | I/O                     | I/O                     |
| 135               | I/O                     | I/O                     | I/O                     |
| 136               | VCCA                    | VCCA                    | VCCA                    |
| 137               | I/O                     | I/O                     | I/O                     |
| 138               | I/O                     | I/O                     | I/O                     |
| 139               | I/O                     | I/O                     | I/O                     |
| 140               | I/O                     | I/O                     | I/O                     |
| 141               | NC                      | I/O                     | I/O                     |
| 142               | I/O                     | I/O                     | I/O                     |
| 143               | I/O                     | I/O                     | I/O                     |
| 144               | I/O                     | I/O                     | I/O                     |
| 145               | I/O                     | I/O                     | I/O                     |
| 146               | NC                      | I/O                     | I/O                     |
| 147               | NC                      | I/O                     | I/O                     |
| 148               | NC                      | I/O                     | I/O                     |
| 149               | NC                      | I/O                     | I/O                     |
| 150               | GND                     | GND                     | GND                     |
| 151               | I/O                     | I/O                     | I/O                     |
| 152               | I/O                     | I/O                     | I/O                     |
| 153               | I/O                     | I/O                     | I/O                     |
| 154               | I/O                     | I/O                     | I/O                     |
| 155               | I/O                     | I/O                     | I/O                     |
| 156               | I/O                     | I/O                     | I/O                     |
| 157               | GND                     | GND                     | GND                     |
| 158               | I/O                     | I/O                     | I/O                     |
| 159               | SDI, I/O                | SDI, I/O                | SDI, I/O                |
| 160               | I/O                     | I/O                     | I/O                     |
| 161               | I/O                     | WD, I/O                 | WD, I/O                 |
| 162               | I/O                     | WD, I/O                 | WD, I/O                 |
| 163               | I/O                     | I/O                     | I/O                     |
| 164               | VCCI                    | VCCI                    | VCCI                    |
| 165               | NC                      | I/O                     | I/O                     |
| 166               | NC                      | I/O                     | I/O                     |
| 167               | I/O                     | I/O                     | I/O                     |
| 168               | I/O                     | WD, I/O                 | WD, I/O                 |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 52                | VCCI                    |
| 53                | I/O                     |
| 54                | WD, I/O                 |
| 55                | WD, I/O                 |
| 56                | I/O                     |
| 57                | SDI, I/O                |
| 58                | I/O                     |
| 59                | VCCA                    |
| 60                | GND                     |
| 61                | GND                     |
| 62                | I/O                     |
| 63                | I/O                     |
| 64                | I/O                     |
| 65                | I/O                     |
| 66                | I/O                     |
| 67                | I/O                     |
| 68                | I/O                     |
| 69                | I/O                     |
| 70                | I/O                     |
| 71                | VCCI                    |
| 72                | I/O                     |
| 73                | I/O                     |
| 74                | I/O                     |
| 75                | I/O                     |
| 76                | I/O                     |
| 77                | I/O                     |
| 78                | I/O                     |
| 79                | I/O                     |
| 80                | I/O                     |
| 81                | I/O                     |
| 82                | I/O                     |
| 83                | I/O                     |
| 84                | I/O                     |
| 85                | VCCA                    |
| 86                | I/O                     |
| 87                | I/O                     |
| 88                | VCCA                    |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 200               | I/O                     |
| 201               | I/O                     |
| 202               | I/O                     |
| 203               | I/O                     |
| 204               | I/O                     |
| 205               | I/O                     |
| 206               | VCCA                    |
| 207               | I/O                     |
| 208               | I/O                     |
| 209               | VCCA                    |
| 210               | VCCI                    |
| 211               | I/O                     |
| 212               | I/O                     |
| 213               | I/O                     |
| 214               | I/O                     |
| 215               | I/O                     |
| 216               | I/O                     |
| 217               | I/O                     |
| 218               | I/O                     |
| 219               | VCCA                    |
| 220               | I/O                     |
| 221               | I/O                     |
| 222               | I/O                     |
| 223               | I/O                     |
| 224               | I/O                     |
| 225               | I/O                     |
| 226               | I/O                     |
| 227               | VCCI                    |
| 228               | I/O                     |
| 229               | I/O                     |
| 230               | I/O                     |
| 231               | I/O                     |
| 232               | I/O                     |
| 233               | I/O                     |
| 234               | I/O                     |
| 235               | I/O                     |
| 236               | I/O                     |

**Table 60 • BG272**

| <b>BG272</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| V16               | I/O                     |
| V17               | I/O                     |
| V18               | SDO, TDO, I/O           |
| V19               | I/O                     |
| V20               | I/O                     |
| W1                | GND                     |
| W2                | GND                     |
| W3                | I/O                     |
| W4                | TMS, I/O                |
| W5                | I/O                     |
| W6                | I/O                     |
| W7                | I/O                     |
| W8                | WD, I/O                 |
| W9                | WD, I/O                 |
| W10               | I/O                     |
| W11               | I/O                     |
| W12               | I/O                     |
| W13               | WD, I/O                 |
| W14               | I/O                     |
| W15               | I/O                     |
| W16               | WD, I/O                 |
| W17               | I/O                     |
| W18               | WD, I/O                 |
| W19               | GND                     |
| W20               | GND                     |
| Y1                | GND                     |
| Y2                | GND                     |
| Y3                | I/O                     |
| Y4                | TDI, I/O                |
| Y5                | WD, I/O                 |
| Y6                | I/O                     |
| Y7                | QCLKA, I/O              |
| Y8                | I/O                     |
| Y9                | I/O                     |
| Y10               | I/O                     |
| Y11               | I/O                     |
| Y12               | I/O                     |

Table 60 • BG272

| BG272      |                  |
|------------|------------------|
| Pin Number | A42MX36 Function |
| Y13        | I/O              |
| Y14        | I/O              |
| Y15        | I/O              |
| Y16        | I/O              |
| Y17        | I/O              |
| Y18        | WD, I/O          |
| Y19        | GND              |
| Y20        | GND              |

Figure 52 • PG132

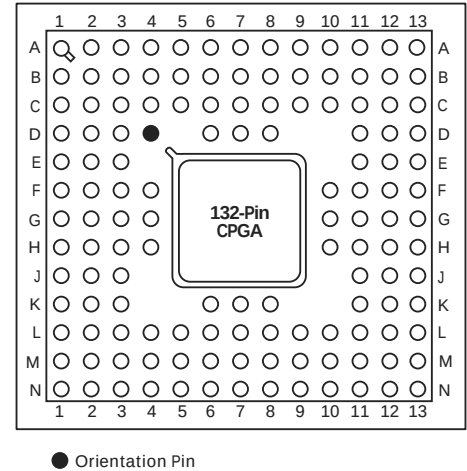


Table 61 • PG132

| PG132      |                  |
|------------|------------------|
| Pin Number | A42MX09 Function |
| –          | PMPOUT           |
| B2         | I/O              |
| A1         | MODE             |
| B1         | I/O              |
| D3         | I/O              |
| C2         | I/O              |
| C1         | I/O              |
| D2         | I/O              |
| D1         | I/O              |
| E2         | I/O              |
| E1         | I/O              |
| F3         | I/O              |