



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                          |
| Number of LABs/CLBs            | -                                                                                                                                                               |
| Number of Logic Elements/Cells | -                                                                                                                                                               |
| Total RAM Bits                 | -                                                                                                                                                               |
| Number of I/O                  | 57                                                                                                                                                              |
| Number of Gates                | 3000                                                                                                                                                            |
| Voltage - Supply               | 3V ~ 3.6V, 4.5V ~ 5.5V                                                                                                                                          |
| Mounting Type                  | Surface Mount                                                                                                                                                   |
| Operating Temperature          | -40°C ~ 85°C (TA)                                                                                                                                               |
| Package / Case                 | 80-TQFP                                                                                                                                                         |
| Supplier Device Package        | 80-VQFP (14x14)                                                                                                                                                 |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a40mx02-vqg80i">https://www.e-xfl.com/product-detail/microchip-technology/a40mx02-vqg80i</a> |

# Tables

|          |                                                                                                                                                      |    |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Table 1  | Product profile                                                                                                                                      | 1  |
| Table 2  | Plastic Device Resources                                                                                                                             | 4  |
| Table 3  | Ceramic Device Resources                                                                                                                             | 4  |
| Table 4  | Temperature Grade Offerings                                                                                                                          | 5  |
| Table 5  | Speed Grade Offerings                                                                                                                                | 5  |
| Table 6  | Voltage Support of MX Devices                                                                                                                        | 13 |
| Table 7  | Fixed Capacitance Values for MX FPGAs (pF)                                                                                                           | 16 |
| Table 8  | Device Configuration Options for Probe Capability                                                                                                    | 17 |
| Table 9  | Test Access Port Descriptions                                                                                                                        | 18 |
| Table 10 | Supported BST Public Instructions                                                                                                                    | 18 |
| Table 11 | Boundary Scan Pin Configuration and Functionality                                                                                                    | 19 |
| Table 12 | Absolute Maximum Ratings for 40MX Devices*                                                                                                           | 20 |
| Table 13 | Absolute Maximum Ratings for 42MX Devices*                                                                                                           | 20 |
| Table 14 | Recommended Operating Conditions                                                                                                                     | 21 |
| Table 15 | 5V TTL Electrical Specifications                                                                                                                     | 21 |
| Table 16 | Absolute Maximum Ratings for 40MX Devices*                                                                                                           | 22 |
| Table 17 | Absolute Maximum Ratings for 42MX Devices*                                                                                                           | 22 |
| Table 18 | Recommended Operating Conditions                                                                                                                     | 22 |
| Table 19 | 3.3V LVTTTL Electrical Specifications                                                                                                                | 23 |
| Table 20 | Absolute Maximum Ratings*                                                                                                                            | 23 |
| Table 21 | Recommended Operating Conditions                                                                                                                     | 24 |
| Table 22 | Mixed 5.0V/3.3V Electrical Specifications                                                                                                            | 25 |
| Table 23 | DC Specification (5.0 V PCI Signaling)                                                                                                               | 25 |
| Table 24 | AC Specifications (5.0V PCI Signaling)*                                                                                                              | 26 |
| Table 25 | DC Specification (3.3 V PCI Signaling)                                                                                                               | 27 |
| Table 26 | AC Specifications for (3.3 V PCI Signaling)*                                                                                                         | 27 |
| Table 27 | Package Thermal Characteristics                                                                                                                      | 29 |
| Table 28 | 42MX Temperature and Voltage Derating Factors (Normalized to $T_J = 25^{\circ}\text{C}$ , $V_{CCA} = 5.0\text{ V}$ )                                 | 38 |
| Table 29 | 40MX Temperature and Voltage Derating Factors(Normalized to $T_J = 25^{\circ}\text{C}$ , $V_{CC} = 5.0\text{ V}$ )                                   | 38 |
| Table 30 | 42MX Temperature and Voltage Derating Factors(Normalized to $T_J = 25^{\circ}\text{C}$ , $V_{CCA} = 3.3\text{ V}$ )                                  | 39 |
| Table 31 | 40MX Temperature and Voltage Derating Factors (Normalized to $T_J = 25^{\circ}\text{C}$ , $V_{CC} = 3.3\text{ V}$ )                                  | 39 |
| Table 32 | Clock Specification for 33 MHz PCI                                                                                                                   | 40 |
| Table 33 | Timing Parameters for 33 MHz PCI                                                                                                                     | 40 |
| Table 34 | A40MX02 Timing Characteristics (Nominal 5.0 V Operation)                                                                                             | 41 |
| Table 35 | A40MX02 Timing Characteristics (Nominal 3.3 V Operation)                                                                                             | 43 |
| Table 36 | A40MX04 Timing Characteristics (Nominal 5.0 V Operation) (Worst-Case Commercial Conditions, $V_{CC} = 4.75\text{ V}$ , $T_J = 70^{\circ}\text{C}$ )  | 46 |
| Table 37 | A40MX04 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, $V_{CC} = 3.0\text{ V}$ , $T_J = 70^{\circ}\text{C}$ )   | 49 |
| Table 38 | A42MX09 Timing Characteristics (Nominal 5.0 V Operation) (Worst-Case Commercial Conditions, $V_{CCA} = 4.75\text{ V}$ , $T_J = 70^{\circ}\text{C}$ ) | 52 |
| Table 39 | A42MX09 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, $V_{CCA} = 3.0\text{ V}$ , $T_J = 70^{\circ}\text{C}$ )  | 56 |
| Table 40 | A42MX16 Timing Characteristics (Nominal 5.0 V Operation) (Worst-Case Commercial Conditions, $V_{CCA} = 4.75\text{ V}$ , $T_J = 70^{\circ}\text{C}$ ) | 60 |
| Table 41 | A42MX16 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, $V_{CCA} = 3.0\text{ V}$ , $T_J = 70^{\circ}\text{C}$ )  | 64 |
| Table 42 | A42MX24 Timing Characteristics (Nominal 5.0 V Operation) (Worst-Case Commercial Conditions, $V_{CCA} = 4.75\text{ V}$ , $T_J = 70^{\circ}\text{C}$ ) | 67 |
| Table 43 | A42MX24 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, $V_{CCA} = 3.0\text{ V}$ , $T_J = 70^{\circ}\text{C}$ )  | 71 |
| Table 44 | A42MX36 Timing Characteristics (Nominal 5.0 V Operation)(Worst-Case Commercial Conditions, $V_{CCA} = 4.75\text{ V}$ , $T_J = 70^{\circ}\text{C}$ )  | 75 |
| Table 45 | A42MX36 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions,                                                          |    |

- The Transient Current, page 13 is new (SAR 36930).
- Package names were revised according to standards established in *Package Mechanical Drawings* (SAR 34774)

## 1.7 Revision 9.0

The following is a summary of the changes in revision 9.0 of this document

- In Table 20, page 23, the limits in VI were changed from -0.5 to VCCI + 0.5 to -0.5 to VCCA + 0.5
- In Table 22, page 25, V<sub>OH</sub> was changed from 3.7 to 2.4 for the min in industrial and military. V<sub>IH</sub> had V<sub>CCI</sub> and that was changed to VCCA

## 1.8 Revision 6.0

The following is a summary of the changes in revision 6.0 of this document.

- The Ease of Integration, page 1 was updated
- The Temperature Grade Offerings, page 5 is new
- The Speed Grade Offerings, page 5 is new
- The General Description, page 6 was updated
- The MultiPlex I/O Modules, page 11 was updated
- The User Security, page 12 was updated
- Table 6, page 13 was updated
- The Power Dissipation, page 14 was updated.
- The Static Power Component, page 14 was updated
- The Equivalent Capacitance, page 15 was updated
- Figure 13, page 17 was updated
- Table 10, page 18 was updated.
- Figure 14, page 18 was updated.
- Table 11, page 19 was updated.

### 3.4.9 JTAG Mode Activation

The JTAG test logic circuit is activated in the Designer software by selecting **Tools > Device Selection**. This brings up the Device Selection dialog box as shown in the following figure. The JTAG test logic circuit can be enabled by clicking the “Reserve JTAG Pins” check box. The following table explains the pins' behavior in either mode.

**Figure 15 • Device Selection Wizard**

**Table 11 • Boundary Scan Pin Configuration and Functionality**

| Reserve JTAG | Checked                                                                | Unchecked |
|--------------|------------------------------------------------------------------------|-----------|
| TCK          | BST input; must be terminated to logical HIGH or LOW to avoid floating | User I/O  |
| TDI, TMS     | BST input; may float or be tied to HIGH                                | User I/O  |
| TDO          | BST output; may float or be connected to TDI of another device         | User I/O  |

### 3.4.10 TRST Pin and TAP Controller Reset

An active reset (TRST) pin is not supported; however, MX devices contain power-on circuitry that resets the boundary scan circuitry upon power-up. Also, the TMS pin is equipped with an internal pull-up resistor. This allows the TAP controller to remain in or return to the Test-Logic-Reset state when there is no input or when a logical 1 is on the TMS pin. To reset the controller, TMS must be HIGH for at least five TCK cycles.

### 3.4.11 Boundary Scan Description Language (BSDL) File

Conforming to the IEEE Standard 1149.1 requires that the operation of the various JTAG components be documented. The BSDL file provides the standard format to describe the JTAG components that can be used by automatic test equipment software. The file includes the instructions that are supported, instruction bit pattern, and the boundary-scan chain order. For an in-depth discussion on BSDL files, see the *BSDL Files Format Description* application note.

BSDL files are grouped into two categories - generic and device-specific. The generic files assign all user I/Os as inouts. Device-specific files assign user I/Os as inputs, outputs or inouts.

Generic files for MX devices are available on the Microsemi SoC Product Group's website:

<http://www.microsemi.com/soc/techdocs/models/bsdl.html>.

## 3.5 Development Tool Support

The MX family of FPGAs is fully supported by Libero® Integrated Design Environment (IDE). Libero IDE is a design management environment, seamlessly integrating design tools while guiding the user through the design flow, managing all design and log files, and passing necessary design data among tools. Libero IDE allows users to integrate both schematic and HDL synthesis into a single flow and verify the entire design in a single environment. Libero IDE includes SynplifyPro from Synopsys, ModelSim® HDL Simulator from Mentor Graphics® and Viewdraw.

Libero IDE includes place-and-route and provides a comprehensive suite of backend support tools for FPGA development, including timing-driven place-and-route, and a world-class integrated static timing analyzer and constraints editor.

3. All outputs unloaded. All inputs = VCC/VCCI or GND

## 3.8 3.3 V Operating Conditions

The following table shows 3.3 V operating conditions.

**Table 16 • Absolute Maximum Ratings for 40MX Devices\***

| Symbol           | Parameter           | Limits            | Units |
|------------------|---------------------|-------------------|-------|
| VCC              | DC Supply Voltage   | –0.5 to +7.0      | V     |
| VI               | Input Voltage       | –0.5 to VCC + 0.5 | V     |
| VO               | Output Voltage      | –0.5 to VCC + 0.5 | V     |
| t <sub>STG</sub> | Storage Temperature | –65 to +150       | °C    |

**Note:** \*Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. Exposure to absolute maximum rated conditions for extended periods may affect device reliability. Devices should not be operated outside the recommended operating conditions.

**Table 17 • Absolute Maximum Ratings for 42MX Devices\***

| Symbol           | Parameter                   | Limits           | Units |
|------------------|-----------------------------|------------------|-------|
| VCCI             | DC Supply Voltage for I/Os  | –0.5 to +7.0     | V     |
| VCCA             | DC Supply Voltage for Array | –0.5 to +7.0     | V     |
| VI               | Input Voltage               | –0.5 to VCCI+0.5 | V     |
| VO               | Output Voltage              | –0.5 to VCCI+0.5 | V     |
| t <sub>STG</sub> | Storage Temperature         | –65 to +150      | °C    |


**Note:** \*Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. Exposure to absolute maximum rated conditions for extended periods may affect device reliability. Devices should not be operated outside the recommended operating conditions.

**Table 18 • Recommended Operating Conditions**

| Parameter          | Commercial | Industrial | Military    | Units |
|--------------------|------------|------------|-------------|-------|
| Temperature Range* | 0 to +70   | –40 to +85 | –55 to +125 | °C    |
| VCC (40MX)         | 3.0 to 3.6 | 3.0 to 3.6 | 3.0 to 3.6  | V     |
| VCCA (42MX)        | 3.0 to 3.6 | 3.0 to 3.6 | 3.0 to 3.6  | V     |
| VCCI (42MX)        | 3.0 to 3.6 | 3.0 to 3.6 | 3.0 to 3.6  | V     |

**Note:** \*Ambient temperature (T<sub>A</sub>) is used for commercial and industrial grades; case temperature (T<sub>C</sub>) is used for military grades.

All the following tables show various specifications and operating conditions of 40MX and 42MX FPGAs.

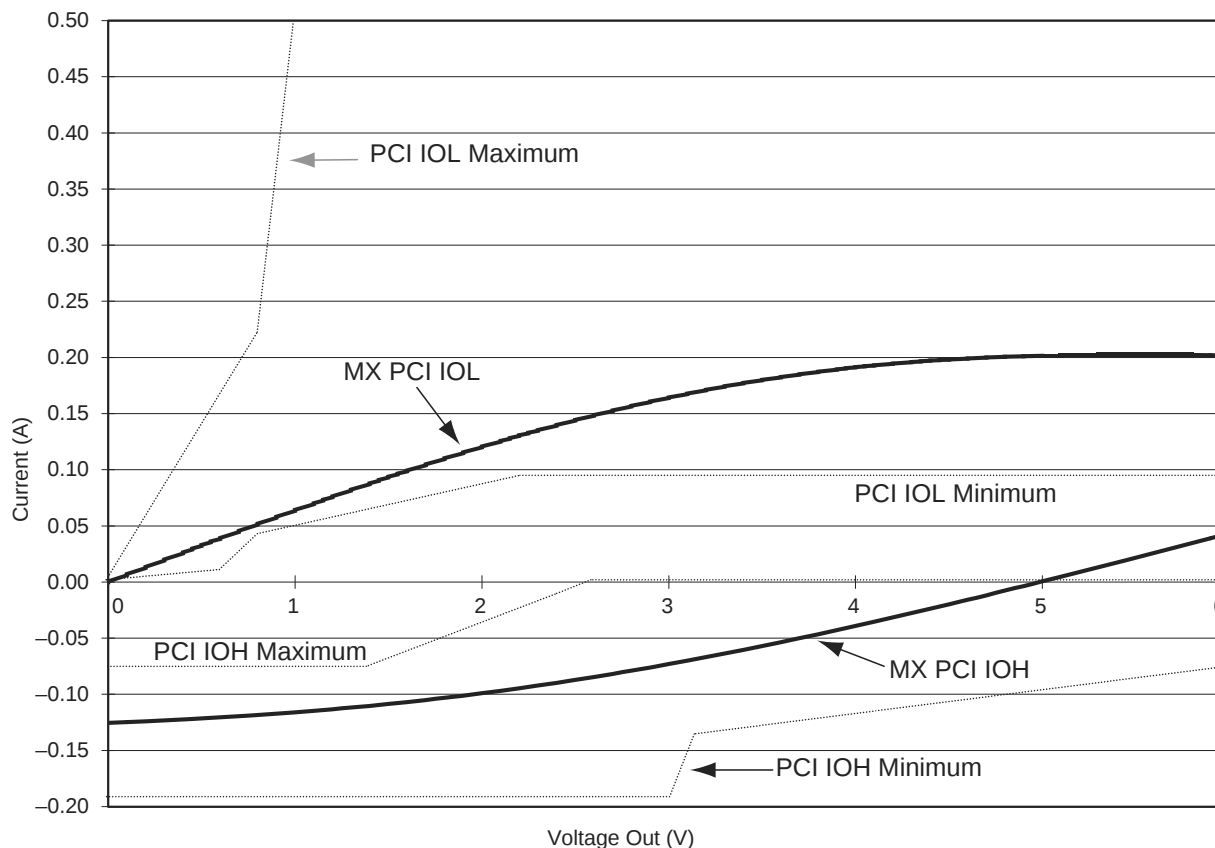**Figure 16 • Typical Output Drive Characteristics (Based Upon Measured Data)**

### 3.9.4 Junction Temperature ( $T_J$ )

The temperature variable in the Designer software refers to the junction temperature, not the ambient temperature. This is an important distinction because the heat generated from dynamic power consumption is usually hotter than the ambient temperature. The following equation can be used to calculate junction temperature.

$$\text{Junction Temperature} = \Delta T + T_a(1)$$

EQ 4

where:

- $T_a$  = Ambient Temperature
- $\Delta T$  = Temperature gradient between junction (silicon) and ambient
- $\Delta T = \theta_{ja} * P$  (2)
- $P$  = Power
- $\theta_{ja}$  = Junction to ambient of package.  $\theta_{ja}$  numbers are located in Table 27, page 29.

### 3.9.5 Package Thermal Characteristics

The device junction-to-case thermal characteristic is  $\theta_{jc}$ , and the junction-to-ambient air characteristic is  $\theta_{ja}$ . The thermal characteristics for  $\theta_{ja}$  are shown with two different air flow rates.

The maximum junction temperature is 150°C.

Maximum power dissipation for commercial- and industrial-grade devices is a function of  $\theta_{ja}$ .

A sample calculation of the absolute maximum power dissipation allowed for a TQ176 package at commercial temperature and still air is given in the following equation

$$\text{MaximumPowerAllowed} = \frac{\text{Max} \cdot \text{junction temp} \cdot (^\circ\text{C}) - \text{Max} \cdot \text{ambient temp} \cdot (^\circ\text{C})}{\theta_{ja}(^\circ\text{C}/\text{W})} = \frac{150^\circ\text{C} - 70^\circ\text{C}}{(28^\circ\text{C})/\text{W}} = 2.86\text{W}$$

EQ 5

The maximum power dissipation for military-grade devices is a function of  $\theta_{jc}$ . A sample calculation of the absolute maximum power dissipation allowed for CQFP 208-pin package at military temperature and still air is given in the following equation

$$\text{MaximumPowerAllowed} = \frac{\text{Max} \cdot \text{junction temp} \cdot (^\circ\text{C}) - \text{Max} \cdot \text{ambient temp} \cdot (^\circ\text{C})}{\theta_{jc}(^\circ\text{C}/\text{W})} = \frac{150^\circ\text{C} - 125^\circ\text{C}}{(6.3^\circ\text{C})/\text{W}} = 3.97\text{W}$$

EQ 6

**Table 27 • Package Thermal Characteristics**

| Plastic Packages                 | Pin Count | $\theta_{jc}$ | $\theta_{ja}$ |                        |                        | Units                     |
|----------------------------------|-----------|---------------|---------------|------------------------|------------------------|---------------------------|
|                                  |           |               | Still Air     | 1.0 m/s<br>200 ft/min. | 2.5 m/s<br>500 ft/min. |                           |
| Plastic Quad Flat Pack           | 100       | 12.0          | 27.8          | 23.4                   | 21.2                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 144       | 10.0          | 26.2          | 22.8                   | 21.1                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 160       | 10.0          | 26.2          | 22.8                   | 21.1                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 208       | 8.0           | 26.1          | 22.5                   | 20.8                   | $^\circ\text{C}/\text{W}$ |
| Plastic Quad Flat Pack           | 240       | 8.5           | 25.6          | 22.3                   | 20.8                   | $^\circ\text{C}/\text{W}$ |
| Plastic Leaded Chip Carrier      | 44        | 16.0          | 20.0          | 24.5                   | 22.0                   | $^\circ\text{C}/\text{W}$ |
| Plastic Leaded Chip Carrier      | 68        | 13.0          | 25.0          | 21.0                   | 19.4                   | $^\circ\text{C}/\text{W}$ |
| Plastic Leaded Chip Carrier      | 84        | 12.0          | 22.5          | 18.9                   | 17.6                   | $^\circ\text{C}/\text{W}$ |
| Thin Plastic Quad Flat Pack      | 176       | 11.0          | 24.7          | 19.9                   | 18.0                   | $^\circ\text{C}/\text{W}$ |
| Very Thin Plastic Quad Flat Pack | 80        | 12.0          | 38.2          | 31.9                   | 29.4                   | $^\circ\text{C}/\text{W}$ |
| Very Thin Plastic Quad Flat Pack | 100       | 10.0          | 35.3          | 29.4                   | 27.1                   | $^\circ\text{C}/\text{W}$ |
| Plastic Ball Grid Array          | 272       | 3.0           | 18.3          | 14.9                   | 13.9                   | $^\circ\text{C}/\text{W}$ |
| <b>Ceramic Packages</b>          |           |               |               |                        |                        |                           |
| Ceramic Pin Grid Array           | 132       | 4.8           | 25.0          | 20.6                   | 18.7                   | $^\circ\text{C}/\text{W}$ |
| Ceramic Quad Flat Pack           | 208       | 2.0           | 22.0          | 19.8                   | 18.0                   | $^\circ\text{C}/\text{W}$ |
| Ceramic Quad Flat Pack           | 256       | 2.0           | 20.0          | 16.5                   | 15.0                   | $^\circ\text{C}/\text{W}$ |

**Table 35 • A40MX02 Timing Characteristics (Nominal 3.3 V Operation) (continued)**  
**(Worst-Case Commercial Conditions, VCC = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                |                      | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------|----------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                      | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| CMOS Output Module Timing <sup>4</sup> |                      |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH     | 5.5      |      | 6.4      |      | 7.2      |      | 8.5       |      | 11.9     |      | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW      | 4.8      |      | 5.5      |      | 6.2      |      | 7.3       |      | 10.2     |      | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH | 4.7      |      | 5.5      |      | 6.2      |      | 7.3       |      | 10.2     |      | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW  | 6.8      |      | 7.9      |      | 8.9      |      | 10.5      |      | 14.7     |      | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z | 11.1     |      | 12.8     |      | 14.5     |      | 17.1      |      | 23.9     |      | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z  | 8.2      |      | 9.5      |      | 10.7     |      | 12.6      |      | 17.7     |      | ns    |
| d <sub>TLH</sub>                       | Delta LOW to HIGH    | 0.05     |      | 0.05     |      | 0.06     |      | 0.07      |      | 0.10     |      | ns/pF |
| d <sub>THL</sub>                       | Delta HIGH to LOW    | 0.03     |      | 0.03     |      | 0.04     |      | 0.04      |      | 0.06     |      | ns/pF |

1. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
2. Set-up times assume fanout of 3. Further testing information can be obtained from the Timer utility.
3. The hold time for the DFME1A macro may be greater than 0 ns. Use the Timer tool from the Designer software to check the hold time for this macro
4. Delays based on 35 pF loading

**Table 36 • A40MX04 Timing Characteristics (Nominal 5.0 V Operation) (Worst-Case Commercial Conditions, VCC = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                                        | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|----------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                                        | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Propagation Delays                    |                                        |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>PD1</sub>                                   | Single Module                          |          | 1.2  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>PD2</sub>                                   | Dual-Module Macros                     |          | 2.3  |          | 3.1  |          | 3.5  |           | 4.1  |          | 5.7  | ns    |
| t <sub>CO</sub>                                    | Sequential Clock-to-Q                  |          | 1.2  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>GO</sub>                                    | Latch G-to-Q                           |          | 1.2  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>RS</sub>                                    | Flip-Flop (Latch) Reset-to-Q           |          | 1.2  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| Logic Module Predicted Routing Delays <sup>1</sup> |                                        |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>RD1</sub>                                   | FO = 1 Routing Delay                   |          | 1.2  |          | 1.6  |          | 1.8  |           | 2.1  |          | 3.0  | ns    |
| t <sub>RD2</sub>                                   | FO = 2 Routing Delay                   |          | 1.9  |          | 2.2  |          | 2.5  |           | 2.9  |          | 4.1  | ns    |
| t <sub>RD3</sub>                                   | FO = 3 Routing Delay                   |          | 2.4  |          | 2.8  |          | 3.2  |           | 3.7  |          | 5.2  | ns    |
| t <sub>RD4</sub>                                   | FO = 4 Routing Delay                   |          | 2.9  |          | 3.4  |          | 3.9  |           | 4.5  |          | 6.3  | ns    |
| t <sub>RD8</sub>                                   | FO = 8 Routing Delay                   |          | 5.0  |          | 5.8  |          | 6.6  |           | 7.8  |          | 10.9 | ns    |
| Logic Module Sequential Timing <sup>2</sup>        |                                        |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>SUD</sub>                                   | Flip-Flop (Latch)<br>Data Input Set-Up |          | 3.1  |          | 3.5  |          | 4.0  |           | 4.7  |          | 6.6  | ns    |
| t <sub>HD</sub> <sup>3</sup>                       | Flip-Flop (Latch)<br>Data Input Hold   |          | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | 0.0  | ns    |
| t <sub>SUENA</sub>                                 | Flip-Flop (Latch)<br>Enable Set-Up     |          | 3.1  |          | 3.5  |          | 4.0  |           | 4.7  |          | 6.6  | ns    |

**Table 38 • A42MX09 Timing Characteristics (Nominal 5.0 V Operation) (continued)**(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)

| Parameter / Description               |                                                          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|---------------------------------------|----------------------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                       |                                                          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| TTL Output Module Timing <sup>5</sup> |                                                          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                      | Data-to-Pad HIGH                                         |          | 2.5  |          | 2.7  |          | 3.1  |           | 3.6  |          | 5.1  | ns    |
| t <sub>DHL</sub>                      | Data-to-Pad LOW                                          |          | 2.9  |          | 3.2  |          | 3.6  |           | 4.3  |          | 6.0  | ns    |
| t <sub>ENZH</sub>                     | Enable Pad Z to HIGH                                     |          | 2.6  |          | 2.9  |          | 3.3  |           | 3.9  |          | 5.5  | ns    |
| t <sub>ENZL</sub>                     | Enable Pad Z to LOW                                      |          | 2.9  |          | 3.2  |          | 3.7  |           | 4.3  |          | 6.1  | ns    |
| t <sub>ENHZ</sub>                     | Enable Pad HIGH to Z                                     |          | 4.9  |          | 5.4  |          | 6.2  |           | 7.3  |          | 10.2 | ns    |
| t <sub>ENLZ</sub>                     | Enable Pad LOW to Z                                      |          | 5.3  |          | 5.9  |          | 6.7  |           | 7.9  |          | 11.1 | ns    |
| t <sub>GLH</sub>                      | G-to-Pad HIGH                                            |          | 2.6  |          | 2.9  |          | 3.3  |           | 3.8  |          | 5.3  | ns    |
| t <sub>GHL</sub>                      | G-to-Pad LOW                                             |          | 2.6  |          | 2.9  |          | 3.3  |           | 3.8  |          | 5.3  | ns    |
| t <sub>LSU</sub>                      | I/O Latch Set-Up                                         | 0.5      |      | 0.5      |      | 0.6      |      | 0.7       |      | 1.0      |      | ns    |
| t <sub>LH</sub>                       | I/O Latch Hold                                           | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub>                      | I/O Latch Clock-to-Out<br>(Pad-to-Pad), 64 Clock Loading |          | 5.2  |          | 5.8  |          | 6.6  |           | 7.7  |          | 10.8 | ns    |
| t <sub>ACO</sub>                      | Array Clock-to-Out<br>(Pad-to-Pad), 64 Clock Loading     |          | 7.4  |          | 8.2  |          | 9.3  |           | 10.9 |          | 15.3 | ns    |
| d <sub>TLH</sub>                      | Capacity Loading, LOW to HIGH                            |          | 0.03 |          | 0.03 |          | 0.03 |           | 0.04 |          | 0.06 | ns/pF |
| d <sub>THL</sub>                      | Capacity Loading, HIGH to LOW                            |          | 0.04 |          | 0.04 |          | 0.04 |           | 0.05 |          | 0.07 | ns/pF |

**Table 40 • A42MX16 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                                  |                                               | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------------|-----------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                          |                                               | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| t <sub>RD3</sub>                                         | FO = 3 Routing Delay                          |          | 1.3  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>RD4</sub>                                         | FO = 4 Routing Delay                          |          | 1.6  |          | 1.7  |          | 2.0  |           | 2.3  |          | 3.2  | ns    |
| t <sub>RD8</sub>                                         | FO = 8 Routing Delay                          |          | 2.6  |          | 2.9  |          | 3.2  |           | 3.8  |          | 5.3  | ns    |
| <b>Logic Module Sequential Timing<sup>3,4</sup></b>      |                                               |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>SUD</sub>                                         | Flip-Flop (Latch)<br>Data Input Set-Up        |          | 0.3  |          | 0.4  |          | 0.4  |           | 0.5  |          | 0.7  | ns    |
| t <sub>HD</sub>                                          | Flip-Flop (Latch) Data Input Hold             |          | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | 0.0  | ns    |
| t <sub>SUENA</sub>                                       | Flip-Flop (Latch) Enable Set-Up               |          | 0.7  |          | 0.8  |          | 0.9  |           | 1.0  |          | 1.4  | ns    |
| t <sub>HENA</sub>                                        | Flip-Flop (Latch) Enable Hold                 |          | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | 0.0  | ns    |
| t <sub>WCLKA</sub>                                       | Flip-Flop (Latch)<br>Clock Active Pulse Width |          | 3.4  |          | 3.8  |          | 4.3  |           | 5.0  |          | 7.1  | ns    |
| t <sub>WASYN</sub>                                       | Flip-Flop (Latch)<br>Asynchronous Pulse Width |          | 4.5  |          | 5.0  |          | 5.6  |           | 6.6  |          | 9.2  | ns    |
| t <sub>A</sub>                                           | Flip-Flop Clock Input Period                  |          | 6.8  |          | 7.6  |          | 8.6  |           | 10.1 |          | 14.1 | ns    |
| t <sub>INH</sub>                                         | Input Buffer Latch Hold                       |          | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | 0.0  | ns    |
| t <sub>INSU</sub>                                        | Input Buffer Latch Set-Up                     |          | 0.5  |          | 0.5  |          | 0.6  |           | 0.7  |          | 1.0  | ns    |
| t <sub>OUTH</sub>                                        | Output Buffer Latch Hold                      |          | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | 0.0  | ns    |
| t <sub>OUTSU</sub>                                       | Output Buffer Latch Set-Up                    |          | 0.5  |          | 0.5  |          | 0.6  |           | 0.7  |          | 1.0  | ns    |
| f <sub>MAX</sub>                                         | Flip-Flop (Latch) Clock Frequency             |          | 215  |          | 195  |          | 179  |           | 156  |          | 94   | MHz   |
| <b>Input Module Propagation Delays</b>                   |                                               |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>INYH</sub>                                        | Pad-to-Y HIGH                                 |          | 1.1  |          | 1.2  |          | 1.3  |           | 1.6  |          | 2.2  | ns    |
| t <sub>INYL</sub>                                        | Pad-to-Y LOW                                  |          | 0.8  |          | 0.9  |          | 1.0  |           | 1.2  |          | 1.7  | ns    |
| t <sub>INGH</sub>                                        | G to Y HIGH                                   |          | 1.4  |          | 1.6  |          | 1.8  |           | 2.1  |          | 2.9  | ns    |
| t <sub>INGL</sub>                                        | G to Y LOW                                    |          | 1.4  |          | 1.6  |          | 1.8  |           | 2.1  |          | 2.9  | ns    |
| <b>Input Module Predicted Routing Delays<sup>2</sup></b> |                                               |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                        | FO = 1 Routing Delay                          |          | 1.8  |          | 2.0  |          | 2.3  |           | 2.7  |          | 4.0  | ns    |
| t <sub>IRD2</sub>                                        | FO = 2 Routing Delay                          |          | 2.1  |          | 2.3  |          | 2.6  |           | 3.1  |          | 4.3  | ns    |
| t <sub>IRD3</sub>                                        | FO = 3 Routing Delay                          |          | 2.3  |          | 2.6  |          | 3.0  |           | 3.5  |          | 4.9  | ns    |
| t <sub>IRD4</sub>                                        | FO = 4 Routing Delay                          |          | 2.6  |          | 3.0  |          | 3.3  |           | 3.9  |          | 5.4  | ns    |
| t <sub>IRD8</sub>                                        | FO = 8 Routing Delay                          |          | 3.6  |          | 4.0  |          | 4.6  |           | 5.4  |          | 7.5  | ns    |
| <b>Global Clock Network</b>                              |                                               |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                         | Input LOW to HIGH                             | FO = 32  | 2.6  |          | 2.9  |          | 3.3  |           | 3.9  |          | 5.4  | ns    |
|                                                          |                                               | FO = 384 | 2.9  |          | 3.2  |          | 3.6  |           | 4.3  |          | 6.0  | ns    |
| t <sub>CKL</sub>                                         | Input HIGH to LOW                             | FO = 32  | 3.8  |          | 4.2  |          | 4.8  |           | 5.6  |          | 7.8  | ns    |
|                                                          |                                               | FO = 384 | 4.5  |          | 5.0  |          | 5.6  |           | 6.6  |          | 9.2  | ns    |
| t <sub>PWH</sub>                                         | Minimum Pulse Width<br>HIGH                   | FO = 32  | 3.2  |          | 3.5  |          | 4.0  |           | 4.7  |          | 6.6  | ns    |
|                                                          |                                               | FO = 384 | 3.7  |          | 4.1  |          | 4.6  |           | 5.4  |          | 7.6  | ns    |

**Table 48 • PL68**

| <b>PL68</b>       |                         |                         |
|-------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A40MX02 Function</b> | <b>A40MX04 Function</b> |
| 24                | I/O                     | I/O                     |
| 25                | VCC                     | VCC                     |
| 26                | I/O                     | I/O                     |
| 27                | I/O                     | I/O                     |
| 28                | I/O                     | I/O                     |
| 29                | I/O                     | I/O                     |
| 30                | I/O                     | I/O                     |
| 31                | I/O                     | I/O                     |
| 32                | GND                     | GND                     |
| 33                | I/O                     | I/O                     |
| 34                | I/O                     | I/O                     |
| 35                | I/O                     | I/O                     |
| 36                | I/O                     | I/O                     |
| 37                | I/O                     | I/O                     |
| 38                | VCC                     | VCC                     |
| 39                | I/O                     | I/O                     |
| 40                | I/O                     | I/O                     |
| 41                | I/O                     | I/O                     |
| 42                | I/O                     | I/O                     |
| 43                | I/O                     | I/O                     |
| 44                | I/O                     | I/O                     |
| 45                | I/O                     | I/O                     |
| 46                | I/O                     | I/O                     |
| 47                | I/O                     | I/O                     |
| 48                | I/O                     | I/O                     |
| 49                | GND                     | GND                     |
| 50                | I/O                     | I/O                     |
| 51                | I/O                     | I/O                     |
| 52                | CLK, I/O                | CLK, I/O                |
| 53                | I/O                     | I/O                     |
| 54                | MODE                    | MODE                    |
| 55                | VCC                     | VCC                     |
| 56                | SDI, I/O                | SDI, I/O                |
| 57                | DCLK, I/O               | DCLK, I/O               |
| 58                | PRA, I/O                | PRA, I/O                |
| 59                | PRB, I/O                | PRB, I/O                |
| 60                | I/O                     | I/O                     |

**Table 49 • PL84**

| <b>PL84</b>       |                         |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A40MX04 Function</b> | <b>A42MX09 Function</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> |
| 10                | I/O                     | DCLK, I/O               | DCLK, I/O               | DCLK, I/O               |
| 11                | I/O                     | I/O                     | I/O                     | I/O                     |
| 12                | NC                      | MODE                    | MODE                    | MODE                    |
| 13                | I/O                     | I/O                     | I/O                     | I/O                     |
| 14                | I/O                     | I/O                     | I/O                     | I/O                     |
| 15                | I/O                     | I/O                     | I/O                     | I/O                     |
| 16                | I/O                     | I/O                     | I/O                     | I/O                     |
| 17                | I/O                     | I/O                     | I/O                     | I/O                     |
| 18                | GND                     | I/O                     | I/O                     | I/O                     |
| 19                | GND                     | I/O                     | I/O                     | I/O                     |
| 20                | I/O                     | I/O                     | I/O                     | I/O                     |
| 21                | I/O                     | I/O                     | I/O                     | I/O                     |
| 22                | I/O                     | VCCA                    | VCCI                    | VCCI                    |
| 23                | I/O                     | VCCI                    | VCCA                    | VCCA                    |
| 24                | I/O                     | I/O                     | I/O                     | I/O                     |
| 25                | VCC                     | I/O                     | I/O                     | I/O                     |
| 26                | VCC                     | I/O                     | I/O                     | I/O                     |
| 27                | I/O                     | I/O                     | I/O                     | I/O                     |
| 28                | I/O                     | GND                     | GND                     | GND                     |
| 29                | I/O                     | I/O                     | I/O                     | I/O                     |
| 30                | I/O                     | I/O                     | I/O                     | I/O                     |
| 31                | I/O                     | I/O                     | I/O                     | I/O                     |
| 32                | I/O                     | I/O                     | I/O                     | I/O                     |
| 33                | VCC                     | I/O                     | I/O                     | I/O                     |
| 34                | I/O                     | I/O                     | I/O                     | TMS, I/O                |
| 35                | I/O                     | I/O                     | I/O                     | TDI, I/O                |
| 36                | I/O                     | I/O                     | I/O                     | WD, I/O                 |
| 37                | I/O                     | I/O                     | I/O                     | I/O                     |
| 38                | I/O                     | I/O                     | I/O                     | WD, I/O                 |
| 39                | I/O                     | I/O                     | I/O                     | WD, I/O                 |
| 40                | GND                     | I/O                     | I/O                     | I/O                     |
| 41                | I/O                     | I/O                     | I/O                     | I/O                     |
| 42                | I/O                     | I/O                     | I/O                     | I/O                     |
| 43                | I/O                     | VCCA                    | VCCA                    | VCCA                    |
| 44                | I/O                     | I/O                     | I/O                     | WD, I/O                 |
| 45                | I/O                     | I/O                     | I/O                     | WD, I/O                 |
| 46                | VCC                     | I/O                     | I/O                     | WD, I/O                 |

**Table 52 • PQ160**

| <b>PQ160</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> |
| 21                | CLKA, I/O               | CLKA, I/O               | CLKA, I/O               |
| 22                | I/O                     | I/O                     | I/O                     |
| 23                | PRA, I/O                | PRA, I/O                | PRA, I/O                |
| 24                | NC                      | I/O                     | WD, I/O                 |
| 25                | I/O                     | I/O                     | WD, I/O                 |
| 26                | I/O                     | I/O                     | I/O                     |
| 27                | I/O                     | I/O                     | I/O                     |
| 28                | NC                      | I/O                     | I/O                     |
| 29                | I/O                     | I/O                     | WD, I/O                 |
| 30                | GND                     | GND                     | GND                     |
| 31                | NC                      | I/O                     | WD, I/O                 |
| 32                | I/O                     | I/O                     | I/O                     |
| 33                | I/O                     | I/O                     | I/O                     |
| 34                | I/O                     | I/O                     | I/O                     |
| 35                | NC                      | VCCI                    | VCCI                    |
| 36                | I/O                     | I/O                     | WD, I/O                 |
| 37                | I/O                     | I/O                     | WD, I/O                 |
| 38                | SDI, I/O                | SDI, I/O                | SDI, I/O                |
| 39                | I/O                     | I/O                     | I/O                     |
| 40                | GND                     | GND                     | GND                     |
| 41                | I/O                     | I/O                     | I/O                     |
| 42                | I/O                     | I/O                     | I/O                     |
| 43                | I/O                     | I/O                     | I/O                     |
| 44                | GND                     | GND                     | GND                     |
| 45                | I/O                     | I/O                     | I/O                     |
| 46                | I/O                     | I/O                     | I/O                     |
| 47                | I/O                     | I/O                     | I/O                     |
| 48                | I/O                     | I/O                     | I/O                     |
| 49                | GND                     | GND                     | GND                     |
| 50                | I/O                     | I/O                     | I/O                     |
| 51                | I/O                     | I/O                     | I/O                     |
| 52                | NC                      | I/O                     | I/O                     |
| 53                | I/O                     | I/O                     | I/O                     |
| 54                | NC                      | VCCA                    | VCCA                    |
| 55                | I/O                     | I/O                     | I/O                     |
| 56                | I/O                     | I/O                     | I/O                     |
| 57                | VCCA                    | VCCA                    | VCCA                    |

**Table 53 • PQ208**

| <b>PQ208</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> | <b>A42MX36 Function</b> |
| 21                | I/O                     | I/O                     | I/O                     |
| 22                | GND                     | GND                     | GND                     |
| 23                | I/O                     | I/O                     | I/O                     |
| 24                | I/O                     | I/O                     | I/O                     |
| 25                | I/O                     | I/O                     | I/O                     |
| 26                | I/O                     | I/O                     | I/O                     |
| 27                | GND                     | GND                     | GND                     |
| 28                | VCCI                    | VCCI                    | VCCI                    |
| 29                | VCCA                    | VCCA                    | VCCA                    |
| 30                | I/O                     | I/O                     | I/O                     |
| 31                | I/O                     | I/O                     | I/O                     |
| 32                | VCCA                    | VCCA                    | VCCA                    |
| 33                | I/O                     | I/O                     | I/O                     |
| 34                | I/O                     | I/O                     | I/O                     |
| 35                | I/O                     | I/O                     | I/O                     |
| 36                | I/O                     | I/O                     | I/O                     |
| 37                | I/O                     | I/O                     | I/O                     |
| 38                | I/O                     | I/O                     | I/O                     |
| 39                | I/O                     | I/O                     | I/O                     |
| 40                | I/O                     | I/O                     | I/O                     |
| 41                | NC                      | I/O                     | I/O                     |
| 42                | NC                      | I/O                     | I/O                     |
| 43                | NC                      | I/O                     | I/O                     |
| 44                | I/O                     | I/O                     | I/O                     |
| 45                | I/O                     | I/O                     | I/O                     |
| 46                | I/O                     | I/O                     | I/O                     |
| 47                | I/O                     | I/O                     | I/O                     |
| 48                | I/O                     | I/O                     | I/O                     |
| 49                | I/O                     | I/O                     | I/O                     |
| 50                | NC                      | I/O                     | I/O                     |
| 51                | NC                      | I/O                     | I/O                     |
| 52                | GND                     | GND                     | GND                     |
| 53                | GND                     | GND                     | GND                     |
| 54                | I/O                     | TMS, I/O                | TMS, I/O                |
| 55                | I/O                     | TDI, I/O                | TDI, I/O                |
| 56                | I/O                     | I/O                     | I/O                     |
| 57                | I/O                     | WD, I/O                 | WD, I/O                 |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 15                | QCLKC, I/O              |
| 16                | I/O                     |
| 17                | WD, I/O                 |
| 18                | WD, I/O                 |
| 19                | I/O                     |
| 20                | I/O                     |
| 21                | WD, I/O                 |
| 22                | WD, I/O                 |
| 23                | I/O                     |
| 24                | PRB, I/O                |
| 25                | I/O                     |
| 26                | CLKB, I/O               |
| 27                | I/O                     |
| 28                | GND                     |
| 29                | VCCA                    |
| 30                | VCCI                    |
| 31                | I/O                     |
| 32                | CLKA, I/O               |
| 33                | I/O                     |
| 34                | PRA, I/O                |
| 35                | I/O                     |
| 36                | I/O                     |
| 37                | WD, I/O                 |
| 38                | WD, I/O                 |
| 39                | I/O                     |
| 40                | I/O                     |
| 41                | I/O                     |
| 42                | I/O                     |
| 43                | I/O                     |
| 44                | I/O                     |
| 45                | QCLKD, I/O              |
| 46                | I/O                     |
| 47                | WD, I/O                 |
| 48                | WD, I/O                 |
| 49                | I/O                     |
| 50                | I/O                     |
| 51                | I/O                     |

Figure 47 • VQ100

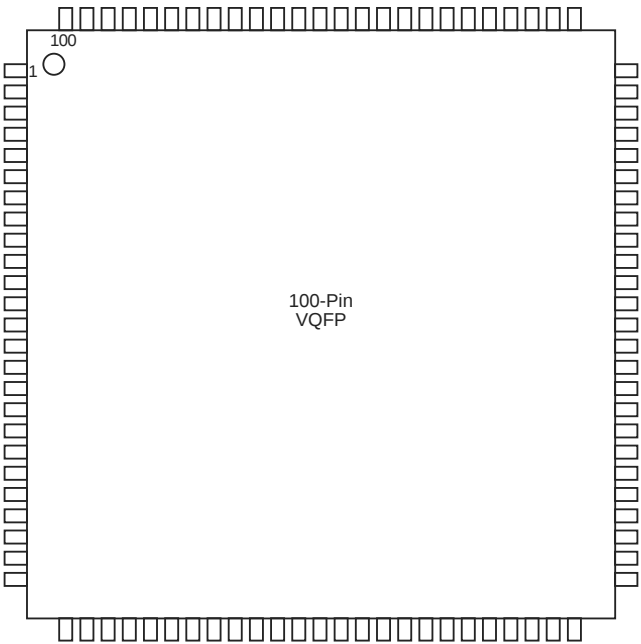



Table 56 • VQ100

| VQ100      |                     |                     |
|------------|---------------------|---------------------|
| Pin Number | A42MX09<br>Function | A42MX16<br>Function |
| 1          | I/O                 | I/O                 |
| 2          | MODE                | MODE                |
| 3          | I/O                 | I/O                 |
| 4          | I/O                 | I/O                 |
| 5          | I/O                 | I/O                 |
| 6          | I/O                 | I/O                 |
| 7          | GND                 | GND                 |
| 8          | I/O                 | I/O                 |
| 9          | I/O                 | I/O                 |
| 10         | I/O                 | I/O                 |
| 11         | I/O                 | I/O                 |
| 12         | I/O                 | I/O                 |
| 13         | I/O                 | I/O                 |
| 14         | VCCA                | NC                  |
| 15         | VCCI                | VCCI                |
| 16         | I/O                 | I/O                 |
| 17         | I/O                 | I/O                 |
| 18         | I/O                 | I/O                 |
| 19         | I/O                 | I/O                 |
| 20         | GND                 | GND                 |

Table 57 • TQ176

| TQ176      |                  |                  |                  |
|------------|------------------|------------------|------------------|
| Pin Number | A42MX09 Function | A42MX16 Function | A42MX24 Function |
| 158        | CLKB, I/O        | CLKB, I/O        | CLKB, I/O        |
| 159        | I/O              | I/O              | I/O              |
| 160        | PRB, I/O         | PRB, I/O         | PRB, I/O         |
| 161        | NC               | I/O              | WD, I/O          |
| 162        | I/O              | I/O              | WD, I/O          |
| 163        | I/O              | I/O              | I/O              |
| 164        | I/O              | I/O              | I/O              |
| 165        | NC               | NC               | WD, I/O          |
| 166        | NC               | I/O              | WD, I/O          |
| 167        | I/O              | I/O              | I/O              |
| 168        | NC               | I/O              | I/O              |
| 169        | I/O              | I/O              | I/O              |
| 170        | NC               | VCCI             | VCCI             |
| 171        | I/O              | I/O              | WD, I/O          |
| 172        | I/O              | I/O              | WD, I/O          |
| 173        | NC               | I/O              | I/O              |
| 174        | I/O              | I/O              | I/O              |
| 175        | DCLK, I/O        | DCLK, I/O        | DCLK, I/O        |
| 176        | I/O              | I/O              | I/O              |

Figure 49 • CQ208

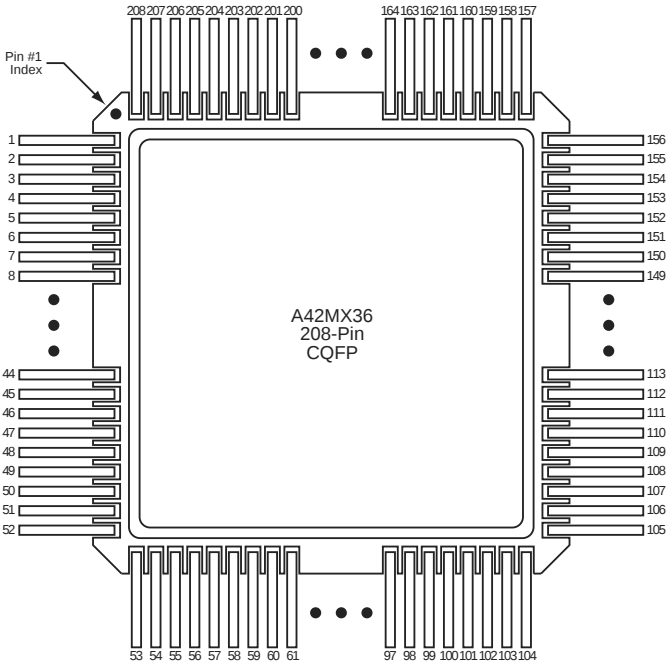

**Table 58 • CQ208**

| <b>CQ208</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 185               | I/O                     |
| 186               | CLKB, I/O               |
| 187               | I/O                     |
| 188               | PRB, I/O                |
| 189               | I/O                     |
| 190               | WD, I/O                 |
| 191               | WD, I/O                 |
| 192               | I/O                     |
| 193               | I/O                     |
| 194               | WD, I/O                 |
| 195               | WD, I/O                 |
| 196               | QCLKC, I/O              |
| 197               | I/O                     |
| 198               | I/O                     |
| 199               | I/O                     |
| 200               | I/O                     |
| 201               | I/O                     |
| 202               | VCCI                    |
| 203               | WD, I/O                 |
| 204               | WD, I/O                 |
| 205               | I/O                     |
| 206               | I/O                     |
| 207               | DCLK, I/O               |
| 208               | I/O                     |

**Table 59 • CQ256**

| <b>CQ256</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 133               | I/O                     |
| 134               | I/O                     |
| 135               | I/O                     |
| 136               | I/O                     |
| 137               | I/O                     |
| 138               | I/O                     |
| 139               | GND                     |
| 140               | I/O                     |
| 141               | I/O                     |
| 142               | I/O                     |
| 143               | I/O                     |
| 144               | I/O                     |
| 145               | I/O                     |
| 146               | I/O                     |
| 147               | I/O                     |
| 148               | I/O                     |
| 149               | I/O                     |
| 150               | I/O                     |
| 151               | I/O                     |
| 152               | I/O                     |
| 153               | I/O                     |
| 154               | I/O                     |
| 155               | VCCA                    |
| 156               | I/O                     |
| 157               | I/O                     |
| 158               | VCCA                    |
| 159               | VCCI                    |
| 160               | GND                     |
| 161               | I/O                     |
| 162               | I/O                     |
| 163               | I/O                     |
| 164               | I/O                     |
| 165               | GND                     |
| 166               | I/O                     |
| 167               | I/O                     |
| 168               | I/O                     |
| 169               | I/O                     |

**Table 60 • BG272**

| <b>BG272</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| T19               | I/O                     |
| T20               | I/O                     |
| U1                | I/O                     |
| U2                | I/O                     |
| U3                | I/O                     |
| U4                | I/O                     |
| U5                | VCCI                    |
| U6                | WD, I/O                 |
| U7                | I/O                     |
| U8                | I/O                     |
| U9                | WD, I/O                 |
| U10               | VCCA                    |
| U11               | VCCI                    |
| U12               | I/O                     |
| U13               | I/O                     |
| U14               | QCLKB, I/O              |
| U15               | I/O                     |
| U16               | VCCI                    |
| U17               | I/O                     |
| U18               | GND                     |
| U19               | I/O                     |
| U20               | I/O                     |
| V1                | I/O                     |
| V2                | I/O                     |
| V3                | GND                     |
| V4                | GND                     |
| V5                | I/O                     |
| V6                | I/O                     |
| V7                | I/O                     |
| V8                | WD, I/O                 |
| V9                | I/O                     |
| V10               | I/O                     |
| V11               | I/O                     |
| V12               | I/O                     |
| V13               | WD, I/O                 |
| V14               | I/O                     |
| V15               | WD, I/O                 |

**Table 61 • PG132**

| <b>PG132</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> |
| N10               | I/O                     |
| M10               | I/O                     |
| N11               | I/O                     |
| L10               | I/O                     |
| M11               | I/O                     |
| N12               | SDO                     |
| M12               | I/O                     |
| L11               | I/O                     |
| N13               | I/O                     |
| M13               | I/O                     |
| K11               | I/O                     |
| L12               | I/O                     |
| L13               | I/O                     |
| K13               | I/O                     |
| H10               | I/O                     |
| J12               | I/O                     |
| J13               | I/O                     |
| H11               | I/O                     |
| H12               | I/O                     |
| H13               | VKS                     |
| G13               | VPP                     |