



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                        |
| Number of LABs/CLBs            | -                                                                                                                                                               |
| Number of Logic Elements/Cells | -                                                                                                                                                               |
| Total RAM Bits                 | -                                                                                                                                                               |
| Number of I/O                  | 69                                                                                                                                                              |
| Number of Gates                | 6000                                                                                                                                                            |
| Voltage - Supply               | 3V ~ 3.6V, 4.75V ~ 5.25V                                                                                                                                        |
| Mounting Type                  | Surface Mount                                                                                                                                                   |
| Operating Temperature          | 0°C ~ 70°C (TA)                                                                                                                                                 |
| Package / Case                 | 100-BQFP                                                                                                                                                        |
| Supplier Device Package        | 100-PQFP (20x14)                                                                                                                                                |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a40mx04-3pq100">https://www.e-xfl.com/product-detail/microchip-technology/a40mx04-3pq100</a> |

Figure 51 BG272 ..... 145

Figure 52 PG132 ..... 153

Figure 53 CQ172 ..... 158


**Table 1 • Product profile**

| Device                   | A40MX02 | A40MX04    | A42MX09       | A42MX16       | A42MX24  | A42MX36  |
|--------------------------|---------|------------|---------------|---------------|----------|----------|
| Maximum Flip-Flops       | 147     | 273        | 516           | 928           | 1,410    | 1,822    |
| Clocks                   | 1       | 1          | 2             | 2             | 2        | 6        |
| User I/O (maximum)       | 57      | 69         | 104           | 140           | 176      | 202      |
| PCI                      | –       | –          | –             | –             | Yes      | Yes      |
| Boundary Scan Test (BST) | –       | –          | –             | –             | Yes      | Yes      |
| Packages (by pin count)  |         |            |               |               |          |          |
| PLCC                     | 44, 68  | 44, 68, 84 | 84            | 84            | 84       | –        |
| PQFP                     | 100     | 100        | 100, 144, 160 | 100, 160, 208 | 160, 208 | 208, 240 |
| VQFP                     | 80      | 80         | 100           | 100           | –        | –        |
| TQFP                     | –       | –          | 176           | 176           | 176      | –        |
| CQFP                     | –       | –          | –             | 172           | –        | 208, 256 |
| PBGA                     | –       | –          | –             | –             | –        | 272      |
| CPGA                     | –       | –          | 132           | –             | –        | –        |

## 2.3 Ordering Information


The following figure shows ordering information. All the following tables show plastic and ceramic device resources, temperature and speed grade offerings.

**Figure 1 • Ordering Information**

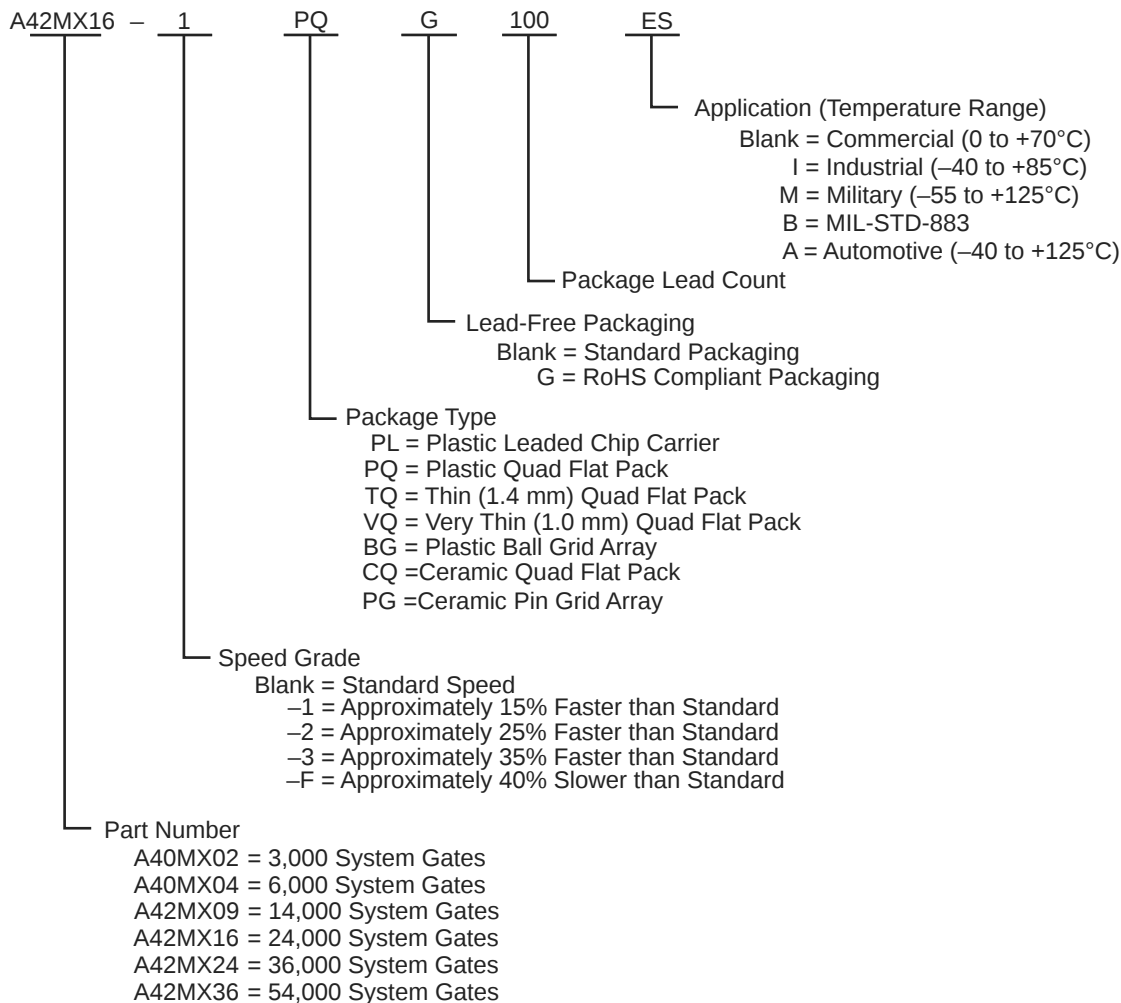


Designer software development tools provide a design library of I/O macro functions that can implement all I/O configurations supported by the MX FPGAs.

**Figure 10 • 42MX I/O Module**

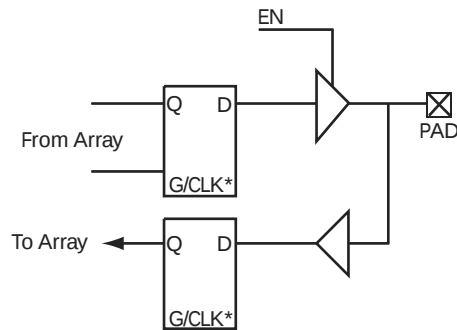

**Note:** \*Can be configured as a Latch or D Flip-Flop (Using C-Module)

**Figure 11 • PCI Output Structure of A42MX24 and A42MX36 Devices**

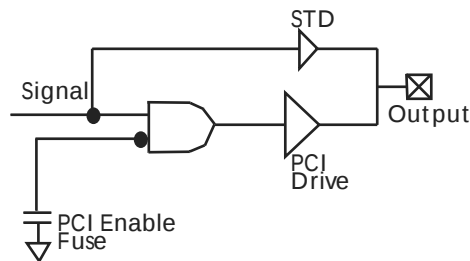

## 3.3 Other Architectural Features

The following sections cover other architectural features of 40MX and 42MX FPGAs.

### 3.3.1 Performance

MX devices can operate with internal clock frequencies of 250 MHz, enabling fast execution of complex logic functions. MX devices are live on power-up and do not require auxiliary configuration devices and thus are an optimal platform to integrate the functionality contained in multiple programmable logic devices. In addition, designs that previously would have required a gate array to meet performance can be integrated into an MX device with improvements in cost and time-to-market. Using timing-driven place-and-route (TDPR) tools, designers can achieve highly deterministic device performance.


### 3.3.2 User Security

Microsemi FuseLock provides robust security against design theft. Special security fuses are hidden in the fabric of the device and protect against unauthorized users attempting to access the programming and/or probe interfaces. It is virtually impossible to identify or bypass these fuses without damaging the device, making Microsemi antifuse FPGAs protected with the highest level of security available from both invasive and noninvasive attacks.

Special security fuses in 40MX devices include the Probe Fuse and Program Fuse. The former disables the probing circuitry while the latter prohibits further programming of all fuses, including the Probe Fuse. In 42MX devices, there is the Security Fuse which, when programmed, both disables the probing circuitry and prohibits further programming of the device.

### 3.3.3 Programming


Device programming is supported through the Silicon Sculptor series of programmers. Silicon Sculptor is a compact, robust, single-site and multi-site device programmer for the PC. With standalone software, Silicon Sculptor is designed to allow concurrent programming of multiple units from the same PC.

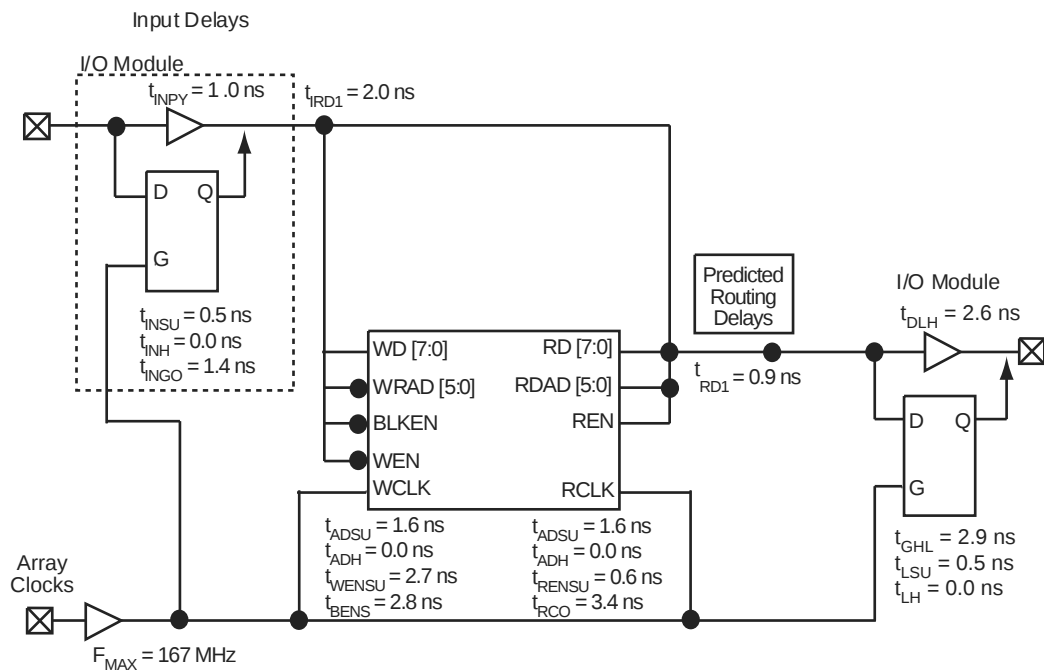**Figure 20 • 42MX Timing Model (SRAM Functions)**

**Note:** Values are shown for A42MX36 –3 at 5.0 V worst-case commercial conditions.

### 3.10.1 Parameter Measurement

The following figures show parameter measurement details.

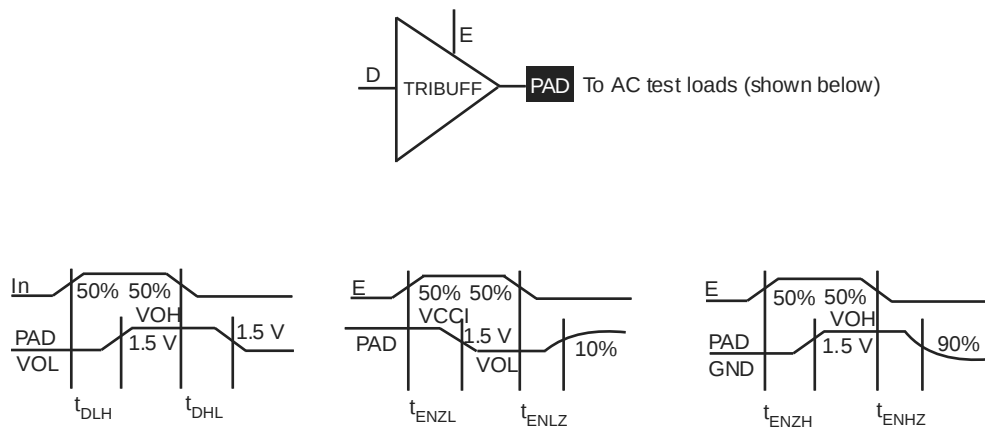**Figure 21 • Output Buffer Delays**

**Table 41 • A42MX16 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                                            |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|--------------------------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                                            |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Sequential Timing <sup>3, 4</sup>     |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>SUD</sub>                                   | Flip-Flop (Latch) Data Input Set-Up        |          | 0.5      |      | 0.5      |      | 0.6      |      | 0.7       |      | 0.9      |      | ns    |
| t <sub>HD</sub>                                    | Flip-Flop (Latch) Data Input Hold          |          | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>SUENA</sub>                                 | Flip-Flop (Latch) Enable Set-Up            |          | 1.0      |      | 1.1      |      | 1.2      |      | 1.4       |      | 2.0      |      | ns    |
| t <sub>HENA</sub>                                  | Flip-Flop (Latch) Enable Hold              |          | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>WCLKA</sub>                                 | Flip-Flop (Latch) Clock Active Pulse Width |          | 4.8      |      | 5.3      |      | 6.0      |      | 7.1       |      | 9.9      |      | ns    |
| t <sub>WASYN</sub>                                 | Flip-Flop (Latch) Asynchronous Pulse Width |          | 6.2      |      | 6.9      |      | 7.9      |      | 9.2       |      | 12.9     |      | ns    |
| t <sub>A</sub>                                     | Flip-Flop Clock Input Period               |          | 9.5      |      | 10.6     |      | 12.0     |      | 14.1      |      | 19.8     |      | ns    |
| t <sub>INH</sub>                                   | Input Buffer Latch Hold                    |          | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>INSU</sub>                                  | Input Buffer Latch Set-Up                  |          | 0.7      |      | 0.8      |      | 0.9      |      | 1.01      |      | 1.4      |      | ns    |
| t <sub>OUTH</sub>                                  | Output Buffer Latch Hold                   |          | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>OUTSU</sub>                                 | Output Buffer Latch Set-Up                 |          | 0.7      |      | 0.8      |      | 0.89     |      | 1.01      |      | 1.4      |      | ns    |
| f <sub>MAX</sub>                                   | Flip-Flop (Latch) Clock Frequency          |          |          | 129  |          | 117  |          | 108  |           | 94   |          | 56   | MHz   |
| Input Module Propagation Delays                    |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>INYH</sub>                                  | Pad-to-Y HIGH                              |          |          | 1.5  |          | 1.6  |          | 1.9  |           | 2.2  |          | 3.1  | ns    |
| t <sub>INYL</sub>                                  | Pad-to-Y LOW                               |          |          | 1.1  |          | 1.3  |          | 1.4  |           | 1.7  |          | 2.4  | ns    |
| t <sub>INGH</sub>                                  | G to Y HIGH                                |          |          | 2.0  |          | 2.2  |          | 2.5  |           | 2.9  |          | 4.1  | ns    |
| t <sub>INGL</sub>                                  | G to Y LOW                                 |          |          | 2.0  |          | 2.2  |          | 2.5  |           | 2.9  |          | 4.1  | ns    |
| Input Module Predicted Routing Delays <sup>2</sup> |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay                       |          |          | 2.6  |          | 2.9  |          | 3.2  |           | 3.8  |          | 5.3  | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay                       |          |          | 2.9  |          | 3.2  |          | 3.7  |           | 4.3  |          | 6.1  | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay                       |          |          | 3.3  |          | 3.6  |          | 4.1  |           | 4.9  |          | 6.8  | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay                       |          |          | 3.6  |          | 4.0  |          | 4.6  |           | 5.4  |          | 7.6  | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay                       |          |          | 5.1  |          | 5.6  |          | 6.4  |           | 7.5  |          | 10.5 | ns    |
| Global Clock Network                               |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input LOW to HIGH                          | FO = 32  | 4.4      |      | 4.8      |      | 5.5      |      | 6.5       |      | 9.0      | ns   |       |
|                                                    |                                            | FO = 384 | 4.8      |      | 5.3      |      | 6.0      |      | 7.1       |      | 9.9      | ns   |       |
| t <sub>CKL</sub>                                   | Input HIGH to LOW                          | FO = 32  | 5.3      |      | 5.9      |      | 6.7      |      | 7.8       |      | 11.0     | ns   |       |
|                                                    |                                            | FO = 384 | 6.2      |      | 6.9      |      | 7.9      |      | 9.2       |      | 12.9     | ns   |       |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH                   | FO = 32  | 5.7      |      | 6.3      |      | 7.1      |      | 8.4       |      | 11.8     | ns   |       |
|                                                    |                                            | FO = 384 | 6.6      |      | 7.4      |      | 8.3      |      | 9.8       |      | 13.7     | ns   |       |

**Table 41 • A42MX16 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                |                                                       |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------|-------------------------------------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                                                       |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| t <sub>PWL</sub>                       | Minimum Pulse Width LOW                               | FO = 32  | 5.3      |      | 5.9      |      | 6.7      |      | 7.8       |      | 11.0     |      | ns    |
|                                        |                                                       | FO = 384 | 6.2      |      | 6.9      |      | 7.9      |      | 9.2       |      | 12.9     |      | ns    |
| t <sub>CKSW</sub>                      | Maximum Skew                                          | FO = 32  |          | 0.5  |          | 0.5  |          | 0.6  |           | 0.7  |          | 1.0  | ns    |
|                                        |                                                       | FO = 384 |          | 2.2  |          | 2.4  |          | 2.7  |           | 3.2  |          | 4.5  | ns    |
| t <sub>SUEXT</sub>                     | Input Latch External Set-Up                           | FO = 32  | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
|                                        |                                                       | FO = 384 | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>HEXT</sub>                      | Input Latch External Hold                             | FO = 32  | 3.9      |      | 4.3      |      | 4.9      |      | 5.7       |      | 8.0      |      | ns    |
|                                        |                                                       | FO = 384 | 4.5      |      | 4.9      |      | 5.6      |      | 6.6       |      | 9.2      |      | ns    |
| t <sub>p</sub>                         | Minimum Period                                        | FO = 32  | 7.0      |      | 7.8      |      | 8.4      |      | 9.7       |      | 16.2     |      | ns    |
|                                        |                                                       | FO = 384 | 7.7      |      | 8.6      |      | 9.3      |      | 10.7      |      | 17.8     |      | ns    |
| f <sub>MAX</sub>                       | Maximum Frequency                                     | FO = 32  |          | 142  |          | 129  |          | 119  |           | 103  |          | 62   | MHz   |
|                                        |                                                       | FO = 384 |          | 129  |          | 117  |          | 108  |           | 94   |          | 56   | MHz   |
| TTL Output Module Timing <sup>5</sup>  |                                                       |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH                                      |          |          | 3.5  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW                                       |          |          | 4.1  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH                                  |          |          | 3.8  |          | 4.2  |          | 4.8  |           | 5.6  |          | 7.8  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW                                   |          |          | 4.2  |          | 4.6  |          | 5.3  |           | 6.2  |          | 8.7  | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z                                  |          |          | 7.6  |          | 8.4  |          | 9.5  |           | 11.2 |          | 15.7 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z                                   |          |          | 7.0  |          | 7.8  |          | 8.8  |           | 10.4 |          | 14.5 | ns    |
| t <sub>GLH</sub>                       | G-to-Pad HIGH                                         |          |          | 4.8  |          | 5.3  |          | 6.0  |           | 7.2  |          | 10.0 | ns    |
| t <sub>GHL</sub>                       | G-to-Pad LOW                                          |          |          | 4.8  |          | 5.3  |          | 6.0  |           | 7.2  |          | 10.0 | ns    |
| t <sub>LCO</sub>                       | I/O Latch Clock-to-Out (Pad-to-Pad), 64 Clock Loading |          |          | 8.0  |          | 8.9  |          | 10.1 |           | 11.9 |          | 16.7 | ns    |
| t <sub>ACO</sub>                       | Array Clock-to-Out (Pad-to-Pad), 64 Clock Loading     |          |          | 11.3 |          | 12.5 |          | 14.2 |           | 16.7 |          | 23.3 | ns    |
| d <sub>TLH</sub>                       | Capacitive Loading, LOW to HIGH                       |          |          | 0.04 |          | 0.04 |          | 0.05 |           | 0.06 |          | 0.08 | ns/pF |
| d <sub>THL</sub>                       | Capacitive Loading, HIGH to LOW                       |          |          | 0.05 |          | 0.05 |          | 0.06 |           | 0.07 |          | 0.10 | ns/pF |
| CMOS Output Module Timing <sup>5</sup> |                                                       |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH                                      |          |          | 4.5  |          | 5.0  |          | 5.6  |           | 6.6  |          | 9.3  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW                                       |          |          | 3.4  |          | 3.8  |          | 4.3  |           | 5.1  |          | 7.1  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH                                  |          |          | 3.8  |          | 4.2  |          | 4.8  |           | 5.6  |          | 7.8  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW                                   |          |          | 4.2  |          | 4.6  |          | 5.3  |           | 6.2  |          | 8.7  | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z                                  |          |          | 7.6  |          | 8.4  |          | 9.5  |           | 11.2 |          | 15.7 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z                                   |          |          | 7.0  |          | 7.8  |          | 8.8  |           | 10.4 |          | 14.5 | ns    |
| t <sub>GLH</sub>                       | G-to-Pad HIGH                                         |          |          | 7.1  |          | 7.9  |          | 8.9  |           | 10.5 |          | 14.7 | ns    |
| t <sub>GHL</sub>                       | G-to-Pad LOW                                          |          |          | 7.1  |          | 7.9  |          | 8.9  |           | 10.5 |          | 14.7 | ns    |
| t <sub>LCO</sub>                       | I/O Latch Clock-to-Out (Pad-to-Pad), 64 Clock Loading |          |          | 8.0  |          | 8.9  |          | 10.1 |           | 11.9 |          | 16.7 | ns    |

**Table 42 • A42MX24 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                                      |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|--------------------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                                      |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Input Module Predicted Routing Delays <sup>2</sup> |                                      |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay                 |          | 1.8      |      | 2.0      |      | 2.3      |      | 2.7       |      | 3.8      |      | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay                 |          | 2.1      |      | 2.3      |      | 2.6      |      | 3.1       |      | 4.3      |      | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay                 |          | 2.3      |      | 2.5      |      | 2.9      |      | 3.4       |      | 4.8      |      | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay                 |          | 2.5      |      | 2.8      |      | 3.2      |      | 3.7       |      | 5.2      |      | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay                 |          | 3.4      |      | 3.8      |      | 4.3      |      | 5.1       |      | 7.1      |      | ns    |
| Global Clock Network                               |                                      |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input LOW to HIGH                    | FO = 32  | 2.6      |      | 2.9      |      | 3.3      |      | 3.9       |      | 5.4      |      | ns    |
|                                                    |                                      | FO = 486 | 2.9      |      | 3.2      |      | 3.6      |      | 4.3       |      | 5.9      |      | ns    |
| t <sub>CKL</sub>                                   | Input HIGH to LOW                    | FO = 32  | 3.7      |      | 4.1      |      | 4.6      |      | 5.4       |      | 7.6      |      | ns    |
|                                                    |                                      | FO = 486 | 4.3      |      | 4.7      |      | 5.4      |      | 6.3       |      | 8.8      |      | ns    |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH             | FO = 32  | 2.2      | 2.4  | 2.7      |      | 3.2      |      | 4.5       |      |          |      | ns    |
|                                                    |                                      | FO = 486 | 2.4      | 2.6  | 3.0      |      | 3.5      |      | 4.9       |      |          |      | ns    |
| t <sub>PWL</sub>                                   | Minimum Pulse Width LOW              | FO = 32  | 2.2      | 2.4  | 2.7      |      | 3.2      |      | 4.5       |      |          |      | ns    |
|                                                    |                                      | FO = 486 | 2.4      | 2.6  | 3.0      |      | 3.5      |      | 4.9       |      |          |      | ns    |
| t <sub>CKSW</sub>                                  | Maximum Skew                         | FO = 32  | 0.5      |      | 0.6      |      | 0.7      |      | 0.8       |      | 1.1      |      | ns    |
|                                                    |                                      | FO = 486 | 0.5      |      | 0.6      |      | 0.7      |      | 0.8       |      | 1.1      |      | ns    |
| t <sub>SUEXT</sub>                                 | Input Latch External Set-Up          | FO = 32  | 0.0      | 0.0  | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
|                                                    |                                      | FO = 486 | 0.0      | 0.0  | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>HEXT</sub>                                  | Input Latch External Hold            | FO = 32  | 2.8      | 3.1  | 3.5      |      | 4.1      |      | 5.7       |      |          |      | ns    |
|                                                    |                                      | FO = 486 | 3.3      | 3.7  | 4.2      |      | 4.9      |      | 6.9       |      |          |      | ns    |
| t <sub>P</sub>                                     | Minimum Period (1/f <sub>MAX</sub> ) | FO = 32  | 4.7      | 5.2  | 5.7      |      | 6.5      |      | 10.9      |      |          |      | ns    |
|                                                    |                                      | FO = 486 | 5.1      | 5.7  | 6.2      |      | 7.1      |      | 11.9      |      |          |      | ns    |

**Table 43 • A42MX24 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                        |                                               | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|------------------------------------------------|-----------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                |                                               | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Sequential Timing <sup>3, 4</sup> |                                               |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CO</sub>                                | Flip-Flop Clock-to-Output                     |          | 2.1  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>GO</sub>                                | Latch Gate-to-Output                          |          | 3.4  |          | 1.9  |          | 2.1  |           | 2.5  |          | 3.4  | ns    |
| t <sub>SUD</sub>                               | Flip-Flop (Latch) Set-Up Time                 | 0.4      |      | 0.5      |      | 0.6      |      | 0.7       |      | 0.9      |      | ns    |
| t <sub>HD</sub>                                | Flip-Flop (Latch) Hold Time                   | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>RO</sub>                                | Flip-Flop (Latch) Reset-to-Output             |          | 2.0  |          | 2.2  |          | 2.5  |           | 2.9  |          | 4.1  | ns    |
| t <sub>SUENA</sub>                             | Flip-Flop (Latch) Enable Set-Up               | 0.6      |      | 0.6      |      | 0.7      |      | 0.8       |      | 1.2      |      | ns    |
| t <sub>HENA</sub>                              | Flip-Flop (Latch) Enable Hold                 | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>WCLKA</sub>                             | Flip-Flop (Latch)<br>Clock Active Pulse Width | 4.6      |      | 5.2      |      | 5.8      |      | 6.9       |      | 9.6      |      | ns    |
| t <sub>WASYN</sub>                             | Flip-Flop (Latch)<br>Asynchronous Pulse Width | 6.1      |      | 6.8      |      | 7.7      |      | 9.0       |      | 12.6     |      | ns    |
| Input Module Propagation Delays                |                                               |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>INPY</sub>                              | Input Data Pad-to-Y                           |          | 1.4  |          | 1.6  |          | 1.8  |           | 2.2  |          | 3.0  | ns    |
| t <sub>INGO</sub>                              | Input Latch Gate-to-Output                    |          | 1.8  |          | 1.9  |          | 2.2  |           | 2.6  |          | 3.6  | ns    |
| t <sub>INH</sub>                               | Input Latch Hold                              | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>INSU</sub>                              | Input Latch Set-Up                            | 0.7      |      | 0.7      |      | 0.8      |      | 1.0       |      | 1.4      |      | ns    |
| t <sub>ILA</sub>                               | Latch Active Pulse Width                      | 6.5      |      | 7.3      |      | 8.2      |      | 9.7       |      | 13.5     |      | ns    |

**Table 52 • PQ160**

| <b>PQ160</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> |
| 132               | I/O                     | I/O                     | I/O                     |
| 133               | I/O                     | I/O                     | I/O                     |
| 134               | I/O                     | I/O                     | I/O                     |
| 135               | NC                      | VCCA                    | VCCA                    |
| 136               | I/O                     | I/O                     | I/O                     |
| 137               | I/O                     | I/O                     | I/O                     |
| 138               | NC                      | VCCA                    | VCCA                    |
| 139               | VCCI                    | VCCI                    | VCCI                    |
| 140               | GND                     | GND                     | GND                     |
| 141               | NC                      | I/O                     | I/O                     |
| 142               | I/O                     | I/O                     | I/O                     |
| 143               | I/O                     | I/O                     | I/O                     |
| 144               | I/O                     | I/O                     | I/O                     |
| 145               | GND                     | GND                     | GND                     |
| 146               | NC                      | I/O                     | I/O                     |
| 147               | I/O                     | I/O                     | I/O                     |
| 148               | I/O                     | I/O                     | I/O                     |
| 149               | I/O                     | I/O                     | I/O                     |
| 150               | NC                      | VCCA                    | VCCA                    |
| 151               | NC                      | I/O                     | I/O                     |
| 152               | NC                      | I/O                     | I/O                     |
| 153               | NC                      | I/O                     | I/O                     |
| 154               | NC                      | I/O                     | I/O                     |
| 155               | GND                     | GND                     | GND                     |
| 156               | I/O                     | I/O                     | I/O                     |
| 157               | I/O                     | I/O                     | I/O                     |
| 158               | I/O                     | I/O                     | I/O                     |
| 159               | MODE                    | MODE                    | MODE                    |
| 160               | GND                     | GND                     | GND                     |

**Table 53 • PQ208**

| <b>PQ208</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> | <b>A42MX36 Function</b> |
| 95                | NC                      | I/O                     | I/O                     |
| 96                | NC                      | I/O                     | I/O                     |
| 97                | NC                      | I/O                     | I/O                     |
| 98                | VCCI                    | VCCI                    | VCCI                    |
| 99                | I/O                     | I/O                     | I/O                     |
| 100               | I/O                     | WD, I/O                 | WD, I/O                 |
| 101               | I/O                     | WD, I/O                 | WD, I/O                 |
| 102               | I/O                     | I/O                     | I/O                     |
| 103               | SDO, I/O                | SDO, TDO, I/O           | SDO, TDO, I/O           |
| 104               | I/O                     | I/O                     | I/O                     |
| 105               | GND                     | GND                     | GND                     |
| 106               | NC                      | VCCA                    | VCCA                    |
| 107               | I/O                     | I/O                     | I/O                     |
| 108               | I/O                     | I/O                     | I/O                     |
| 109               | I/O                     | I/O                     | I/O                     |
| 110               | I/O                     | I/O                     | I/O                     |
| 111               | I/O                     | I/O                     | I/O                     |
| 112               | NC                      | I/O                     | I/O                     |
| 113               | NC                      | I/O                     | I/O                     |
| 114               | NC                      | I/O                     | I/O                     |
| 115               | NC                      | I/O                     | I/O                     |
| 116               | I/O                     | I/O                     | I/O                     |
| 117               | I/O                     | I/O                     | I/O                     |
| 118               | I/O                     | I/O                     | I/O                     |
| 119               | I/O                     | I/O                     | I/O                     |
| 120               | I/O                     | I/O                     | I/O                     |
| 121               | I/O                     | I/O                     | I/O                     |
| 122               | I/O                     | I/O                     | I/O                     |
| 123               | I/O                     | I/O                     | I/O                     |
| 124               | I/O                     | I/O                     | I/O                     |
| 125               | I/O                     | I/O                     | I/O                     |
| 126               | GND                     | GND                     | GND                     |
| 127               | I/O                     | I/O                     | I/O                     |
| 128               | I/O                     | TCK, I/O                | TCK, I/O                |
| 129               | LP                      | LP                      | LP                      |
| 130               | VCCA                    | VCCA                    | VCCA                    |
| 131               | GND                     | GND                     | GND                     |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 52                | VCCI                    |
| 53                | I/O                     |
| 54                | WD, I/O                 |
| 55                | WD, I/O                 |
| 56                | I/O                     |
| 57                | SDI, I/O                |
| 58                | I/O                     |
| 59                | VCCA                    |
| 60                | GND                     |
| 61                | GND                     |
| 62                | I/O                     |
| 63                | I/O                     |
| 64                | I/O                     |
| 65                | I/O                     |
| 66                | I/O                     |
| 67                | I/O                     |
| 68                | I/O                     |
| 69                | I/O                     |
| 70                | I/O                     |
| 71                | VCCI                    |
| 72                | I/O                     |
| 73                | I/O                     |
| 74                | I/O                     |
| 75                | I/O                     |
| 76                | I/O                     |
| 77                | I/O                     |
| 78                | I/O                     |
| 79                | I/O                     |
| 80                | I/O                     |
| 81                | I/O                     |
| 82                | I/O                     |
| 83                | I/O                     |
| 84                | I/O                     |
| 85                | VCCA                    |
| 86                | I/O                     |
| 87                | I/O                     |
| 88                | VCCA                    |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 163               | WD, I/O                 |
| 164               | WD, I/O                 |
| 165               | I/O                     |
| 166               | QCLKA, I/O              |
| 167               | I/O                     |
| 168               | I/O                     |
| 169               | I/O                     |
| 170               | I/O                     |
| 171               | I/O                     |
| 172               | VCCI                    |
| 173               | I/O                     |
| 174               | WD, I/O                 |
| 175               | WD, I/O                 |
| 176               | I/O                     |
| 177               | I/O                     |
| 178               | TDI, I/O                |
| 179               | TMS, I/O                |
| 180               | GND                     |
| 181               | VCCA                    |
| 182               | GND                     |
| 183               | I/O                     |
| 184               | I/O                     |
| 185               | I/O                     |
| 186               | I/O                     |
| 187               | I/O                     |
| 188               | I/O                     |
| 189               | I/O                     |
| 190               | I/O                     |
| 191               | I/O                     |
| 192               | VCCI                    |
| 193               | I/O                     |
| 194               | I/O                     |
| 195               | I/O                     |
| 196               | I/O                     |
| 197               | I/O                     |
| 198               | I/O                     |
| 199               | I/O                     |

Table 54 • PQ240

| PQ240      |                  |
|------------|------------------|
| Pin Number | A42MX36 Function |
| 237        | GND              |
| 238        | MODE             |
| 239        | VCCA             |
| 240        | GND              |

Figure 46 • VQ80

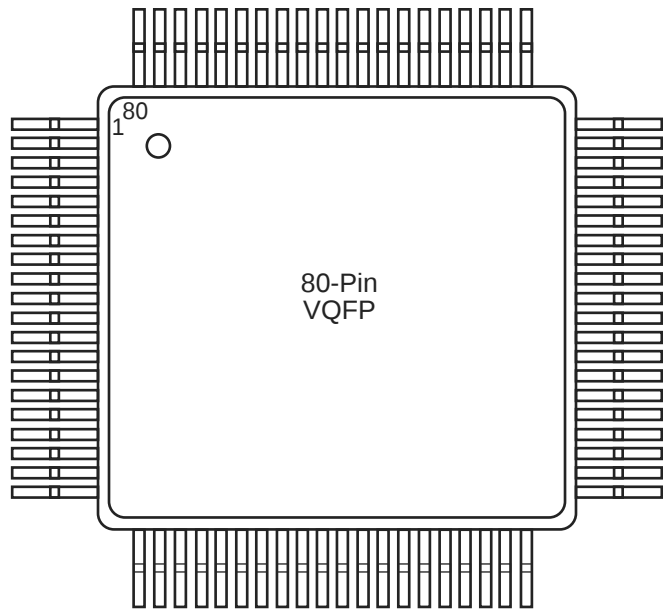


Table 55 • VQ80

| VQ80       |                  |                  |
|------------|------------------|------------------|
| Pin Number | A40MX02 Function | A40MX04 Function |
| 1          | I/O              | I/O              |
| 2          | NC               | I/O              |
| 3          | NC               | I/O              |
| 4          | NC               | I/O              |
| 5          | I/O              | I/O              |
| 6          | I/O              | I/O              |
| 7          | GND              | GND              |
| 8          | I/O              | I/O              |
| 9          | I/O              | I/O              |
| 10         | I/O              | I/O              |
| 11         | I/O              | I/O              |
| 12         | I/O              | I/O              |

**Table 55 • VQ80**

| <b>VQ80</b>       |                             |                             |
|-------------------|-----------------------------|-----------------------------|
| <b>Pin Number</b> | <b>A40MX02<br/>Function</b> | <b>A40MX04<br/>Function</b> |
| 49                | I/O                         | I/O                         |
| 50                | CLK, I/O                    | CLK, I/O                    |
| 51                | I/O                         | I/O                         |
| 52                | MODE                        | MODE                        |
| 53                | VCC                         | VCC                         |
| 54                | NC                          | I/O                         |
| 55                | NC                          | I/O                         |
| 56                | NC                          | I/O                         |
| 57                | SDI, I/O                    | SDI, I/O                    |
| 58                | DCLK, I/O                   | DCLK, I/O                   |
| 59                | PRA, I/O                    | PRA, I/O                    |
| 60                | NC                          | NC                          |
| 61                | PRB, I/O                    | PRB, I/O                    |
| 62                | I/O                         | I/O                         |
| 63                | I/O                         | I/O                         |
| 64                | I/O                         | I/O                         |
| 65                | I/O                         | I/O                         |
| 66                | I/O                         | I/O                         |
| 67                | I/O                         | I/O                         |
| 68                | GND                         | GND                         |
| 69                | I/O                         | I/O                         |
| 70                | I/O                         | I/O                         |
| 71                | I/O                         | I/O                         |
| 72                | I/O                         | I/O                         |
| 73                | I/O                         | I/O                         |
| 74                | VCC                         | <b>VCC</b>                  |
| 75                | I/O                         | I/O                         |
| 76                | I/O                         | I/O                         |
| 77                | I/O                         | I/O                         |
| 78                | I/O                         | I/O                         |
| 79                | I/O                         | I/O                         |
| 80                | I/O                         | I/O                         |

**Table 58 • CQ208**

| <b>CQ208</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 1                 | GND                     |
| 2                 | VCCA                    |
| 3                 | MODE                    |
| 4                 | I/O                     |
| 5                 | I/O                     |
| 6                 | I/O                     |
| 7                 | I/O                     |
| 8                 | I/O                     |
| 9                 | I/O                     |
| 10                | I/O                     |
| 11                | I/O                     |
| 12                | I/O                     |
| 13                | I/O                     |
| 14                | I/O                     |
| 15                | I/O                     |
| 16                | I/O                     |
| 17                | VCCA                    |
| 18                | I/O                     |
| 19                | I/O                     |
| 20                | I/O                     |
| 21                | I/O                     |
| 22                | GND                     |
| 23                | I/O                     |
| 24                | I/O                     |
| 25                | I/O                     |
| 26                | I/O                     |
| 27                | GND                     |
| 28                | VCCI                    |
| 29                | VCCA                    |
| 30                | I/O                     |
| 31                | I/O                     |
| 32                | VCCA                    |
| 33                | I/O                     |
| 34                | I/O                     |
| 35                | I/O                     |
| 36                | I/O                     |

**Table 59 • CQ256**

| <b>CQ256</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 59                | I/O                     |
| 60                | VCCA                    |
| 61                | GND                     |
| 62                | GND                     |
| 63                | NC                      |
| 64                | NC                      |
| 65                | NC                      |
| 66                | I/O                     |
| 67                | SDO, TDO, I/O           |
| 68                | I/O                     |
| 69                | WD, I/O                 |
| 70                | WD, I/O                 |
| 71                | I/O                     |
| 72                | VCCI                    |
| 73                | I/O                     |
| 74                | I/O                     |
| 75                | I/O                     |
| 76                | WD, I/O                 |
| 77                | GND                     |
| 78                | WD, I/O                 |
| 79                | I/O                     |
| 80                | QCLKB, I/O              |
| 81                | I/O                     |
| 82                | I/O                     |
| 83                | I/O                     |
| 84                | I/O                     |
| 85                | I/O                     |
| 86                | I/O                     |
| 87                | WD, I/O                 |
| 88                | WD, I/O                 |
| 89                | I/O                     |
| 90                | I/O                     |
| 91                | I/O                     |
| 92                | I/O                     |
| 93                | I/O                     |
| 94                | I/O                     |
| 95                | VCCI                    |

**Table 60 • BG272**

| <b>BG272</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| J9                | GND                     |
| J10               | GND                     |
| J11               | GND                     |
| J12               | GND                     |
| J17               | VCCA                    |
| J18               | I/O                     |
| J19               | I/O                     |
| J20               | I/O                     |
| K1                | I/O                     |
| K2                | I/O                     |
| K3                | I/O                     |
| K4                | VCCI                    |
| K9                | GND                     |
| K10               | GND                     |
| K11               | GND                     |
| K12               | GND                     |
| K17               | I/O                     |
| K18               | VCCA                    |
| K19               | VCCA                    |
| K20               | LP                      |
| L1                | I/O                     |
| L2                | I/O                     |
| L3                | VCCA                    |
| L4                | VCCA                    |
| L9                | GND                     |
| L10               | GND                     |
| L11               | GND                     |
| L12               | GND                     |
| L17               | VCCI                    |
| L18               | I/O                     |
| L19               | I/O                     |
| L20               | TCK, I/O                |
| M1                | I/O                     |
| M2                | I/O                     |
| M3                | I/O                     |
| M4                | VCCI                    |
| M9                | GND                     |

**Table 60 • BG272**

| <b>BG272</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| T19               | I/O                     |
| T20               | I/O                     |
| U1                | I/O                     |
| U2                | I/O                     |
| U3                | I/O                     |
| U4                | I/O                     |
| U5                | VCCI                    |
| U6                | WD, I/O                 |
| U7                | I/O                     |
| U8                | I/O                     |
| U9                | WD, I/O                 |
| U10               | VCCA                    |
| U11               | VCCI                    |
| U12               | I/O                     |
| U13               | I/O                     |
| U14               | QCLKB, I/O              |
| U15               | I/O                     |
| U16               | VCCI                    |
| U17               | I/O                     |
| U18               | GND                     |
| U19               | I/O                     |
| U20               | I/O                     |
| V1                | I/O                     |
| V2                | I/O                     |
| V3                | GND                     |
| V4                | GND                     |
| V5                | I/O                     |
| V6                | I/O                     |
| V7                | I/O                     |
| V8                | WD, I/O                 |
| V9                | I/O                     |
| V10               | I/O                     |
| V11               | I/O                     |
| V12               | I/O                     |
| V13               | WD, I/O                 |
| V14               | I/O                     |
| V15               | WD, I/O                 |

**Table 62 • CQ172**

|    |        |
|----|--------|
| 21 | I/O    |
| 22 | GND    |
| 23 | VCCI   |
| 24 | VSV    |
| 25 | I/O    |
| 26 | I/O    |
| 27 | VCC    |
| 28 | I/O    |
| 29 | I/O    |
| 30 | I/O    |
| 31 | I/O    |
| 32 | GND    |
| 33 | I/O    |
| 34 | I/O    |
| 35 | I/O    |
| 36 | I/O    |
| 37 | GND    |
| 38 | I/O    |
| 39 | I/O    |
| 40 | I/O    |
| 41 | I/O    |
| 42 | I/O    |
| 43 | I/O    |
| 44 | BININ  |
| 45 | BINOUT |
| 46 | I/O    |
| 47 | I/O    |
| 48 | I/O    |
| 49 | I/O    |
| 50 | VCCI   |
| 51 | I/O    |
| 52 | I/O    |
| 53 | I/O    |
| 54 | I/O    |
| 55 | GND    |
| 56 | I/O    |
| 57 | I/O    |
| 58 | I/O    |
| 59 | I/O    |