


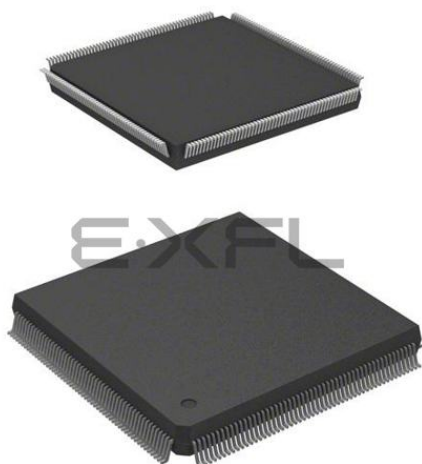

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                          |
| Number of LABs/CLBs            | -                                                                                                                                                                 |
| Number of Logic Elements/Cells | -                                                                                                                                                                 |
| Total RAM Bits                 | -                                                                                                                                                                 |
| Number of I/O                  | 140                                                                                                                                                               |
| Number of Gates                | 24000                                                                                                                                                             |
| Voltage - Supply               | 3V ~ 3.6V, 4.5V ~ 5.5V                                                                                                                                            |
| Mounting Type                  | Surface Mount                                                                                                                                                     |
| Operating Temperature          | -40°C ~ 85°C (TA)                                                                                                                                                 |
| Package / Case                 | 208-BFQFP                                                                                                                                                         |
| Supplier Device Package        | 208-PQFP (28x28)                                                                                                                                                  |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a42mx16-3pq208i">https://www.e-xfl.com/product-detail/microchip-technology/a42mx16-3pq208i</a> |

Additionally, the back-annotation flow is compatible with all the major simulators and the simulation results can be cross-probed with Silicon Explorer II, Microsemi's integrated verification and logic analysis tool. Another tool included in the Libero software is the SmartGen macro builder, which easily creates popular and commonly used logic functions for implementation into your schematic or HDL design.

Microsemi's Libero software is compatible with the most popular FPGA design entry and verification tools from companies such as Mentor Graphics, Synopsys, and Cadence design systems.

See the Libero IDE web content at [www.microsemi.com/soc/products/software/libero/default.aspx](http://www.microsemi.com/soc/products/software/libero/default.aspx) for further information on licensing and current operating system support.

## 3.6 Related Documents

The following sections give the list of related documents which can be referred for this datasheet.

### 3.6.1 Application Notes

- *AC278: BSDL Files Format Description*
- *AC225: Programming Antifuse Devices*
- *AC168: Implementation of Security in Microsemi Antifuse FPGAs*

### 3.6.2 User Guides and Manuals

- *Antifuse Macro Library Guide*
- *Silicon Sculptor Programmers User Guide*

### 3.6.3 Miscellaneous

*Libero IDE Flow Diagram*

## 3.7 5.0 V Operating Conditions

The following tables show 5.0 V operating conditions.

**Table 12 • Absolute Maximum Ratings for 40MX Devices\***

| Symbol           | Parameter           | Limits          | Units |
|------------------|---------------------|-----------------|-------|
| VCC              | DC Supply Voltage   | −0.5 to +7.0    | V     |
| VI               | Input Voltage       | −0.5 to VCC+0.5 | V     |
| VO               | Output Voltage      | −0.5 to VCC+0.5 | V     |
| t <sub>STG</sub> | Storage Temperature | −65 to +150     | °C    |

**Note:** \*Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. Exposure to absolute maximum rated conditions for extended periods may affect device reliability. Devices should not be operated outside the recommended operating conditions.

**Table 13 • Absolute Maximum Ratings for 42MX Devices\***

| Symbol           | Parameter                   | Limits           | Units |
|------------------|-----------------------------|------------------|-------|
| VCCI             | DC Supply Voltage for I/Os  | −0.5 to +7.0     | V     |
| VCCA             | DC Supply Voltage for Array | −0.5 to +7.0     | V     |
| VI               | Input Voltage               | −0.5 to VCCI+0.5 | V     |
| VO               | Output Voltage              | −0.5 to VCCI+0.5 | V     |
| t <sub>STG</sub> | Storage Temperature         | −65 to +150      | °C    |

### 3.9.3 Output Drive Characteristics for 3.3 V PCI Signaling

**Table 25 • DC Specification (3.3 V PCI Signaling)<sup>1</sup>**

| Symbol           | Parameter                  | Condition         | PCI  |           | MX   |                     | Units |
|------------------|----------------------------|-------------------|------|-----------|------|---------------------|-------|
|                  |                            |                   | Min. | Max.      | Min. | Max.                |       |
| VCCI             | Supply Voltage for I/Os    |                   | 3.0  | 3.6       | 3.0  | 3.6 <sup>2</sup>    | V     |
| VIH              | Input High Voltage         |                   | 0.5  | VCC + 0.5 | 0.5  | VCCI + 0.3          | V     |
| VIL              | Input Low Voltage          |                   | −0.5 | 0.8       | −0.3 | 0.8                 | V     |
| IIH              | Input High Leakage Current | VIN = 2.7 V       |      | 70        |      | 10                  | μA    |
| IIL              | Input Leakage Current      |                   |      | −70       |      | −10                 | μA    |
| VOH              | Output High Voltage        | IOUT = −2 mA      | 0.9  |           | 3.3  |                     | V     |
| VOL              | Output Low Voltage         | IOUT = 3 mA, 6 mA |      | 0.1       |      | 0.1 VCCI            | V     |
| CIN              | Input Pin Capacitance      |                   |      | 10        |      | 10                  | pF    |
| CLK              | CLK Pin Capacitance        |                   | 5    | 12        |      | 10                  | pF    |
| L <sub>PIN</sub> | Pin Inductance             |                   |      | 20        |      | < 8 nH <sup>3</sup> | nH    |

1. PCI Local Bus Specification, Version 2.1, Section 4.2.2.1.

2. Maximum rating for VCCI −0.5 V to 7.0V.

3. Dependent upon the chosen package. PCI recommends QFP and BGA packaging to reduce pin inductance and capacitance.

**Table 26 • AC Specifications for (3.3 V PCI Signaling)\***


| Symbol   | Parameter             | Condition           | PCI                     |      | MX   |      | Units |
|----------|-----------------------|---------------------|-------------------------|------|------|------|-------|
|          |                       |                     | Min.                    | Max. | Min. | Max. |       |
| ICL      | Low Clamp Current     | −5 < VIN ≤ −1       | −25 + (VIN + 1) / 0.015 |      | −60  | −10  | mA    |
| Slew (r) | Output Rise Slew Rate | 0.2 V to 0.6 V load | 1                       | 4    | 1.8  | 2.8  | V/ns  |
| Slew (f) | Output Fall Slew Rate | 0.6 V to 0.2 V load | 1                       | 4    | 2.8  | 4.0  | V/ns  |

**Note:** \*PCI Local Bus Specification, Version 2.1, Section 4.2.2.2.

### 3.10.2 Sequential Module Timing Characteristics

The following figure shows sequential module timing characteristics.

**Figure 25 • Flip-Flops and Latches**

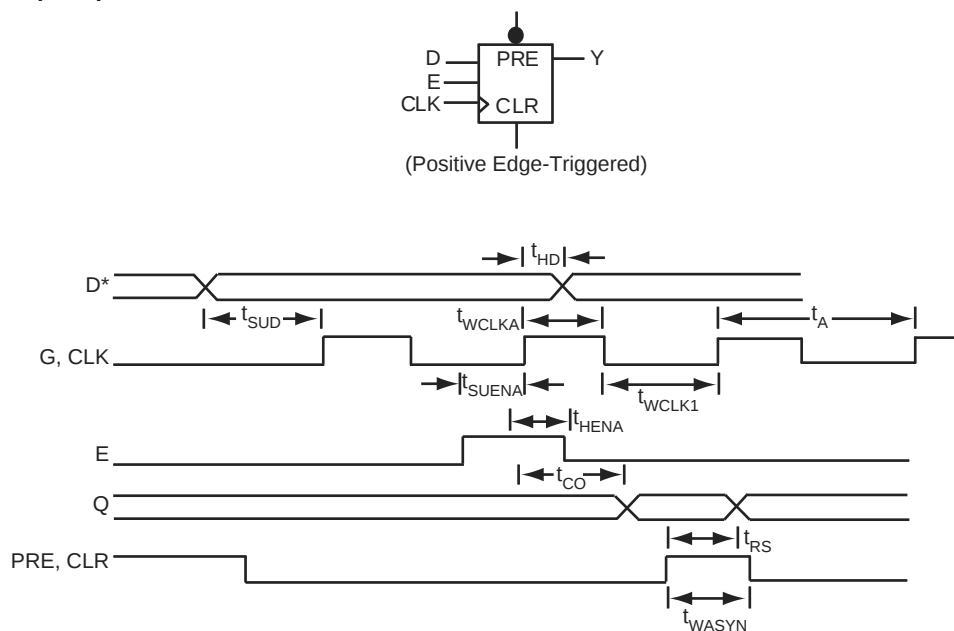


**Note:** \*D represents all data functions involving A, B, and S for multiplexed flip-flops.

### 3.10.3 Sequential Timing Characteristics

The following figures show sequential timing characteristics.

**Figure 26 • Input Buffer Latches**

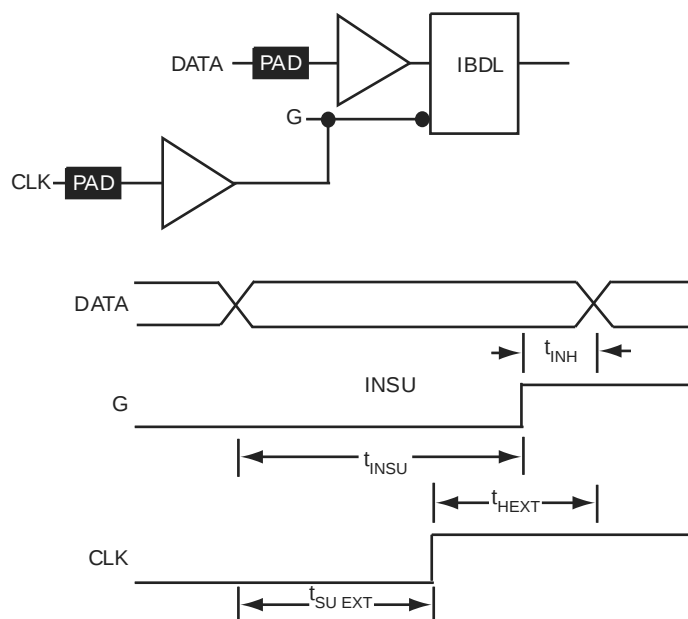

**Table 38 • A42MX09 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                             |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|-----------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                             |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Input Module Propagation Delays                    |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>INYH</sub>                                  | Pad-to-Y HIGH               |          |          | 1.0  |          | 1.2  |          | 1.3  |           | 1.6  |          | 2.2  | ns    |
| t <sub>INYL</sub>                                  | Pad-to-Y LOW                |          |          | 0.8  |          | 0.9  |          | 1.0  |           | 1.2  |          | 1.7  | ns    |
| t <sub>INGH</sub>                                  | G to Y HIGH                 |          |          | 1.3  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>INGL</sub>                                  | G to Y LOW                  |          |          | 1.3  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| Input Module Predicted Routing Delays <sup>2</sup> |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay        |          |          | 2.0  |          | 2.2  |          | 2.5  |           | 3.0  |          | 4.2  | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay        |          |          | 2.3  |          | 2.5  |          | 2.9  |           | 3.4  |          | 4.7  | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay        |          |          | 2.5  |          | 2.8  |          | 3.2  |           | 3.7  |          | 5.2  | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay        |          |          | 2.8  |          | 3.1  |          | 3.5  |           | 4.1  |          | 5.7  | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay        |          |          | 3.7  |          | 4.1  |          | 4.7  |           | 5.5  |          | 7.7  | ns    |
| Global Clock Network                               |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input LOW to HIGH           | FO = 32  |          | 2.4  |          | 2.7  |          | 3.0  |           | 3.6  |          | 5.0  | ns    |
|                                                    |                             | FO = 256 |          | 2.7  |          | 3.0  |          | 3.4  |           | 4.0  |          | 5.5  | ns    |
| t <sub>CKL</sub>                                   | Input HIGH to LOW           | FO = 32  |          | 3.5  |          | 3.9  |          | 4.4  |           | 5.2  |          | 7.3  | ns    |
|                                                    |                             | FO = 256 |          | 3.9  |          | 4.3  |          | 4.9  |           | 5.7  |          | 8.0  | ns    |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH    | FO = 32  | 1.2      |      | 1.4      |      | 1.5      |      | 1.8       |      | 2.5      |      | ns    |
|                                                    |                             | FO = 256 | 1.3      |      | 1.5      |      | 1.7      |      | 2.0       |      | 2.7      |      | ns    |
| t <sub>PWL</sub>                                   | Minimum Pulse Width LOW     | FO = 32  | 1.2      |      | 1.4      |      | 1.5      |      | 1.8       |      | 2.5      |      | ns    |
|                                                    |                             | FO = 256 | 1.3      |      | 1.5      |      | 1.7      |      | 2.0       |      | 2.7      |      | ns    |
| t <sub>CKSW</sub>                                  | Maximum Skew                | FO = 32  |          | 0.3  |          | 0.3  |          | 0.4  |           | 0.5  |          | 0.6  | ns    |
|                                                    |                             | FO = 256 |          | 0.3  |          | 0.3  |          | 0.4  |           | 0.5  |          | 0.6  | ns    |
| t <sub>SUEXT</sub>                                 | Input Latch External Set-Up | FO = 32  | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
|                                                    |                             | FO = 256 | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>HEXT</sub>                                  | Input Latch External Hold   | FO = 32  | 2.3      |      | 2.6      |      | 3.0      |      | 3.5       |      | 4.9      |      | ns    |
|                                                    |                             | FO = 256 | 2.2      |      | 2.4      |      | 3.3      |      | 3.9       |      | 5.5      |      | ns    |
| t <sub>P</sub>                                     | Minimum Period              | FO = 32  | 3.4      |      | 3.7      |      | 4.0      |      | 4.7       |      | 7.8      |      | ns    |
|                                                    |                             | FO = 256 | 3.7      |      | 4.1      |      | 4.5      |      | 5.2       |      | 8.6      |      | ns    |
| f <sub>MAX</sub>                                   | Maximum Frequency           | FO = 32  |          | 296  |          | 269  |          | 247  |           | 215  |          | 129  | MHz   |
|                                                    |                             | FO = 256 |          | 268  |          | 244  |          | 224  |           | 195  |          | 117  | MHz   |

**Table 38 • A42MX09 Timing Characteristics (Nominal 5.0 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                |                                                       | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------|-------------------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                                                       | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| CMOS Output Module Timing <sup>5</sup> |                                                       |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH                                      |          | 2.4  |          | 2.7  |          | 3.1  |           | 3.6  |          | 5.1  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW                                       |          | 2.9  |          | 3.2  |          | 3.6  |           | 4.3  |          | 6.0  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH                                  |          | 2.7  |          | 2.9  |          | 3.3  |           | 3.9  |          | 5.5  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW                                   |          | 2.9  |          | 3.2  |          | 3.7  |           | 4.3  |          | 6.1  | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z                                  |          | 4.9  |          | 5.4  |          | 6.2  |           | 7.3  |          | 10.2 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z                                   |          | 5.3  |          | 5.9  |          | 6.7  |           | 7.9  |          | 11.1 | ns    |
| t <sub>GLH</sub>                       | G-to-Pad HIGH                                         |          | 4.2  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>GHL</sub>                       | G-to-Pad LOW                                          |          | 4.2  |          | 4.6  |          | 5.2  |           | 6.1  |          | 8.6  | ns    |
| t <sub>LSU</sub>                       | I/O Latch Set-Up                                      | 0.5      |      | 0.5      |      | 0.6      |      | 0.7       |      | 1.0      |      | ns    |
| t <sub>LH</sub>                        | I/O Latch Hold                                        | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub>                       | I/O Latch Clock-to-Out (Pad-to-Pad), 64 Clock Loading |          | 5.2  |          | 5.8  |          | 6.6  |           | 7.7  |          | 10.8 | ns    |
| t <sub>ACO</sub>                       | Array Clock-to-Out ( Pad-to-Pad), 64 Clock Loading    |          | 7.4  |          | 8.2  |          | 9.3  |           | 10.9 |          | 15.3 | ns    |
| d <sub>TLH</sub>                       | Capacity Loading, LOW to HIGH                         |          | 0.03 |          | 0.03 |          | 0.03 |           | 0.04 |          | 0.06 | ns/pF |
| d <sub>THL</sub>                       | Capacity Loading, HIGH to LOW                         |          | 0.04 |          | 0.04 |          | 0.04 |           | 0.05 |          | 0.07 | ns/pF |

1. For dual-module macros, use t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, t<sub>CO</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, or t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>SUD</sub>, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
3. Data applies to macros based on the S-module. Timing parameters for sequential macros constructed from C-modules can be obtained from the Timer utility.
4. Set-up and hold timing parameters for the input buffer latch are defined with respect to the PAD and the D input. External setup/hold timing parameters must account for delay from an external PAD signal to the G inputs. Delay from an external PAD signal to the G input subtracts (adds) to the internal setup (hold) time.
5. Delays based on 35 pF loading

**Table 39 • A42MX09 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                              | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                              | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Propagation Delays <sup>1</sup>       |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>PD1</sub>                                   | Single Module                |          | 1.6  |          | 1.8  |          | 2.1  |           | 2.5  |          | 3.5  | ns    |
| t <sub>CO</sub>                                    | Sequential Clock-to-Q        |          | 1.8  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.8  | ns    |
| t <sub>GO</sub>                                    | Latch G-to-Q                 |          | 1.7  |          | 1.9  |          | 2.1  |           | 2.5  |          | 3.5  | ns    |
| t <sub>RS</sub>                                    | Flip-Flop (Latch) Reset-to-Q |          | 2.0  |          | 2.2  |          | 2.5  |           | 2.9  |          | 4.1  | ns    |
| Logic Module Predicted Routing Delays <sup>2</sup> |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>RD1</sub>                                   | FO = 1 Routing Delay         |          | 1.0  |          | 1.1  |          | 1.2  |           | 1.4  |          | 2.0  | ns    |
| t <sub>RD2</sub>                                   | FO = 2 Routing Delay         |          | 1.3  |          | 1.4  |          | 1.6  |           | 1.9  |          | 2.7  | ns    |
| t <sub>RD3</sub>                                   | FO = 3 Routing Delay         |          | 1.6  |          | 1.8  |          | 2.0  |           | 2.4  |          | 3.3  | ns    |

**Table 39 • A42MX09 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                             |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|-----------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                             |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Input Module Propagation Delays                    |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>INYH</sub>                                  | Pad-to-Y HIGH               |          | 1.5      |      | 1.6      |      | 1.8      |      | 2.17      |      | 3.0      |      | ns    |
| t <sub>INYL</sub>                                  | Pad-to-Y LOW                |          | 1.2      |      | 1.3      |      | 1.4      |      | 1.7       |      | 2.4      |      | ns    |
| t <sub>INGH</sub>                                  | G to Y HIGH                 |          | 1.8      |      | 2.0      |      | 2.3      |      | 2.7       |      | 3.7      |      | ns    |
| t <sub>INGL</sub>                                  | G to Y LOW                  |          | 1.8      |      | 2.0      |      | 2.3      |      | 2.7       |      | 3.7      |      | ns    |
| Input Module Predicted Routing Delays <sup>2</sup> |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay        |          | 2.8      |      | 3.2      |      | 3.6      |      | 4.2       |      | 5.9      |      | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay        |          | 3.2      |      | 3.5      |      | 4.0      |      | 4.7       |      | 6.6      |      | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay        |          | 3.5      |      | 3.9      |      | 4.4      |      | 5.2       |      | 7.3      |      | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay        |          | 3.9      |      | 4.3      |      | 4.9      |      | 5.7       |      | 8.0      |      | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay        |          | 5.2      |      | 5.8      |      | 6.6      |      | 7.7       |      | 10.8     |      | ns    |
| Global Clock Network                               |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input LOW to HIGH           | FO = 32  | 4.1      |      | 4.5      |      | 5.1      |      | 6.0       |      | 8.4      |      | ns    |
|                                                    |                             | FO = 256 | 4.5      |      | 5.0      |      | 5.6      |      | 6.7       |      | 9.3      |      | ns    |
| t <sub>CKL</sub>                                   | Input HIGH to LOW           | FO = 32  | 5.0      |      | 5.5      |      | 6.2      |      | 7.3       |      | 10.2     |      | ns    |
|                                                    |                             | FO = 256 | 5.4      |      | 6.0      |      | 6.8      |      | 8.0       |      | 11.2     |      | ns    |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH    | FO = 32  | 1.7      |      | 1.9      |      | 2.1      |      | 2.5       |      | 3.5      |      | ns    |
|                                                    |                             | FO = 256 | 1.9      |      | 2.1      |      | 2.3      |      | 2.7       |      | 3.8      |      | ns    |
| t <sub>PWL</sub>                                   | Minimum Pulse Width LOW     | FO = 32  | 1.7      |      | 1.9      |      | 2.1      |      | 2.5       |      | 3.5      |      | ns    |
|                                                    |                             | FO = 256 | 1.9      |      | 2.1      |      | 2.3      |      | 2.7       |      | 3.8      |      | ns    |
| t <sub>CKSW</sub>                                  | Maximum Skew                | FO = 32  | 0.4      |      | 0.5      |      | 0.5      |      | 0.6       |      | 0.9      |      | ns    |
|                                                    |                             | FO = 256 | 0.4      |      | 0.5      |      | 0.5      |      | 0.6       |      | 0.9      |      | ns    |
| t <sub>SUEXT</sub>                                 | Input Latch External Set-Up | FO = 32  | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
|                                                    |                             | FO = 256 | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>HEXT</sub>                                  | Input Latch External Hold   | FO = 32  | 3.3      |      | 3.7      |      | 4.2      |      | 4.9       |      | 6.9      |      | ns    |
|                                                    |                             | FO = 256 | 3.7      |      | 4.1      |      | 4.6      |      | 5.5       |      | 7.6      |      | ns    |
| t <sub>P</sub>                                     | Minimum Period              | FO = 32  | 5.6      |      | 6.2      |      | 6.7      |      | 7.8       |      | 12.9     |      | ns    |
|                                                    |                             | FO = 256 | 6.1      |      | 6.8      |      | 7.4      |      | 8.5       |      | 14.2     |      | ns    |
| f <sub>MAX</sub>                                   | Maximum Frequency           | FO = 32  | 177      |      | 161      |      | 148      |      | 129       |      | 77       |      | MHz   |
|                                                    |                             | FO = 256 | 161      |      | 146      |      | 135      |      | 117       |      | 70       |      | MHz   |

**Table 43 • A42MX24 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                             |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|-----------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                             |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Input Module Predicted Routing Delays <sup>2</sup> |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay        |          | 2.6      |      | 2.9      |      | 3.2      |      | 3.8       |      | 5.3      |      | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay        |          | 2.9      |      | 3.2      |      | 3.6      |      | 4.3       |      | 6.0      |      | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay        |          | 3.2      |      | 3.6      |      | 4.0      |      | 4.8       |      | 6.6      |      | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay        |          | 3.5      |      | 3.9      |      | 4.4      |      | 5.2       |      | 7.3      |      | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay        |          | 4.8      |      | 5.3      |      | 6.1      |      | 7.1       |      | 10.0     |      | ns    |
| Global Clock Network                               |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input LOW to HIGH           | FO = 32  | 4.4      |      | 4.8      |      | 5.5      |      | 6.5       |      | 9.1      |      | ns    |
|                                                    |                             | FO = 486 | 4.8      |      | 5.3      |      | 6.0      |      | 7.1       |      | 10.0     |      | ns    |
| t <sub>CKL</sub>                                   | Input HIGH to LOW           | FO = 32  | 5.1      |      | 5.7      |      | 6.4      |      | 7.6       |      | 10.6     |      | ns    |
|                                                    |                             | FO = 486 | 6.0      |      | 6.6      |      | 7.5      |      | 8.8       |      | 12.4     |      | ns    |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH    | FO = 32  | 3.0      | 3.3  |          | 3.8  |          | 4.5  |           | 6.3  |          | ns   |       |
|                                                    |                             | FO = 486 | 3.3      | 3.7  |          | 4.2  |          | 4.9  |           | 6.9  |          | ns   |       |
| t <sub>PWL</sub>                                   | Minimum Pulse Width LOW     | FO = 32  | 3.0      | 3.4  |          | 3.8  |          | 4.5  |           | 6.3  |          | ns   |       |
|                                                    |                             | FO = 486 | 3.3      | 3.7  |          | 4.2  |          | 4.9  |           | 6.9  |          | ns   |       |
| t <sub>CKSW</sub>                                  | Maximum Skew                | FO = 32  | 0.8      |      | 0.8      |      | 1.0      |      | 1.1       |      | 1.6      |      | ns    |
|                                                    |                             | FO = 486 | 0.8      |      | 0.8      |      | 1.0      |      | 1.1       |      | 1.6      |      | ns    |
| t <sub>SUEXT</sub>                                 | Input Latch External Set-Up | FO = 32  | 0.0      | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | ns   |       |
|                                                    |                             | FO = 486 | 0.0      | 0.0  |          | 0.0  |          | 0.0  |           | 0.0  |          | ns   |       |
| TTL Output Module Timing <sup>5</sup>              |                             |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                                   | Data-to-Pad HIGH            |          | 3.4      |      | 3.8      |      | 4.3      |      | 5.0       |      | 7.1      |      | ns    |
| t <sub>DHL</sub>                                   | Data-to-Pad LOW             |          | 4.0      |      | 4.4      |      | 5.0      |      | 5.9       |      | 8.3      |      | ns    |
| t <sub>ENZH</sub>                                  | Enable Pad Z to HIGH        |          | 3.6      |      | 4.0      |      | 4.5      |      | 5.3       |      | 7.4      |      | ns    |
| t <sub>ENZL</sub>                                  | Enable Pad Z to LOW         |          | 3.9      |      | 4.4      |      | 5.0      |      | 5.8       |      | 8.2      |      | ns    |
| t <sub>ENHZ</sub>                                  | Enable Pad HIGH to Z        |          | 7.2      |      | 8.0      |      | 9.1      |      | 10.7      |      | 14.9     |      | ns    |
| t <sub>ENLZ</sub>                                  | Enable Pad LOW to Z         |          | 6.7      |      | 7.5      |      | 8.5      |      | 9.9       |      | 13.9     |      | ns    |
| t <sub>GLH</sub>                                   | G-to-Pad HIGH               |          | 4.8      |      | 5.3      |      | 6.0      |      | 7.2       |      | 10.0     |      | ns    |
| t <sub>GHL</sub>                                   | G-to-Pad LOW                |          | 4.8      |      | 5.3      |      | 6.0      |      | 7.2       |      | 10.0     |      | ns    |
| t <sub>LSU</sub>                                   | I/O Latch Output Set-Up     |          | 0.7      |      | 0.7      |      | 0.8      |      | 1.0       |      | 1.4      |      | ns    |

**Table 44 • A42MX36 Timing Characteristics (Nominal 5.0 V Operation)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                           |                                                 | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|---------------------------------------------------|-------------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                   |                                                 | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| TTL Output Module Timing <sup>5</sup> (Continued) |                                                 |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>ENLZ</sub>                                 | Enable Pad LOW to Z                             |          | 4.9  |          | 5.5  |          | 6.2  |           | 7.3  |          | 10.2 | ns    |
| t <sub>GLH</sub>                                  | G-to-Pad HIGH                                   |          | 2.9  |          | 3.3  |          | 3.7  |           | 4.4  |          | 6.1  | ns    |
| t <sub>GHL</sub>                                  | G-to-Pad LOW                                    |          | 2.9  |          | 3.3  |          | 3.7  |           | 4.4  |          | 6.1  | ns    |
| t <sub>LSU</sub>                                  | I/O Latch Output Set-Up                         | 0.5      |      | 0.5      |      | 0.6      |      | 0.7       |      | 1.0      |      | ns    |
| t <sub>LH</sub>                                   | I/O Latch Output Hold                           | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub>                                  | I/O Latch Clock-to-Out<br>(Pad-to-Pad) 32 I/O   |          | 5.7  |          | 6.3  |          | 7.1  |           | 8.4  |          | 11.8 | ns    |
| t <sub>ACO</sub>                                  | Array Latch Clock-to-Out<br>(Pad-to-Pad) 32 I/O |          | 7.8  |          | 8.6  |          | 9.8  |           | 11.5 |          | 16.1 | ns    |
| d <sub>TLH</sub>                                  | Capacitive Loading,<br>LOW to HIGH              |          | 0.07 |          | 0.08 |          | 0.09 |           | 0.10 |          | 0.14 | ns/pF |
| d <sub>THL</sub>                                  | Capacitive Loading,<br>HIGH to LOW              |          | 0.07 |          | 0.08 |          | 0.09 |           | 0.10 |          | 0.14 | ns/pF |

**Table 44 • A42MX36 Timing Characteristics (Nominal 5.0 V Operation)(Worst-Case Commercial Conditions, VCCA = 4.75 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                |                                              | -3 Speed |      | -2 Speed |      | -1 Speed |      | Std Speed |      | -F Speed |      | Units |
|----------------------------------------|----------------------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                        |                                              | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| CMOS Output Module Timing <sup>5</sup> |                                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                       | Data-to-Pad HIGH                             |          | 3.5  |          | 3.9  |          | 4.5  |           | 5.2  |          | 7.3  | ns    |
| t <sub>DHL</sub>                       | Data-to-Pad LOW                              |          | 2.5  |          | 2.7  |          | 3.1  |           | 3.6  |          | 5.1  | ns    |
| t <sub>ENZH</sub>                      | Enable Pad Z to HIGH                         |          | 2.7  |          | 3.0  |          | 3.3  |           | 3.9  |          | 5.5  | ns    |
| t <sub>ENZL</sub>                      | Enable Pad Z to LOW                          |          | 2.9  |          | 3.3  |          | 3.7  |           | 4.3  |          | 6.1  | ns    |
| t <sub>ENHZ</sub>                      | Enable Pad HIGH to Z                         |          | 5.3  |          | 5.8  |          | 6.6  |           | 7.8  |          | 10.9 | ns    |
| t <sub>ENLZ</sub>                      | Enable Pad LOW to Z                          |          | 4.9  |          | 5.5  |          | 6.2  |           | 7.3  |          | 10.2 | ns    |
| t <sub>GLH</sub>                       | G-to-Pad HIGH                                |          | 5.0  |          | 5.6  |          | 6.3  |           | 7.5  |          | 10.4 | ns    |
| t <sub>GHL</sub>                       | G-to-Pad LOW                                 |          | 5.0  |          | 5.6  |          | 6.3  |           | 7.5  |          | 10.4 | ns    |
| t <sub>LSU</sub>                       | I/O Latch Set-Up                             | 0.5      |      | 0.5      |      | 0.6      |      | 0.7       |      | 1.0      |      | ns    |
| t <sub>LH</sub>                        | I/O Latch Hold                               | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub>                       | I/O Latch Clock-to-Out (Pad-to-Pad) 32 I/O   |          | 5.7  |          | 6.3  |          | 7.1  |           | 8.4  |          | 11.8 | ns    |
| t <sub>ACO</sub>                       | Array Latch Clock-to-Out (Pad-to-Pad) 32 I/O |          | 7.8  |          | 8.6  |          | 9.8  |           | 11.5 |          | 16.1 | ns    |
| d <sub>TLH</sub>                       | Capacitive Loading, LOW to HIGH              |          | 0.07 |          | 0.08 |          | 0.09 |           | 0.10 |          | 0.14 | ns/pF |
| d <sub>THL</sub>                       | Capacitive Loading, HIGH to LOW              |          | 0.07 |          | 0.08 |          | 0.09 |           | 0.10 |          | 0.14 | ns/pF |

1. For dual-module macros, use t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, t<sub>CO</sub> + t<sub>RD1</sub> + t<sub>PDn</sub>, or t<sub>PD1</sub> + t<sub>RD1</sub> + t<sub>SUD</sub>, whichever is appropriate.
2. Routing delays are for typical designs across worst-case operating conditions. These parameters should be used for estimating device performance. Post-route timing analysis or simulation is required to determine actual performance.
3. Data applies to macros based on the S-module. Timing parameters for sequential macros constructed from C-modules can be obtained from the Timer utility.
4. Set-up and hold timing parameters for the Input Buffer Latch are defined with respect to the PAD and the D input. External setup/hold timing parameters must account for delay from an external PAD signal to the G inputs. Delay from an external PAD signal to the G input subtracts (adds) to the internal setup (hold) time.
5. Delays based on 35 pF loading.

**Table 45 • A42MX36 Timing Characteristics (Nominal 3.3 V Operation) (Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                              | -3 Speed |      | -2 Speed |      | -1 Speed |      | Std Speed |      | -F Speed |      | Units |
|----------------------------------------------------|------------------------------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                              | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Logic Module Combinatorial Functions <sup>1</sup>  |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>PD</sub>                                    | Internal Array Module Delay  |          | 1.9  |          | 2.1  |          | 2.3  |           | 2.7  |          | 3.8  | ns    |
| t <sub>PDD</sub>                                   | Internal Decode Module Delay |          | 2.2  |          | 2.5  |          | 2.8  |           | 3.3  |          | 4.7  | ns    |
| Logic Module Predicted Routing Delays <sup>2</sup> |                              |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>RD1</sub>                                   | FO = 1 Routing Delay         |          | 1.3  |          | 1.5  |          | 1.7  |           | 2.0  |          | 2.7  | ns    |
| t <sub>RD2</sub>                                   | FO = 2 Routing Delay         |          | 1.8  |          | 2.0  |          | 2.3  |           | 2.7  |          | 3.7  | ns    |
| t <sub>RD3</sub>                                   | FO = 3 Routing Delay         |          | 2.3  |          | 2.5  |          | 2.8  |           | 3.4  |          | 4.7  | ns    |
| t <sub>RD4</sub>                                   | FO = 4 Routing Delay         |          | 2.8  |          | 3.1  |          | 3.5  |           | 4.1  |          | 5.7  | ns    |

**Table 45 • A42MX36 Timing Characteristics (Nominal 3.3 V Operation) (continued)(Worst-Case Commercial Conditions, VCCA = 3.0 V, T<sub>J</sub> = 70°C)**

| Parameter / Description                            |                                            |          | –3 Speed |      | –2 Speed |      | –1 Speed |      | Std Speed |      | –F Speed |      | Units |
|----------------------------------------------------|--------------------------------------------|----------|----------|------|----------|------|----------|------|-----------|------|----------|------|-------|
|                                                    |                                            |          | Min.     | Max. | Min.     | Max. | Min.     | Max. | Min.      | Max. | Min.     | Max. |       |
| Input Module Predicted Routing Delays <sup>2</sup> |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>IRD1</sub>                                  | FO = 1 Routing Delay                       |          | 2.8      |      | 3.1      |      | 3.5      |      | 4.1       |      | 5.7      |      | ns    |
| t <sub>IRD2</sub>                                  | FO = 2 Routing Delay                       |          | 3.2      |      | 3.5      |      | 4.1      |      | 4.8       |      | 6.7      |      | ns    |
| t <sub>IRD3</sub>                                  | FO = 3 Routing Delay                       |          | 3.7      |      | 4.1      |      | 4.7      |      | 5.5       |      | 7.7      |      | ns    |
| t <sub>IRD4</sub>                                  | FO = 4 Routing Delay                       |          | 4.2      |      | 4.6      |      | 5.3      |      | 6.2       |      | 8.7      |      | ns    |
| t <sub>IRD8</sub>                                  | FO = 8 Routing Delay                       |          | 6.1      |      | 6.8      |      | 7.7      |      | 9.0       |      | 12.6     |      | ns    |
| Global Clock Network                               |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>CKH</sub>                                   | Input LOW to HIGH                          | FO = 32  | 4.6      |      | 5.1      |      | 5.7      |      | 6.7       |      | 9.3      |      | ns    |
|                                                    |                                            | FO = 635 | 5.0      |      | 5.6      |      | 6.3      |      | 7.4       |      | 10.3     |      | ns    |
| t <sub>CKL</sub>                                   | Input HIGH to LOW                          | FO = 32  | 5.3      |      | 5.9      |      | 6.7      |      | 7.8       |      | 11.0     |      | ns    |
|                                                    |                                            | FO = 635 | 6.8      |      | 7.6      |      | 8.6      |      | 10.1      |      | 14.1     |      | ns    |
| t <sub>PWH</sub>                                   | Minimum Pulse Width HIGH                   | FO = 32  | 2.5      |      | 2.7      |      | 3.1      |      | 3.6       |      | 5.1      |      | ns    |
|                                                    |                                            | FO = 635 | 2.8      |      | 3.1      |      | 3.5      |      | 4.1       |      | 5.7      |      | ns    |
| t <sub>PWL</sub>                                   | Minimum Pulse Width LOW                    | FO = 32  | 2.5      |      | 2.7      |      | 3.1      |      | 3.6       |      | 5.1      |      | ns    |
|                                                    |                                            | FO = 635 | 2.8      |      | 3.1      |      | 3.5      |      | 4.1       |      | 5.7      |      | ns    |
| t <sub>CKSW</sub>                                  | Maximum Skew                               | FO = 32  | 1.0      |      | 1.2      |      | 1.3      |      | 1.5       |      | 2.2      |      | ns    |
|                                                    |                                            | FO = 635 | 1.0      |      | 1.2      |      | 1.3      |      | 1.5       |      | 2.2      |      | ns    |
| t <sub>SUEXT</sub>                                 | Input Latch External Set-Up                | FO = 32  | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
|                                                    |                                            | FO = 635 | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>HEXT</sub>                                  | Input Latch External Hold                  | FO = 32  | 4.0      |      | 4.4      |      | 5.0      |      | 5.9       |      | 8.2      |      | ns    |
|                                                    |                                            | FO = 635 | 4.6      |      | 5.2      |      | 5.9      |      | 6.9       |      | 9.6      |      | ns    |
| t <sub>P</sub>                                     | Minimum Period (1/f <sub>MAX</sub> )       | FO = 32  | 9.2      |      | 10.2     |      | 11.1     |      | 12.7      |      | 21.2     |      | ns    |
|                                                    |                                            | FO = 635 | 9.9      |      | 11.0     |      | 12.0     |      | 13.8      |      | 23.0     |      | ns    |
| f <sub>MAX</sub>                                   | Maximum Datapath Frequency                 | FO = 32  | 108      |      | 98       |      | 90       |      | 79        |      | 47       |      | MHz   |
|                                                    |                                            | FO = 635 | 100      |      | 91       |      | 83       |      | 73        |      | 44       |      | MHz   |
| TTL Output Module Timing <sup>5</sup>              |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>DLH</sub>                                   | Data-to-Pad HIGH                           |          | 3.6      |      | 4.0      |      | 4.5      |      | 5.3       |      | 7.4      |      | ns    |
| t <sub>DHL</sub>                                   | Data-to-Pad LOW                            |          | 4.2      |      | 4.6      |      | 5.2      |      | 6.2       |      | 8.6      |      | ns    |
| t <sub>ENZH</sub>                                  | Enable Pad Z to HIGH                       |          | 3.7      |      | 4.2      |      | 4.7      |      | 5.5       |      | 7.7      |      | ns    |
| t <sub>ENZL</sub>                                  | Enable Pad Z to LOW                        |          | 4.1      |      | 4.6      |      | 5.2      |      | 6.1       |      | 8.5      |      | ns    |
| t <sub>ENHZ</sub>                                  | Enable Pad HIGH to Z                       |          | 7.34     |      | 8.2      |      | 9.3      |      | 10.9      |      | 15.3     |      | ns    |
| TTL Output Module Timing <sup>5</sup>              |                                            |          |          |      |          |      |          |      |           |      |          |      |       |
| t <sub>ENLZ</sub>                                  | Enable Pad LOW to Z                        |          | 6.9      |      | 7.6      |      | 8.7      |      | 10.2      |      | 14.3     |      | ns    |
| t <sub>GLH</sub>                                   | G-to-Pad HIGH                              |          | 4.9      |      | 5.5      |      | 6.2      |      | 7.3       |      | 10.2     |      | ns    |
| t <sub>GHL</sub>                                   | G-to-Pad LOW                               |          | 4.9      |      | 5.5      |      | 6.2      |      | 7.3       |      | 10.2     |      | ns    |
| t <sub>LSU</sub>                                   | I/O Latch Output Set-Up                    |          | 0.7      |      | 0.7      |      | 0.8      |      | 1.0       |      | 1.4      |      | ns    |
| t <sub>LH</sub>                                    | I/O Latch Output Hold                      |          | 0.0      |      | 0.0      |      | 0.0      |      | 0.0       |      | 0.0      |      | ns    |
| t <sub>LCO</sub>                                   | I/O Latch Clock-to-Out (Pad-to-Pad) 32 I/O |          | 7.9      |      | 8.8      |      | 10.0     |      | 11.8      |      | 16.5     |      | ns    |

Input, output, tristate or bidirectional buffer. Input and output levels are compatible with standard TTL and CMOS specifications. Unused I/Os pins are configured by the Designer software as shown in Table 46, page 84.

**Table 46 • Configuration of Unused I/Os**

| Device           | Configuration |
|------------------|---------------|
| A40MX02, A40MX04 | Pulled LOW    |
| A42MX09, A42MX16 | Pulled LOW    |
| A42MX24, A42MX36 | Tristated     |

In all cases, it is recommended to tie all unused MX I/O pins to LOW on the board. This applies to all dual-purpose pins when configured as I/Os as well.

#### **LP, Low Power Mode**

Controls the low power mode of all 42MX devices. The device is placed in the low power mode by connecting the LP pin to logic HIGH. In low power mode, all I/Os are tristated, all input buffers are turned OFF, and the core of the device is turned OFF. To exit the low power mode, the LP pin must be set LOW. The device enters the low power mode 800 ns after the LP pin is driven to a logic HIGH. It will resume normal operation in 200  $\mu$ s after the LP pin is driven to a logic LOW.

#### **MODE, Mode**

Controls the use of multifunction pins (DCLK, PRA, PRB, SDI, TDO). The MODE pin is held HIGH to provide verification capability. The MODE pin should be terminated to GND through a 10k $\Omega$  resistor so that the MODE pin can be pulled HIGH when required.

#### **NC, No Connection**

This pin is not connected to circuitry within the device. These pins can be driven to any voltage or can be left floating with no effect on the operation of the device.

#### **PRA, I/O**

#### **PRB, I/OProbe A/B**

The Probe pin is used to output data from any user-defined design node within the device. Each diagnostic pin can be used in conjunction with the other probe pin to allow real-time diagnostic output of any signal path within the device. The Probe pin can be used as a user-defined I/O when verification has been completed. The pin's probe capabilities can be permanently disabled to protect programmed design confidentiality. The Probe pin is accessible when the MODE pin is HIGH. This pin functions as an I/O when the MODE pin is LOW.

#### **QCLKA/B/C/D, I/O Quadrant Clock**

Quadrant clock inputs for A42MX36 devices. When not used as a register control signal, these pins can function as user I/Os.

#### **SDI, I/OSerial Data Input**

Serial data input for diagnostic probe and device programming. SDI is active when the MODE pin is HIGH. This pin functions as an I/O when the MODE pin is LOW.

#### **SDO, I/OSerial Data Output**

Serial data output for diagnostic probe and device programming. SDO is active when the MODE pin is HIGH. This pin functions as an I/O when the MODE pin is LOW. SDO is available for 42MX devices only.

When Silicon Explorer II is being used, SDO will act as an output while the "checksum" command is run. It will return to user I/O when "checksum" is complete.

#### **TCK, I/O Test Clock**

Figure 42 • PQ144

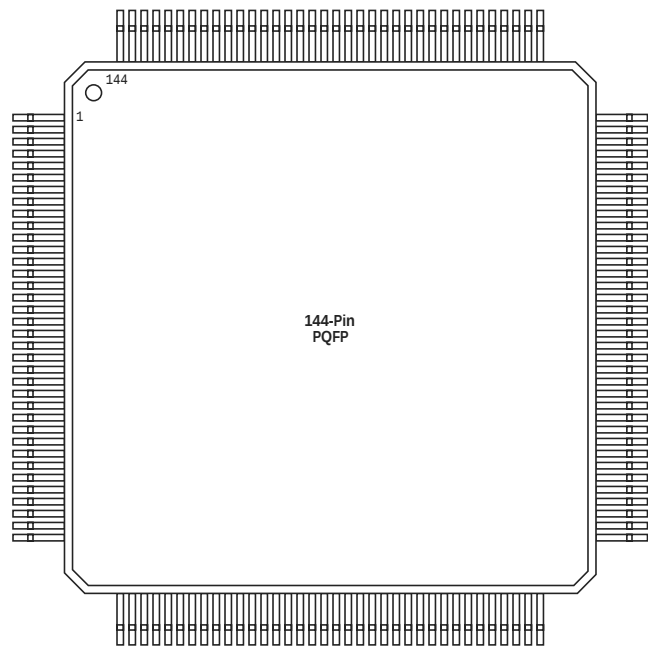


Table 51 • PQ144

| PQ144      |                  |
|------------|------------------|
| Pin Number | A42MX09 Function |
| 1          | I/O              |
| 2          | MODE             |
| 3          | I/O              |
| 4          | I/O              |
| 5          | I/O              |

**Table 52 • PQ160**

| <b>PQ160</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> |
| 95                | I/O                     | I/O                     | I/O                     |
| 96                | I/O                     | I/O                     | WD, I/O                 |
| 97                | I/O                     | I/O                     | I/O                     |
| 98                | VCCA                    | VCCA                    | VCCA                    |
| 99                | GND                     | GND                     | GND                     |
| 100               | NC                      | I/O                     | I/O                     |
| 101               | I/O                     | I/O                     | I/O                     |
| 102               | I/O                     | I/O                     | I/O                     |
| 103               | NC                      | I/O                     | I/O                     |
| 104               | I/O                     | I/O                     | I/O                     |
| 105               | I/O                     | I/O                     | I/O                     |
| 106               | I/O                     | I/O                     | WD, I/O                 |
| 107               | I/O                     | I/O                     | WD, I/O                 |
| 108               | I/O                     | I/O                     | I/O                     |
| 109               | GND                     | GND                     | GND                     |
| 110               | NC                      | I/O                     | I/O                     |
| 111               | I/O                     | I/O                     | WD, I/O                 |
| 112               | I/O                     | I/O                     | WD, I/O                 |
| 113               | I/O                     | I/O                     | I/O                     |
| 114               | NC                      | VCCI                    | VCCI                    |
| 115               | I/O                     | I/O                     | WD, I/O                 |
| 116               | NC                      | I/O                     | WD, I/O                 |
| 117               | I/O                     | I/O                     | I/O                     |
| 118               | I/O                     | I/O                     | TDI, I/O                |
| 119               | I/O                     | I/O                     | TMS, I/O                |
| 120               | GND                     | GND                     | GND                     |
| 121               | I/O                     | I/O                     | I/O                     |
| 122               | I/O                     | I/O                     | I/O                     |
| 123               | I/O                     | I/O                     | I/O                     |
| 124               | NC                      | I/O                     | I/O                     |
| 125               | GND                     | GND                     | GND                     |
| 126               | I/O                     | I/O                     | I/O                     |
| 127               | I/O                     | I/O                     | I/O                     |
| 128               | I/O                     | I/O                     | I/O                     |
| 129               | NC                      | I/O                     | I/O                     |
| 130               | GND                     | GND                     | GND                     |
| 131               | I/O                     | I/O                     | I/O                     |

**Table 52 • PQ160**

| <b>PQ160</b>      |                         |                         |                         |
|-------------------|-------------------------|-------------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX09 Function</b> | <b>A42MX16 Function</b> | <b>A42MX24 Function</b> |
| 132               | I/O                     | I/O                     | I/O                     |
| 133               | I/O                     | I/O                     | I/O                     |
| 134               | I/O                     | I/O                     | I/O                     |
| 135               | NC                      | VCCA                    | VCCA                    |
| 136               | I/O                     | I/O                     | I/O                     |
| 137               | I/O                     | I/O                     | I/O                     |
| 138               | NC                      | VCCA                    | VCCA                    |
| 139               | VCCI                    | VCCI                    | VCCI                    |
| 140               | GND                     | GND                     | GND                     |
| 141               | NC                      | I/O                     | I/O                     |
| 142               | I/O                     | I/O                     | I/O                     |
| 143               | I/O                     | I/O                     | I/O                     |
| 144               | I/O                     | I/O                     | I/O                     |
| 145               | GND                     | GND                     | GND                     |
| 146               | NC                      | I/O                     | I/O                     |
| 147               | I/O                     | I/O                     | I/O                     |
| 148               | I/O                     | I/O                     | I/O                     |
| 149               | I/O                     | I/O                     | I/O                     |
| 150               | NC                      | VCCA                    | VCCA                    |
| 151               | NC                      | I/O                     | I/O                     |
| 152               | NC                      | I/O                     | I/O                     |
| 153               | NC                      | I/O                     | I/O                     |
| 154               | NC                      | I/O                     | I/O                     |
| 155               | GND                     | GND                     | GND                     |
| 156               | I/O                     | I/O                     | I/O                     |
| 157               | I/O                     | I/O                     | I/O                     |
| 158               | I/O                     | I/O                     | I/O                     |
| 159               | MODE                    | MODE                    | MODE                    |
| 160               | GND                     | GND                     | GND                     |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 126               | WD, I/O                 |
| 127               | I/O                     |
| 128               | VCCI                    |
| 129               | I/O                     |
| 130               | I/O                     |
| 131               | I/O                     |
| 132               | WD, I/O                 |
| 133               | WD, I/O                 |
| 134               | I/O                     |
| 135               | QCLKB, I/O              |
| 136               | I/O                     |
| 137               | I/O                     |
| 138               | I/O                     |
| 139               | I/O                     |
| 140               | I/O                     |
| 141               | I/O                     |
| 142               | WD, I/O                 |
| 143               | WD, I/O                 |
| 144               | I/O                     |
| 145               | I/O                     |
| 146               | I/O                     |
| 147               | I/O                     |
| 148               | I/O                     |
| 149               | I/O                     |
| 150               | VCCI                    |
| 151               | VCCA                    |
| 152               | GND                     |
| 153               | I/O                     |
| 154               | I/O                     |
| 155               | I/O                     |
| 156               | I/O                     |
| 157               | I/O                     |
| 158               | I/O                     |
| 159               | WD, I/O                 |
| 160               | WD, I/O                 |
| 161               | I/O                     |
| 162               | I/O                     |

**Table 54 • PQ240**

| <b>PQ240</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 163               | WD, I/O                 |
| 164               | WD, I/O                 |
| 165               | I/O                     |
| 166               | QCLKA, I/O              |
| 167               | I/O                     |
| 168               | I/O                     |
| 169               | I/O                     |
| 170               | I/O                     |
| 171               | I/O                     |
| 172               | VCCI                    |
| 173               | I/O                     |
| 174               | WD, I/O                 |
| 175               | WD, I/O                 |
| 176               | I/O                     |
| 177               | I/O                     |
| 178               | TDI, I/O                |
| 179               | TMS, I/O                |
| 180               | GND                     |
| 181               | VCCA                    |
| 182               | GND                     |
| 183               | I/O                     |
| 184               | I/O                     |
| 185               | I/O                     |
| 186               | I/O                     |
| 187               | I/O                     |
| 188               | I/O                     |
| 189               | I/O                     |
| 190               | I/O                     |
| 191               | I/O                     |
| 192               | VCCI                    |
| 193               | I/O                     |
| 194               | I/O                     |
| 195               | I/O                     |
| 196               | I/O                     |
| 197               | I/O                     |
| 198               | I/O                     |
| 199               | I/O                     |

**Table 56 • VQ100**

| <b>VQ100</b>      |                             |                             |
|-------------------|-----------------------------|-----------------------------|
| <b>Pin Number</b> | <b>A42MX09<br/>Function</b> | <b>A42MX16<br/>Function</b> |
| 21                | I/O                         | I/O                         |
| 22                | I/O                         | I/O                         |
| 23                | I/O                         | I/O                         |
| 24                | I/O                         | I/O                         |
| 25                | I/O                         | I/O                         |
| 26                | I/O                         | I/O                         |
| 27                | I/O                         | I/O                         |
| 28                | I/O                         | I/O                         |
| 29                | I/O                         | I/O                         |
| 30                | I/O                         | I/O                         |
| 31                | I/O                         | I/O                         |
| 32                | GND                         | GND                         |
| 33                | I/O                         | I/O                         |
| 34                | I/O                         | I/O                         |
| 35                | I/O                         | I/O                         |
| 36                | I/O                         | I/O                         |
| 37                | I/O                         | I/O                         |
| 38                | VCCA                        | VCCA                        |
| 39                | I/O                         | I/O                         |
| 40                | I/O                         | I/O                         |
| 41                | I/O                         | I/O                         |
| 42                | I/O                         | I/O                         |
| 43                | I/O                         | I/O                         |
| 44                | GND                         | GND                         |
| 45                | I/O                         | I/O                         |
| 46                | I/O                         | I/O                         |
| 47                | I/O                         | I/O                         |
| 48                | I/O                         | I/O                         |
| 49                | I/O                         | I/O                         |
| 50                | SDO, I/O                    | SDO, I/O                    |
| 51                | I/O                         | I/O                         |
| 52                | I/O                         | I/O                         |
| 53                | I/O                         | I/O                         |
| 54                | I/O                         | I/O                         |
| 55                | GND                         | GND                         |
| 56                | I/O                         | I/O                         |

**Table 58 • CQ208**

| <b>CQ208</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| 111               | I/O                     |
| 112               | I/O                     |
| 113               | I/O                     |
| 114               | I/O                     |
| 115               | I/O                     |
| 116               | I/O                     |
| 117               | I/O                     |
| 118               | I/O                     |
| 119               | I/O                     |
| 120               | I/O                     |
| 121               | I/O                     |
| 122               | I/O                     |
| 123               | I/O                     |
| 124               | I/O                     |
| 125               | I/O                     |
| 126               | GND                     |
| 127               | I/O                     |
| 128               | TCK, I/O                |
| 129               | LP                      |
| 130               | VCCA                    |
| 131               | GND                     |
| 132               | VCCI                    |
| 133               | VCCA                    |
| 134               | I/O                     |
| 135               | I/O                     |
| 136               | VCCA                    |
| 137               | I/O                     |
| 138               | I/O                     |
| 139               | I/O                     |
| 140               | I/O                     |
| 141               | I/O                     |
| 142               | I/O                     |
| 143               | I/O                     |
| 144               | I/O                     |
| 145               | I/O                     |
| 146               | I/O                     |
| 147               | I/O                     |

**Table 60 • BG272**

| <b>BG272</b>      |                         |
|-------------------|-------------------------|
| <b>Pin Number</b> | <b>A42MX36 Function</b> |
| J9                | GND                     |
| J10               | GND                     |
| J11               | GND                     |
| J12               | GND                     |
| J17               | VCCA                    |
| J18               | I/O                     |
| J19               | I/O                     |
| J20               | I/O                     |
| K1                | I/O                     |
| K2                | I/O                     |
| K3                | I/O                     |
| K4                | VCCI                    |
| K9                | GND                     |
| K10               | GND                     |
| K11               | GND                     |
| K12               | GND                     |
| K17               | I/O                     |
| K18               | VCCA                    |
| K19               | VCCA                    |
| K20               | LP                      |
| L1                | I/O                     |
| L2                | I/O                     |
| L3                | VCCA                    |
| L4                | VCCA                    |
| L9                | GND                     |
| L10               | GND                     |
| L11               | GND                     |
| L12               | GND                     |
| L17               | VCCI                    |
| L18               | I/O                     |
| L19               | I/O                     |
| L20               | TCK, I/O                |
| M1                | I/O                     |
| M2                | I/O                     |
| M3                | I/O                     |
| M4                | VCCI                    |
| M9                | GND                     |

**Table 62 • CQ172**

|     |       |
|-----|-------|
| 138 | I/O   |
| 139 | I/O   |
| 140 | I/O   |
| 141 | GND   |
| 142 | I/O   |
| 143 | I/O   |
| 144 | I/O   |
| 145 | I/O   |
| 146 | I/O   |
| 147 | I/O   |
| 148 | PROBA |
| 149 | I/O   |
| 150 | CLKA  |
| 151 | VCC   |
| 152 | GND   |
| 153 | I/O   |
| 154 | CLKB  |
| 155 | I/O   |
| 156 | PROBB |
| 157 | I/O   |
| 158 | I/O   |
| 159 | I/O   |
| 160 | I/O   |
| 161 | GND   |
| 162 | I/O   |
| 163 | I/O   |
| 164 | I/O   |
| 165 | I/O   |
| 166 | VCCI  |
| 167 | I/O   |
| 168 | I/O   |
| 169 | I/O   |
| 170 | I/O   |
| 171 | DCLK  |