



Welcome to [E-XFL.COM](https://www.e-xfl.com)

What is "[Embedded - Microcontrollers](#)"?


"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Obsolete
Core Processor	FR81S
Core Size	32-Bit Single-Core
Speed	80MHz
Connectivity	CANbus, CSIO, I ² C, LINbus, SPI, UART/USART
Peripherals	DMA, LVD, POR, PWM, WDT
Number of I/O	76
Program Memory Size	576KB (576K x 8)
Program Memory Type	FLASH
EEPROM Size	64K x 8
RAM Size	72K x 8
Voltage - Supply (Vcc/Vdd)	2.7V ~ 5.5V
Data Converters	A/D 37x12b; D/A 2x8b
Oscillator Type	External
Operating Temperature	-40°C ~ 105°C (TA)
Mounting Type	Surface Mount
Package / Case	100-LQFP
Supplier Device Package	100-LQFP (14x14)
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/mb91f524fscpmc-gse1

MB91F522L, MB91F523L, MB91F524L, MB91F525L, MB91F526L

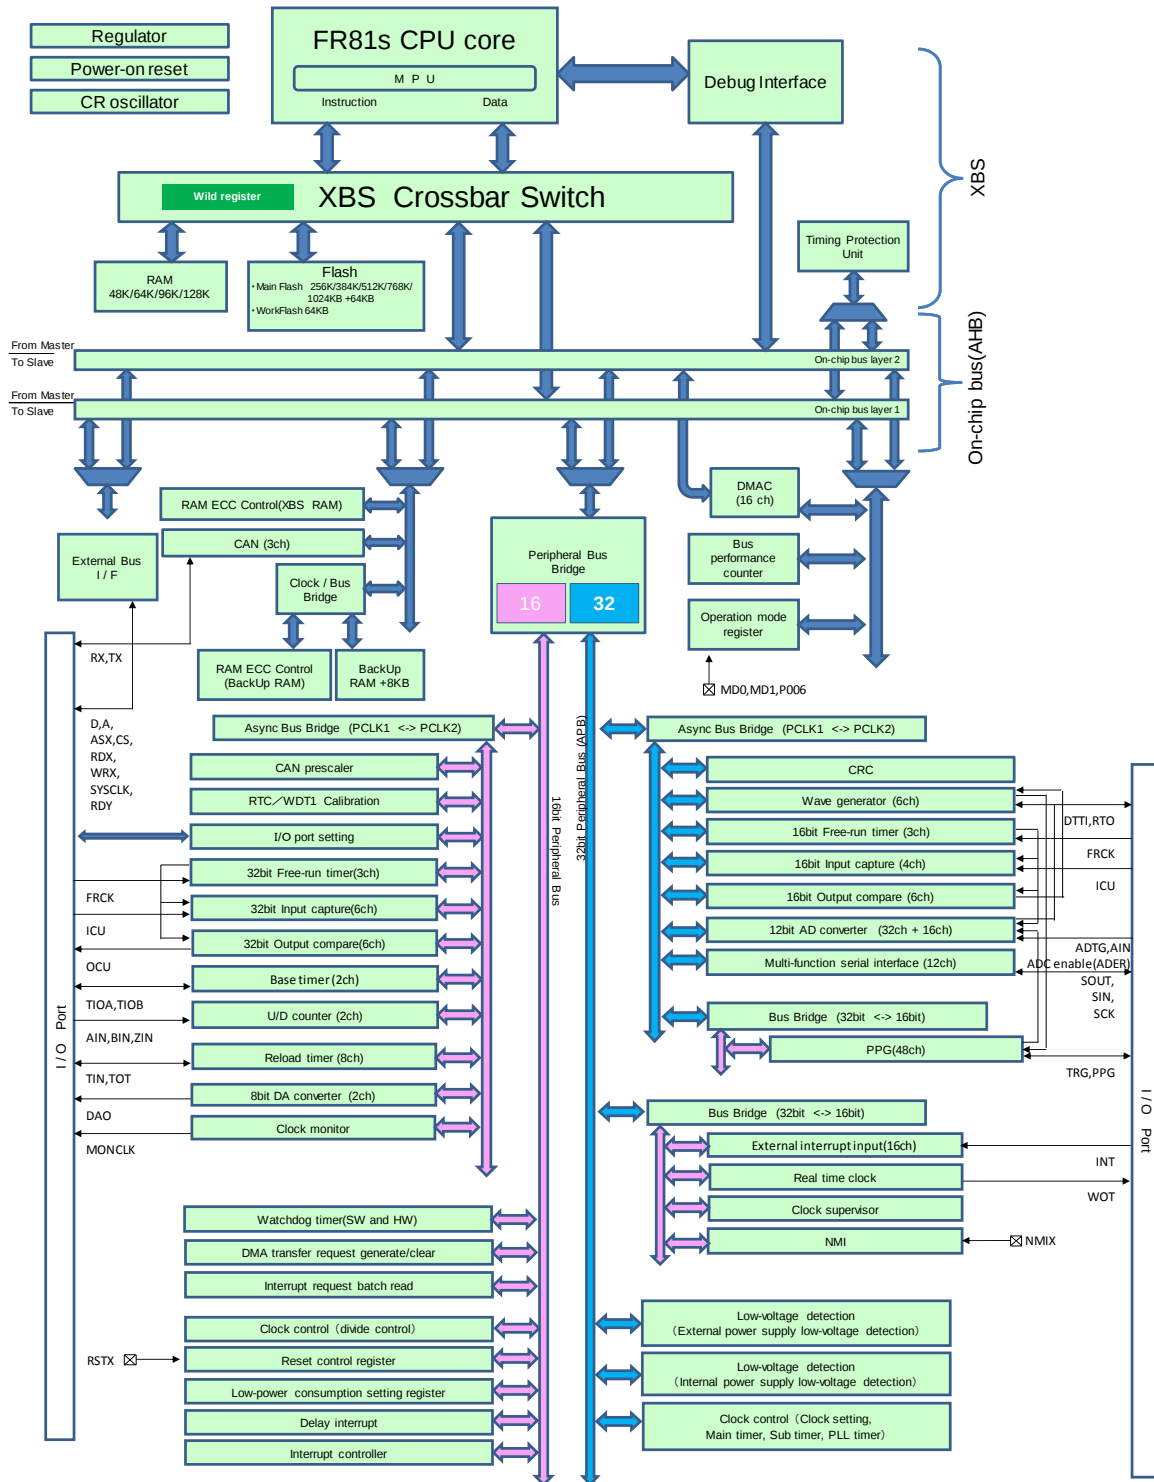

9. I/O Map

The following I/O map shows the relationship between memory space and registers for peripheral resources.

Legend of I/O Map

Address	Address offset value/ register name				Block
	+0	+1	+2	+3	
000090 _H	BT1TMR[R] H 0000000000000000		BT1TMCR[R/W]B,H,W 00000000 00000000		Base timer 1
000094 _H	-	BT1STC[R/W] B 00000000	-	-	
000098 _H	BT1PCSR/BT1PRL[R /W] H 0000000000000000		BT1PDU T/BT1PRLH/BT1DTBF[R/W] H 0000000000000000		
00009C _H	BTSEL[R/W] B ----000 0	-	BTSSSR[W] B,H -----11		
0000A0 _H	ADERH [R/W]B, H, W 00000000 00000000		ADERL [R/W]B, H, W 00000000 00000000		A/D converter
0000A4 _H	ADCS1 [R/W] B, H,W 00000000	ADCS0 [R/W] B, H,W 00000000	ADCR1 [R] B, H,W -----XX	ADCR0 [R] B, H,W XXXXX XXX	
0000A8 _H	ADCT1 [R/W] B, H,W 00010000	ADCT0 [R/W] B, H,W 00101100	ADSCH [R/W] B, H,W --00000	ADECH [R/W] B, H,W ---00000	

Read/Write attribute (R: Read W: Write)

Initial register value after reset

Data access attribute
B: Byte
H: Half-word
W: Word
(Note)The access by the data
access attribute not described
is disabled.

The initial register value after reset indicates as follows:

- "1": Initial value "1"
- "0": Initial value "0"
- "X": Initial value undefined
- "-": Reserved bit/Undefined bit
- "*": Initial value "0" or "1" according to the setting

Note: The access to addresses not described is disabled.

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
001448 _H	ADNCS0[R/W] B,H,W 0-000-00	ADNCS1[R/W] B,H,W 0-000-00	ADNCS2[R/W] B,H,W 0-000-00	ADNCS3[R/W] B,H,W 0-000-00	12-bit A/D converter 1/2 unit
00144C _H	ADNCS4[R/W] B,H,W 0-000-00	ADNCS5[R/W] B,H,W 0-000-00	ADNCS6[R/W] B,H,W 0-000-00	ADNCS7[R/W] B,H,W 0-000-00	
001450 _H	ADNCS8[R/W] B,H,W 0-000-00	ADNCS9[R/W] B,H,W 0-000-00	ADNCS10[R/W] B,H,W 0-000-00	ADNCS11[R/W] B,H,W 0-000-00	
001454 _H	ADNCS12[R/W] B,H,W 0-000-00	ADNCS13[R/W] B,H,W 0-000-00	ADNCS14[R/W] B,H,W 0-000-00	ADNCS15[R/W] B,H,W 0-000-00	
001458 _H	ADPRTF0[R] B,H,W 00000000 00000000 00000000 00000000				
00145C _H	ADEOCF0[R] B,H,W 11111111 11111111 11111111 11111111				
001460 _H	ADCS0[R] B,H,W 0-----		ADCH0[R] B,H,W ---00000	ADMD0[R/W] B,H,W 0---0000	
001464 _H	ADSTPCS0[R/W] B,H,W 00000000	ADSTPCS1[R/W] B,H,W 00000000	ADSTPCS2[R/W] B,H,W 00000000	ADSTPCS3[R/W] B,H,W 00000000	
001468 _H	ADSTPCS4[R/W] B,H,W 00000000	ADSTPCS5[R/W] B,H,W 00000000	ADSTPCS6[R/W] B,H,W 00000000	ADSTPCS7[R/W] B,H,W 00000000	12-bit A/D converter 2/2 unit
00146C _H	—				
001470 _H	ADTSS1[R/W] B,H,W -----0	—	—	—	
001474 _H	ADTSE1[R/W] B,H,W ----- 00000000 00000000				
001478 _H	ADCOMP32/ADCOMPB32[R/W] H,W 00000000 00000000		ADCOMP33/ADCOMPB33[R/W] H,W 00000000 00000000		
00147C _H	ADCOMP34/ADCOMPB34[R/W] H,W 00000000 00000000		ADCOMP35/ADCOMPB35[R/W] H,W 00000000 00000000		
001480 _H	ADCOMP36/ADCOMPB36[R/W] H,W 00000000 00000000		ADCOMP37/ADCOMPB37[R/W] H,W 00000000 00000000		
001484 _H	ADCOMP38/ADCOMPB38[R/W] H,W 00000000 00000000		ADCOMP39/ADCOMPB39[R/W] H,W 00000000 00000000		
001488 _H	ADCOMP40/ADCOMPB40[R/W] H,W 00000000 00000000		ADCOMP41/ADCOMPB41[R/W] H,W 00000000 00000000		12-bit A/D converter 2/2 unit
00148C _H	ADCOMP42/ADCOMPB42[R/W] H,W 00000000 00000000		ADCOMP43/ADCOMPB43[R/W] H,W 00000000 00000000		
001490 _H	ADCOMP44/ADCOMPB44[R/W] H,W 00000000 00000000		ADCOMP45/ADCOMPB45[R/W] H,W 00000000 00000000		
001494 _H	ADCOMP46/ADCOMPB46[R/W] H,W 00000000 00000000		ADCOMP47/ADCOMPB47[R/W] H,W 00000000 00000000		
001498 _H to 0014B4 _H	—	—	—	—	Reserved

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
0018B8 _H	SCR9/(IBCR9) [R/W] B,H,W 0--00000	SMR9[R/W] B,H,W 000-00-0	SSR9[R/W] B,H,W 0-000011	ESCR9/(IBSR9)[R/W]] B,H,W 00000000	Multi-UART9 *1: Byte access is possible only for access to lower 8 bits. *2: Reserved because I ² C mode is not set immediately after reset. *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
0018BC _H	—/(RDR19/(TDR19))[R/W] B,H,W ----- *3		RDR09/(TDR09)[R/W] B,H,W -----0 00000000 *1		
0018C0 _H	SACSR9[R/W] B,H,W 0---000 00000000		STMR9[R] B,H,W 00000000 00000000		
0018C4 _H	STMCR9[R/W] B,H,W 00000000 00000000		—/(SCSCR9/SFUR9)[R/W] B,H,W ----- *3 *4		
0018C8 _H	—/(SCSTR39)/ (LAMSR9) [R/W] B,H,W ----- *3	—/(SCSTR29)/ (LAMCR9) [R/W] B,H,W ----- *3	—/(SCSTR19)/ (SFLR19) [R/W] B,H,W ----- *3	—/(SCSTR09)/ (SFLR09) [R/W] B,H,W ----- *3	
0018CC _H	—	—/(SCSFR29) [R/W] B,H,W ----- *3	—/(SCSFR19) [R/W] B,H,W ----- *3	—/(SCSFR09) [R/W] B,H,W ----- *3	
0018D0 _H	—/(TBYTE39)/ (LAMESR9) [R/W] B,H,W ----- *3	—/(TBYTE29)/ (LAMERT9) [R/W] B,H,W ----- *3	—/(TBYTE19)/ (LAMIER9) [R/W] B,H,W ----- *3	TBYTE09/(LAMRID9) / (LAMTID9) [R/W] B,H,W 00000000	
0018D4 _H	BGR9[R/W] H, W 00000000 00000000		—/(ISMK9)[R/W] B,H,W ----- *2	—/(ISBA9)[R/W] B,H,W ----- *2	
0018D8 _H	FCR19[R/W] B,H,W ---00100	FCR09[R/W] B,H,W -0000000	FBYTE9[R/W] B,H,W 00000000 00000000		
0018DC _H	FTICR9[R/W] B,H,W 00000000 00000000		—	—	
0018E0 _H	SCR10/(IBCR10) [R/W] B,H,W 0--00000	SMR10[R/W] B,H,W 000-00-0	SSR10[R/W] B,H,W 0-000011	ESCR10/(IBSR10) [R/W] B,H,W 00000000	Multi-UART10 *1: Byte access is possible only for access to lower 8 bits. *2: Reserved because I ² C mode is not set immediately after reset.
0018E4 _H	—/(RDR110/(TDR110))[R/W] B,H,W ----- *3		RDR010/(TDR010)[R/W] B,H,W -----0 00000000 *1		
0018E8 _H	SACSR10[R/W] B,H,W 0---000 00000000		STMR10[R] B,H,W 00000000 00000000		
0018EC _H	STMCR10[R/W] B,H,W 00000000 00000000		—/(SCSCR10/SFUR10)[R/W] B,H,W ----- *3 *4		

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
001D50 _H	PCN46 [R/W] B,H,W 00000000 000000-0		PCSR46 [W] H,W XXXXXXXX XXXXXXXX		PPG46
001D54 _H	PDUT46 [W] H,W XXXXXXXX XXXXXXXX		PTMR46 [R] H,W 1111111 1111111		
001D58 _H	PCN246 [R/W] B,H,W --000000 ----110		PSDR46 [R/W] H,W 00000000 00000000		
001D5C _H	PTPC46 [R/W] H,W 00000000 00000000		—	—	
001D60 _H	PCN47 [R/W] B,H,W 00000000 000000-0		PCSR47 [W] H,W XXXXXXXX XXXXXXXX		PPG47
001D64 _H	PDUT47 [W] H,W XXXXXXXX XXXXXXXX		PTMR47 [R] H,W 1111111 1111111		
001D68 _H	PCN247 [R/W] B,H,W --000000 ----110		PSDR47 [R/W] H,W 00000000 00000000		
001D6C _H	PTPC47 [R/W] H,W 00000000 00000000		—	—	
001D70 _H to 001FFC _H	—	—	—	—	Reserved
002000 _H	CTRLR0 [R/W] B,H,W ----- 000-0001		STATR0 [R/W] B,H,W ----- 00000000		CAN0 (128msb)
002004 _H	ERRCNT0 [R] B,H,W 00000000 00000000		BTR0 [R/W] B,H,W -0100011 00000001		
002008 _H	INTR0 [R] B,H,W 00000000 00000000		TESTR0 [R/W] B,H,W ----- X00000--		
00200C _H	BRPER0 [R/W] B,H,W ----- ----0000		—	—	
002010 _H	IF1CREQ0 [R/W] B,H,W 0----- 00000001		IF1CMSK0 [R/W] B,H,W ----- 00000000		
002014 _H	IF1MSK20 [R/W] B,H,W 11-11111 11111111		IF1MSK10 [R/W] B,H,W 11111111 11111111		
002018 _H	IF1ARB20 [R/W] B,H,W 00000000 00000000		IF1ARB10 [R/W] B,H,W 00000000 00000000		
00201C _H	IF1MCTR0 [R/W] B,H,W 00000000 0---0000		—	—	
002020 _H	IF1DTA10 [R/W] B,H,W 00000000 00000000		IF1DTA20 [R/W] B,H,W 00000000 00000000		
002024 _H	IF1DTB10 [R/W] B,H,W 00000000 00000000		IF1DTB20 [R/W] B,H,W 00000000 00000000		
002028 _H	—	—	—	—	
00202C _H	—	—	—	—	
002030 _H , 002034 _H	Reserved(IF1 data mirror)				
002038 _H	—	—	—	—	
00203C _H	—	—	—	—	
002040 _H	IF2CREQ0 [R/W] B,H,W 0----- 00000001		IF2CMSK0 [R/W] B,H,W ----- 00000000		
002044 _H	IF2MSK20 [R/W] B,H,W 11-11111 11111111		IF2MSK10 [R/W] B,H,W 11111111 11111111		
002048 _H	IF2ARB20 [R/W] B,H,W 00000000 00000000		IF2ARB10 [R/W] B,H,W 00000000 00000000		

144 Pins

Interrupt Factor	Interrupt Number		Interrupt Level	Offset	Default Address for TBR	RN
	Decimal	Hexa Decimal				
Reset	0	0	-	3FC _H	000FFFFC _H	-
System reserved	1	1	-	3F8 _H	000FFFF8 _H	-
System reserved	2	2	-	3F4 _H	000FFFF4 _H	-
System reserved	3	3	-	3F0 _H	000FFFF0 _H	-
System reserved	4	4	-	3EC _H	000FFFE _C	-
FPU exception	5	5	-	3E8 _H	000FFFE8 _H	-
Exception of instruction access protection violation	6	6	-	3E4 _H	000FFFE4 _H	-
Exception of data access protection violation	7	7	-	3E0 _H	000FFFE0 _H	-
Data access error interrupt	8	8	-	3DC _H	000FFFD _C	-
INTE instruction	9	9	-	3D8 _H	000FFFD8 _H	-
Instruction break	10	0A	-	3D4 _H	000FFFD4 _H	-
System reserved	11	0B	-	3D0 _H	000FFFD0 _H	-
System reserved	12	0C	-	3CC _H	000FFFC _C	-
System reserved	13	0D	-	3C8 _H	000FFFC8 _H	-
Exception of invalid instruction	14	0E	-	3C4 _H	000FFFC4 _H	-
NMI request	15	0F	15 (F _H) Fixed	3C0 _H	000FFFC0 _H	-
Error generation during internal bus diagnosis						
XBS RAM double-bit error generation						
Backup RAM double-bit error generation						
TPU violation	16	10	ICR00	3BC _H	000FFFBC _H	0
External interrupt 0-7						
External interrupt 8-15						
External low-voltage detection interrupt						
Reload timer 0/1/4/5	17	11	ICR01	3B8 _H	000FFFB8 _H	1* ⁷
Reload timer 2/3/6/7	18	12	ICR02	3B4 _H	000FFFB4 _H	2* ²
Multi-function serial interface ch.0 (reception completed)	19	13	ICR03	3B0 _H	000FFFB0 _H	3* ²
Multi-function serial interface ch.0 (status)	20	14	ICR04	3AC _H	000FFFAC _H	4* ¹
Multi-function serial interface ch.0 (transmission completed)	21	15	ICR05	3A8 _H	000FFFA8 _H	5* ¹
Multi-function serial interface ch.1 (reception completed)	22	16	ICR06	3A4 _H	000FFFA4 _H	6* ¹
Multi-function serial interface ch.1 (status)	23	17	ICR07	3A0 _H	000FFFA0 _H	7* ¹
Multi-function serial interface ch.2 (reception completed)	24	18	ICR08	39C _H	000FFF9C _H	8* ¹
Multi-function serial interface ch.2 (status)	25	19	ICR09	398 _H	000FFF98 _H	9* ¹
Multi-function serial interface ch.3 (reception completed)	26	1A	ICR10	394 _H	000FFF94 _H	10* ¹
Multi-function serial interface ch.3 (status)						

Interrupt Factor	Interrupt Number		Interrupt Level	Offset	Default Address for TBR	RN
	Decimal	Hexa Decimal				
32-bit ICU5 (fetching/measurement)	57	39	ICR41	318 _H	000FFF18 _H	41
A/D converter						
32/33/34/35/36/37/38/39/40/41/42/43/44/45/46/47						
32-bit OCU 6/7/10/11 (match)						
32-bit OCU 8/9 (match)	58	3A	ICR42	314 _H	000FFF14 _H	42
Base timer 0 IRQ0	59	3B	ICR43	310 _H	000FFF10 _H	43
Base timer 0 IRQ1						
Base timer 1 IRQ0	60	3C	ICR44	30C _H	000FFF0C _H	44
Base timer 1 IRQ1						
-						
-						
DMAC 0/1/2/3/4/5/6/7/8/9/10/11/12/13/14/15	61	3D	ICR45	308 _H	000FFF08 _H	45
Delay interrupt	62	3E	ICR46	304 _H	000FFF04 _H	-
System reserved (Used for REALOS)	63	3F	ICR47	300 _H	000FFF00 _H	-
System reserved (Used for REALOS)	64	40	-	2FC _H	000FFEFC _H	-
System reserved (Used for REALOS)	65	41	-	2F8 _H	000FFE8 _H	-
Used with the INT instruction	66	42	-	2F4 _H	000FFE4 _H	-
	255	FF		000 _H	000FFC00 _H	

Note: It does not support a DMA transfer request caused by an interrupt generated from a peripheral to which no RN (Resource Number) is assigned.

- *1: It does not support a DMA transfer by the status of the multi-function serial interface and I²C reception.
- *2: Reload timer ch.4 to ch.7 do not support a DMA transfer by the interrupt.
- *3: PPG ch.24 to ch.47 do not support a DMA transfer by the interrupt.
- *4: The clock calibration unit does not support a DMA transfer by the interrupt.
- *5: 32-bit Free-run timer ch.3, ch.4 and ch.5 do not support a DMA transfer by the interrupt.
- *6: There is no resource corresponding to the interrupt level.
- *7: It does not support a DMA transfer by the external low-voltage detection interrupt.

11. Electrical Characteristics

Absolute Maximum Ratings

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage *1,*2	V _{CC}	V _{SS} -0.3	V _{SS} +6.0	V	
Analog power supply voltage *1,*2	AV _{CC}	V _{SS} -0.3	V _{SS} +6.0	V	AVRH ≤ AV _{CC} ≤ V _{CC}
Analog reference voltage *1	AVRH	V _{SS} -0.3	V _{SS} +6.0	V	AVRH ≤ AV _{CC}
Input voltage *1	V _I	V _{SS} -0.3	V _{CC} +0.3	V	
Analog pin input voltage *1	V _{IA5}	V _{SS} -0.3	V _{CC} +0.3	V	
Output voltage *1	V _O	V _{SS} -0.3	V _{CC} +0.3	V	
Maximum clamp current	I _{CLAMP}	-	4.0	mA	*6
Total maximum clamp current	Σ I _{CLAMP}	-	20	mA	*6
"L" level maximum output current *3	I _{OL1}	-	15	mA	
	I _{OL2}	-	30	mA	
"L" level average output current *4	I _{OLAV1}	-	4	mA	*9
	I _{OLAV2}	-	12	mA	*10
"L" level total output current *5	ΣI _{OL1}	-	100	mA	
	ΣI _{OL2}	-	120	mA	
"H" level maximum output current*3	I _{OH1}	-	-15	mA	
	I _{OH2}	-	-30	mA	
"H" level average output current*4	I _{OHAV1}	-	-4	mA	*9
	I _{OHAV2}	-	-12	mA	*10
"H" level total output current *5	ΣI _{OH1}	-	-100	mA	
	ΣI _{OH2}	-	-120	mA	
Power consumption	T _A : -40 °C to +105 °C	P _D	-	882	mW *8
	T _A : -40 °C to +125 °C		-	675	mW *8
Operating temperature	T _A	-40	+105	°C	
		-40	+125	°C	*7
Storage temperature	T _{stg}	-55	+150	°C	

*1: These parameters are based on the condition that V_{SS} = AV_{SS} = 0.0 V

*2: Caution must be taken that AV_{CC}, AVRH do not exceed V_{CC} upon power-on and under other circumstances.

*3: The maximum output current is defined as the value of the peak current flowing through any one of the corresponding pins.

*4: The average output current is defined as the value of the average current flowing through any one of the corresponding pins for a 10 ms period. The average value is the operation current × the operation ratio.

*5: The total output current is defined as the maximum current value flowing through all of corresponding pins.

*6: · Corresponding pins: all general-purpose ports except P035, 041, 093, 122.

· Use within recommended operating conditions.

· Use at DC voltage (current).

· The + B signal should always be applied by connecting a limiting resistor between the + B signal and the microcontroller.

· The value of the limiting resistor should be set so that the current input to the microcontroller pin does not exceed rated values at any time regardless of instantaneously or constantly when the + B signal is input.

· Note that when the microcontroller drive current is low, such as in the low power consumption modes, the + B input potential can increase the potential at the V_{CC} pin via a protective diode, possibly affecting other devices.

· Note that if the + B signal is input when the microcontroller is off (not fixed at 0 V), since the power is supplied through the pin, the microcontroller may operate incompletely.

· Note that if the +B signal is input at power-on, since the power is supplied through the pin, the power-on reset may not function in the power supply voltage.

· Do not leave + B input pins open.


*7: When it is used under this condition, contact your sales representative.

minimum guaranteed MCU operation voltage, MCU operations are not guaranteed with the exception of LVD.

*2: See the following diagram for details on the connection of smoothing capacitor C_s .

*3: When it is used under this condition, contact your sales representative.

· C Pin Connection Diagram

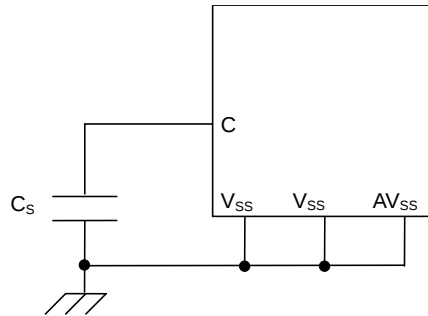

<WARNING>

The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated under these conditions.

Any use of semiconductor devices will be under their recommended operating condition. Operation under any conditions other than these conditions may adversely affect reliability of device and could result in device failure. No warranty is made with respect to any use, operating conditions or combinations not represented on this data sheet. If you are considering application under any conditions other than listed herein, please contact sales representatives beforehand.

(T_A: -40 °C to +125 °C, V_{CC} = AV_{CC} = 5.0 V ± 10 %/3.3 V ± 0.3 V, V_{SS} = AV_{SS} = 0.0 V)

Parameter	Symbol	Pin Name	Conditions		Value			Unit	Remarks	
					Min	Typ	Max			
Power supply current	I _{CC5}	VCC	Operating frequency F _{CP} = 80 MHz, F _{cpp} = 40 MHz, at normal operation		-	60	102	mA		
			Operating frequency F _{CP} = 80 MHz, F _{cpp} = 40 MHz, at Flash write		-	70	115	mA		
			Operating frequency F _{CP} = 80 MHz, F _{cpp} = 40 MHz, at Flash erase		-	70	115	mA		
			Operating frequency F _{CP} = 64 MHz, F _{cpp} = 32 MHz, at normal operation		-	54	92	mA		
			Operating frequency F _{CP} = 64 MHz, F _{cpp} = 32 MHz, at Flash write		-	64	105	mA		
			Operating frequency F _{CP} = 64 MHz, F _{cpp} = 32 MHz, at Flash erase		-	64	105	mA		
			Operating frequency F _{CP} = 48 MHz, F _{cpp} = 24 MHz, at normal operation		-	46	82	mA		
			Operating frequency F _{CP} = 48 MHz, F _{cpp} = 24 MHz, at Flash write		-	56	95	mA		
			Operating frequency F _{CP} = 48 MHz, F _{cpp} = 24 MHz, at Flash erase		-	56	95	mA		
	I _{CCS5}		Operating frequency F _{CP} = 80 MHz, F _{cpp} = 40 MHz, at CPU sleep mode		-	45	82	mA		
	I _{CCBS5}		Operating frequency F _{CP} = 80 MHz, F _{cpp} = 40 MHz, at bus sleep mode		-	23	72	mA		
	I _{CCt5}		Watch mode	When using crystal 4 MHz T _A = +25 °C*		-	1500	2610	μA	
				When using built-in CR clock 50 kHz T _A = +25 °C*		-	450	2000		
				When using sub clock 32 kHz T _A = +25 °C*		-	460	2000		
	I _{CCH5}		Stop mode	T _A = +25 °C*		-	450	2000	μA	
	I _{CCt52}		Watch mode (power off)	When using crystal 4 MHz T _A = +25 °C*		-	1100	1300	μA	LVD/ RTC operation, Backup RAM 8 KB retention
				When using built-in CR clock 50 kHz , T _A = +25 °C*		-	77	267		
				When using sub clock 32 kHz T _A = +25 °C*		-	100	285		
	I _{CCH52}		Stop mode (power off)	T _A = +25 °C*		-	74	265	μA	Backup RAM 8 KB retention

(4-1-2) Bit setting: SMR: MD2 = 0, SMR: MD1 = 1, SMR : MD0 = 0, SMR: SCINV = 1, SCR:SPI = 0

(T_A: -40 °C to +125 °C, V_{CC} = AV_{CC} = 5.0 V ± 10 %/V_{CC} = AV_{CC} = 3.3 V ± 0.3 V, V_{SS} = AV_{SS} = 0.0 V)

Parameter	Symbol	Pin Name	Conditions	Value		Unit	Remarks
				Min	Max		
Serial clock cycle time	t _{SCYC}	SCK0 to SCK11	-	4t _{CPP}	-	ns	Internal shift clock mode output pin : C _L = 50 pF
SCK ↑ → SOT delay time	t _{SHOVI}	SCK0 to SCK2, SCK5 to SCK11 SOT0 to SOT2, SOT5 to SOT11		-30	30	ns	
		SCK3 , SCK4 SOT3 , SOT4		-300	300	ns	
Valid SIN → SCK ↓ setup time	t _{IVSLI}	SCK0 to SCK2, SCK5 to SCK11 SIN0 to SIN2, SIN5 to SIN11		34	-	ns	
		SCK3 , SCK4 SIN3, SIN4		300	-	ns	
SCK ↓ → Valid SIN hold time	t _{SLIXI}	SCK0 to SCK11 SIN0 to SIN11		0	-	ns	
Serial clock "H" pulse width	t _{SHSL}	SCK0 to SCK11	-	t _{CPP} +10	-	ns	External shift clock mode output pin: C _L = 50 pF
Serial clock "L" pulse width	t _{SLSH}			2t _{CPP} -10	-	ns	
SCK ↑ → SOT delay time	t _{SHOVE}	SCK0 to SCK2, SCK5 to SCK11 SOT0 to SOT2, SOT5 to SOT11		-	33	ns	
		SCK3 , SCK4 SOT3 , SOT4		-	300	ns	
Valid SIN → SCK ↓ setup time	t _{IVSLE}	SCK0 to SCK11 SIN0 to SIN11		10	-	ns	
SCK ↓ → Valid SIN hold time	t _{SLIXE}			20	-	ns	
SCK fall time	t _F	SCK0 to SCK11		-	5	ns	
SCK rise time	t _R	SCK0 to SCK11		-	5	ns	

Notes:


AC characteristic in CLK synchronized mode.

C_L is the load capacitance applied to pins during testing.


The maximum baud rate is limited by internal operation clock used and other parameters. Please use ch.3 and ch.4 with maximum baud rate 400 kbps or less.

See Hardware Manual for details.

□ Internal shift clock mode

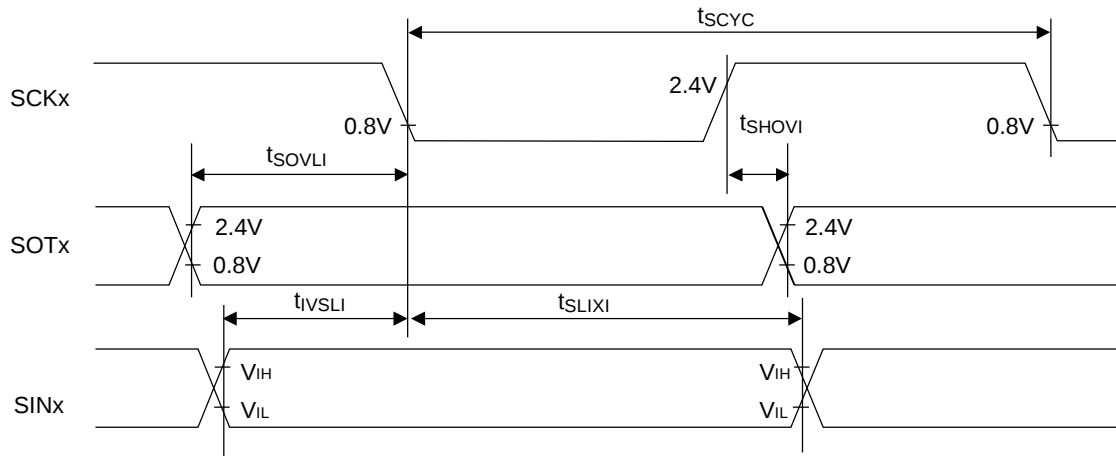

• External shift clock mode

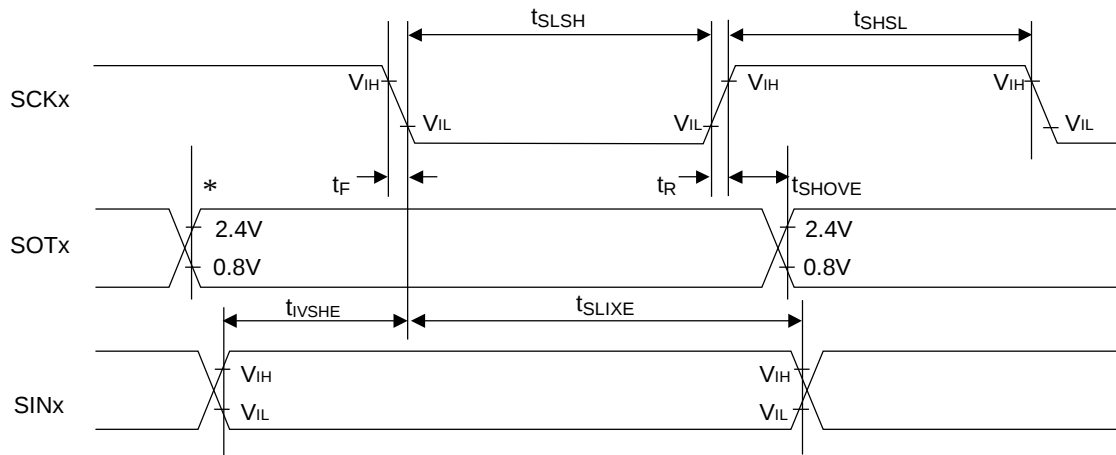

(4-1-5) Bit setting: SMR:MD2 = 0, SMR:MD1 = 1, SMR:MD0 = 0,

When Serial chip select is used : SCSCR:CSEN = 1,

Serial clock output mark level "H" : SMR,SCSFR:SCINV = 0,

Serial chip select Inactive level "H" : SCSCR,SCSFR:CSLVL = 1

(TA: -40 °C to +125 °C, V_{CC} = AV_{CC} = 5.0 V ± 10 %/V_{CC} = AV_{CC} = 3.3 V±0.3 V, V_{SS} = AV_{SS} = 0.0V)

Parameter	Symbol	Pin Name	Conditions	Value		Unit	Remarks
				Min	Max		
SCS↓→SCK↓ setup time	t _{CSSI}	SCK1, SCK2, SCK5 to SCK11 SCS1, SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11	-	t _{CSSU} -50 *1	t _{CSSU} +0 *1	ns	Internal shift clock mode output pin : C _L = 50 pF
		SCK3, SCK4 SCS3, SCS40 to SCS43		t _{CSSU} -50 *1	t _{CSSU} +300 *1	ns	
SCK↑→SCS↑ hold time	t _{CSHI}	SCK1, SCK2, SCK5 to SCK11 SCS1, SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t _{CSHD} -10 *2	t _{CSHD} +50 *2	ns	
		SCK3, SCK4 SCS3, SCS40 to SCS43		t _{CSHD} -300 *2	t _{CSHD} +50 *2	ns	
SCS deselect time	t _{CSDI}	SCS1 to SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t _{CSDS} -50 *3	t _{CSDS} +50 *3	ns	

(4-1-6) Bit setting: SMR:MD2 = 0, SMR:MD1 = 1, SMR:MD0 = 0,

When Serial chip select is used : SCSCR:CSEN = 1,

Serial clock output mark level "L" : SMR,SCSFR:SCINV = 1,

Serial chip select Inactive level "H" : SCSCR,SCSFR:CSLVL = 1

(TA: -40 °C to +125 °C, V_{CC} = AV_{CC} = 5.0 V ± 10 %/V_{CC} = AV_{CC} = 3.3 V ± 0.3 V, V_{SS} = AV_{SS} = 0.0V)

Parameter	Symbol	Pin Name	Conditions	Value		Unit	Remarks
				Min	Max		
SCS↓→SCK↑ setup time	t _{CSSI}	SCK1 , SCK2, SCK5 to SCK11 SCS1 , SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11	-	t _{CSSU} -50 *1	t _{CSSU} +0 *1	ns	Internal shift clock mode output pin : C _L = 50 pF
		SCK3 , SCK4 SCS3 , SCS40 to SCS43		t _{CSSU} -50 *1	t _{CSSU} +300 *1	ns	
SCK↓→SCS↑ hold time	t _{CSHI}	SCK1 , SCK2, SCK5 to SCK11 SCS1 , SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t _{CSHD} -10 *2	t _{CSHD} +50 *2	ns	
		SCK3 , SCK4 SCS3 , SCS40 to SCS43		t _{CSHD} -300 *2	t _{CSHD} +50 *2	ns	
SCS deselect time	t _{CSDI}	SCS1 to SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t _{CSDS} -50 *3	t _{CSDS} +50 *3	ns	

(4-1-8) Bit setting: SMR:MD2 = 0, SMR:MD1 = 1, SMR:MD0 = 0,

When Serial chip select is used: SCSCR:CSEN = 1,


Serial clock output mark level "L" : SMR,SCSFR:SCINV = 1,

Serial chip select Inactive level "L" : SCSCR,SCSFR:CSLVL = 0


(TA: -40 °C to +125 °C, V_{CC} = AV_{CC} = 5.0 V ± 10 %/V_{CC} = AV_{CC} = 3.3 V ± 0.3 V, V_{SS} = AV_{SS} = 0.0 V)

Parameter	Symbol	Pin Name	Conditions	Value		Unit	Remarks
				Min	Max		
SCS↑→SCK↑ setup time	t _{CSU}	SCK1 , SCK2, SCK5 to SCK11 SCS1 , SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11	-	t _{CSU} -50 *1	t _{CSU} +0 *1	ns	Internal shift clock mode output pin : C _L = 50 pF
		SCK3 , SCK4 SCS3 , SCS40 to SCS43		t _{CSU} -50 *1	t _{CSU} +300 *1	ns	
SCK↓→SCS↓ hold time	t _{CSH}	SCK1 , SCK2, SCK5 to SCK11 SCS1 , SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t _{CSHD} -10 *2	t _{CSHD} +50 *2	ns	
		SCK3 , SCK4 SCS3 , SCS40 to SCS43		t _{CSHD} -300 *2	t _{CSHD} +50 *2	ns	
SCS deselect time	t _{CSD}	SCS1 to SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t _{CSDS} -50 *3	t _{CSDS} +50 *3	ns	

External bus I/F (synchronous mode, read operation, and multiplex mode) timing

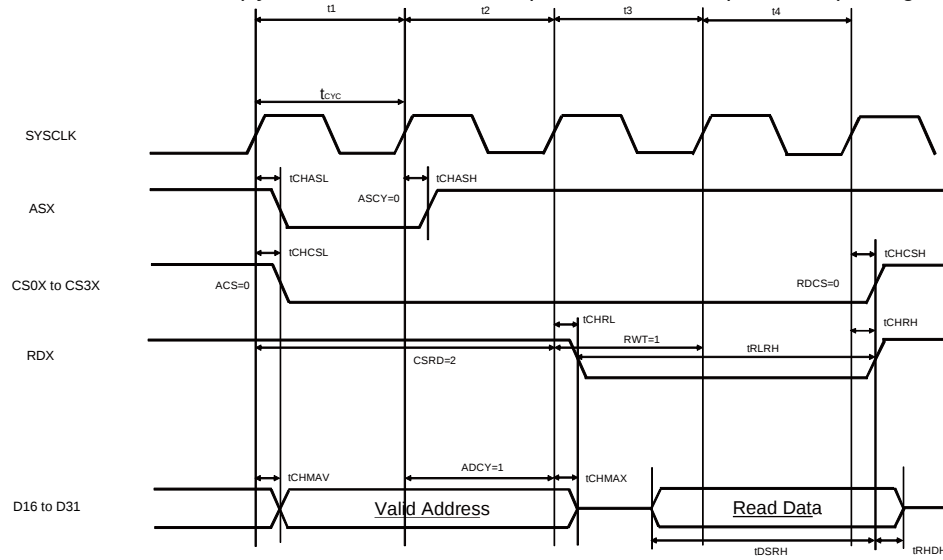

External bus I/F (synchronous mode, read operation, and split mode) timing

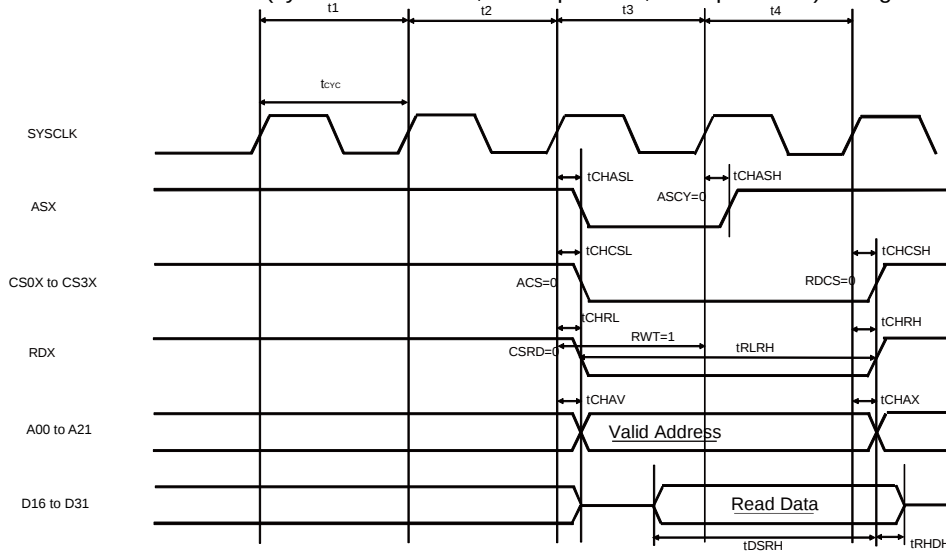

13. Ordering Information MB91F52xxxB*¹

Part Number	Sub Clock	CSV Initial Value	LVD Initial Value	Package* ²
MB91F526LWBPMC	Yes	ON	ON	LQP • 176 pin, Plastic
MB91F526LYBPMC			OFF	
MB91F526LJBPMC		OFF	ON	
MB91F526LLBPMC			OFF	
MB91F525LWBPMC		ON	ON	
MB91F525LYBPMC			OFF	
MB91F525LJBPMC		OFF	ON	
MB91F525LLBPMC			OFF	
MB91F524LWBPMC		ON	ON	
MB91F524LYBPMC			OFF	
MB91F524LJBPMC		OFF	ON	
MB91F524LLBPMC			OFF	
MB91F523LWBPMC		ON	ON	
MB91F523LYBPMC			OFF	
MB91F523LJBPMC		OFF	ON	
MB91F523LLBPMC			OFF	
MB91F522LWBPMC		ON	ON	
MB91F522LYBPMC			OFF	
MB91F522LJBPMC		OFF	ON	
MB91F522LLBPMC			OFF	
MB91F526LSBPMC	None	ON	ON	
MB91F526LUBPMC			OFF	
MB91F526LHBPMC		OFF	ON	
MB91F526LKBPMC			OFF	
MB91F525LSBPMC		ON	ON	
MB91F525LUBPMC			OFF	
MB91F525LHBPMC		OFF	ON	
MB91F525LKBPMC			OFF	
MB91F524LSBPMC		ON	ON	
MB91F524LUBPMC			OFF	
MB91F524LHBPMC		OFF	ON	
MB91F524LKBPMC			OFF	
MB91F523LSBPMC		ON	ON	
MB91F523LUBPMC			OFF	
MB91F523LHBPMC		OFF	ON	
MB91F523LKBPMC			OFF	
MB91F522LSBPMC		ON	ON	
MB91F522LUBPMC			OFF	
MB91F522LHBPMC		OFF	ON	
MB91F522LKBPMC			OFF	

Part Number	Sub Clock	CSV Initial Value	LVD Initial Value	Package*
MB91F526FWDPMC	Yes	ON	ON	LQI • 100 pin, Plastic
MB91F526FJDPMC		OFF	ON	
MB91F525FWDPMC		ON	ON	
MB91F525FJDPMC		OFF	ON	
MB91F524FWDPMC		ON	ON	
MB91F524FJDPMC		OFF	ON	
MB91F523FWDPMC		ON	ON	
MB91F523FJDPMC		OFF	ON	
MB91F522FWDPMC		ON	ON	
MB91F522FJDPMC		OFF	ON	
MB91F526FSDPMC	None	ON	ON	
MB91F526FHDPMC		OFF	ON	
MB91F525FSDPMC		ON	ON	
MB91F525FHDPMC		OFF	ON	
MB91F524FSDPMC		ON	ON	
MB91F524FHDPMC		OFF	ON	
MB91F523FSDPMC		ON	ON	
MB91F523FHDPMC		OFF	ON	
MB91F522FSDPMC		ON	ON	
MB91F522FHDPMC		OFF	ON	
MB91F526DWDPMC	Yes	ON	ON	LQH • 80 pin, Plastic
MB91F526DJDPMC		OFF	ON	
MB91F525DWDPMC		ON	ON	
MB91F525DJDPMC		OFF	ON	
MB91F524DWDPMC		ON	ON	
MB91F524DJDPMC		OFF	ON	
MB91F523DWDPMC		ON	ON	
MB91F523DJDPMC		OFF	ON	
MB91F522DWDPMC		ON	ON	
MB91F522DJDPMC		OFF	ON	
MB91F526DSDPMC	None	ON	ON	
MB91F526DHDPMC		OFF	ON	
MB91F525DSDPMC		ON	ON	
MB91F525DHDPMC		OFF	ON	
MB91F524DSDPMC		ON	ON	
MB91F524DHDPMC		OFF	ON	
MB91F523DSDPMC		ON	ON	
MB91F523DHDPMC		OFF	ON	
MB91F522DSDPMC		ON	ON	
MB91F522DHDPMC		OFF	ON	

Page	Section	Change Results																																																																																																														
20	■PIN Description	A List of "Pin Description" modified.																																																																																																														
		(Error)																																																																																																														
		<table><tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr><tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr><tr><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">4</td><td rowspan="5">7</td><td rowspan="5">10</td><td rowspan="5">12</td><td>P025</td></tr><tr><td>WR1X</td></tr><tr><td>SOT4_1</td></tr><tr><td>PPG25_0</td></tr><tr><td>TIN2_0</td></tr><tr><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">13</td><td>P172</td></tr><tr><td>PPG38_1</td></tr><tr><td rowspan="5">-</td><td rowspan="5">4</td><td rowspan="5">5</td><td rowspan="5">8</td><td rowspan="5">11</td><td rowspan="5">14</td><td>P026</td></tr><tr><td>A00</td></tr><tr><td>SCK4_1</td></tr><tr><td>PPG26_0</td></tr><tr><td>TIN3_0</td></tr><tr><td rowspan="5">4</td><td rowspan="5">5</td><td rowspan="5">6</td><td rowspan="5">9</td><td rowspan="5">12</td><td rowspan="5">15</td><td>P027</td></tr><tr><td>A01</td></tr><tr><td>SCS40_1</td></tr><tr><td>PPG27_0</td></tr><tr><td>TOT0_0</td></tr><tr><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">-</td><td rowspan="2">16</td><td>RTO3_1</td></tr><tr><td>P173</td></tr><tr><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">-</td><td rowspan="5">17</td><td>PPG39_1</td></tr><tr><td>P030</td></tr><tr><td>A02</td></tr><tr><td>SCS41_1</td></tr><tr><td>PPG28_0</td></tr><tr><td rowspan="5">-</td><td rowspan="5">6</td><td rowspan="5">8</td><td rowspan="5">11</td><td rowspan="5">14</td><td rowspan="5">18</td><td>TOT1_0</td></tr><tr><td>P031</td></tr><tr><td>A03</td></tr><tr><td>SCS42_1</td></tr><tr><td>PPG29_0</td></tr><tr><td rowspan="6">5</td><td rowspan="6">7</td><td rowspan="6">9</td><td rowspan="6">12</td><td rowspan="6">15</td><td rowspan="6">19</td><td>TOT2_0</td></tr><tr><td>P032</td></tr><tr><td>A04</td></tr><tr><td>SCS43_1</td></tr><tr><td>PPG30_0</td></tr><tr><td>TOT3_0</td></tr><tr><td rowspan="7">6</td><td rowspan="7">8</td><td rowspan="7">10</td><td rowspan="7">13</td><td rowspan="7">16</td><td rowspan="7">20</td><td>RTO2_1</td></tr><tr><td>P033</td></tr><tr><td>A05</td></tr><tr><td>PPG31_0</td></tr><tr><td>ICU3_3</td></tr><tr><td>TIN4_0</td></tr><tr><td>RTO1_1</td></tr><tr><td>SCK3_2</td></tr></table>	Pin no.						Pin Name	64	80	100	120	144	176	-	-	4	7	10	12	P025	WR1X	SOT4_1	PPG25_0	TIN2_0	-	-	-	-	-	13	P172	PPG38_1	-	4	5	8	11	14	P026	A00	SCK4_1	PPG26_0	TIN3_0	4	5	6	9	12	15	P027	A01	SCS40_1	PPG27_0	TOT0_0	-	-	-	-	-	16	RTO3_1	P173	-	-	-	-	-	17	PPG39_1	P030	A02	SCS41_1	PPG28_0	-	6	8	11	14	18	TOT1_0	P031	A03	SCS42_1	PPG29_0	5	7	9	12	15	19	TOT2_0	P032	A04	SCS43_1	PPG30_0	TOT3_0	6	8	10	13	16	20	RTO2_1	P033	A05	PPG31_0	ICU3_3	TIN4_0	RTO1_1	SCK3_2
		Pin no.						Pin Name																																																																																																								
		64	80	100	120	144	176																																																																																																									
		-	-	4	7	10	12	P025																																																																																																								
								WR1X																																																																																																								
								SOT4_1																																																																																																								
								PPG25_0																																																																																																								
								TIN2_0																																																																																																								
		-	-	-	-	-	13	P172																																																																																																								
								PPG38_1																																																																																																								
		-	4	5	8	11	14	P026																																																																																																								
								A00																																																																																																								
								SCK4_1																																																																																																								
								PPG26_0																																																																																																								
								TIN3_0																																																																																																								
		4	5	6	9	12	15	P027																																																																																																								
								A01																																																																																																								
								SCS40_1																																																																																																								
								PPG27_0																																																																																																								
								TOT0_0																																																																																																								
		-	-	-	-	-	16	RTO3_1																																																																																																								
								P173																																																																																																								
		-	-	-	-	-	17	PPG39_1																																																																																																								
								P030																																																																																																								
								A02																																																																																																								
								SCS41_1																																																																																																								
								PPG28_0																																																																																																								
		-	6	8	11	14	18	TOT1_0																																																																																																								
								P031																																																																																																								
								A03																																																																																																								
								SCS42_1																																																																																																								
								PPG29_0																																																																																																								
		5	7	9	12	15	19	TOT2_0																																																																																																								
								P032																																																																																																								
								A04																																																																																																								
SCS43_1																																																																																																																
PPG30_0																																																																																																																
TOT3_0																																																																																																																
6	8	10	13	16	20	RTO2_1																																																																																																										
						P033																																																																																																										
						A05																																																																																																										
						PPG31_0																																																																																																										
						ICU3_3																																																																																																										
						TIN4_0																																																																																																										
						RTO1_1																																																																																																										
SCK3_2																																																																																																																

Page	Section	Change Results															
34	■PIN Description	A List of "Pin Description" modified.															
		(Error)															
		<table><tr><td>Function^{*2}</td></tr><tr><td> </td></tr><tr><td>General-purpose I/O port</td></tr><tr><td>External bus data bit21 I/O (0)</td></tr><tr><td>Multi-function serial ch.2 clock I/O (0)</td></tr><tr><td>A/D converter external trigger input 0 (1)</td></tr><tr><td>INT7 External interrupt input (1)</td></tr><tr><td>(CAN reception data 2 input MB91F52xB ,MB91F52xD only)</td></tr><tr><td> </td></tr><tr><td>General-purpose I/O port</td></tr><tr><td>External bus data bit22 I/O (0)</td></tr><tr><td>Serial chip select 2 I/O (0)</td></tr><tr><td>A/D converter external trigger input 1 (1)</td></tr><tr><td>INT2 External interrupt input (1)</td></tr><tr><td>(CAN transmission data 2 output MB91F52xB ,MB91F52xD only)</td></tr></table>	Function ^{*2}		General-purpose I/O port	External bus data bit21 I/O (0)	Multi-function serial ch.2 clock I/O (0)	A/D converter external trigger input 0 (1)	INT7 External interrupt input (1)	(CAN reception data 2 input MB91F52xB ,MB91F52xD only)		General-purpose I/O port	External bus data bit22 I/O (0)	Serial chip select 2 I/O (0)	A/D converter external trigger input 1 (1)	INT2 External interrupt input (1)	(CAN transmission data 2 output MB91F52xB ,MB91F52xD only)
		Function ^{*2}															
		General-purpose I/O port															
		External bus data bit21 I/O (0)															
		Multi-function serial ch.2 clock I/O (0)															
		A/D converter external trigger input 0 (1)															
		INT7 External interrupt input (1)															
		(CAN reception data 2 input MB91F52xB ,MB91F52xD only)															
		General-purpose I/O port															
		External bus data bit22 I/O (0)															
		Serial chip select 2 I/O (0)															
		A/D converter external trigger input 1 (1)															
		INT2 External interrupt input (1)															
		(CAN transmission data 2 output MB91F52xB ,MB91F52xD only)															
		(Correct)															
		<table><tr><td>Function^{*9}</td></tr><tr><td> </td></tr><tr><td>General-purpose I/O port</td></tr><tr><td>External bus data bit21 I/O (0)</td></tr><tr><td>Multi-function serial ch.2 clock I/O (0)</td></tr><tr><td>A/D converter external trigger input 0 (1)</td></tr><tr><td>INT7 External interrupt input (1)</td></tr><tr><td>CAN reception data 2 input</td></tr><tr><td> </td></tr><tr><td>General-purpose I/O port</td></tr><tr><td>External bus data bit22 I/O (0)</td></tr><tr><td>Serial chip select 2 I/O (0)</td></tr><tr><td>A/D converter external trigger input 1 (1)</td></tr><tr><td>INT2 External interrupt input (1)</td></tr><tr><td>CAN transmission data 2 output</td></tr></table>	Function ^{*9}		General-purpose I/O port	External bus data bit21 I/O (0)	Multi-function serial ch.2 clock I/O (0)	A/D converter external trigger input 0 (1)	INT7 External interrupt input (1)	CAN reception data 2 input		General-purpose I/O port	External bus data bit22 I/O (0)	Serial chip select 2 I/O (0)	A/D converter external trigger input 1 (1)	INT2 External interrupt input (1)	CAN transmission data 2 output
		Function ^{*9}															
		General-purpose I/O port															
		External bus data bit21 I/O (0)															
		Multi-function serial ch.2 clock I/O (0)															
		A/D converter external trigger input 0 (1)															
		INT7 External interrupt input (1)															
		CAN reception data 2 input															
		General-purpose I/O port															
		External bus data bit22 I/O (0)															
		Serial chip select 2 I/O (0)															
		A/D converter external trigger input 1 (1)															
		INT2 External interrupt input (1)															
		CAN transmission data 2 output															