



Welcome to [E-XFL.COM](https://www.e-xfl.com)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"


Details

| | |
|----------------------------|---|
| Product Status | Active |
| Core Processor | PIC |
| Core Size | 8-Bit |
| Speed | 20MHz |
| Connectivity | I ² C, LINbus, SPI, UART/USART |
| Peripherals | Brown-out Detect/Reset, POR, PWM, WDT |
| Number of I/O | 25 |
| Program Memory Size | 14KB (8K x 14) |
| Program Memory Type | FLASH |
| EEPROM Size | - |
| RAM Size | 512 x 8 |
| Voltage - Supply (Vcc/Vdd) | 2.3V ~ 5.5V |
| Data Converters | A/D 17x10b |
| Oscillator Type | Internal |
| Operating Temperature | -40°C ~ 125°C (TA) |
| Mounting Type | Surface Mount |
| Package / Case | 28-SSOP (0.209", 5.30mm Width) |
| Supplier Device Package | 28-SSOP |
| Purchase URL | https://www.e-xfl.com/product-detail/microchip-technology/pic16f1516-e-ss |

2.0 DEVICE PINOUTS

The pin diagrams for the PIC16(L)F151X/152X family are shown in Figure 2-1 through Figure 2-7. The pins that are required for programming are listed in Table 1-1 and shown in bold lettering in the pin diagrams.

FIGURE 2-1: 28-PIN SPDIP, SOIC, SSOP DIAGRAM FOR PIC16(L)F1512, PIC16(L)F1513, PIC16(L)F1516 AND PIC16(L)F1518

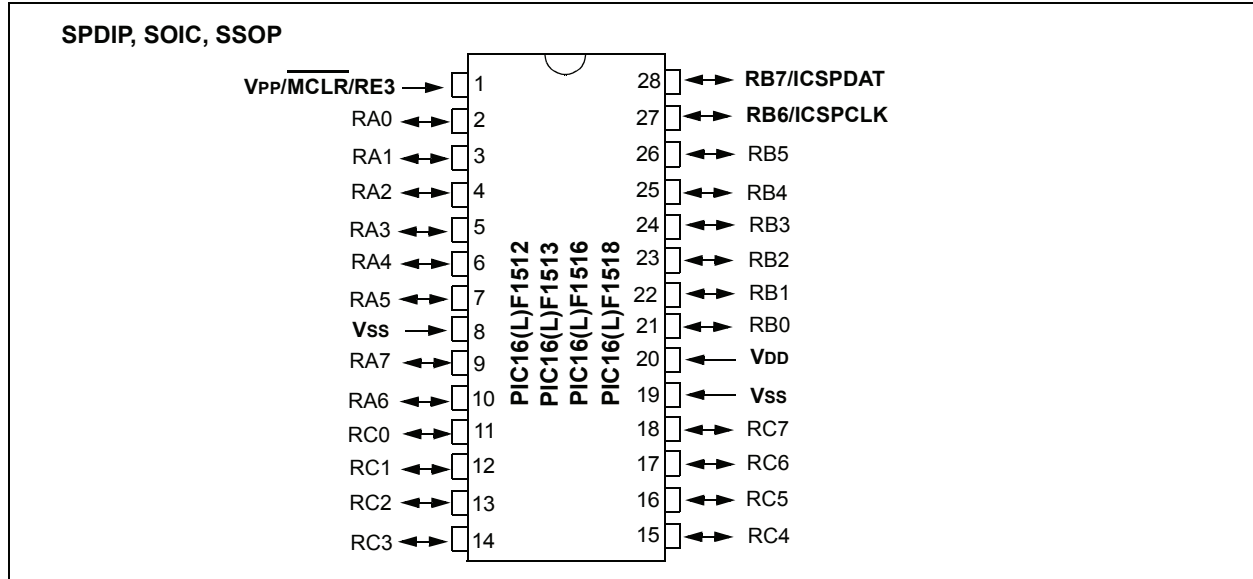

PIC16(L)F151X/152X

FIGURE 2-3: 40-PIN PDIP DIAGRAM FOR PIC16(L)F1517 AND PIC16(L)F1519



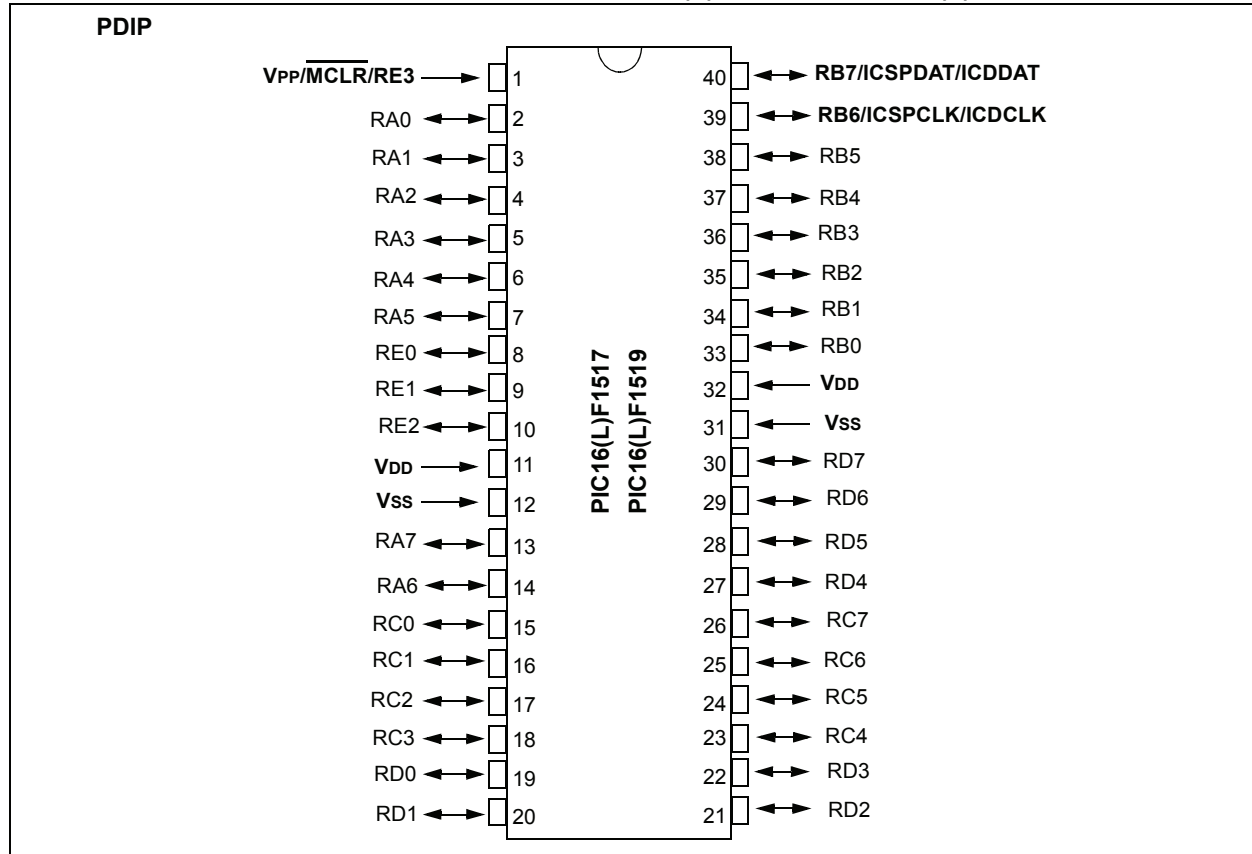


FIGURE 2-4: 40-PIN UQFN DIAGRAM FOR PIC16(L)F1517 AND PIC16(L)F1519

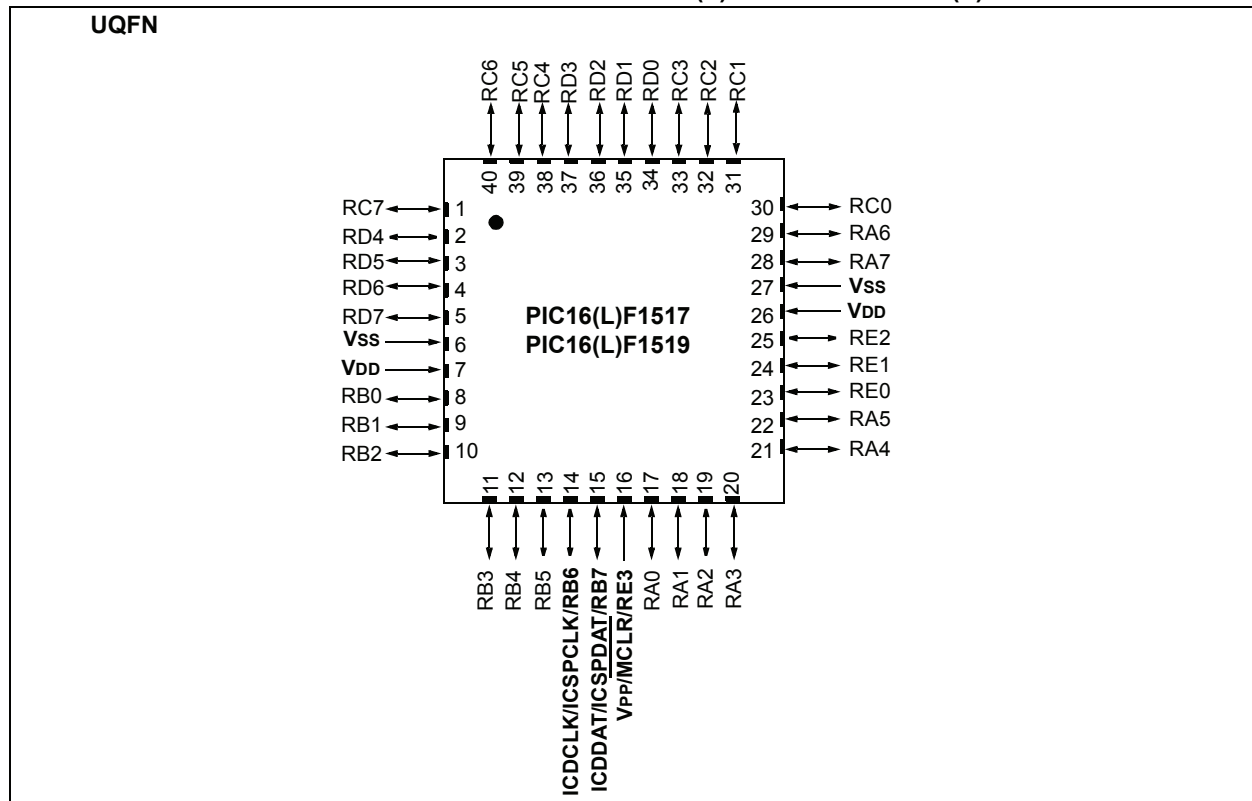

PIC16(L)F151X/152X

FIGURE 2-5: 44-PIN TQFP DIAGRAM FOR PIC16(L)F1517 AND PIC16(L)F1519

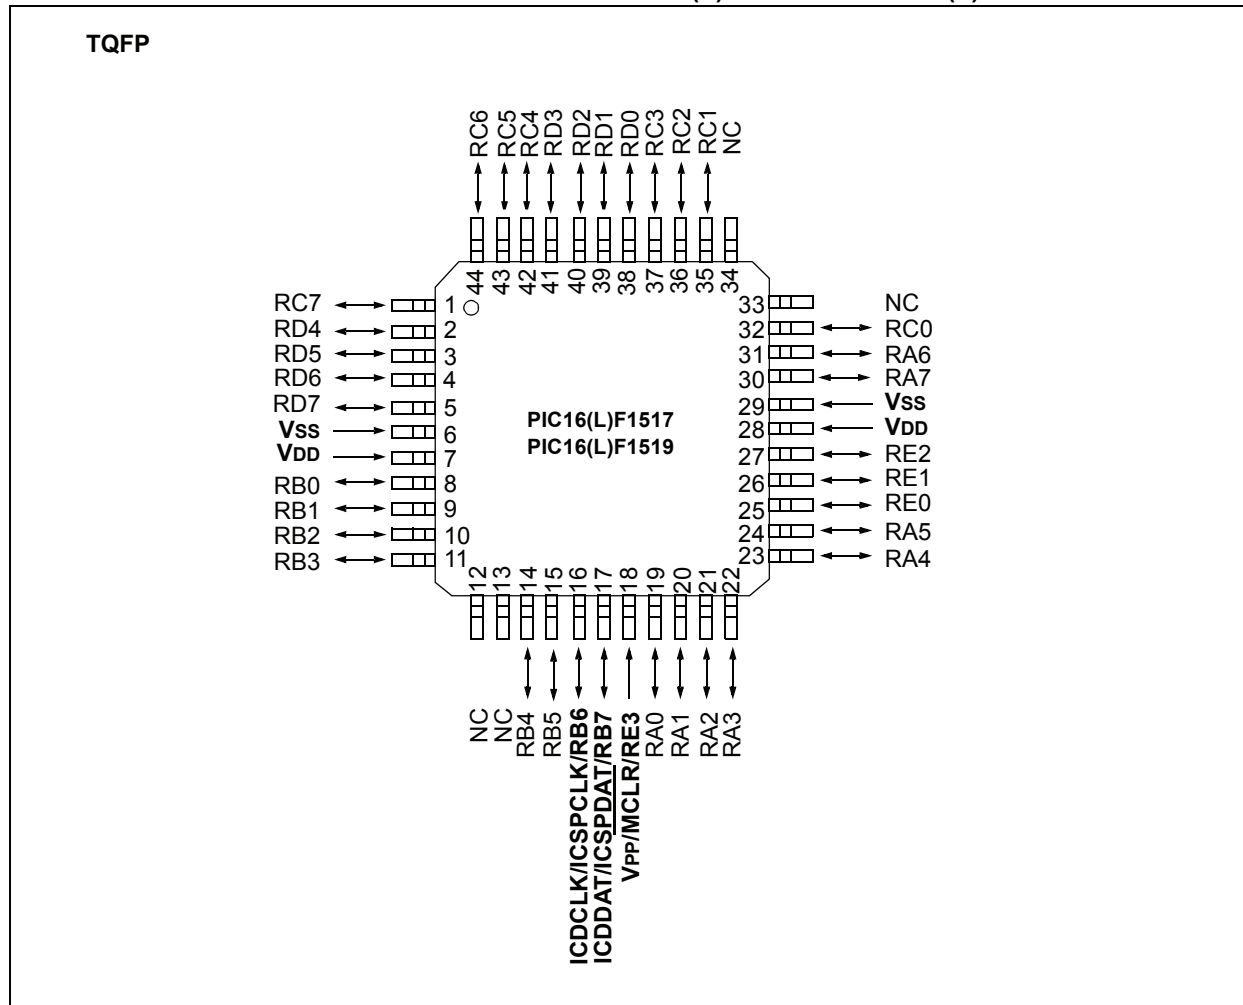

PIC16(L)F151X/152X

FIGURE 3-3: PIC16(L)F1526, PIC16(L)F1516 AND PIC16(L)F1517 PROGRAM MEMORY MAPPING


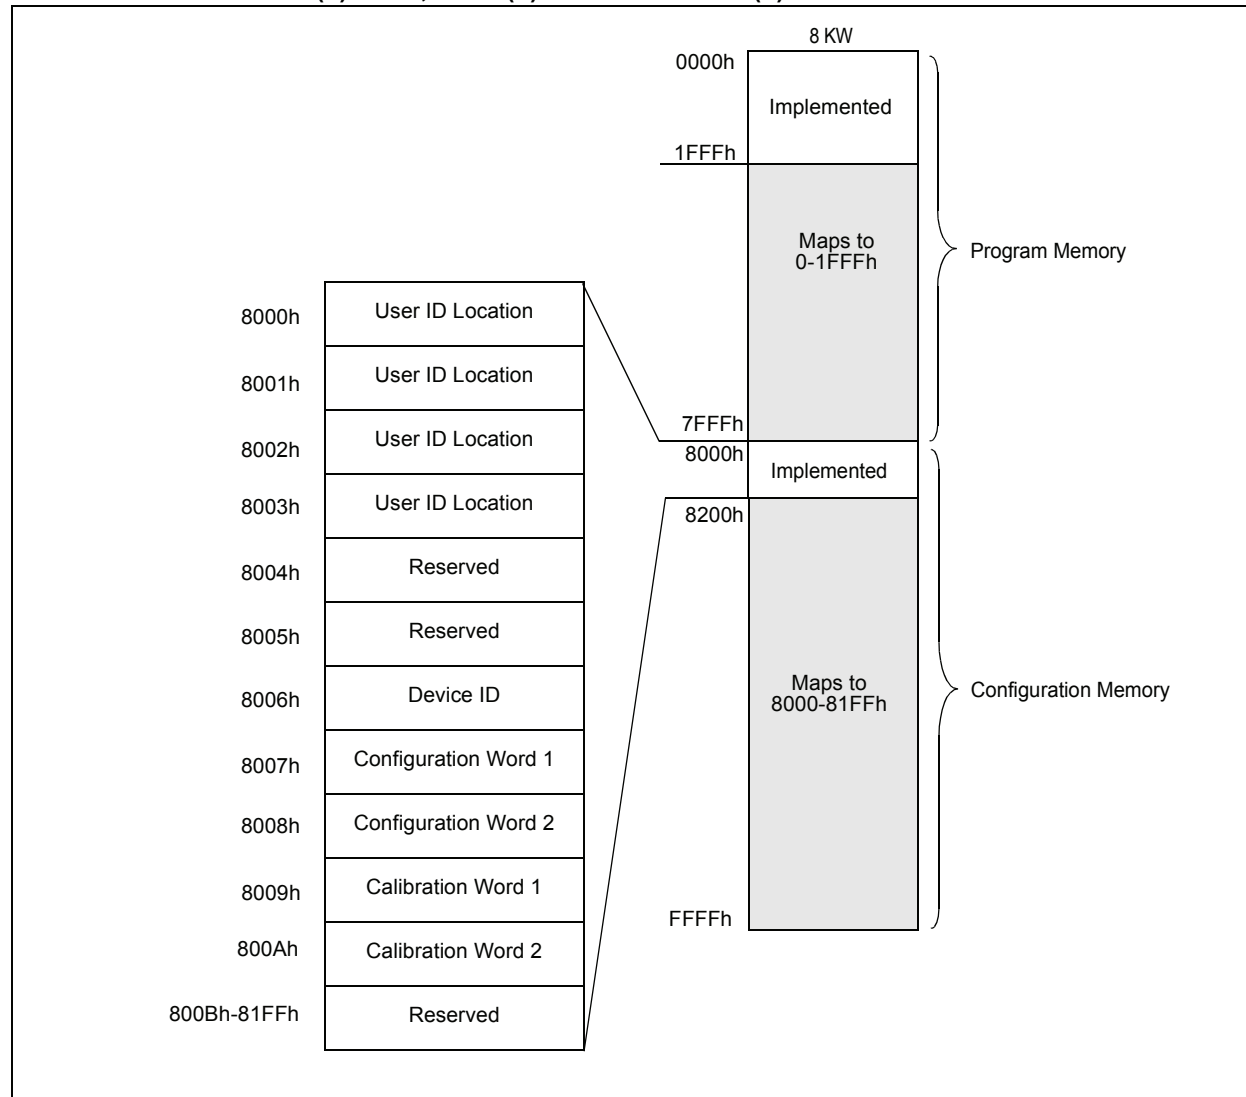


FIGURE 3-4: PIC16(L)F1527, PIC16(L)F1518 AND PIC16(L)F1519 PROGRAM MEMORY MAPPING

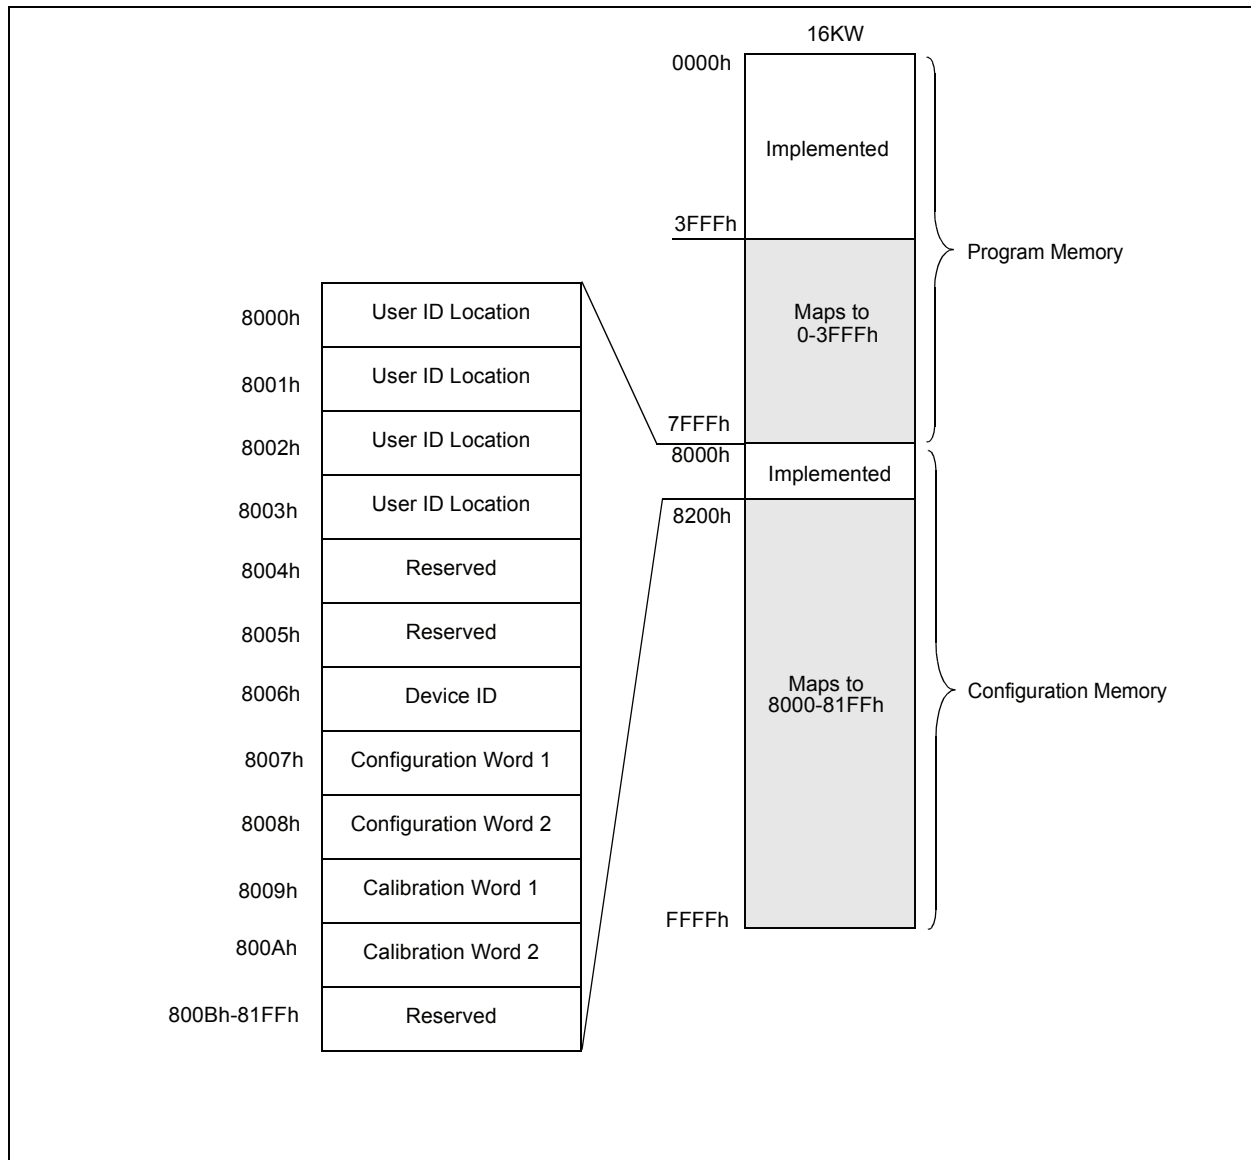

PIC16(L)F151X/152X

3.1 User ID Location

A user may store identification information (user ID) in four designated locations. The user ID locations are mapped to 8000h-8003h. Each location is 14 bits in length. Code protection has no effect on these memory locations. Each location may be read with code protection enabled or disabled.

Note: MPLAB® IDE only displays the 7 Least Significant bits (LSb) of each user ID location, the upper bits are not read. It is recommended that only the 7 LSbs be used if MPLAB IDE is the primary tool used to read these addresses.

3.2 Device ID

The device ID word is located at 8006h. This location is read-only and cannot be erased or modified.

REGISTER 3-1: DEVICE ID: DEVICE ID REGISTER⁽¹⁾

| | | | | | |
|----------|---|---|-------|---|---|
| R | R | R | R | R | R |
| DEV<8:3> | | | | | |
| bit 13 | | | bit 8 | | |

| | | | | | | | |
|----------|---|---|---|----------|---|---|---|
| R | R | R | R | R | R | R | R |
| DEV<2:0> | | | | REV<4:0> | | | |
| bit 7 | | | | bit 0 | | | |

| | | |
|-------------------|----------------------|------------------------------------|
| Legend: | P = Programmable bit | U = Unimplemented bit, read as '0' |
| R = Readable bit | W = Writable bit | '0' = Bit is cleared |
| -n = Value at POR | '1' = Bit is set | x = Bit is unknown |

bit 13-5 **DEV<8:0>**: Device ID bits
These bits are used to identify the part number.

bit 4-0 **REV<4:0>**: Revision ID bits
These bits are used to identify the revision.

Note 1: This location cannot be written.

TABLE 3-1: DEVICE ID VALUES

| DEVICE | DEVICE ID VALUES | |
|-------------|------------------|--------|
| | DEV | REV |
| PIC16F1527 | 0001 0101 101 | x xxxx |
| PIC16F1526 | 0001 0101 100 | x xxxx |
| PIC16LF1527 | 0001 0101 111 | x xxxx |
| PIC16LF1526 | 0001 0101 110 | x xxxx |
| PIC16F1519 | 0001 0110 111 | x xxxx |
| PIC16F1518 | 0001 0110 110 | x xxxx |
| PIC16F1517 | 0001 0110 101 | x xxxx |
| PIC16F1516 | 0001 0110 100 | x xxxx |
| PIC16F1513 | 0001 0110 010 | x xxxx |
| PIC16F1512 | 0001 0111 000 | x xxxx |
| PIC16LF1519 | 0001 0111 111 | x xxxx |
| PIC16LF1518 | 0001 0111 110 | x xxxx |
| PIC16LF1517 | 0001 0111 101 | x xxxx |
| PIC16LF1516 | 0001 0111 100 | x xxxx |
| PIC16LF1513 | 0001 0111 010 | x xxxx |
| PIC16LF1512 | 0001 0111 001 | x xxxx |

3.3 Configuration Words

There are two Configuration Words, Configuration Word 1 (8007h) and Configuration Word 2 (8008h). The individual bits within these Configuration Words are used to enable or disable device functions such as the Brown-out Reset, code protection and Power-up Timer.

3.4 Calibration Words

The internal calibration values are factory calibrated and stored in Calibration Words 1 and 2 (8009h, 800Ah).

The Calibration Words do not participate in erase operations. The device can be erased without affecting the Calibration Words.

REGISTER 3-3: CONFIGURATION WORD 2

| | | | | | |
|--------|-------|-------|-------|--------|-------|
| R/P-1 | R/P-1 | R/P-1 | R/P-1 | R/P-1 | U-1 |
| LVP | DEBUG | LPBOR | BORV | STVREN | — |
| bit 13 | | | | | bit 8 |

| | | | | | | | |
|-------|-----|-----|-----------------------|-----|-----|----------|-------|
| U-1 | U-1 | U-1 | R/P-1 | U-1 | U-1 | R/P-1 | R/P-1 |
| — | — | — | VCAPEN ⁽²⁾ | — | — | WRT<1:0> | |
| bit 7 | | | | | | | bit 0 |

Legend:

R = Readable bit

P = Programmable bit

U = Unimplemented bit, read as '1'

'0' = Bit is cleared

'1' = Bit is set

-n = Value when blank or after Bulk Erase

- bit 13 **LVP:** Low-Voltage Programming Enable bit⁽¹⁾
 1 = Low-voltage programming enabled
 0 = HV on MCLR/VPP must be used for programming
- bit 12 **DEBUG:** In-Circuit Debugger Mode bit
 1 = In-Circuit Debugger disabled, ICSPCLK and ICSPDAT are general purpose I/O pins
 0 = In-Circuit Debugger enabled, ICSPCLK and ICSPDAT are dedicated to the debugger
- bit 11 **LPBOR:** Low-Power BOR
 1 = Low-Power BOR is disabled
 0 = Low-Power BOR is enabled
- bit 10 **BORV:** Brown-out Reset Voltage Selection bit
 1 = Brown-out Reset voltage (VBOR), low trip point selected
 0 = Brown-out Reset voltage (VBOR), high trip point selected
- bit 9 **STVREN:** Stack Overflow/Underflow Reset Enable bit
 1 = Stack Overflow or Underflow will cause a Reset
 0 = Stack Overflow or Underflow will not cause a Reset
- bit 8-5 **Unimplemented:** Read as '1'
- bit 4 **VCAPEN:** Voltage Regulator Capacitor Enable bits⁽¹⁾
 0 = VCAP functionality is enabled on VCAP pin
 1 = All VCAP pin functions are disabled
- bit 3-2 **Unimplemented:** Read as '1'
- bit 1-0 **WRT<1:0>:** Flash Memory Self-Write Protection bits
2 kW Flash memory (PIC16(L)F1512):
 11 = Write protection off
 10 = 000h to 1FFh write-protected, 200h to 7FFh may be modified by PMCON control
 01 = 000h to FFFh write-protected, 400h to 7FFh may be modified by PMCON control
 00 = 000h to 7FFh write-protected, no addresses may be modified by PMCON control
4 kW Flash memory (PIC16(L)F1513):
 11 = Write protection off
 10 = 000h to 1FFh write-protected, 200h to FFFh may be modified by PMCON control
 01 = 000h to 7FFh write-protected, 800h to FFFh may be modified by PMCON control
 00 = 000h to FFFh write-protected, no addresses may be modified by PMCON control
8 kW Flash memory (PIC16F/LF1516/1517/1526):
 11 = Write protection off
 10 = 000h to 1FFh write-protected, 200h to 1FFFh may be modified by PMCON control
 01 = 000h to FFFh write-protected, 1000h to 1FFFh may be modified by PMCON control
 00 = 000h to 1FFFh write-protected, no addresses may be modified by PMCON control
16 kW Flash memory (PIC16F/LF1518/1519/1527):
 11 = Write protection off
 10 = 000h to 1FFh write-protected, 200h to 3FFFh may be modified by PMCON control
 01 = 000h to 1FFFh write-protected, 2000h to 3FFFh may be modified by PMCON control
 00 = 000h to 3FFFh write-protected, no addresses may be modified by PMCON control

Note 1: The LVP bit cannot be programmed to '0' when Programming mode is entered via LVP.

Note 2: Applies to PIC16F151X/152X devices only. On PIC16LF151X/152X, the VCAPEN bit is unimplemented.

PIC16(L)F151X/152X

4.0 PROGRAM/VERIFY MODE

In Program/Verify mode, the program memory and the configuration memory can be accessed and programmed in serial fashion. ICSPDAT and ICSPCLK are used for the data and the clock, respectively. All commands and data words are transmitted LSB first. Data changes on the rising edge of the ICSPCLK and latched on the falling edge. In Program/Verify mode both the ICSPDAT and ICSPCLK are Schmitt Trigger inputs. The sequence that enters the device into Program/Verify mode places all other logic into the Reset state. Upon entering Program/Verify mode, all I/Os are automatically configured as high-impedance inputs and the address is cleared.

4.1 High-Voltage Program/Verify Mode Entry and Exit

There are two different methods of entering Program/Verify mode via high-voltage:

- VPP – First entry mode
- VDD – First entry mode

4.1.1 VPP – FIRST ENTRY MODE

To enter Program/Verify mode via the VPP-first method the following sequence must be followed:

1. Hold ICSPCLK and ICSPDAT low. All other pins should be unpowered.
2. Raise the voltage on $\overline{\text{MCLR}}$ from 0V to V_{IH} .
3. Raise the voltage on VDD FROM 0V to the desired operating voltage.

The VPP-first entry prevents the device from executing code prior to entering Program/Verify mode. For example, when Configuration Word 1 has $\overline{\text{MCLR}}$ disabled ($\text{MCLRE} = 0$), the power-up time is disabled ($\text{PWRT} = 0$), the internal oscillator is selected ($\text{FOSC} = 100$), and ICSPCLK and ICSPDAT pins are driven by the user application, the device will execute code. Since this may prevent entry, VPP-first entry mode is strongly recommended. See the timing diagram in [Figure 8-2](#).

4.1.2 VDD – FIRST ENTRY MODE

To enter Program/Verify mode via the VDD-first method the following sequence must be followed:

1. Hold ICSPCLK and ICSPDAT low.
2. Raise the voltage on VDD from 0V to the desired operating voltage.
3. Raise the voltage on $\overline{\text{MCLR}}$ from VDD or below to V_{IH} .

The VDD-first method is useful when programming the device when VDD is already applied, for it is not necessary to disconnect VDD to enter Program/Verify mode. See the timing diagram in [Figure 8-1](#).

4.1.3 PROGRAM/VERIFY MODE EXIT

To exit Program/Verify mode take $\overline{\text{MCLR}}$ to VDD or lower (V_{IL}). See [Figures 8-3](#) and [8-4](#).

4.2 Low-Voltage Programming (LVP) Mode

The Low-Voltage Programming mode allows the PIC16(L)F151X/152X devices to be programmed using VDD only, without high voltage. When the LVP bit of Configuration Word 2 register is set to '1', the low-voltage ICSP programming entry is enabled. To disable the Low-Voltage ICSP mode, the LVP bit must be programmed to '0'. This can only be done while in the High-Voltage Entry mode.

Entry into the Low-Voltage ICSP Program/Verify modes requires the following steps:

1. $\overline{\text{MCLR}}$ is brought to V_{IL} .
2. A 32-bit key sequence is presented on ICSPDAT, while clocking ICSPCLK.

The key sequence is a specific 32-bit pattern, '0100 1101 0100 0011 0100 1000 0101 0000' (more easily remembered as MCHP in ASCII). The device will enter Program/Verify mode only if the sequence is valid. The Least Significant bit of the Least Significant nibble must be shifted in first.

Once the key sequence is complete, $\overline{\text{MCLR}}$ must be held at V_{IL} for as long as Program/Verify mode is to be maintained.

For low-voltage programming timing, see [Figure 8-8](#) and [Figure 8-9](#).

Exiting Program/Verify mode is done by no longer driving $\overline{\text{MCLR}}$ to V_{IL} . See [Figure 8-8](#) and [Figure 8-9](#).

Note: To enter LVP mode, the LSB of the Least Significant nibble must be shifted in first. This differs from entering the key sequence on other parts.

PIC16(L)F151X/152X


4.3.6 BEGIN INTERNALLY TIMED PROGRAMMING

A Load Configuration or Load Data for Program Memory command must be given before every Begin Programming command. Programming of the addressed memory will begin after this command is received. An internal timing mechanism executes the write. The user must allow for the program cycle time, T_{PINT} , for the programming to complete.

The End Externally Timed Programming command is not needed when the Begin Internally Timed Programming is used to start the programming.

The program memory address that is being programmed is not erased prior to being programmed.

FIGURE 4-6: BEGIN INTERNALLY TIMED PROGRAMMING

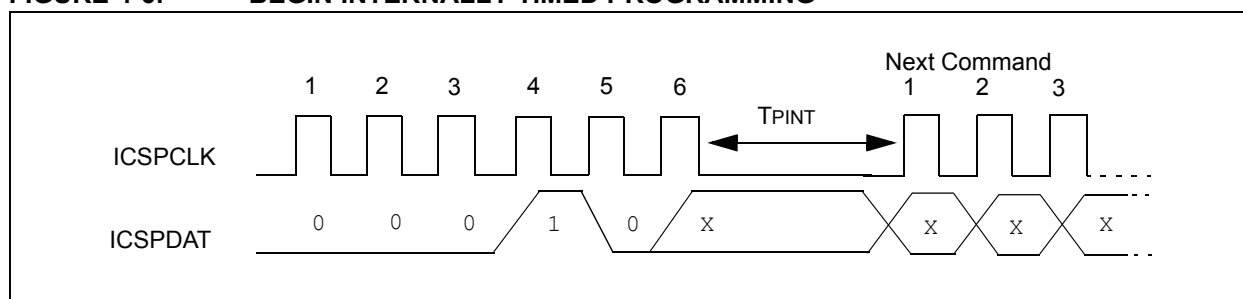


4.3.7 BEGIN EXTERNALLY TIMED PROGRAMMING

A Load Configuration or Load Data for Program Memory command must be given before every Begin Programming command. Programming of the addressed memory will begin after this command is received. To complete the programming the End Externally Timed Programming command must be sent in the specified time window defined by T_{PEXT} (see [Figure 4-7](#)).

Externally timed writes are not supported for Configuration and Calibration bits. Any externally timed write to the Configuration or Calibration Word will have no effect on the targeted word.

FIGURE 4-7: BEGIN EXTERNALLY TIMED PROGRAMMING

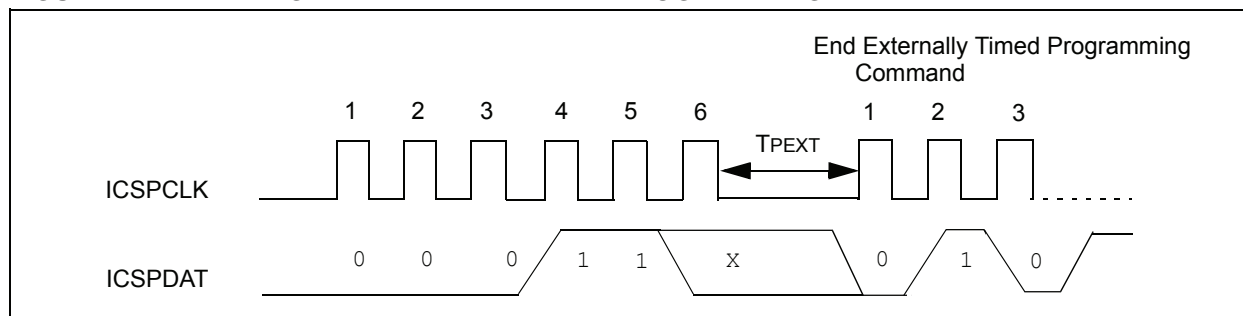

PIC16(L)F151X/152X

FIGURE 5-3: ONE-WORD PROGRAM CYCLE



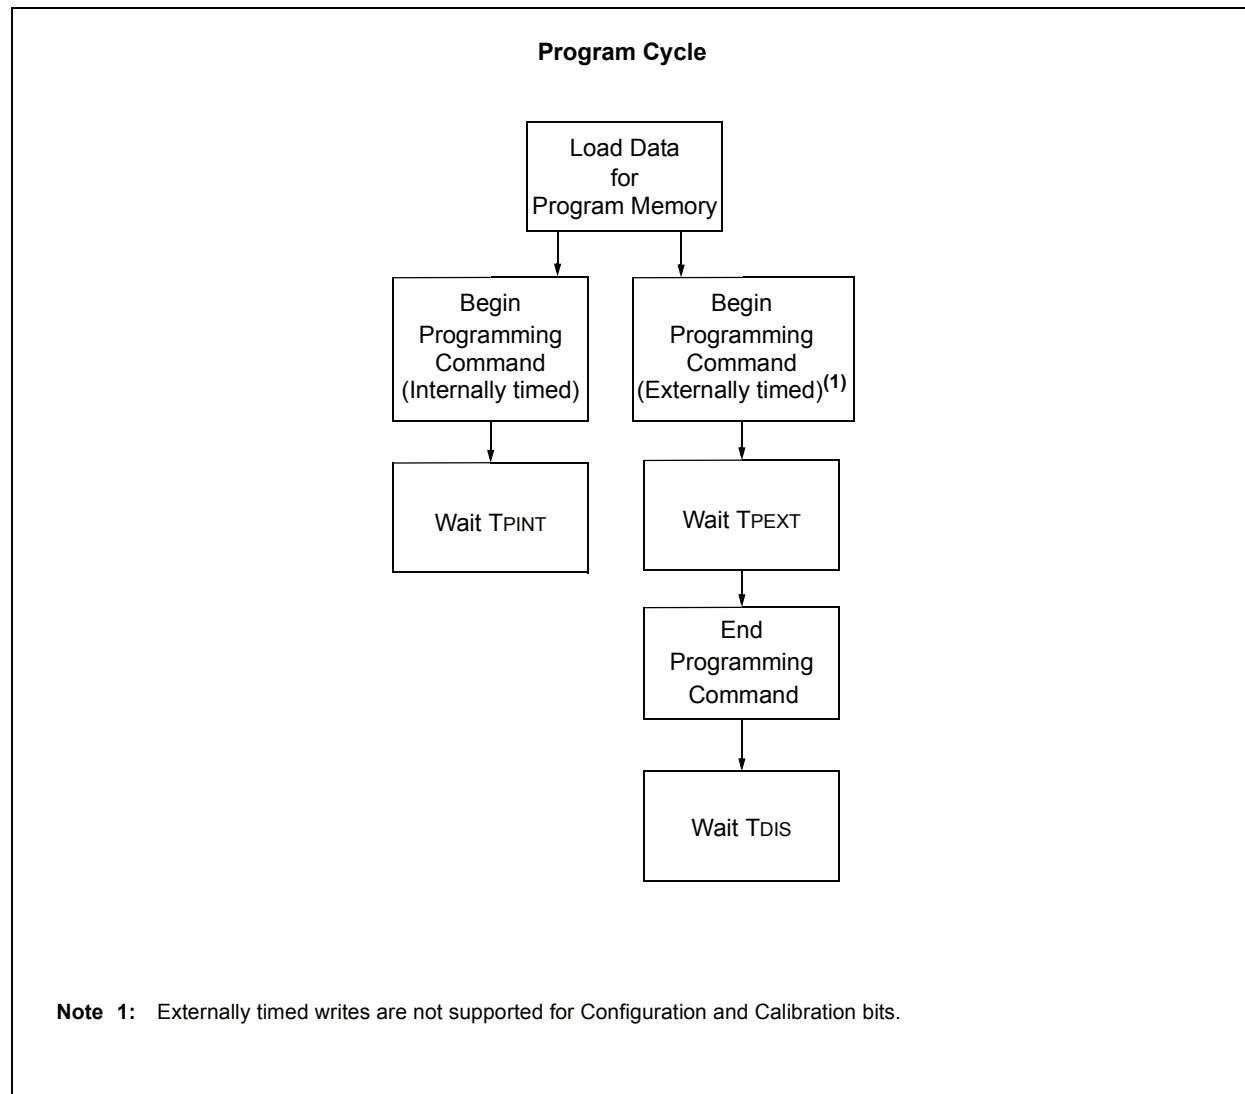


FIGURE 5-4: MULTIPLE-WORD PROGRAM CYCLE

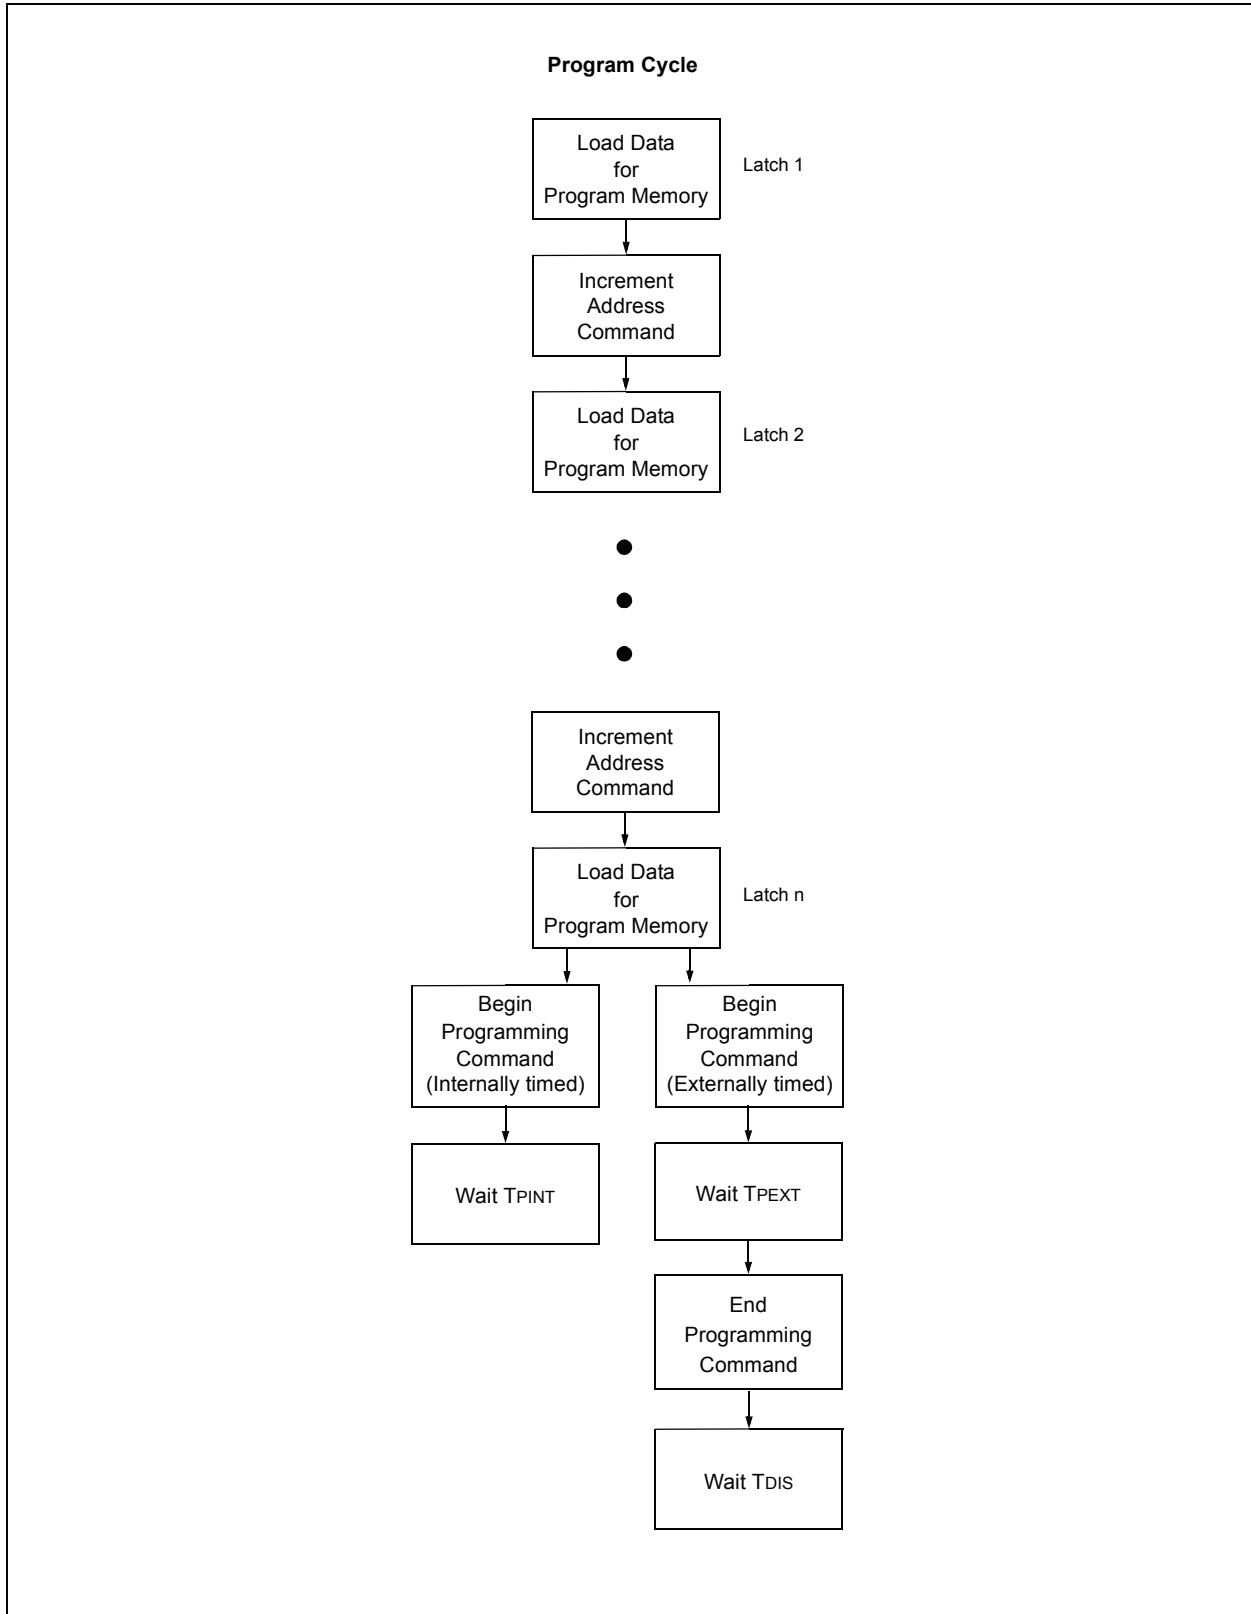

PIC16(L)F151X/152X

FIGURE 5-5: CONFIGURATION MEMORY PROGRAM FLOWCHART

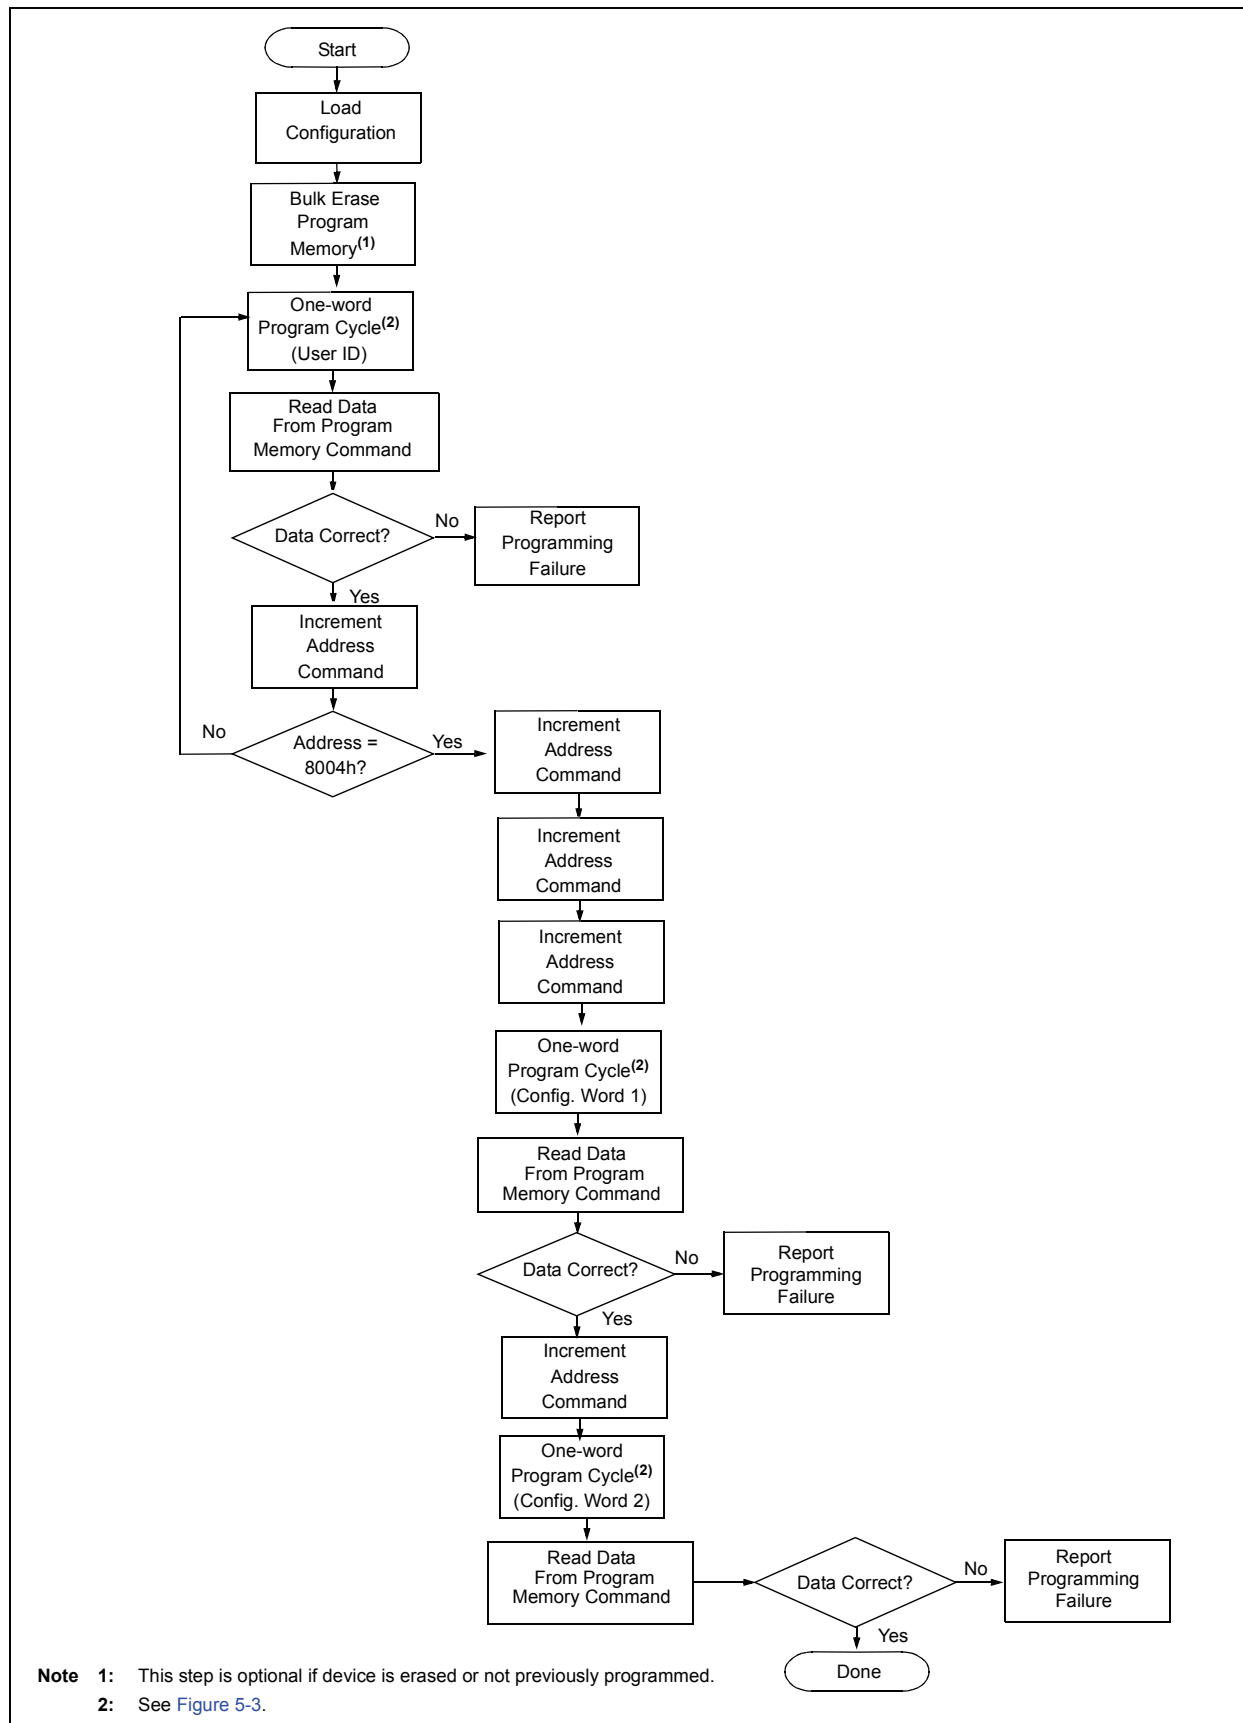

PIC16(L)F151X/152X

EXAMPLE 7-1: CHECKSUM COMPUTED WITH PROGRAM CODE PROTECTION DISABLED PIC16F1527, BLANK DEVICE

| | | |
|------------|--|---|
| PIC16F1527 | Sum of Memory addresses 0000h-3FFFh ⁽¹⁾ | C000h |
| | Configuration Word 1 ⁽²⁾ | 3FFFh |
| | Configuration Word 1 mask ⁽³⁾ | 3EFFh |
| | Configuration Word 2 ⁽²⁾ | 3FFFh |
| | Configuration Word 2 mask ⁽³⁾ | 3E13h |
| | Checksum | = C000h + (3FFFh and 3EFFh) + (3FFFh and 3E13h) |
| | | = C000h + 3EFFh + 3E13h |
| | | = 3D12h |

- Note 1:** Sum of memory addresses = (Total number of program memory address locations) x (3FFFh) = C000h, truncated to 16 bits.
- 2:** Configuration Word 1 and 2 = all bits are '1'; thus, code-protect is disabled.
- 3:** Configuration Word 1 and 2 Mask = all bits are set to '1', except for unimplemented bits that are '0'.

EXAMPLE 7-2: CHECKSUM COMPUTED WITH PROGRAM CODE PROTECTION DISABLED PIC16LF1527, 00AAh AT FIRST AND LAST ADDRESS

| | | |
|-------------|--|---|
| PIC16LF1527 | Sum of Memory addresses 0000h-3FFFh ⁽¹⁾ | 4156h |
| | Configuration Word 1 ⁽²⁾ | 3FFFh |
| | Configuration Word 1 mask ⁽³⁾ | 3EFFh |
| | Configuration Word 2 ⁽²⁾ | 3FFFh |
| | Configuration Word 2 mask ⁽⁴⁾ | 3E03h |
| | Checksum | = 4156h + (3FFFh and 3EFFh) + (3FFFh and 3E03h) |
| | | = 4156h + 3EFFh + 3E03h |
| | | = BE58h |

- Note 1:** Total number of Program memory address locations: 3FFFh + 1 = 4000h. Then, 4000h - 2 = 3FFEh. Thus, [(3FFEh x 3FFFh) + (2 x 00AAh)] = 4156h, truncated to 16 bits.
- 2:** Configuration Word 1 and 2 = all bits are '1'; thus, code-protect is disabled.
- 3:** Configuration Word 1 Mask = all Configuration Word bits are set to '1', except for unimplemented bits that are '0'.
- 4:** On the PIC16LF1527 device, the $\overline{\text{VCAPEN}}$ bit is not implemented in Configuration Word 2; Thus, all unimplemented bits are '0'.

PIC16(L)F151X/152X

EXAMPLE 7-4: CHECKSUM COMPUTED WITH PROGRAM CODE PROTECTION ENABLED PIC16LF1527, 00AAh AT FIRST AND LAST ADDRESS

| | | |
|-------------|---|--|
| PIC16LF1527 | Configuration Word 1 ⁽²⁾ | 3F7Fh |
| | Configuration Word 1 mask ⁽³⁾ | 3EFFh |
| | Configuration Word 2 ⁽²⁾ | 3FFFh |
| | Configuration Word 2 mask ^{(3), (5)} | 3E03h |
| | User ID (8000h) ⁽¹⁾ | 000Eh |
| | User ID (8001h) ⁽¹⁾ | 0008h |
| | User ID (8002h) ⁽¹⁾ | 0005h |
| | User ID (8003h) ⁽¹⁾ | 0008h |
| | Sum of User IDs ⁽⁴⁾ | $= (000Eh \text{ and } 000Fh) \ll 12 + (0008h \text{ and } 000Fh) \ll 8 +$ $(0005h \text{ and } 000Fh) \ll 4 + (0008h \text{ and } 000Fh)$ $= E000h + 0800h + 0050h + 0008h$ $= E858h$ |
| | Checksum | $= (3F7Fh \text{ and } 3EFFh) + (3FFFh \text{ and } 3E03h) + \text{Sum of User IDs}$ $= 3E7Fh + 3E03h + E858h$ $= 64DAh$ |

- Note 1:** User ID values in this example are random values.
- 2:** Configuration Word 1 and 2 = all bits are '1' except the code-protect enable bit.
- 3:** Configuration Word 1 and 2 Mask = all Configuration Word bits are set to '1', except for unimplemented bits which read '0'.
- 4:** \ll = shift left, thus the LSb of the first user ID value is the MSb of the sum of user IDs and so on, until the LSb of the last user ID value becomes the LSb of the sum of user IDs.
- 5:** On the PIC16LF1527 device, the $\overline{\text{VCAPEN}}$ bit is not implemented in Configuration Word 2; thus, all unimplemented bits are '0'.

8.0 ELECTRICAL SPECIFICATIONS

Refer to device specific data sheet for absolute maximum ratings.

TABLE 8-1: AC/DC CHARACTERISTICS TIMING REQUIREMENTS FOR PROGRAM/VERIFY MODE

| AC/DC CHARACTERISTICS | | | Standard Operating Conditions Production tested at 25°C | | | | |
|---------------------------------|--|----------------------------|--|------|-------------------------------|-------|--|
| Sym. | Characteristics | | Min. | Typ. | Max. | Units | Conditions/Comments |
| Supply Voltages and Currents | | | | | | | |
| VDD | Supply Voltage (VDDMIN, VDDMAX) | PIC16F151X PIC16F152X | 2.3 | — | 5.5 | V | |
| | | PIC16LF151X PIC16LF152X | 1.8 | — | 3.6 | V | |
| | | | | | | | |
| VPEW | Read/Write and Row Erase operations | | VDDMIN | — | VDDMAX | V | |
| VPBE | Bulk Erase operations | | 2.7 | — | VDDMAX | V | |
| IDDI | Current on VDD, Idle | | — | — | 1.0 | mA | |
| IDDP | Current on VDD, Programming | | — | — | 3.0 | mA | |
| IPP | VPP | | | | | | |
| | Current on MCLR/VPP | | — | — | 600 | μA | |
| VIHH | High voltage on MCLR/VPP for Program/Verify mode entry | | 8.0 | — | 9.0 | V | |
| TVHHR | MCLR rise time (VIL to VIH) for Program/Verify mode entry | | — | — | 1.0 | μs | |
| | I/O pins | | | | | | |
| VIH | (ICSPCLK, ICSPDAT, MCLR/VPP) input high level | | 0.8 VDD | — | — | V | |
| VIL | (ICSPCLK, ICSPDAT, MCLR/VPP) input low level | | — | — | 0.2 VDD | V | |
| VOH | ICSPDAT output high level | | VDD-0.7 VDD-0.7 VDD-0.7 | — | — | V | IOH = 3.5 mA, VDD = 5V IOH = 3 mA, VDD = 3.3V IOH = 2 mA, VDD = 1.8V |
| VOL | ICSPDAT output low level | | — | — | VSS+0.6 VSS+0.6 VSS+0.6 | V | IOH = 8 mA, VDD = 5V IOH = 6 mA, VDD = 3.3V IOH = 3 mA, VDD = 1.8V |
| Programming Mode Entry and Exit | | | | | | | |
| TENTS | Programing mode entry setup time: ICSPCLK, ICSPDAT setup time before VDD or MCLR↑ | | 100 | — | — | ns | |
| TENTH | Programing mode entry hold time: ICSPCLK, ICSPDAT hold time after VDD or MCLR↑ | | 250 | — | — | μs | |
| Serial Program/Verify | | | | | | | |
| TCKL | Clock Low Pulse Width | | 100 | — | — | ns | |
| TCKH | Clock High Pulse Width | | 100 | — | — | ns | |
| TDS | Data in setup time before clock↓ | | 100 | — | — | ns | |
| TDH | Data in hold time after clock↓ | | 100 | — | — | ns | |
| TCO | Clock↑ to data out valid (during a Read Data command) | | 0 | — | 80 | ns | |
| TLZD | Clock↓ to data low-impedance (during a Read Data command) | | 0 | — | 80 | ns | |
| THZD | Clock↓ to data high-impedance (during a Read Data command) | | 0 | — | 80 | ns | |
| TDLY | Data input not driven to next clock input (delay required between command/data or command/command) | | 1.0 | — | — | μs | |
| TERAB | Bulk Erase cycle time | | — | — | 5 | ms | |
| TERAR | Row Erase cycle time | | — | — | 2.5 | ms | |

Note 1: Externally timed writes are not supported for Configuration and Calibration bits.

APPENDIX A: REVISION HISTORY

Revision A (08/2010)

Original release of this document.

Revision B (09/2011)

Added PIC16(L)F1512/1513 devices; Added new Figures 3-1 and 3-2; Updated Registers 3-1, 3-2 and 3-3 to new format; Updated Register 3-3 to add 2 kW and 4 kW Flash memory; Added Notes to Examples 7-1 to 7-4; Updated Table 8-1; Other minor corrections.

PIC16(L)F151X/152X

NOTES:

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC³² logo, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.


FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscent Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICKit, PICtail, REAL ICE, rfLAB, Select Mode, Total Endurance, TSHARC, UniWinDriver, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2010-2011, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

ISBN: 978-1-61341-635-8

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949:2009 ==

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Farmington Hills, MI
Tel: 248-538-2250
Fax: 248-538-2260

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

Santa Clara
Santa Clara, CA
Tel: 408-961-6444
Fax: 408-961-6445

Toronto
Mississauga, Ontario,
Canada
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2401-1200
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Hangzhou
Tel: 86-571-2819-3187
Fax: 86-571-2819-3189

China - Hong Kong SAR
Tel: 852-2401-1200
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8203-2660
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-2566-1512
Fax: 91-20-2566-1513

Japan - Yokohama
Tel: 81-45-471- 6166
Fax: 81-45-471-6122

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-536-4818
Fax: 886-7-330-9305

Taiwan - Taipei
Tel: 886-2-2500-6610
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

UK - Wokingham
Tel: 44-118-921-5869
Fax: 44-118-921-5820

08/02/11