


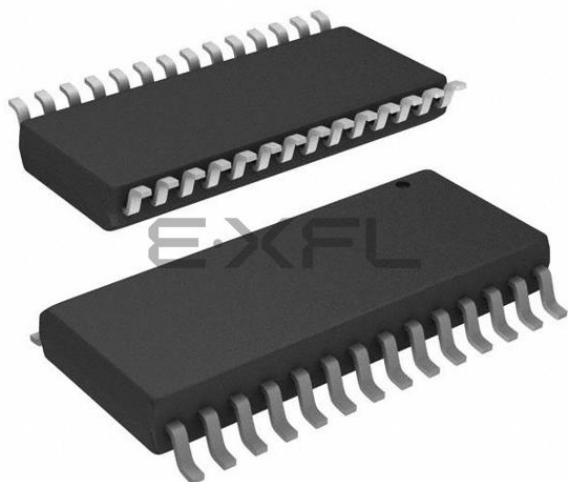

Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                           |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Obsolete                                                                                                                                  |
| Core Processor             | Z8                                                                                                                                        |
| Core Size                  | 8-Bit                                                                                                                                     |
| Speed                      | 8MHz                                                                                                                                      |
| Connectivity               | -                                                                                                                                         |
| Peripherals                | HLVD, POR, WDT                                                                                                                            |
| Number of I/O              | 24                                                                                                                                        |
| Program Memory Size        | 4KB (4K x 8)                                                                                                                              |
| Program Memory Type        | OTP                                                                                                                                       |
| EEPROM Size                | -                                                                                                                                         |
| RAM Size                   | 237 x 8                                                                                                                                   |
| Voltage - Supply (Vcc/Vdd) | 2V ~ 3.6V                                                                                                                                 |
| Data Converters            | -                                                                                                                                         |
| Oscillator Type            | Internal                                                                                                                                  |
| Operating Temperature      | -40°C ~ 105°C (TA)                                                                                                                        |
| Mounting Type              | Surface Mount                                                                                                                             |
| Package / Case             | 28-SOIC (0.295", 7.50mm Width)                                                                                                            |
| Supplier Device Package    | -                                                                                                                                         |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/zilog/zgp323les2804c00tr">https://www.e-xfl.com/product-detail/zilog/zgp323les2804c00tr</a> |



# List of Figures

|                                                                      |    |
|----------------------------------------------------------------------|----|
| Figure 1. Functional Block Diagram . . . . .                         | 3  |
| Figure 2. Counter/Timers Diagram . . . . .                           | 4  |
| Figure 3. 20-Pin PDIP/SOIC/SSOP/CDIP* Pin Configuration . . . . .    | 5  |
| Figure 4. 28-Pin PDIP/SOIC/SSOP/CDIP* Pin Configuration . . . . .    | 6  |
| Figure 5. 40-Pin PDIP/CDIP* Pin Configuration . . . . .              | 7  |
| Figure 6. 48-Pin SSOP Pin Configuration . . . . .                    | 8  |
| Figure 7. Test Load Diagram . . . . .                                | 10 |
| Figure 8. AC Timing Diagram . . . . .                                | 14 |
| Figure 9. Port 0 Configuration . . . . .                             | 17 |
| Figure 10. Port 1 Configuration . . . . .                            | 18 |
| Figure 11. Port 2 Configuration . . . . .                            | 19 |
| Figure 12. Port 3 Configuration . . . . .                            | 20 |
| Figure 13. Port 3 Counter/Timer Output Configuration . . . . .       | 22 |
| Figure 14. Program Memory Map (32K OTP) . . . . .                    | 24 |
| Figure 15. Expanded Register File Architecture . . . . .             | 26 |
| Figure 16. Register Pointer . . . . .                                | 27 |
| Figure 17. Register Pointer—Detail . . . . .                         | 29 |
| Figure 18. Glitch Filter Circuitry . . . . .                         | 38 |
| Figure 19. Transmit Mode Flowchart . . . . .                         | 39 |
| Figure 20. 8-Bit Counter/Timer Circuits . . . . .                    | 40 |
| Figure 21. T8_OUT in Single-Pass Mode . . . . .                      | 41 |
| Figure 22. T8_OUT in Modulo-N Mode . . . . .                         | 41 |
| Figure 23. Demodulation Mode Count Capture Flowchart . . . . .       | 42 |
| Figure 24. Demodulation Mode Flowchart . . . . .                     | 43 |
| Figure 25. 16-Bit Counter/Timer Circuits . . . . .                   | 44 |
| Figure 26. T16_OUT in Single-Pass Mode . . . . .                     | 45 |
| Figure 27. T16_OUT in Modulo-N Mode . . . . .                        | 45 |
| Figure 28. Ping-Pong Mode Diagram . . . . .                          | 47 |
| Figure 29. Output Circuit . . . . .                                  | 47 |
| Figure 30. Interrupt Block Diagram . . . . .                         | 49 |
| Figure 31. Oscillator Configuration . . . . .                        | 51 |
| Figure 32. Port Configuration Register (PCON) (Write Only) . . . . . | 53 |
| Figure 33. STOP Mode Recovery Register . . . . .                     | 55 |
| Figure 34. SCLK Circuit . . . . .                                    | 56 |



# List of Tables

|           |                                                 |    |
|-----------|-------------------------------------------------|----|
| Table 1.  | Features                                        | 1  |
| Table 2.  | Power Connections                               | 3  |
| Table 3.  | 20-Pin PDIP/SOIC/SSOP/CDIP* Pin Identification. | 5  |
| Table 4.  | 28-Pin PDIP/SOIC/SSOP/CDIP* Pin Identification. | 6  |
| Table 5.  | 40- and 48-Pin Configuration                    | 8  |
| Table 6.  | Absolute Maximum Ratings                        | 10 |
| Table 7.  | Capacitance                                     | 11 |
| Table 8.  | DC Characteristics                              | 11 |
| Table 9.  | EPROM/OTP Characteristics                       | 13 |
| Table 10. | AC Characteristics                              | 15 |
| Table 11. | Port 3 Pin Function Summary                     | 21 |
| Table 12. | CTR0(D)00H Counter/Timer8 Control Register      | 31 |
| Table 13. | CTR1(0D)01H T8 and T16 Common Functions.        | 33 |
| Table 14. | CTR2(D)02H: Counter/Timer16 Control Register.   | 36 |
| Table 15. | CTR3 (D)03H: T8/T16 Control Register            | 37 |
| Table 16. | Interrupt Types, Sources, and Vectors           | 50 |
| Table 17. | IRQ Register                                    | 50 |
| Table 18. | SMR2(F)0DH:Stop Mode Recovery Register 2*       | 56 |
| Table 19. | Stop Mode Recovery Source                       | 58 |
| Table 20. | Watch-Dog Timer Time Select                     | 61 |
| Table 21. | EPROM Selectable Options                        | 62 |

## Development Features

Table 1 lists the features of ZiLOG®'s Z8 GP™ OTP MCU Family family members.

**Table 1. Features**

| Device                 | OTP (KB)     | RAM (Bytes) | I/O Lines    | Voltage Range |
|------------------------|--------------|-------------|--------------|---------------|
| ZGP323L OTP MCU Family | 4, 8, 16, 32 | 237         | 32, 24 or 16 | 2.0V–3.6V     |

- Low power consumption—6mW (typical)
- T = Temperature  
S = Standard 0° to +70°C  
E = Extended -40° to +105°C  
A = Automotive -40° to +125°C
- Three standby modes:
  - STOP—2μA (typical)
  - HALT—0.8mA (typical)
  - Low voltage reset
- Special architecture to automate both generation and reception of complex pulses or signals:
  - One programmable 8-bit counter/timer with two capture registers and two load registers
  - One programmable 16-bit counter/timer with one 16-bit capture register pair and one 16-bit load register pair
  - Programmable input glitch filter for pulse reception
- Six priority interrupts
  - Three external
  - Two assigned to counter/timers
  - One low-voltage detection interrupt
- Low voltage detection and high voltage detection flags
- Programmable Watch-Dog Timer/Power-On Reset (WDT/POR) circuits
- Two independent comparators with programmable interrupt polarity
- Programmable EPROM options
  - Port 0: 0–3 pull-up transistors
  - Port 0: 4–7 pull-up transistors

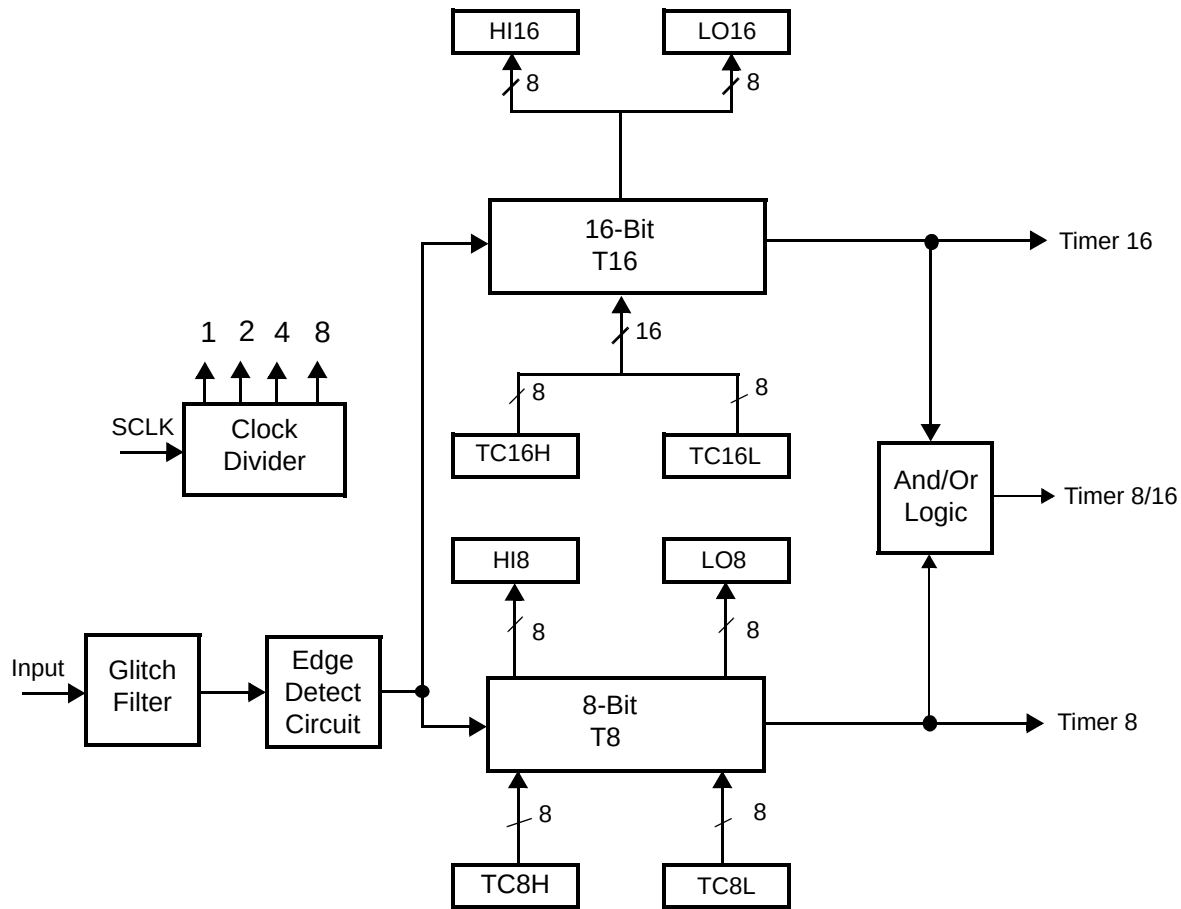


Figure 2. Counter/Timers Diagram


## Pin Description

The pin configuration for the 20-pin PDIP/SOIC/SSOP is illustrated in Figure 3 and described in Table 3. The pin configuration for the 28-pin PDIP/SOIC/SSOP are depicted in Figure 4 and described in Table 4. The pin configurations for the 40-pin PDIP and 48-pin SSOP versions are illustrated in Figure 5, Figure 6, and described in Table 5.

For customer engineering code development, a UV eraseable windowed cerdip packaging is offered in 20-pin, 28-pin, and 40-pin configurations. ZILOG does not recommend nor guarantee these packages for use in production.

## AC Characteristics

Figure 8 and Table 10 describe the Alternating Current (AC) characteristics.

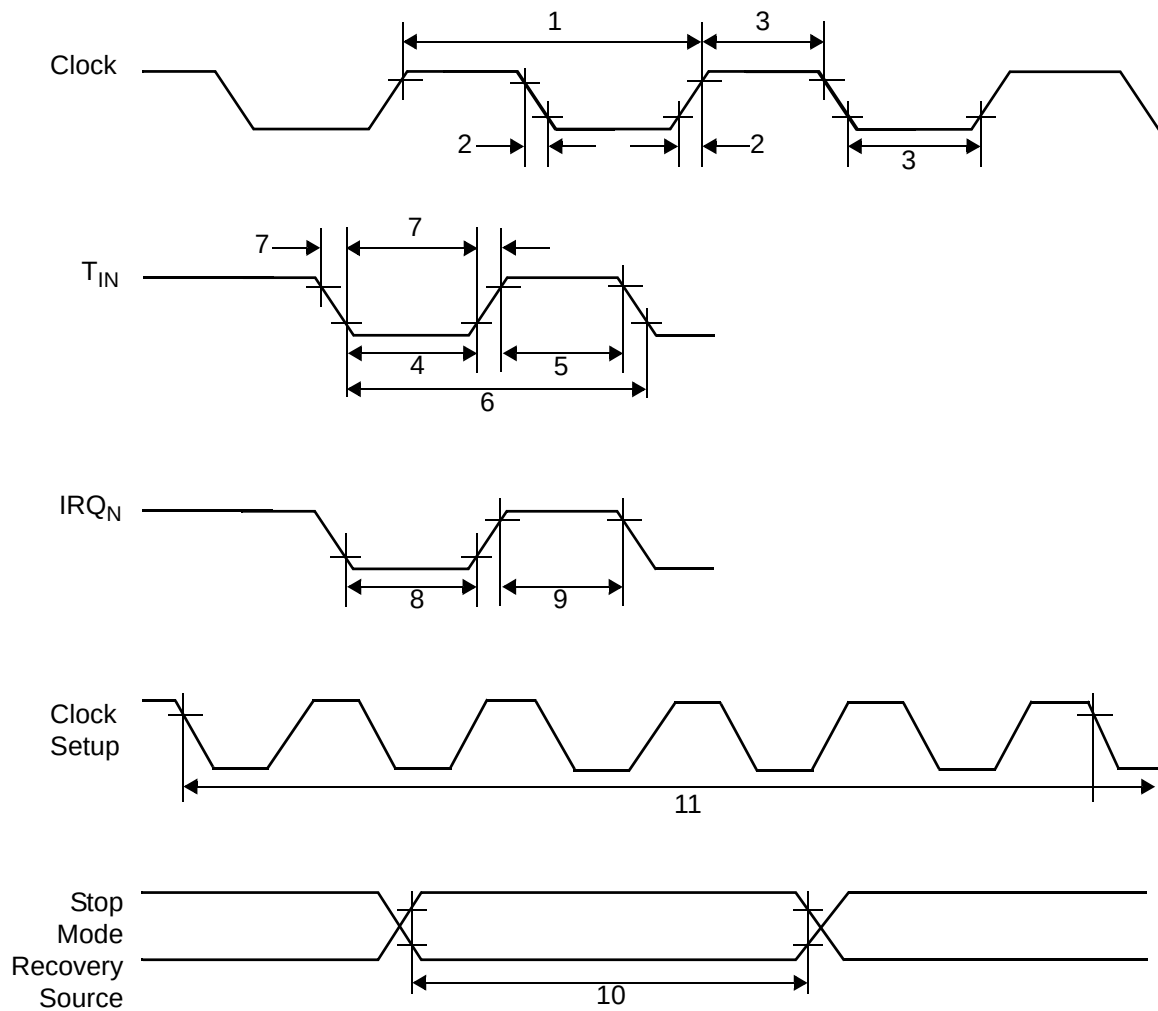

**Figure 8. AC Timing Diagram**

**Table 13. CTR1(0D)01H T8 and T16 Common Functions (Continued)**

| Field                              | Bit Position |     | Value | Description            |
|------------------------------------|--------------|-----|-------|------------------------|
| Transmit_Submode/<br>Glitch_Filter | ----32--     | R/W |       | Transmit Mode          |
|                                    |              |     | 00*   | Normal Operation       |
|                                    |              |     | 01    | Ping-Pong Mode         |
|                                    |              |     | 10    | T16_Out = 0            |
|                                    |              |     | 11    | T16_Out = 1            |
|                                    |              |     |       | Demodulation Mode      |
|                                    |              |     | 00*   | No Filter              |
|                                    |              |     | 01    | 4 SCLK Cycle           |
|                                    |              |     | 10    | 8 SCLK Cycle           |
|                                    |              |     | 11    | Reserved               |
| Initial_T8_Out/<br>Rising Edge     | -----1-      | R/W | 0*    | Transmit Mode          |
|                                    |              |     | 1     | T8_OUT is 0 Initially  |
|                                    |              | R   | 0*    | T8_OUT is 1 Initially  |
|                                    |              |     | 1     | Demodulation Mode      |
|                                    |              | W   | 0     | No Rising Edge         |
|                                    |              |     | 1     | Rising Edge Detected   |
| Initial_T16_Out/<br>Falling_Edge   | -----0       | R/W | 0*    | No Effect              |
|                                    |              |     | 1     | Reset Flag to 0        |
|                                    |              | R   | 0*    | Transmit Mode          |
|                                    |              |     | 1     | T16_OUT is 0 Initially |
|                                    |              | W   | 0     | T16_OUT is 1 Initially |
|                                    |              |     | 1     | Demodulation Mode      |

**Note:**

\*Default at Power-On Reset.

\*\*Default at Power-On Reset. Not reset with Stop Mode recovery.

**Mode**

If the result is 0, the counter/timers are in TRANSMIT mode; otherwise, they are in DEMODULATION mode.

**P36\_Out/Demodulator\_Input**

In TRANSMIT Mode, this bit defines whether P36 is used as a normal output pin or the combined output of T8 and T16.

In DEMODULATION Mode, this bit defines whether the input signal to the Counter/Timers is from P20 or P31.

If the input signal is from Port 31, a capture event may also generate an IRQ2 interrupt. To prevent generating an IRQ2, either disable the IRQ2 interrupt by clearing its IMR bit D2 or use P20 as the input.

Table 14. CTR2(D)02H: Counter/Timer16 Control Register

| Field            | Bit Position |     | Value | Description                 |
|------------------|--------------|-----|-------|-----------------------------|
| T16_Enable       | 7-----       | R   | 0*    | Counter Disabled            |
|                  |              |     | 1     | Counter Enabled             |
|                  |              | W   | 0     | Stop Counter                |
|                  |              |     | 1     | Enable Counter              |
| Single/Modulo-N  | -6-----      | R/W | 0*    | Transmit Mode               |
|                  |              |     | 1     | Modulo-N                    |
|                  |              |     | 0     | Single Pass                 |
|                  |              |     | 1     | Demodulation Mode           |
| Time_Out         | --5-----     | R   | 0*    | T16 Recognizes Edge         |
|                  |              |     | 1     | T16 Does Not Recognize Edge |
|                  |              | W   | 0     | No Counter Timeout          |
|                  |              |     | 1     | Counter Timeout Occurred    |
| T16_Clock        | ---43---     | R/W | 00**  | No Effect                   |
|                  |              |     | 01    | Reset Flag to 0             |
|                  |              |     | 10    | SCLK                        |
|                  |              |     | 11    | SCLK/2                      |
| Capture_INT_Mask | -----2--     | R/W | 0**   | SCLK/4                      |
|                  |              |     | 1     | SCLK/8                      |
| Counter_INT_Mask | -----1-      | R/W | 0     | Disable Data Capture Int.   |
|                  |              |     | 1     | Enable Data Capture Int.    |
| P35_Out          | -----0       | R/W | 0*    | Disable Timeout Int.        |
|                  |              |     | 1     | Enable Timeout Int.         |

**Note:**

\*Indicates the value upon Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with Stop Mode recovery.

**T16\_Enable**

This field enables T16 when set to 1.

**Single/Modulo-N**

In TRANSMIT Mode, when set to 0, the counter reloads the initial value when it reaches the terminal count. When set to 1, the counter stops when the terminal count is reached.



In Demodulation Mode, when set to 0, T16 captures and reloads on detection of all the edges. When set to 1, T16 captures and detects on the first edge but ignores the subsequent edges. For details, see the description of T16 Demodulation Mode on page 45.

### Time\_Out

This bit is set when T16 times out (terminal count reached). To reset the bit, write a 1 to this location.

### T16\_Clock

This bit defines the frequency of the input signal to Counter/Timer16.

### Capture\_INT\_Mask

This bit is set to allow an interrupt when data is captured into LO16 and HI16.

### Counter\_INT\_Mask

Set this bit to allow an interrupt when T16 times out.

### P35\_Out

This bit defines whether P35 is used as a normal output pin or T16 output.

### CTR3 T8/T16 Control Register—CTR3(D)03H

Table 15 lists and briefly describes the fields for this register. This register allows the T<sub>8</sub> and T<sub>16</sub> counters to be synchronized.

**Table 15. CTR3 (D)03H: T8/T16 Control Register**

| Field                  | Bit Position |     | Value | Description       |
|------------------------|--------------|-----|-------|-------------------|
| T <sub>16</sub> Enable | 7-----       | R   | 0*    | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| T <sub>8</sub> Enable  | -6-----      | R   | 0*    | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| Sync Mode              | --5-----     | R/W | 0**   | Disable Sync Mode |
|                        |              |     | 1     | Enable Sync Mode  |

into LO8; if it is a negative edge, data is put into HI8. From that point, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt can be generated if enabled (CTR0, D2). Meanwhile, T8 is loaded with FFh and starts counting again. If T8 reaches 0, the timeout status bit (CTR0, D5) is set, and an interrupt can be generated if enabled (CTR0, D1). T8 then continues counting from FFh (see Figure 23 and Figure 24).

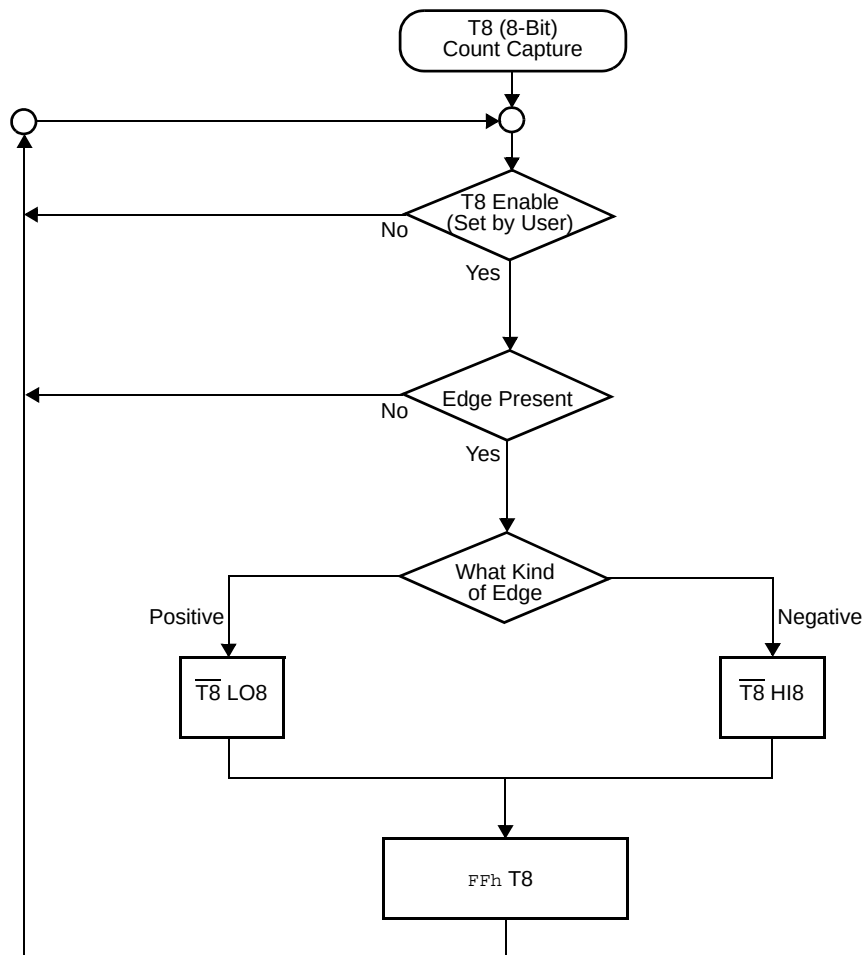


Figure 23. Demodulation Mode Count Capture Flowchart

### If D6 of CTR2 Is 1

T16 ignores the subsequent edges in the input signal and continues counting down. A timeout of T8 causes T16 to capture its current value and generate an interrupt if enabled (CTR2, D2). In this case, T16 does not reload and continues counting. If the D6 bit of CTR2 is toggled (by writing a 0 then a 1 to it), T16 captures and reloads on the next edge (rising, falling, or both depending on CTR1, D5; D4), continuing to ignore subsequent edges.


This T16 mode generally measures mark time, the length of an active carrier signal burst.

If T16 reaches 0, T16 continues counting from `FFFFh`. Meanwhile, a status bit (CTR2 D5) is set, and an interrupt timeout can be generated if enabled (CTR2 D1).

### Ping-Pong Mode

This operation mode is only valid in TRANSMIT Mode. T8 and T16 must be programmed in Single-Pass mode (CTR0, D6; CTR2, D6), and Ping-Pong mode must be programmed in CTR1, D3; D2. The user can begin the operation by enabling either T8 or T16 (CTR0, D7 or CTR2, D7). For example, if T8 is enabled, T8\_OUT is set to this initial value (CTR1, D1). According to T8\_OUT's level, TC8H or TC8L is loaded into T8. After the terminal count is reached, T8 is disabled, and T16 is enabled. T16\_OUT then switches to its initial value (CTR1, D0), data from TC16H and TC16L is loaded, and T16 starts to count. After T16 reaches the terminal count, it stops, T8 is enabled again, repeating the entire cycle. Interrupts can be allowed when T8 or T16 reaches terminal control (CTR0, D1; CTR2, D1). To stop the ping-pong operation, write 00 to bits D3 and D2 of CTR1. See Figure 28.

- **Note:** Enabling ping-pong operation while the counter/timers are running might cause intermittent counter/timer function. Disable the counter/timers and reset the status flags before instituting this operation.

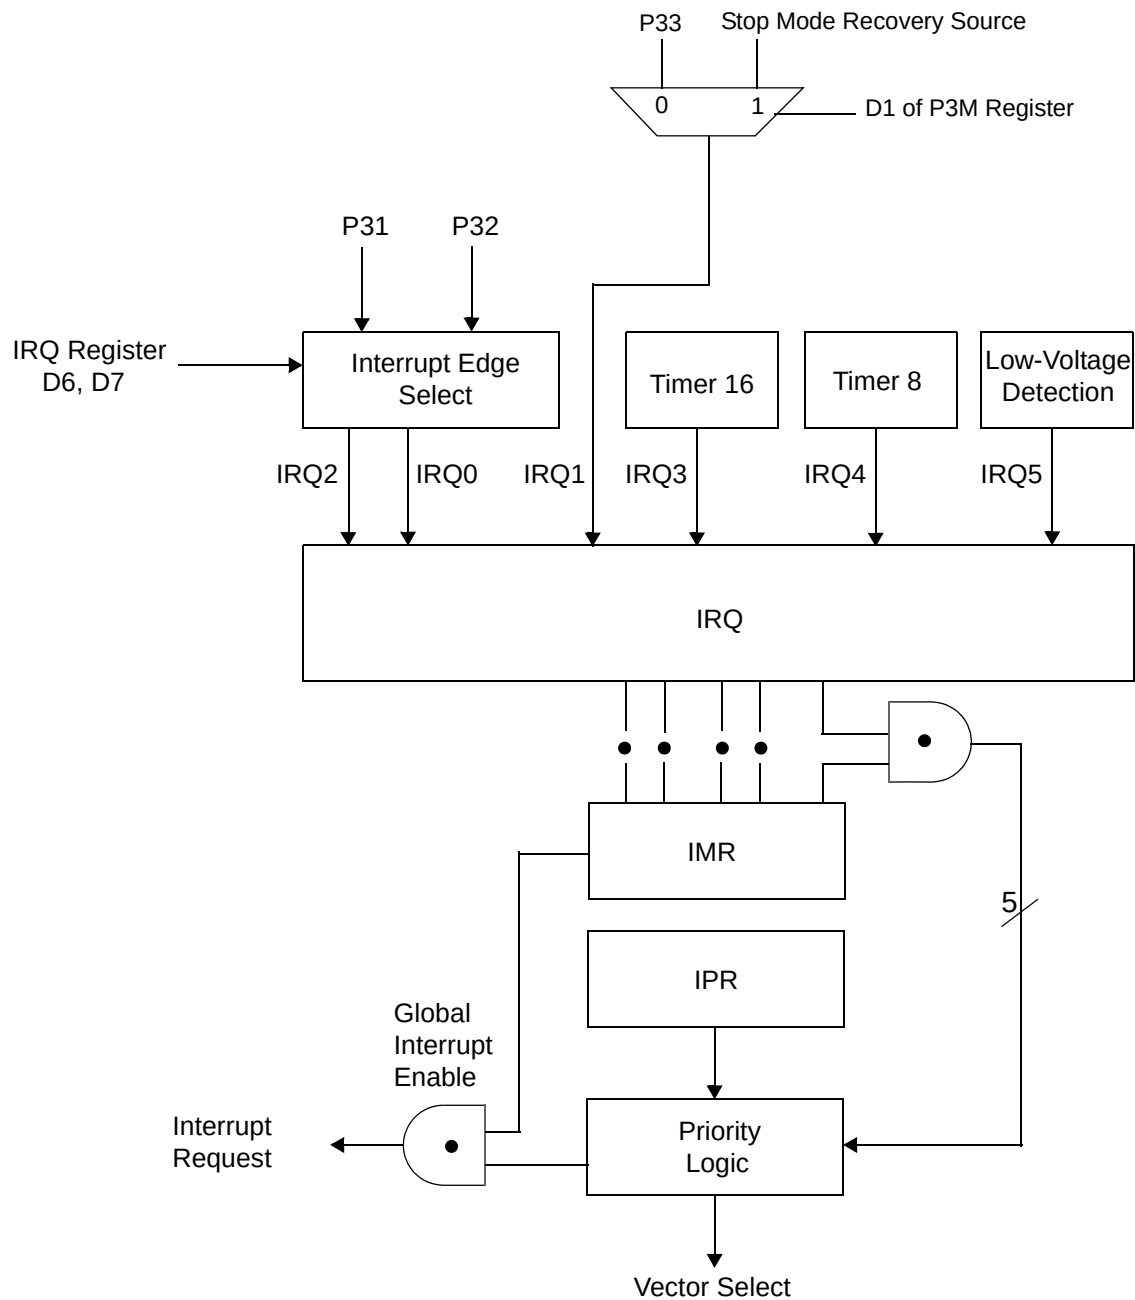

**Figure 30. Interrupt Block Diagram**

### Power-On Reset

A timer circuit clocked by a dedicated on-board RC-oscillator is used for the Power-On Reset (POR) timer function. The POR time allows  $V_{DD}$  and the oscillator circuit to stabilize before instruction execution begins.

The POR timer circuit is a one-shot timer triggered by one of three conditions:

- Power Fail to Power OK status, including Waking up from  $V_{BO}$  Standby
- Stop-Mode Recovery (if D5 of SMR = 1)
- WDT Timeout

The POR timer is 2.5 ms minimum. Bit 5 of the Stop-Mode Register determines whether the POR timer is bypassed after Stop-Mode Recovery (typical for external clock).

### HALT Mode

This instruction turns off the internal CPU clock, but not the XTAL oscillation. The counter/timers and external interrupts IRQ0, IRQ1, IRQ2, IRQ3, IRQ4, and IRQ5 remain active. The devices are recovered by interrupts, either externally or internally generated. An interrupt request must be executed (enabled) to exit HALT Mode. After the interrupt service routine, the program continues from the instruction after HALT Mode.


### STOP Mode

This instruction turns off the internal clock and external crystal oscillation, reducing the standby current to 10  $\mu$ A or less. STOP Mode is terminated only by a reset, such as WDT timeout, POR, SMR or external reset. This condition causes the processor to restart the application program at address 000CH. To enter STOP (or HALT) mode, first flush the instruction pipeline to avoid suspending execution in mid-instruction. Execute a NOP (Opcode = FFH) immediately before the appropriate sleep instruction, as follows:

### Stop Mode Recovery Register 2 (SMR2)

This register determines the mode of Stop Mode Recovery for SMR2 (Figure 36).

SMR2(0F)DH

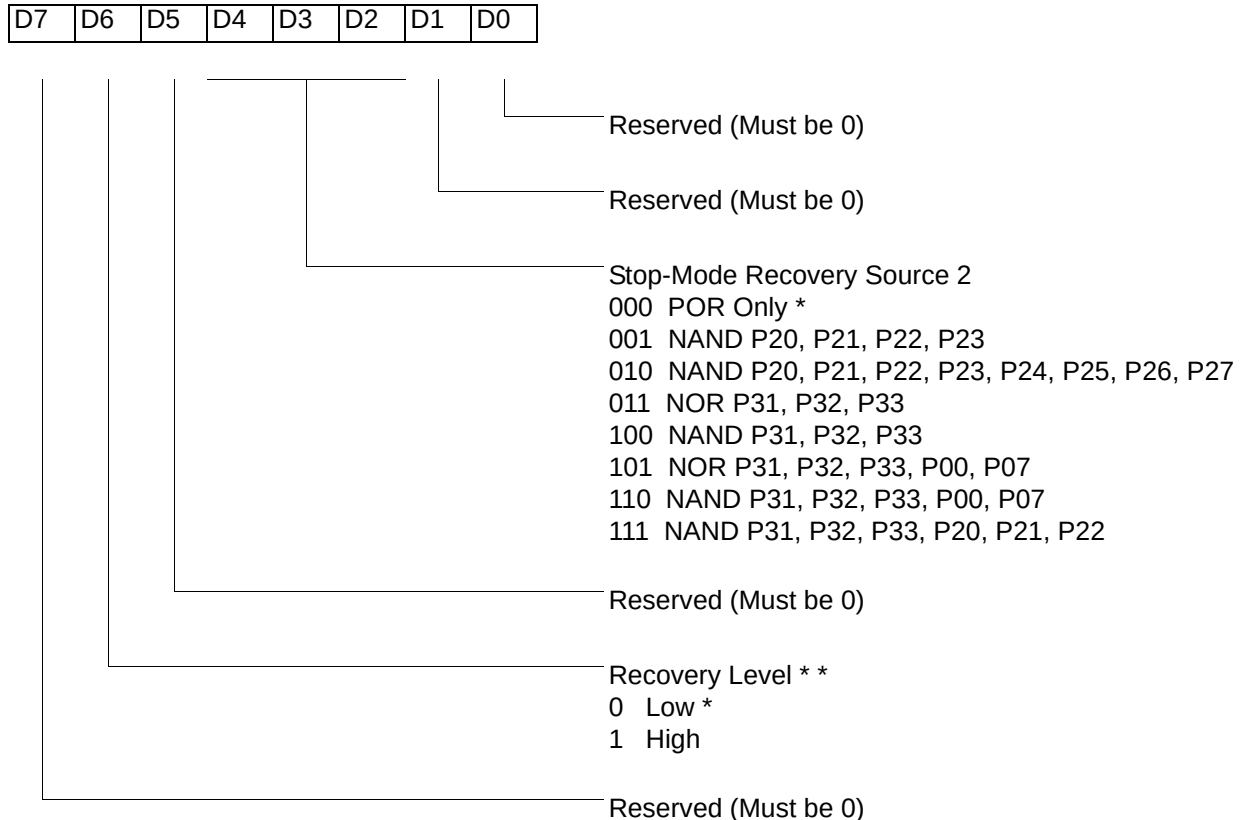

Note: If used in conjunction with SMR, either of the two specified events causes a Stop-Mode Recovery.

\* Default setting after reset

\* \* At the XOR gate input


**Figure 36. Stop Mode Recovery Register 2 ((0F)DH:D2–D4, D6 Write Only)**

If SMR2 is used in conjunction with SMR, either of the specified events causes a Stop Mode Recovery.

► **Note:** Port pins configured as outputs are ignored as an SMR or SMR2 recovery source. For example, if the NAND or P23–P20 is selected as the recovery source and P20 is configured as an output, the remaining SMR pins (P23–P21) form the NAND equation.

R249 IPR(F9H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

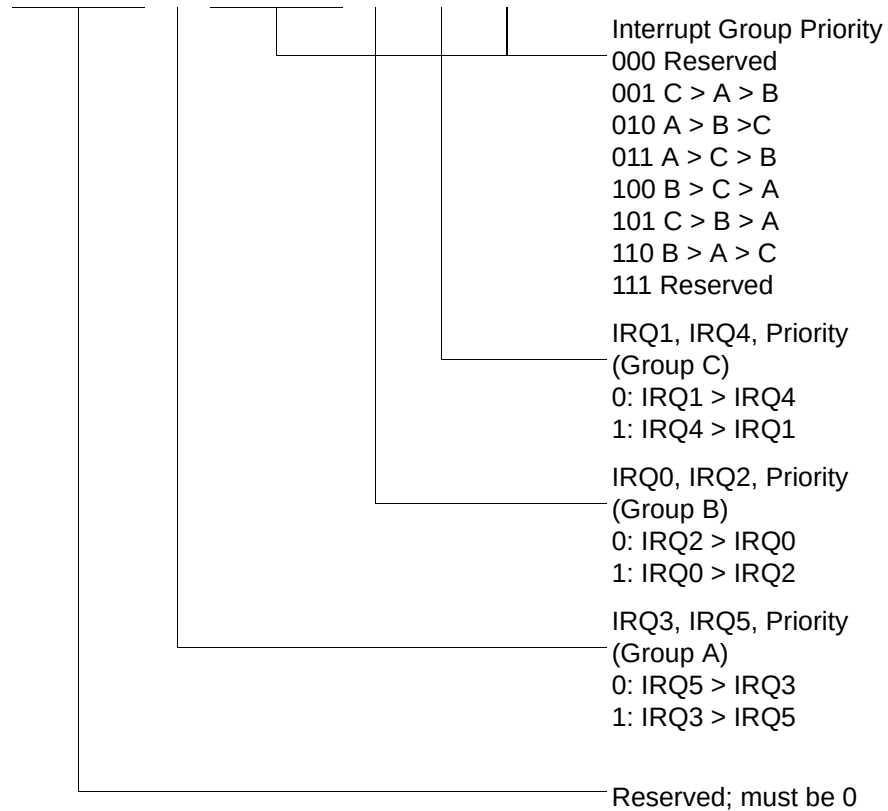

**Figure 51. Interrupt Priority Register (F9H: Write Only)**

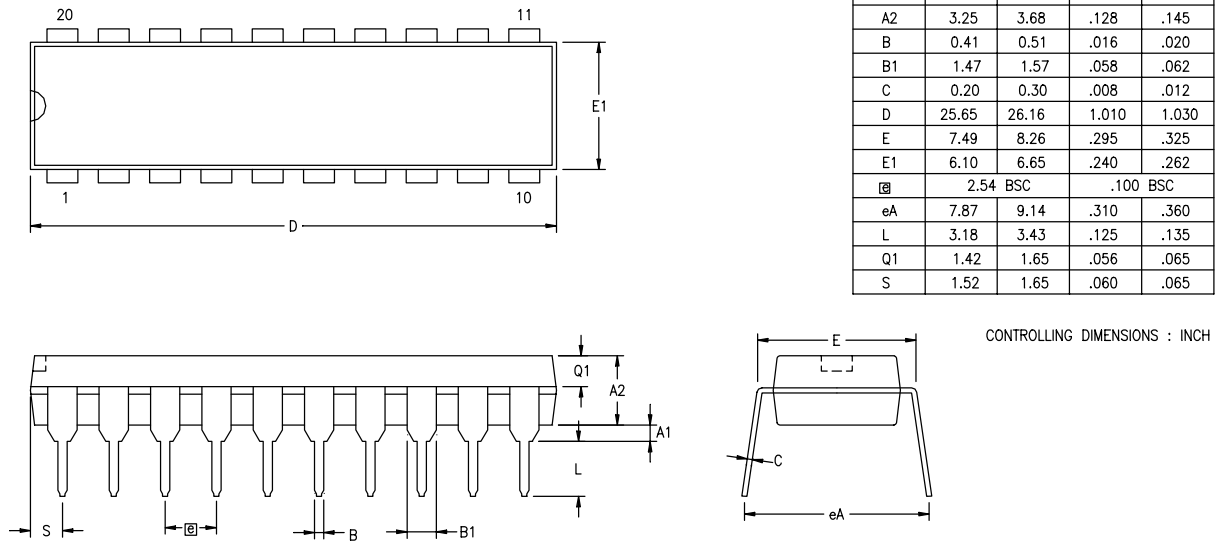


Figure 59. 20-Pin PDIP Package Diagram



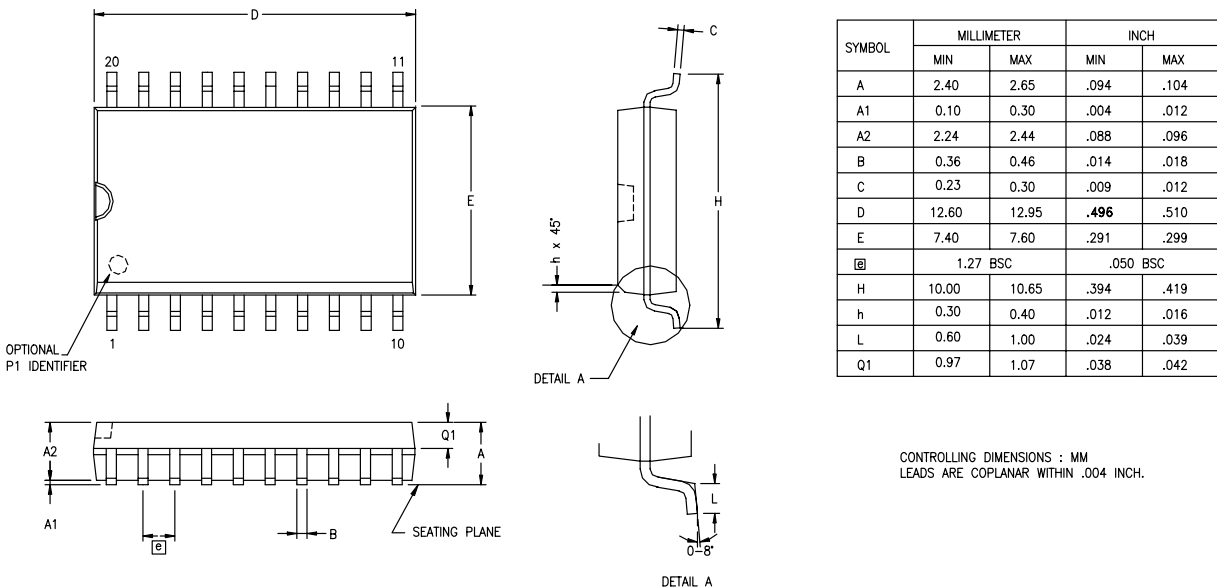


Figure 60. 20-Pin SOIC Package Diagram



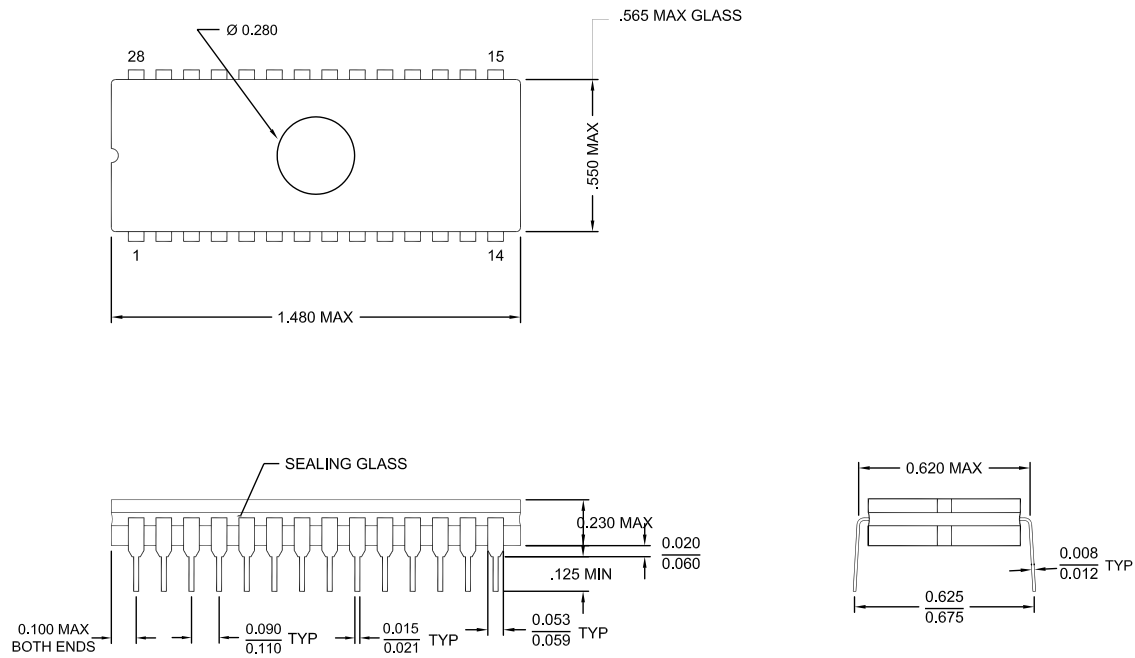

**Figure 62. 28-Pin CDIP Package**

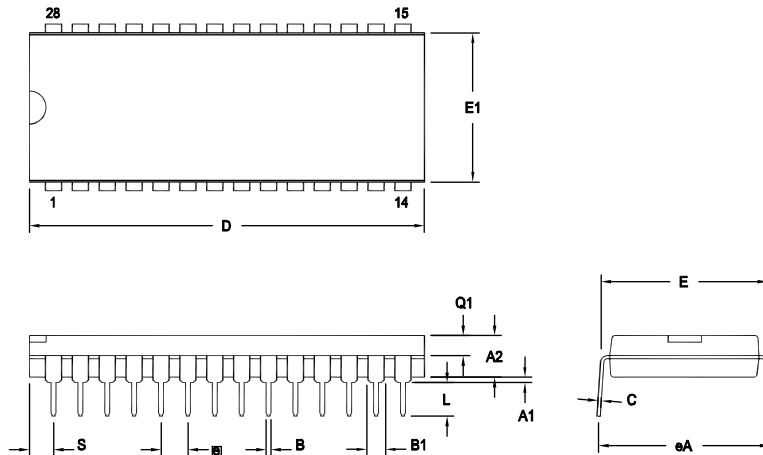

Note: ZILOG supplies both options for production. Component layout  
PCB design should cover bigger option 01.

Figure 64. 28-Pin PDIP Package Diagram

| SYMBOL | OPT # | MILLIMETER |       | INCH     |       |
|--------|-------|------------|-------|----------|-------|
|        |       | MIN        | MAX   | MIN      | MAX   |
| A1     |       | 0.38       | 1.02  | .015     | .040  |
| A2     |       | 3.18       | 4.19  | .125     | .165  |
| B      |       | 0.38       | 0.53  | .015     | .021  |
| B1     | 01    | 1.40       | 1.65  | .055     | .065  |
|        | 02    | 1.14       | 1.40  | .045     | .055  |
| C      |       | 0.23       | 0.38  | .009     | .015  |
| D      | 01    | 36.58      | 37.34 | 1.440    | 1.470 |
|        | 02    | 35.31      | 35.94 | 1.390    | 1.415 |
| E      |       | 15.24      | 15.75 | .600     | .620  |
| E1     | 01    | 13.59      | 14.10 | .535     | .555  |
|        | 02    | 12.83      | 13.08 | .505     | .515  |
| e      |       | 2.54 TYP   |       | .100 BSC |       |
| eA     |       | 15.49      | 16.76 | .610     | .660  |
| L      |       | 3.05       | 3.81  | .120     | .150  |
| Q1     | 01    | 1.40       | 1.91  | .055     | .075  |
|        | 02    | 1.40       | 1.78  | .055     | .070  |
| S      | 01    | 1.52       | 2.29  | .060     | .090  |
|        | 02    | 1.02       | 1.52  | .040     | .060  |

CONTROLLING DIMENSIONS : INCH

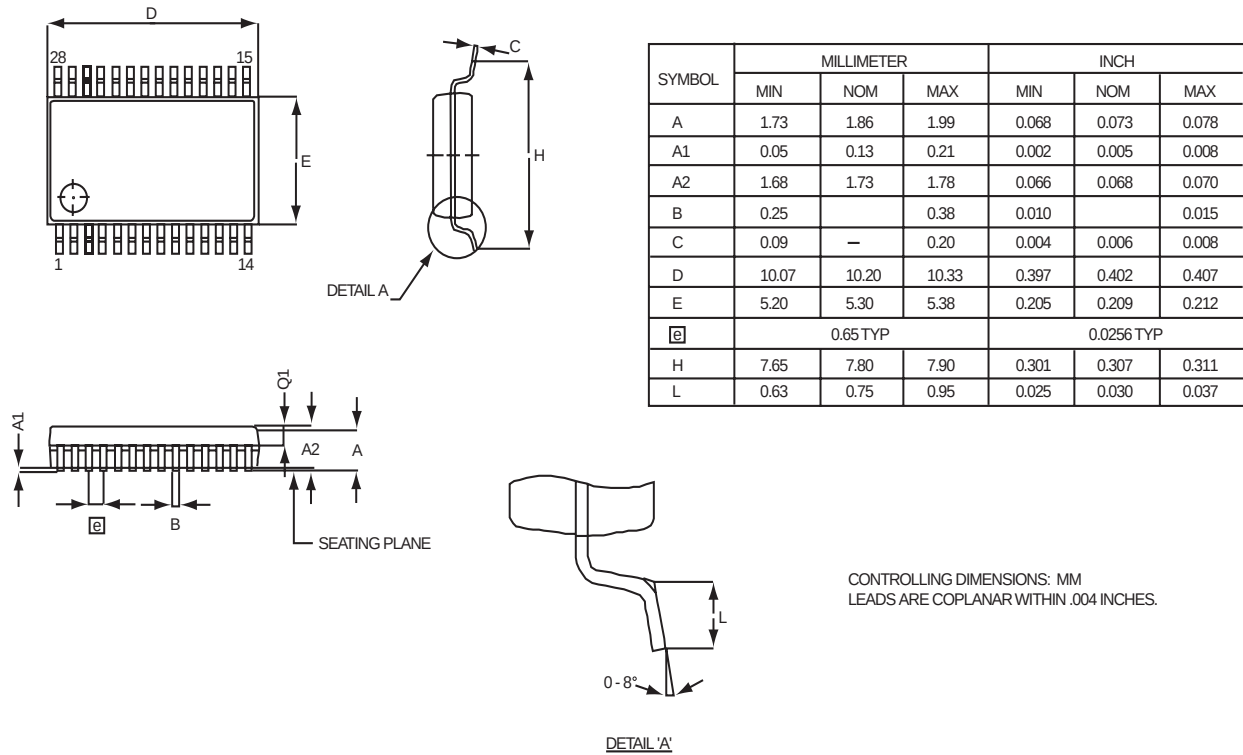


Figure 65. 28-Pin SSOP Package Diagram

## Ordering Information

| <b>32KB Standard Temperature: 0° to +70°C</b>      |                     |                    |                     |
|----------------------------------------------------|---------------------|--------------------|---------------------|
| <b>Part Number</b>                                 | <b>Description</b>  | <b>Part Number</b> | <b>Description</b>  |
| ZGP323LSH4832C                                     | 48-pin SSOP 32K OTP | ZGP323LSS2832C     | 28-pin SOIC 32K OTP |
| ZGP323LSP4032C                                     | 40-pin PDIP 32K OTP | ZGP323LSH2032C     | 20-pin SSOP 32K OTP |
| ZGP323LSH2832C                                     | 28-pin SSOP 32K OTP | ZGP323LSP2032C     | 20-pin PDIP 32K OTP |
| ZGP323LSP2832C                                     | 28-pin PDIP 32K OTP | ZGP323LSS2032C     | 20-pin SOIC 32K OTP |
| ZGP323LSK2032E                                     | 20-pin CDIP 32K OTP | ZGP323LSK4032E     | 40-pin CDIP 32K OTP |
|                                                    |                     | ZGP323LSK2832E     | 28-pin CDIP 32K OTP |
| <b>32KB Extended Temperature: -40° to +105°C</b>   |                     |                    |                     |
| <b>Part Number</b>                                 | <b>Description</b>  | <b>Part Number</b> | <b>Description</b>  |
| ZGP323LEH4832C                                     | 48-pin SSOP 32K OTP | ZGP323LES2832C     | 28-pin SOIC 32K OTP |
| ZGP323LEP4032C                                     | 40-pin PDIP 32K OTP | ZGP323LEH2032C     | 20-pin SSOP 32K OTP |
| ZGP323LEH2832C                                     | 28-pin SSOP 32K OTP | ZGP323LEP2032C     | 20-pin PDIP 32K OTP |
| ZGP323LEP2832C                                     | 28-pin PDIP 32K OTP | ZGP323LES2032C     | 20-pin SOIC 32K OTP |
| <b>32KB Automotive Temperature: -40° to +125°C</b> |                     |                    |                     |
| <b>Part Number</b>                                 | <b>Description</b>  | <b>Part Number</b> | <b>Description</b>  |
| ZGP323LAH4832C                                     | 48-pin SSOP 32K OTP | ZGP323LAS2832C     | 28-pin SOIC 32K OTP |
| ZGP323LAP4032C                                     | 40-pin PDIP 32K OTP | ZGP323LAH2032C     | 20-pin SSOP 32K OTP |
| ZGP323LAH2832C                                     | 28-pin SSOP 32K OTP | ZGP323LAP2032C     | 20-pin PDIP 32K OTP |
| ZGP323LAP2832C                                     | 28-pin PDIP 32K OTP | ZGP323LAS2032C     | 20-pin SOIC 32K OTP |
| Note: Replace C with G for Lead-Free Packaging     |                     |                    |                     |

## M

memory, program 23  
modulo-N mode  
    T16\_OUT 45  
    T8\_OUT 41

## O

oscillator configuration 51  
output circuit, counter/timer 47

## P

package information  
    20-pin DIP package diagram 81  
    20-pin SSOP package diagram 82  
    28-pin DIP package diagram 85  
    28-pin SOIC package diagram 84  
    28-pin SSOP package diagram 86  
    40-pin DIP package diagram 87  
    48-pin SSOP package diagram 88  
pin configuration  
    20-pin DIP/SOIC/SSOP 5  
    28-pin DIP/SOIC/SSOP 6  
    40- and 48-pin 8  
    40-pin DIP 7  
    48-pin SSOP 8  
pin functions  
    port 0 (P07 - P00) 16  
    port 0 (P17 - P10) 17  
    port 0 configuration 17  
    port 1 configuration 18  
    port 2 (P27 - P20) 18  
    port 2 (P37 - P30) 19  
    port 2 configuration 19  
    port 3 configuration 20  
    port 3 counter/timer configuration 22  
    reset) 23  
    XTAL1 (time-based input 16  
    XTAL2 (time-based output) 16  
ping-pong mode 46  
port 0 configuration 17  
port 0 pin function 16

port 1 configuration 18  
port 1 pin function 17  
port 2 configuration 19  
port 2 pin function 18  
port 3 configuration 20  
port 3 pin function 19  
port 3 counter/timer configuration 22  
port configuration register 53  
power connections 3  
power supply 5  
precharacterization product 95  
program memory 23  
    map 24

## R

ratings, absolute maximum 10  
register 59  
    CTR(D)01h 33  
    CTR0(D)00h 31  
    CTR2(D)02h 35  
    CTR3(D)03h 37  
    flag 78  
    HI16(D)09h 30  
    HI8(D)0Bh 30  
    interrupt priority 76  
    interrupt request 77  
    interruptmask 77  
    L016(D)08h 30  
    L08(D)0Ah 30  
    LVD(D)0Ch 63  
    pointer 78  
    port 0 and 1 75  
    port 2 configuration 73  
    port 3 mode 74  
    port configuration 53, 73  
    SMR2(F)0Dh 38  
    stack pointer high 79  
    stack pointer low 79  
    stop mode recovery 55  
    stop mode recovery 2 59  
    stop-mode recovery 71  
    stop-mode recovery 2 72  
    T16 control 67