



Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications,

### Details

|                                |                                                                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                                |
| Number of LABs/CLBs            | 8500                                                                                                                                                                  |
| Number of Logic Elements/Cells | 68000                                                                                                                                                                 |
| Total RAM Bits                 | 1056768                                                                                                                                                               |
| Number of I/O                  | 500                                                                                                                                                                   |
| Number of Gates                | -                                                                                                                                                                     |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                         |
| Mounting Type                  | Surface Mount                                                                                                                                                         |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                                                       |
| Package / Case                 | 672-BBGA                                                                                                                                                              |
| Supplier Device Package        | 672-FPBGA (27x27)                                                                                                                                                     |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2-70e-5fn672c">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2-70e-5fn672c</a> |

## SERDES Power Supply Requirements (LatticeECP2M Family Only)<sup>1</sup>

Over Recommended Operating Conditions

| Symbol                                    | Description                                        | Typ. <sup>2</sup> | Units |
|-------------------------------------------|----------------------------------------------------|-------------------|-------|
| <b>Standby (Power Down)</b>               |                                                    |                   |       |
| I <sub>CCTX-SB</sub>                      | V <sub>CCTX</sub> current (per channel)            | 10                | μA    |
| I <sub>CCR<sub>X</sub>-SB</sub>           | V <sub>CCR<sub>X</sub></sub> current (per channel) | 75                | μA    |
| I <sub>CCIB-SB</sub>                      | Input buffer current (per channel)                 | 0                 | μA    |
| I <sub>CCOB-SB</sub>                      | Output buffer current (per channel)                | 0                 | μA    |
| I <sub>CCP-SB</sub>                       | SERDES PLL current (per quad)                      | 30                | μA    |
| I <sub>CCAX33-SB</sub>                    | SERDES termination current (per quad)              | 10                | μA    |
| <b>Operating (Data Rate = 3.125 Gbps)</b> |                                                    |                   |       |
| I <sub>CCTX-OP</sub>                      | V <sub>CCTX</sub> current (per channel)            | 19                | mA    |
| I <sub>CCR<sub>X</sub>-OP</sub>           | V <sub>CCR<sub>X</sub></sub> current (per channel) | 34                | mA    |
| I <sub>CCIB-OP</sub>                      | Input buffer current (per channel)                 | 4                 | mA    |
| I <sub>CCOB-OP</sub>                      | Output buffer current (per channel)                | 13                | mA    |
| I <sub>CCP-OP</sub>                       | SERDES PLL current (per quad)                      | 26                | mA    |
| I <sub>CCAX33-OP</sub>                    | SERDES termination current (per quad)              | 0.01              | mA    |

1. Equalization enabled, pre-emphasis disabled.

2. T<sub>J</sub> = 25°C, power supplies at nominal voltage.

## SERDES Power (LatticeECP2M Family Only)

Table 3-1 presents the SERDES power for one channel.

**Table 3-1. SERDES Power<sup>1</sup>**

| Symbol                | Description                             | Typ. <sup>2</sup> | Units |
|-----------------------|-----------------------------------------|-------------------|-------|
| P <sub>S-1CH-31</sub> | SERDES power (one channel @ 3.125 Gbps) | 90                | mW    |
| P <sub>S-1CH-25</sub> | SERDES power (one channel @ 2.5 Gbps)   | 87                | mW    |
| P <sub>S-1CH-12</sub> | SERDES power (one channel @ 1.25 Gbps)  | 86                | mW    |
| P <sub>S-1CH-02</sub> | SERDES power (one channel @ 250 Mbps)   | 76                | mW    |


1. One quarter of the total quad power (includes contribution from common circuits, all channels in the quad operating, pre-emphasis disabled, equalization enabled).

2. Typical values measured at 25°C and 1.2V.

### BLVDS

The LatticeECP2/M devices support the BLVDS standard. This standard is emulated using complementary LVC-MOS outputs in conjunction with a parallel external resistor across the driver outputs. BLVDS is intended for use when multi-drop and bi-directional multi-point differential signaling is required. The scheme shown in Figure 3-2 is one possible solution for bi-directional multi-point differential signals.

**Figure 3-2. BLVDS Multi-point Output Example**

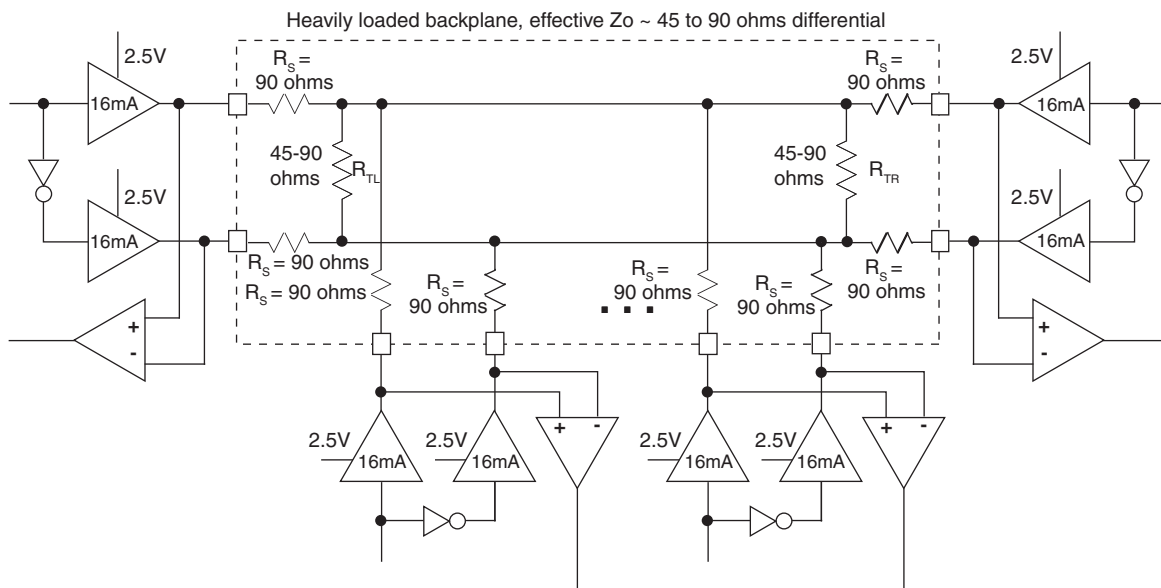

**Table 3-3. BLVDS DC Conditions<sup>1</sup>**

#### Over Recommended Operating Conditions

| Parameter | Description                       | Typical  |          | Units |
|-----------|-----------------------------------|----------|----------|-------|
|           |                                   | Zo = 45Ω | Zo = 90Ω |       |
| VCCIO     | Output Driver Supply (+/- 5%)     | 2.50     | 2.50     | V     |
| ZOUT      | Driver Impedance                  | 10.00    | 10.00    | Ω     |
| RS        | Driver Series Resistor (+/- 1%)   | 90.00    | 90.00    | Ω     |
| RTL       | Driver Parallel Resistor (+/- 1%) | 45.00    | 90.00    | Ω     |
| RTR       | Receiver Termination (+/- 1%)     | 45.00    | 90.00    | Ω     |
| VOH       | Output High Voltage               | 1.38     | 1.48     | V     |
| VOL       | Output Low Voltage                | 1.12     | 1.02     | V     |
| VOD       | Output Differential Voltage       | 0.25     | 0.46     | V     |
| VCM       | Output Common Mode Voltage        | 1.25     | 1.25     | V     |
| IDC       | DC Output Current                 | 11.24    | 10.20    | mA    |

1. For input buffer, see LVDS table.

## LatticeECP2/M External Switching Characteristics<sup>9</sup> (Continued)

Over Recommended Operating Conditions

| Parameter              | Description                                                    | Device   | -7   |      | -6   |      | -5   |      | Units |
|------------------------|----------------------------------------------------------------|----------|------|------|------|------|------|------|-------|
|                        |                                                                |          | Min. | Max. | Min. | Max. | Min. | Max. |       |
| t <sub>HPLL</sub>      | Clock to Data Hold - PIO Input Register                        | LFE2-6   | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2-12  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2-20  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2-35  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2-50  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2-70  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2M20  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2M35  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2M50  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2M70  | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
|                        |                                                                | LFE2M100 | 1.00 | —    | 1.20 | —    | 1.40 | —    | ns    |
| t <sub>SU_DELPLL</sub> | Clock to Data Setup - PIO Input Register with Data Input Delay | LFE2-6   | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2-12  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2-20  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2-35  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2-50  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2-70  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2M20  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2M35  | 1.80 | —    | 2.00 | —    | 2.20 | —    | ns    |
|                        |                                                                | LFE2M50  | 1.90 | —    | 2.10 | —    | 2.30 | —    | ns    |
|                        |                                                                | LFE2M70  | 1.90 | —    | 2.10 | —    | 2.30 | —    | ns    |
|                        |                                                                | LFE2M100 | 2.00 | —    | 2.20 | —    | 2.40 | —    | ns    |
| t <sub>H_DELPLL</sub>  | Clock to Data Hold - PIO Input Register with Input Data Delay  | LFE2-6   | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2-12  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2-20  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2-35  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2-50  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2-70  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2M20  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2M35  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2M50  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2M70  | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
|                        |                                                                | LFE2M100 | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |

### DDR I/O Pin Parameters<sup>2</sup>

|                      |                                   |        |       |       |       |       |       |       |     |
|----------------------|-----------------------------------|--------|-------|-------|-------|-------|-------|-------|-----|
| t <sub>DVADQ</sub>   | Data Valid After DQS (DDR Read)   | ECP2/M | —     | 0.225 | —     | 0.225 | —     | 0.225 | UI  |
| t <sub>DVEDQ</sub>   | Data Hold After DQS (DDR Read)    | ECP2/M | 0.640 | —     | 0.640 | —     | 0.640 | —     | UI  |
| t <sub>DQVBS</sub>   | Data Valid Before DQS (DDR Write) | ECP2/M | 0.250 | —     | 0.250 | —     | 0.250 | —     | UI  |
| t <sub>DQVAS</sub>   | Data Valid After DQS (DDR Write)  | ECP2/M | 0.250 | —     | 0.250 | —     | 0.250 | —     | UI  |
| f <sub>MAX_DDR</sub> | DDR Clock Frequency <sup>6</sup>  | ECP2/M | 95    | 200   | 95    | 166   | 95    | 133   | MHz |

### DDR2 I/O Pin Parameters<sup>3</sup>

|                    |                                 |        |       |       |       |       |       |       |    |
|--------------------|---------------------------------|--------|-------|-------|-------|-------|-------|-------|----|
| t <sub>DVADQ</sub> | Data Valid After DQS (DDR Read) | ECP2/M | —     | 0.225 | —     | 0.225 | —     | 0.225 | UI |
| t <sub>DVEDQ</sub> | Data Hold After DQS (DDR Read)  | ECP2/M | 0.640 | —     | 0.640 | —     | 0.640 | —     | UI |

**LatticeECP2/M Family Timing Adders<sup>1, 2, 3</sup>**
**Over Recommended Operating Conditions**

| Buffer Type             | Description                            | -7    | -6    | -5    | Units |
|-------------------------|----------------------------------------|-------|-------|-------|-------|
| <b>Input Adjusters</b>  |                                        |       |       |       |       |
| LVDS25                  | LVDS                                   | -0.04 | -0.02 | 0.00  | ns    |
| BLVDS25                 | BLVDS                                  | -0.04 | -0.09 | -0.15 | ns    |
| MLVDS                   | LVDS                                   | -0.15 | -0.15 | -0.15 | ns    |
| RSDS                    | RSDS                                   | -0.15 | -0.15 | -0.15 | ns    |
| LVPECL33                | LVPECL                                 | 0.16  | 0.15  | 0.13  | ns    |
| HSTL18_I                | HSTL_18 class I                        | 0.01  | -0.01 | -0.04 | ns    |
| HSTL18_II               | HSTL_18 class II                       | 0.01  | -0.01 | -0.04 | ns    |
| HSTL18D_I               | Differential HSTL 18 class I           | 0.01  | -0.01 | -0.04 | ns    |
| HSTL18D_II              | Differential HSTL 18 class II          | 0.01  | -0.01 | -0.04 | ns    |
| HSTL15_I                | HSTL_15 class I                        | 0.01  | -0.01 | -0.04 | ns    |
| HSTL15D_I               | Differential HSTL 15 class I           | 0.01  | -0.01 | -0.04 | ns    |
| SSTL33_I                | SSTL_3 class I                         | -0.03 | -0.07 | -0.10 | ns    |
| SSTL33_II               | SSTL_3 class II                        | -0.03 | -0.07 | -0.10 | ns    |
| SSTL33D_I               | Differential SSTL_3 class I            | -0.03 | -0.07 | -0.10 | ns    |
| SSTL33D_II              | Differential SSTL_3 class II           | -0.03 | -0.07 | -0.10 | ns    |
| SSTL25_I                | SSTL_2 class I                         | -0.04 | -0.07 | -0.10 | ns    |
| SSTL25_II               | SSTL_2 class II                        | -0.04 | -0.07 | -0.10 | ns    |
| SSTL25D_I               | Differential SSTL_2 class I            | -0.04 | -0.07 | -0.10 | ns    |
| SSTL25D_II              | Differential SSTL_2 class II           | -0.04 | -0.07 | -0.10 | ns    |
| SSTL18_I                | SSTL_18 class I                        | -0.01 | -0.04 | -0.07 | ns    |
| SSTL18_II               | SSTL_18 class II                       | -0.01 | -0.04 | -0.07 | ns    |
| SSTL18D_I               | Differential SSTL_18 class I           | -0.01 | -0.04 | -0.07 | ns    |
| SSTL18D_II              | Differential SSTL_18 class II          | -0.01 | -0.04 | -0.07 | ns    |
| LVTTTL33                | LVTTTL                                 | -0.16 | -0.16 | -0.16 | ns    |
| LVC MOS33               | LVC MOS 3.3                            | -0.08 | -0.12 | -0.16 | ns    |
| LVC MOS25               | LVC MOS 2.5                            | 0.00  | 0.00  | 0.00  | ns    |
| LVC MOS18               | LVC MOS 1.8                            | -0.16 | -0.17 | -0.17 | ns    |
| LVC MOS15               | LVC MOS 1.5                            | -0.14 | -0.14 | -0.14 | ns    |
| LVC MOS12               | LVC MOS 1.2                            | -0.04 | -0.01 | 0.01  | ns    |
| PCI33                   | PCI                                    | -0.08 | -0.12 | -0.16 | ns    |
| <b>Output Adjusters</b> |                                        |       |       |       |       |
| LVDS25E                 | LVDS 2.5 E <sup>4</sup>                | 0.25  | 0.19  | 0.13  | ns    |
| LVDS25                  | LVDS 2.5                               | 0.10  | 0.13  | 0.17  | ns    |
| BLVDS25                 | BLVDS 2.5                              | 0.00  | -0.01 | -0.03 | ns    |
| MLVDS                   | MLVDS 2.5 <sup>4</sup>                 | 0.00  | -0.01 | -0.03 | ns    |
| RSDS                    | RSDS 2.5 <sup>4</sup>                  | 0.25  | 0.19  | 0.13  | ns    |
| LVPECL33                | LVPECL 3.3 <sup>4</sup>                | -0.02 | -0.04 | -0.06 | ns    |
| HSTL18_I                | HSTL_18 class I 8mA drive              | -0.19 | -0.22 | -0.25 | ns    |
| HSTL18_II               | HSTL_18 class II                       | -0.30 | -0.34 | -0.37 | ns    |
| HSTL18D_I               | Differential HSTL 18 class I 8mA drive | -0.19 | -0.22 | -0.25 | ns    |
| HSTL18D_II              | Differential HSTL 18 class II          | -0.30 | -0.34 | -0.37 | ns    |

## sysCLOCK GPLL Timing

### Over Recommended Operating Conditions

| Parameter                       | Description                           | Conditions                               | Min.  | Typ. | Max.  | Units |
|---------------------------------|---------------------------------------|------------------------------------------|-------|------|-------|-------|
| f <sub>IN</sub>                 | Input Clock Frequency (CLKI, CLKFB)   | Without external capacitor               | 20    | —    | 420   | MHz   |
|                                 |                                       | With external capacitor <sup>5, 6</sup>  | 2     | —    | 420   | MHz   |
| f <sub>OUT</sub>                | Output Clock Frequency (CLKOP, CLKOS) | Without external capacitor               | 20    | —    | 420   | MHz   |
|                                 |                                       | With external capacitor <sup>5</sup>     | 5     | —    | 50    | MHz   |
| f <sub>OUT2</sub>               | K-Divider Output Frequency (CLKOK)    | Without external capacitor               | 0.156 | —    | 210   | MHz   |
|                                 |                                       | With external capacitor <sup>5</sup>     | 0.039 | —    | 25    | MHz   |
| f <sub>VCO</sub>                | PLL VCO Frequency                     |                                          | 640   | —    | 1280  | MHz   |
| f <sub>PFD</sub>                | Phase Detector Input Frequency        | Without external capacitor               | 20    | —    | 420   | MHz   |
|                                 |                                       | With external capacitor <sup>5, 6</sup>  | 2     | —    | 50    | MHz   |
| AC Characteristics              |                                       |                                          |       |      |       |       |
| t <sub>DT</sub>                 | Output Clock Duty Cycle               | Default duty cycle selected <sup>3</sup> | 45    | 50   | 55    | %     |
| t <sub>PH</sub> <sup>4</sup>    | Output Phase Accuracy                 |                                          | —     | —    | ±0.05 | UI    |
| t <sub>OPJIT</sub> <sup>1</sup> | Output Clock Period Jitter            | f <sub>OUT</sub> ≥ 100 MHz               | —     | —    | ±125  | ps    |
|                                 |                                       | 50 ≤ f <sub>OUT</sub> < 100 MHz          | —     | —    | 0.025 | UIPP  |
|                                 |                                       | f <sub>OUT</sub> < 50 MHz                | —     | —    | 0.04  | UIPP  |
| t <sub>SK</sub>                 | Input Clock to Output Clock Skew      | N/M = integer                            | —     | —    | ±250  | ps    |
| t <sub>W</sub>                  | Output Clock Pulse Width              | At 90% or 10%                            | 1     | —    | —     | ns    |
| t <sub>LOCK</sub> <sup>2</sup>  | PLL Lock-in Time                      | Without external capacitor               | —     | —    | 150   | μs    |
|                                 |                                       | With external capacitor <sup>5</sup>     | —     | —    | 500   | μs    |
| t <sub>PA</sub>                 | Programmable Delay Unit               |                                          | 85    | 130  | 360   | ps    |
| t <sub>IPJIT</sub>              | Input Clock Period Jitter             |                                          | —     | —    | ±200  | ps    |
| t <sub>FBKDLY</sub>             | External Feedback Delay               |                                          | —     | —    | 10    | ns    |
| t <sub>HI</sub>                 | Input Clock High Time                 | 90% to 90%                               | 0.5   | —    | —     | ns    |
| t <sub>LO</sub>                 | Input Clock Low Time                  | 10% to 10%                               | 0.5   | —    | —     | ns    |
| t <sub>RST</sub>                | RST Pulse Width (RESETM/RESETK)       |                                          | 15    | —    | —     | ns    |
|                                 | Reset Signal Pulse Width (CNTRST)     | Without external capacitor               | 500   | —    | —     | ns    |
|                                 |                                       | With external capacitor <sup>5</sup>     | 20    | —    | —     | μs    |

1. Jitter sample is taken over 10,000 samples of the primary PLL output with clean reference clock and no additional I/O pins toggling.

2. Output clock is valid after  $t_{LOCK}$  for PLL reset and dynamic delay adjustment.

3. Using LVDS output buffers.

4. Relative to CLKOP.

5. Value of external capacitor: 5.6 nF ±20%, NPO dielectric, ceramic chip capacitor, 1206 or smaller package, connected to PLLCAP pin.

6.  $f_{OUT} (max) = f_{IN} * 10$  for  $f_{IN} < 5$  MHz.


## JTAG Port Timing Specifications

Over Recommended Operating Conditions

| Symbol               | Parameter                                                          | Min | Max | Units |
|----------------------|--------------------------------------------------------------------|-----|-----|-------|
| $f_{\text{MAX}}$     | TCK clock frequency                                                | —   | 25  | MHz   |
| $t_{\text{BTCP}}$    | TCK [BSCAN] clock pulse width                                      | 40  | —   | ns    |
| $t_{\text{BTCPH}}$   | TCK [BSCAN] clock pulse width high                                 | 20  | —   | ns    |
| $t_{\text{BTCPL}}$   | TCK [BSCAN] clock pulse width low                                  | 20  | —   | ns    |
| $t_{\text{BTS}}$     | TCK [BSCAN] setup time                                             | 8   | —   | ns    |
| $t_{\text{BTH}}$     | TCK [BSCAN] hold time                                              | 10  | —   | ns    |
| $t_{\text{BTRF}}$    | TCK [BSCAN] rise/fall time                                         | 50  | —   | mV/ns |
| $t_{\text{BTCO}}$    | TAP controller falling edge of clock to valid output               | —   | 10  | ns    |
| $t_{\text{BTCODIS}}$ | TAP controller falling edge of clock to valid disable              | —   | 10  | ns    |
| $t_{\text{BTCOEN}}$  | TAP controller falling edge of clock to valid enable               | —   | 10  | ns    |
| $t_{\text{BTCRS}}$   | BSCAN test capture register setup time                             | 8   | —   | ns    |
| $t_{\text{BTCRH}}$   | BSCAN test capture register hold time                              | 25  | —   | ns    |
| $t_{\text{BUTCO}}$   | BSCAN test update register, falling edge of clock to valid output  | —   | 25  | ns    |
| $t_{\text{BTUODIS}}$ | BSCAN test update register, falling edge of clock to valid disable | —   | 25  | ns    |
| $t_{\text{BTUPOEN}}$ | BSCAN test update register, falling edge of clock to valid enable  | —   | 25  | ns    |

Timing v.A 0.11

**Figure 3-21. JTAG Port Timing Waveforms**

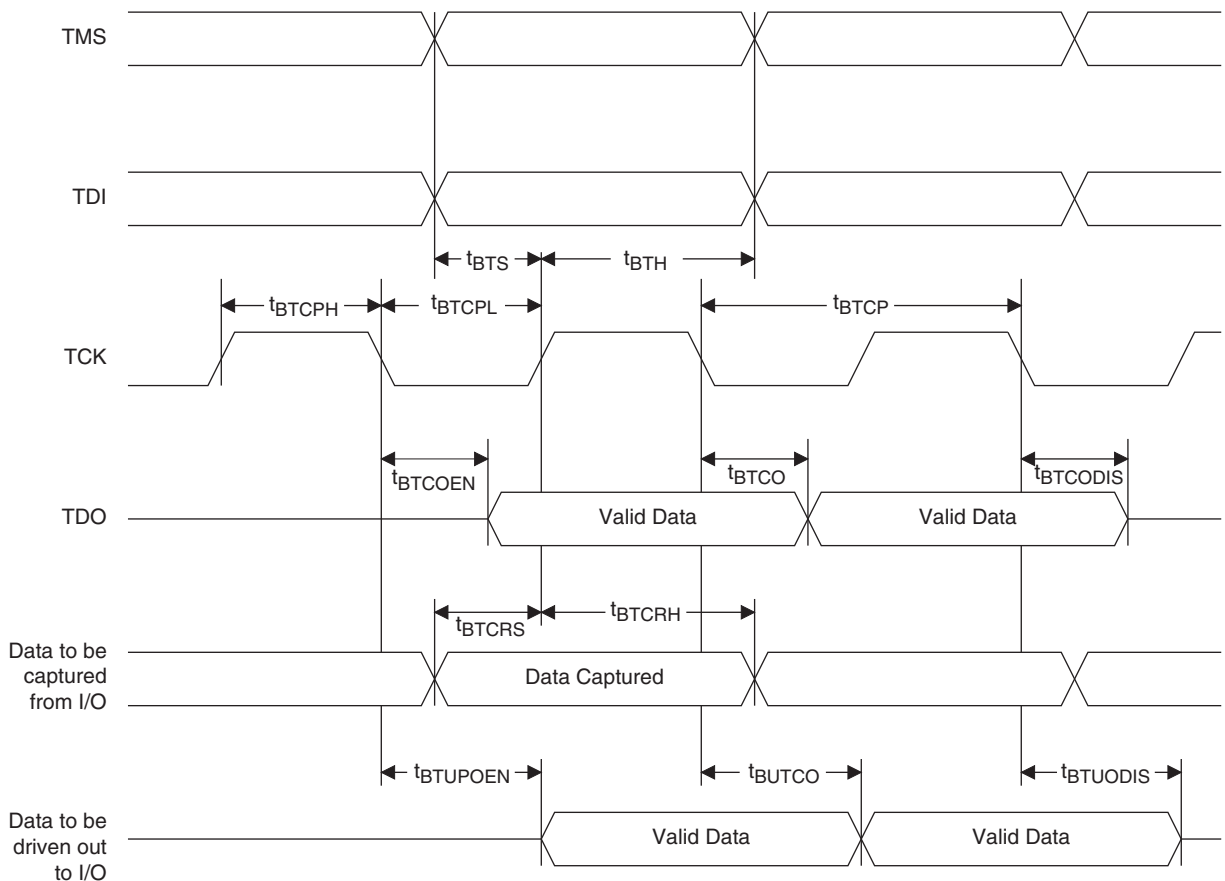

## Signal Descriptions (Cont.)

| Signal Name                                       | I/O | Description                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [LOC]DQS[num]                                     | I/O | DQ input/output pads: T (top), R (right), B (bottom), L (left), DQS, num = ball function number.                                                                                                                                                                                                                                                             |
| [LOC]DQ[num]                                      | I/O | DQ input/output pads: T (top), R (right), B (bottom), L (left), DQ, associated DQS number.                                                                                                                                                                                                                                                                   |
| <b>Test and Programming (Dedicated Pins)</b>      |     |                                                                                                                                                                                                                                                                                                                                                              |
| TMS                                               | I   | Test Mode Select input, used to control the 1149.1 state machine. Pull-up is enabled during configuration.                                                                                                                                                                                                                                                   |
| TCK                                               | I   | Test Clock input pin, used to clock the 1149.1 state machine. No pull-up enabled.                                                                                                                                                                                                                                                                            |
| TDI                                               | I   | Test Data in pin. Used to load data into device using 1149.1 state machine. After power-up, this TAP port can be activated for configuration by sending appropriate command. (Note: once a configuration port is selected it is locked. Another configuration port cannot be selected until the power-up sequence). Pull-up is enabled during configuration. |
| TDO                                               | O   | Output pin. Test Data Out pin used to shift data out of a device using 1149.1.                                                                                                                                                                                                                                                                               |
| VCCJ                                              | —   | Power supply pin for JTAG Test Access Port.                                                                                                                                                                                                                                                                                                                  |
| <b>Configuration Pads (Used During sysCONFIG)</b> |     |                                                                                                                                                                                                                                                                                                                                                              |
| CFG[2:0]                                          | I   | Mode pins used to specify configuration mode values latched on rising edge of INITN. During configuration, a pull-up is enabled. These are dedicated pins.                                                                                                                                                                                                   |
| INITN                                             | I/O | Open Drain pin. Indicates the FPGA is ready to be configured. During configuration, a pull-up is enabled. It is a dedicated pin.                                                                                                                                                                                                                             |
| PROGRAMN                                          | I   | Initiates configuration sequence when asserted low. This pin always has an active pull-up. This is a dedicated pin.                                                                                                                                                                                                                                          |
| DONE                                              | I/O | Open Drain pin. Indicates that the configuration sequence is complete, and the startup sequence is in progress. This is a dedicated pin.                                                                                                                                                                                                                     |
| CCLK                                              | I/O | Configuration Clock for configuring an FPGA in sysCONFIG mode.                                                                                                                                                                                                                                                                                               |
| BUSY/SISPI                                        | I/O | Read control command in SPI or SPI <sub>m</sub> mode.                                                                                                                                                                                                                                                                                                        |
| CSN                                               | I   | sysCONFIG chip select (active low). During configuration, a pull-up is enabled.                                                                                                                                                                                                                                                                              |
| CS1N                                              | I   | sysCONFIG chip select (active low). During configuration, a pull-up is enabled.                                                                                                                                                                                                                                                                              |
| WRITEN                                            | I   | Write Data on Parallel port (active low).                                                                                                                                                                                                                                                                                                                    |
| D[0]/SPIFASTN                                     | I/O | sysCONFIG Port Data I/O for Parallel mode.<br>sysCONFIG Port Data I/O for SPI or SPI <sub>m</sub> . When using the SPI or SPI <sub>m</sub> mode, this pin should either be tied high or low, must not be left floating.                                                                                                                                      |
| D[1:6]                                            | I/O | sysCONFIG Port Data I/O for Parallel                                                                                                                                                                                                                                                                                                                         |
| D[7]/SPID0                                        | I/O | sysCONFIG Port Data I/O for Parallel, SPI, SPI <sub>m</sub>                                                                                                                                                                                                                                                                                                  |
| DOUT/CSN                                          | O   | Output for serial configuration data (rising edge of CCLK) when using sysCONFIG port.                                                                                                                                                                                                                                                                        |
| DI/CSSPI0N                                        | I/O | Input for serial configuration data (clocked with CCLK) when using sysCONFIG port. During configuration, a pull-up is enabled. Output when used in SPI/SPI <sub>m</sub> modes.                                                                                                                                                                               |
| <b>Dedicated SERDES Signals<sup>1, 2, 3</sup></b> |     |                                                                                                                                                                                                                                                                                                                                                              |
| [LOC]_SQ_VCCAUX33                                 | —   | Termination resistor switching power (3.3V). This pin must be tied to 3.3V even if the quad is unused.                                                                                                                                                                                                                                                       |
| [LOC]_SQ_REFCLKN                                  | I   | Negative Reference Clock Input                                                                                                                                                                                                                                                                                                                               |
| [LOC]_SQ_REFCLKP                                  | I   | Positive Reference Clock Input                                                                                                                                                                                                                                                                                                                               |
| [LOC]_SQ_VCCP                                     | —   | PLL and Reference clock buffer power (1.2V). This pin must be tied to 1.2V even if the quad is unused.                                                                                                                                                                                                                                                       |

**LFE2-6E/SE and LFE2-12E/SE Logic Signal Connections: 256 fpBGA (Cont.)**

| LFE2-6E/SE  |                   |      |                    |              | LFE2-12E/SE       |      |                    |              |
|-------------|-------------------|------|--------------------|--------------|-------------------|------|--------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function      | Differential | Ball/Pad Function | Bank | Dual Function      | Differential |
| N14         | CFG1              | 8    |                    |              | CFG1              | 8    |                    |              |
| N13         | PROGRAMN          | 8    |                    |              | PROGRAMN          | 8    |                    |              |
| N15         | CFG0              | 8    |                    |              | CFG0              | 8    |                    |              |
| P15         | PR30B             | 8    | WRITEN             | C            | PR30B             | 8    | WRITEN             | C            |
| L12         | INITN             | 8    |                    |              | INITN             | 8    |                    |              |
| N16         | PR29B             | 8    | CSN                | C            | PR29B             | 8    | CSN                | C            |
| GND         | GNDIO8            | -    |                    |              | GNDIO8            | -    |                    |              |
| R14         | CCLK              | 8    |                    |              | CCLK              | 8    |                    |              |
| P14         | PR30A             | 8    | CS1N               | T            | PR30A             | 8    | CS1N               | T            |
| M13         | DONE              | 8    |                    |              | DONE              | 8    |                    |              |
| R16         | PR28B             | 8    | D1                 | C            | PR28B             | 8    | D1                 | C            |
| VCCIO       | VCCIO8            | 8    |                    |              | VCCIO8            | 8    |                    |              |
| M16         | PR29A             | 8    | D0/SPIFASTN        | T            | PR29A             | 8    | D0/SPIFASTN        | T            |
| P16         | PR28A             | 8    | D2                 | T            | PR28A             | 8    | D2                 | T            |
| L15         | PR27B             | 8    | D3                 | C            | PR27B             | 8    | D3                 | C            |
| GND         | GNDIO8            | -    |                    |              | GNDIO8            | -    |                    |              |
| L14         | PR26A             | 8    | D6                 | T            | PR26A             | 8    | D6                 | T            |
| L16         | PR27A             | 8    | D4                 | T            | PR27A             | 8    | D4                 | T            |
| L10         | PR25B             | 8    | D7/SPID0           | C            | PR25B             | 8    | D7/SPID0           | C            |
| L13         | PR26B             | 8    | D5                 | C            | PR26B             | 8    | D5                 | C            |
| VCCIO       | VCCIO8            | 8    |                    |              | VCCIO8            | 8    |                    |              |
| K11         | PR25A             | 8    | DI/CSSPI0N         | T            | PR25A             | 8    | DI/CSSPI0N         | T            |
| K14         | PR24B             | 8    | DOU/CSON           | C            | PR24B             | 8    | DOU/CSON           | C            |
| K13         | PR24A             | 8    | BUSY/SISPI         | T            | PR24A             | 8    | BUSY/SISPI         | T            |
| GND         | GNDIO8            | -    |                    |              | GNDIO8            | -    |                    |              |
| K15         | PR21B             | 3    | RLM0_GPLL_C_FB_A   | C            | PR21B             | 3    | RLM0_GPLL_C_FB_A   | C            |
| VCCIO       | VCCIO3            | 3    |                    |              | VCCIO3            | 3    |                    |              |
| K16         | PR21A             | 3    | RLM0_GPLL_T_FB_A   | T            | PR21A             | 3    | RLM0_GPLL_T_FB_A   | T            |
| GND         | GNDIO3            | -    |                    |              | GNDIO3            | -    |                    |              |
| J16         | PR20B             | 3    | RLM0_GPLL_C_IN_A** | C (LVDS)*    | PR20B             | 3    | RLM0_GPLL_C_IN_A** | C (LVDS)*    |
| J15         | PR20A             | 3    | RLM0_GPLL_T_IN_A** | T (LVDS)*    | PR20A             | 3    | RLM0_GPLL_T_IN_A** | T (LVDS)*    |
| J14         | RLM0_PLLCAP       | 3    |                    |              | RLM0_PLLCAP       | 3    |                    |              |
| J13         | PR18B             | 3    | RLM0_GDLL_C_FB_A   | C            | PR18B             | 3    | RLM0_GDLL_C_FB_A   | C            |
| J12         | PR18A             | 3    | RLM0_GDLL_T_FB_A   | T            | PR18A             | 3    | RLM0_GDLL_T_FB_A   | T            |
| H12         | PR17B             | 3    | RLM0_GDLL_C_IN_A** | C (LVDS)*    | PR17B             | 3    | RLM0_GDLL_C_IN_A** | C (LVDS)*    |
| GND         | GNDIO3            | -    |                    |              | GNDIO3            | -    |                    |              |
| H13         | PR17A             | 3    | RLM0_GDLL_T_IN_A** | T (LVDS)*    | PR17A             | 3    | RLM0_GDLL_T_IN_A** | T (LVDS)*    |
| H15         | PR16B             | 3    | VREF2_3            | C            | PR16B             | 3    | VREF2_3            | C            |
| VCCIO       | VCCIO3            | 3    |                    |              | VCCIO3            | 3    |                    |              |
| H16         | PR16A             | 3    | VREF1_3            | T            | PR16A             | 3    | VREF1_3            | T            |
| H11         | PR15B             | 3    | PCLKC3_0           | C (LVDS)*    | PR15B             | 3    | PCLKC3_0           | C (LVDS)*    |
| J11         | PR15A             | 3    | PCLKT3_0           | T (LVDS)*    | PR15A             | 3    | PCLKT3_0           | T (LVDS)*    |
| G16         | PR13B             | 2    | PCLKC2_0/RDQ10     | C            | PR13B             | 2    | PCLKC2_0/RDQ10     | C            |
| GND         | GNDIO2            | -    |                    |              | GNDIO2            | -    |                    |              |
| G15         | PR13A             | 2    | PCLKT2_0/RDQ10     | T            | PR13A             | 2    | PCLKT2_0/RDQ10     | T            |

**LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA**  
**(Cont.)**

| LFE2-12E/12SE |                   |      |               |              | LFE2-20E/20SE     |      |               |              |  |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| F19           | PR5A              | 2    |               | T            | PR7A              | 2    | RDQ8          | T            |  |
| D20           | PR4A              | 2    |               | T (LVDS)*    | PR6A              | 2    | RDQ8          | T (LVDS)*    |  |
| F18           | PR3B              | 2    |               | C            | PR5B              | 2    | RDQ8          | C            |  |
| VCCIO         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| C21           | NC                | -    |               |              | PR4B              | 2    | RDQ8          | C (LVDS)*    |  |
| F16           | PR3A              | 2    |               | T            | PR5A              | 2    | RDQ8          | T            |  |
| C22           | NC                | -    |               |              | PR4A              | 2    | RDQ8          | T (LVDS)*    |  |
| -             | -                 | -    |               |              | GNDIO             | -    |               |              |  |
| D19           | PR2B              | 2    | VREF2_2       | C (LVDS)*    | PR2B              | 2    | VREF2_2       | C (LVDS)*    |  |
| E19           | PR2A              | 2    | VREF1_2       | T (LVDS)*    | PR2A              | 2    | VREF1_2       | T (LVDS)*    |  |
| B21           | PT55B             | 1    | VREF2_1       | C            | PT64B             | 1    | VREF2_1       | C            |  |
| B22           | PT55A             | 1    | VREF1_1       | T            | PT64A             | 1    | VREF1_1       | T            |  |
| GNDIO         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |  |
| D18           | PT53B             | 1    |               | C            | PT62B             | 1    |               | C            |  |
| C20           | PT54B             | 1    |               | C            | PT63B             | 1    |               | C            |  |
| E18           | PT53A             | 1    |               | T            | PT62A             | 1    |               | T            |  |
| C19           | PT54A             | 1    |               | T            | PT63A             | 1    |               | T            |  |
| VCCIO         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| D17           | PT51B             | 1    |               | C            | PT60B             | 1    |               | C            |  |
| B20           | PT52B             | 1    |               | C            | PT61B             | 1    |               | C            |  |
| C18           | PT51A             | 1    |               | T            | PT60A             | 1    |               | T            |  |
| A19           | PT52A             | 1    |               | T            | PT61A             | 1    |               | T            |  |
| GNDIO         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |  |
| A18           | PT49B             | 1    |               | C            | PT58B             | 1    |               | C            |  |
| A21           | PT50B             | 1    |               | C            | PT59B             | 1    |               | C            |  |
| B18           | PT49A             | 1    |               | T            | PT58A             | 1    |               | T            |  |
| A20           | PT50A             | 1    |               | T            | PT59A             | 1    |               | T            |  |
| VCCIO         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| D16           | PT47B             | 1    |               | C            | PT56B             | 1    |               | C            |  |
| G16           | PT48B             | 1    |               | C            | PT57B             | 1    |               | C            |  |
| E16           | PT47A             | 1    |               | T            | PT56A             | 1    |               | T            |  |
| G15           | PT48A             | 1    |               | T            | PT57A             | 1    |               | T            |  |
| C17           | PT46B             | 1    |               | C            | PT55B             | 1    |               | C            |  |
| GNDIO         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |  |
| C16           | PT46A             | 1    |               | T            | PT55A             | 1    |               | T            |  |
| A17           | PT44B             | 1    |               | C            | PT53B             | 1    |               | C            |  |
| B17           | PT45B             | 1    |               | C            | PT54B             | 1    |               | C            |  |
| A16           | PT44A             | 1    |               | T            | PT53A             | 1    |               | T            |  |
| VCCIO         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| B16           | PT45A             | 1    |               | T            | PT54A             | 1    |               | T            |  |
| E15           | PT42B             | 1    |               | C            | PT51B             | 1    |               | C            |  |
| C15           | PT43B             | 1    |               | C            | PT52B             | 1    |               | C            |  |
| F15           | PT42A             | 1    |               | T            | PT51A             | 1    |               | T            |  |
| D15           | PT43A             | 1    |               | T            | PT52A             | 1    |               | T            |  |

## LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2-12E/12SE |                   |      |               |              | LFE2-20E/20SE     |      |               |              |  |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| C2            | PT3A              | 0    |               | T            | PT3A              | 0    |               | T            |  |
| J10           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| J11           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| J12           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| J13           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| K14           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| K9            | VCC               | -    |               |              | VCC               | -    |               |              |  |
| L14           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| L9            | VCC               | -    |               |              | VCC               | -    |               |              |  |
| M14           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| M9            | VCC               | -    |               |              | VCC               | -    |               |              |  |
| N14           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| N9            | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P10           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P11           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P12           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| P13           | VCC               | -    |               |              | VCC               | -    |               |              |  |
| G10           | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| G9            | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| H9            | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| H8            | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |  |
| G11           | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| G12           | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| G13           | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| G14           | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |  |
| H14           | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| H15           | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| J15           | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| K16           | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |  |
| L16           | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| M16           | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| N16           | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| P16           | VCCIO3            | 3    |               |              | VCCIO3            | 3    |               |              |  |
| R14           | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| T12           | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| T13           | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| T14           | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |  |
| R9            | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| T10           | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| T11           | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| T9            | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |  |
| N7            | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| P7            | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| P8            | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |

**LFE2-70E/SE Logic Signal Connections: 900 fpBGA**

| LFE2-70E/SE |                   |      |                       |              |
|-------------|-------------------|------|-----------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function         | Differential |
| VCCIO       | VCCIO7            | 7    |                       |              |
| F4          | PL2A              | 7    | VREF2_7               | T (LVDS)*    |
| F3          | PL2B              | 7    | VREF1_7               | C (LVDS)*    |
| H4          | PL3A              | 7    |                       | T            |
| G5          | PL3B              | 7    |                       | C            |
| GND         | GNDIO7            | -    |                       |              |
| D2          | PL4A              | 7    |                       | T (LVDS)*    |
| D1          | PL4B              | 7    |                       | C (LVDS)*    |
| E2          | PL5A              | 7    |                       | T            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| E1          | PL5B              | 7    |                       | C            |
| GND         | GNDIO7            | -    |                       |              |
| VCCIO       | VCCIO7            | 7    |                       |              |
| F1          | PL14A             | 7    | LUM1_SPLLT_IN_A/LDQ12 | T (LVDS)*    |
| F2          | PL14B             | 7    | LUM1_SPLLC_IN_A/LDQ12 | C (LVDS)*    |
| G1          | PL15A             | 7    | LUM1_SPLLT_FB_A/LDQ12 | T            |
| G2          | PL15B             | 7    | LUM1_SPLLC_FB_A/LDQ12 | C            |
| GND         | GNDIO7            | -    |                       |              |
| H8          | PL18A             | 7    | LDQ21                 | T            |
| H6          | PL18B             | 7    | LDQ21                 | C            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| G4          | PL19A             | 7    | LDQ21                 | T (LVDS)*    |
| G3          | PL19B             | 7    | LDQ21                 | C (LVDS)*    |
| H7          | PL20A             | 7    | LDQ21                 | T            |
| H5          | PL20B             | 7    | LDQ21                 | C            |
| GND         | GNDIO7            | -    |                       |              |
| H2          | PL21A             | 7    | LDQS21                | T (LVDS)*    |
| H1          | PL21B             | 7    | LDQ21                 | C (LVDS)*    |
| J6          | PL22A             | 7    | LDQ21                 | T            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| J8          | PL22B             | 7    | LDQ21                 | C            |
| J2          | PL23A             | 7    | LDQ21                 | T (LVDS)*    |
| J1          | PL23B             | 7    | LDQ21                 | C (LVDS)*    |
| J5          | PL24A             | 7    | LDQ21                 | T            |
| GND         | GNDIO7            | -    |                       |              |
| J7          | PL24B             | 7    | LDQ21                 | C            |
| J4          | PL25A             | 7    | LDQ29                 | T (LVDS)*    |
| J3          | PL25B             | 7    | LDQ29                 | C (LVDS)*    |
| K6          | PL26A             | 7    | LDQ29                 | T            |
| K8          | PL26B             | 7    | LDQ29                 | C            |
| VCCIO       | VCCIO7            | 7    |                       |              |
| K2          | PL27A             | 7    | LDQ29                 | T (LVDS)*    |

**LFE2-70E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2-70E/SE |                   |      |                       |              |
|-------------|-------------------|------|-----------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function         | Differential |
| P25         | PR51B             | 2    | RDQ54                 | C            |
| VCCIO       | VCCIO2            | 2    |                       |              |
| P23         | PR51A             | 2    | RDQ54                 | T            |
| P27         | PR50B             | 2    | RDQ54                 | C (LVDS)*    |
| P28         | PR50A             | 2    | RDQ54                 | T (LVDS)*    |
| GND         | GNDIO2            | -    |                       |              |
| VCCIO       | VCCIO2            | 2    |                       |              |
| N24         | PR39B             | 2    | RUM0_SPLLC_FB_A/RDQ37 | C            |
| N26         | PR39A             | 2    | RUM0_SPLLT_FB_A/RDQ37 | T            |
| N23         | PR38B             | 2    | RUM0_SPLLC_IN_A/RDQ37 | C            |
| N25         | PR38A             | 2    | RUM0_SPLLT_IN_A/RDQ37 | T            |
| VCCIO       | VCCIO2            | 2    |                       |              |
| P29         | PR37B             | 2    | RDQ37                 | C (LVDS)*    |
| P30         | PR37A             | 2    | RDQS37                | T (LVDS)*    |
| M26         | PR36B             | 2    | RDQ37                 | C            |
| GND         | GNDIO2            | -    |                       |              |
| M24         | PR36A             | 2    | RDQ37                 | T            |
| N29         | PR35B             | 2    | RDQ37                 | C (LVDS)*    |
| N30         | PR35A             | 2    | RDQ37                 | T (LVDS)*    |
| M25         | PR34B             | 2    | RDQ37                 | C            |
| VCCIO       | VCCIO2            | 2    |                       |              |
| M23         | PR34A             | 2    | RDQ37                 | T            |
| M27         | PR33B             | 2    | RDQ37                 | C (LVDS)*    |
| M28         | PR33A             | 2    | RDQ37                 | T (LVDS)*    |
| L26         | PR32B             | 2    | RDQ29                 | C            |
| GND         | GNDIO2            | -    |                       |              |
| L24         | PR32A             | 2    | RDQ29                 | T            |
| M29         | PR31B             | 2    | RDQ29                 | C (LVDS)*    |
| M30         | PR31A             | 2    | RDQ29                 | T (LVDS)*    |
| L25         | PR30B             | 2    | RDQ29                 | C            |
| VCCIO       | VCCIO2            | 2    |                       |              |
| L23         | PR30A             | 2    | RDQ29                 | T            |
| L27         | PR29B             | 2    | RDQ29                 | C (LVDS)*    |
| L28         | PR29A             | 2    | RDQS29                | T (LVDS)*    |
| GND         | GNDIO2            | -    |                       |              |
| K24         | PR28B             | 2    | RDQ29                 | C            |
| K26         | PR28A             | 2    | RDQ29                 | T            |
| L29         | PR27B             | 2    | RDQ29                 | C (LVDS)*    |
| L30         | PR27A             | 2    | RDQ29                 | T (LVDS)*    |
| VCCIO       | VCCIO2            | 2    |                       |              |
| K23         | PR26B             | 2    | RDQ29                 | C            |
| K25         | PR26A             | 2    | RDQ29                 | T            |
| K27         | PR25B             | 2    | RDQ29                 | C (LVDS)*    |

**LFE2M50E/SE Logic Signal Connections: 484 fpBGA (Cont.)**

| LFE2M50E/SE |                   |      |                   |              |
|-------------|-------------------|------|-------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function     | Differential |
| GNDIO       | GNDIO7            | -    |                   |              |
| L1          | PL36A             | 7    | LDQS36            | T (LVDS)*    |
| L2          | PL36B             | 7    | LDQ36             | C (LVDS)*    |
| M7          | PL37A             | 7    | LDQ36             | T            |
| VCCIO       | VCCIO7            | 7    |                   |              |
| L5          | PL37B             | 7    | LDQ36             | C            |
| L3          | PL38A             | 7    | LDQ36             | T (LVDS)*    |
| L4          | PL38B             | 7    | LDQ36             | C (LVDS)*    |
| M1          | PL39A             | 7    | PCLKT7_0/LDQ36    | T            |
| GNDIO       | GNDIO7            | -    |                   |              |
| M2          | PL39B             | 7    | PCLKC7_0/LDQ36    | C            |
| M6          | PL41A             | 6    | PCLKT6_0          | T (LVDS)*    |
| M5          | PL41B             | 6    | PCLKC6_0          | C (LVDS)*    |
| M3          | PL42A             | 6    | VREF2_6           | T            |
| M4          | PL42B             | 6    | VREF1_6           | C            |
| VCCIO       | VCCIO6            | 6    |                   |              |
| N7          | PL45A             | 6    | LLM3_SPLLT_IN_A   | T (LVDS)*    |
| GNDIO       | GNDIO6            | -    |                   |              |
| N6          | PL45B             | 6    | LLM3_SPLLC_IN_A   | C (LVDS)*    |
| N1          | PL46A             | 6    | LLM3_SPLLT_FB_A   | T            |
| N2          | PL46B             | 6    | LLM3_SPLLC_FB_A   | C            |
| VCCIO       | VCCIO6            | 6    |                   |              |
| GNDIO       | GNDIO6            | -    |                   |              |
| P6          | PL52A             | 6    | LDQS52****        | T (LVDS)*    |
| N5          | PL52B             | 6    | LDQ52             | C (LVDS)*    |
| P1          | PL53A             | 6    | LDQ52             | T            |
| VCCIO       | VCCIO6            | 6    |                   |              |
| P2          | PL53B             | 6    | LDQ52             | C            |
| P3          | PL54A             | 6    | LDQ52             | T (LVDS)*    |
| P4          | PL54B             | 6    | LDQ52             | C (LVDS)*    |
| P5          | PL55A             | 6    | LDQ52             | T            |
| GNDIO       | GNDIO6            | -    |                   |              |
| P7          | PL55B             | 6    | LDQ52             | C            |
| VCCIO       | VCCIO6            | 6    |                   |              |
| GNDIO       | GNDIO6            | -    |                   |              |
| R1          | PL62A             | 6    | LLM0_GPLLT_IN_A** | T (LVDS)*    |
| GNDIO       | GNDIO6            | -    |                   |              |
| R2          | PL62B             | 6    | LLM0_GPLLC_IN_A** | C (LVDS)*    |
| R3          | PL63A             | 6    | LLM0_GPLLT_FB_A   | T            |
| R4          | PL63B             | 6    | LLM0_GPLLC_FB_A   | C            |
| VCCIO       | VCCIO6            | 6    |                   |              |
| R6          | PL64A             | 6    | LLM0_GDLLT_IN_A** | T (LVDS)*    |
| R5          | PL64B             | 6    | LLM0_GDLLC_IN_A** | C (LVDS)*    |

## LFE2M35E/SE and LFE2M50E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2M35E/SE |                   |      |               |              | LFE2M50E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| D23         | NC                | -    |               |              | NC                | -    |               |              |
| D24         | NC                | -    |               |              | NC                | -    |               |              |
| D25         | NC                | -    |               |              | NC                | -    |               |              |
| D26         | NC                | -    |               |              | NC                | -    |               |              |
| E20         | NC                | -    |               |              | NC                | -    |               |              |
| E21         | NC                | -    |               |              | NC                | -    |               |              |
| E25         | NC                | -    |               |              | NC                | -    |               |              |
| E26         | NC                | -    |               |              | NC                | -    |               |              |
| F20         | NC                | -    |               |              | NC                | -    |               |              |
| G20         | NC                | -    |               |              | NC                | -    |               |              |
| K10         | NC                | -    |               |              | NC                | -    |               |              |
| K17         | NC                | -    |               |              | NC                | -    |               |              |
| R4          | NC                | -    |               |              | NC                | -    |               |              |
| U10         | NC                | -    |               |              | NC                | -    |               |              |
| U23         | NC                | -    |               |              | NC                | -    |               |              |
| V10         | NC                | -    |               |              | NC                | -    |               |              |
| W7          | NC                | -    |               |              | NC                | -    |               |              |
| AB21        | PB69B             | 4    | BDQ69         | C            | NC                | -    |               |              |
| AC20        | PB58A             | 4    | BDQ60         | T            | NC                | -    |               |              |
| AC21        | PB63A             | 4    | BDQ60         | T            | NC                | -    |               |              |
| AC22        | PB69A             | 4    | BDQS69****    | T            | NC                | -    |               |              |
| AC23        | PB71A             | 4    | BDQ69         | T            | NC                | -    |               |              |
| AC25        | PB71B             | 4    | BDQ69         | C            | NC                | -    |               |              |
| AD26        | PB70B             | 4    | BDQ69         | C            | NC                | -    |               |              |
| W20         | PB72B             | 4    | BDQ69         | C            | NC                | -    |               |              |
| H7          | L_VCCPLL          | -    |               |              | L_VCCPLL          | -    |               |              |
| K6          | L_VCCPLL          | -    |               |              | L_VCCPLL          | -    |               |              |
| P7          | L_VCCPLL          | -    |               |              | L_VCCPLL          | -    |               |              |
| R8          | L_VCCPLL          | -    |               |              | L_VCCPLL          | -    |               |              |
| V18         | R_VCCPLL          | -    |               |              | R_VCCPLL          | -    |               |              |
| P20         | R_VCCPLL          | -    |               |              | R_VCCPLL          | -    |               |              |
| J17         | R_VCCPLL          | -    |               |              | R_VCCPLL          | -    |               |              |
| G19         | R_VCCPLL          | -    |               |              | R_VCCPLL          | -    |               |              |

\* Supports true LVDS. Other differential signals must be emulated with external resistors.

\*\* These dedicated input pins can be used for GPLLs or GDLLs within the respective quadrant.

\*\*\* For density migration, board design must take into account that these sysCONFIG pins are dual function for the lower density devices (ECP2M20 and ECP2M35). They can be either sysCONFIG pins or general purpose I/Os. These pins are dedicated pins for the higher density devices (ECP2M50, ECP2M70 and ECP2M100).

\*\*\*\*Due to packaging bond out option, this DQS does not have all the necessary DQ pins bonded out for a full 8-bit data width.

Note: VCCIO and GND pads are used to determine the average DC current drawn by I/Os between GND/VCCIO connections, or between the last GND/VCCIO in an I/O bank and the end of an I/O bank. The substrate pads listed in the Pin Table do not necessarily have a one to one connection with a package ball or pin.

**LFE2M100E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2M100E/SE |                   |      |               |              |
|--------------|-------------------|------|---------------|--------------|
| Ball Number  | Ball/Pad Function | Bank | Dual Function | Differential |
| H14          | PT61A             | 0    |               | T            |
| A14          | PT60B             | 0    |               | C            |
| B14          | PT60A             | 0    |               | T            |
| D13          | PT59B             | 0    |               | C            |
| GNDIO        | GNDIO0            | -    |               |              |
| F13          | PT59A             | 0    |               | T            |
| G13          | PT58B             | 0    |               | C            |
| VCCIO        | VCCIO0            | 0    |               |              |
| J11          | PT58A             | 0    |               | T            |
| D4           | PT57B             | 0    |               |              |
| D5           | PT56A             | 0    |               |              |
| E5           | PT55B             | 0    |               | C            |
| F6           | PT55A             | 0    |               | T            |
| GNDIO        | GNDIO0            | -    |               |              |
| VCCIO        | VCCIO0            | 0    |               |              |
| F7           | PT52B             | 0    |               | C            |
| D8           | PT52A             | 0    |               | T            |
| GNDIO        | GNDIO0            | -    |               |              |
| J13          | PT50B             | 0    |               | C            |
| G11          | PT50A             | 0    |               | T            |
| H13          | PT49B             | 0    |               | C            |
| H12          | PT49A             | 0    |               | T            |
| VCCIO        | VCCIO0            | 0    |               |              |
| E8           | PT48B             | 0    |               | C            |
| D9           | PT48A             | 0    |               | T            |
| D12          | PT46B             | 0    |               | C            |
| GNDIO        | GNDIO0            | -    |               |              |
| E13          | PT46A             | 0    |               | T            |
| VCCIO        | VCCIO0            | 0    |               |              |
| GNDIO        | GNDIO0            | -    |               |              |
| J12          | PT31B             | 0    |               | C            |
| -            | -                 | -    |               |              |
| VCCIO        | VCCIO0            | 0    |               |              |
| H10          | PT31A             | 0    |               | T            |
| E12          | PT30B             | 0    |               | C            |
| D11          | PT30A             | 0    |               | T            |
| H11          | PT29B             | 0    |               | C            |
| F11          | PT29A             | 0    |               | T            |
| C13          | ULC_SQ_VCCR0      | 11   |               |              |
| A12          | ULC_SQ_HDINP0     | 11   |               | T            |
| B13          | ULC_SQ_VCCIB0     | 11   |               |              |
| B12          | ULC_SQ_HDINN0     | 11   |               | C            |
| C10          | ULC_SQ_VCCTX0     | 11   |               |              |

**LFE2M100E/SE Logic Signal Connections: 900 fpBGA (Cont.)**

| LFE2M100E/SE |                   |      |               |              |
|--------------|-------------------|------|---------------|--------------|
| Ball Number  | Ball/Pad Function | Bank | Dual Function | Differential |
| AE23         | NC                | -    |               |              |
| AE5          | NC                | -    |               |              |
| AE6          | NC                | -    |               |              |
| AE7          | NC                | -    |               |              |
| AF20         | NC                | -    |               |              |
| AF23         | NC                | -    |               |              |
| AF5          | NC                | -    |               |              |
| AG23         | NC                | -    |               |              |
| AG26         | NC                | -    |               |              |
| D10          | NC                | -    |               |              |
| E10          | NC                | -    |               |              |
| E11          | NC                | -    |               |              |
| F10          | NC                | -    |               |              |
| F20          | NC                | -    |               |              |
| F23          | NC                | -    |               |              |
| F8           | NC                | -    |               |              |
| G10          | NC                | -    |               |              |
| G20          | NC                | -    |               |              |
| G21          | NC                | -    |               |              |
| G7           | NC                | -    |               |              |
| G8           | NC                | -    |               |              |
| G9           | NC                | -    |               |              |
| H19          | NC                | -    |               |              |
| H20          | NC                | -    |               |              |
| H21          | NC                | -    |               |              |
| H22          | NC                | -    |               |              |
| H6           | NC                | -    |               |              |
| H8           | NC                | -    |               |              |
| H9           | NC                | -    |               |              |
| J10          | NC                | -    |               |              |
| J20          | NC                | -    |               |              |
| J21          | NC                | -    |               |              |
| J9           | NC                | -    |               |              |
| K9           | NC                | -    |               |              |
| R9           | NC                | -    |               |              |
| U22          | NC                | -    |               |              |
| W9           | NC                | -    |               |              |
| N13          | VCCPLL            | -    |               |              |
| N18          | VCCPLL            | -    |               |              |
| V13          | VCCPLL            | -    |               |              |

## LFE2M70E/SE and LFE2M100E/SE Logic Signal Connections: 1152 fpBGA (Cont.)

| LFE2M70E/SE |                   |      |               | LFE2M100E/SE |                   |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| AE12        | NC                | -    |               |              | NC                | -    |               |              |
| AE13        | NC                | -    |               |              | NC                | -    |               |              |
| AE19        | NC                | -    |               |              | NC                | -    |               |              |
| AE21        | NC                | -    |               |              | NC                | -    |               |              |
| AE22        | NC                | -    |               |              | NC                | -    |               |              |
| AE23        | NC                | -    |               |              | NC                | -    |               |              |
| AF11        | NC                | -    |               |              | NC                | -    |               |              |
| AF21        | NC                | -    |               |              | NC                | -    |               |              |
| AF22        | NC                | -    |               |              | NC                | -    |               |              |
| AF24        | NC                | -    |               |              | NC                | -    |               |              |
| AF8         | NC                | -    |               |              | NC                | -    |               |              |
| AF9         | NC                | -    |               |              | NC                | -    |               |              |
| AG10        | NC                | -    |               |              | NC                | -    |               |              |
| AG11        | NC                | -    |               |              | NC                | -    |               |              |
| AG24        | NC                | -    |               |              | NC                | -    |               |              |
| AG25        | NC                | -    |               |              | NC                | -    |               |              |
| AG26        | NC                | -    |               |              | NC                | -    |               |              |
| AG3         | NC                | -    |               |              | NC                | -    |               |              |
| AG7         | NC                | -    |               |              | NC                | -    |               |              |
| AG8         | NC                | -    |               |              | NC                | -    |               |              |
| AG9         | NC                | -    |               |              | NC                | -    |               |              |
| AH10        | NC                | -    |               |              | NC                | -    |               |              |
| AH11        | NC                | -    |               |              | NC                | -    |               |              |
| AH13        | NC                | -    |               |              | NC                | -    |               |              |
| AH24        | NC                | -    |               |              | NC                | -    |               |              |
| AH25        | NC                | -    |               |              | NC                | -    |               |              |
| AH26        | NC                | -    |               |              | NC                | -    |               |              |
| AH27        | NC                | -    |               |              | NC                | -    |               |              |
| AH5         | NC                | -    |               |              | NC                | -    |               |              |
| AH6         | NC                | -    |               |              | NC                | -    |               |              |
| AH7         | NC                | -    |               |              | NC                | -    |               |              |
| AH8         | NC                | -    |               |              | NC                | -    |               |              |
| AH9         | NC                | -    |               |              | NC                | -    |               |              |
| AJ10        | NC                | -    |               |              | NC                | -    |               |              |
| AJ11        | NC                | -    |               |              | NC                | -    |               |              |
| AJ13        | NC                | -    |               |              | NC                | -    |               |              |
| AJ24        | NC                | -    |               |              | NC                | -    |               |              |
| AJ25        | NC                | -    |               |              | NC                | -    |               |              |
| AJ26        | NC                | -    |               |              | NC                | -    |               |              |
| AJ27        | NC                | -    |               |              | NC                | -    |               |              |
| AJ3         | NC                | -    |               |              | NC                | -    |               |              |
| AJ4         | NC                | -    |               |              | NC                | -    |               |              |
| AJ5         | NC                | -    |               |              | NC                | -    |               |              |
| AJ6         | NC                | -    |               |              | NC                | -    |               |              |
| AJ7         | NC                | -    |               |              | NC                | -    |               |              |
| AJ8         | NC                | -    |               |              | NC                | -    |               |              |
| AJ9         | NC                | -    |               |              | NC                | -    |               |              |
| AK10        | NC                | -    |               |              | NC                | -    |               |              |
| AK11        | NC                | -    |               |              | NC                | -    |               |              |

**LatticeECP2 Standard Series Devices, Conventional Packaging**
**Commercial**

| Part Number    | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-6E-5T144C | 90   | 1.2V    | -5    | TQFP    | 144  | COM   | 6        |
| LFE2-6E-6T144C | 90   | 1.2V    | -6    | TQFP    | 144  | COM   | 6        |
| LFE2-6E-7T144C | 90   | 1.2V    | -7    | TQFP    | 144  | COM   | 6        |
| LFE2-6E-5F256C | 190  | 1.2V    | -5    | fpBGA   | 256  | COM   | 6        |
| LFE2-6E-6F256C | 190  | 1.2V    | -6    | fpBGA   | 256  | COM   | 6        |
| LFE2-6E-7F256C | 190  | 1.2V    | -7    | fpBGA   | 256  | COM   | 6        |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-12E-5T144C | 93   | 1.2V    | -5    | TQFP    | 144  | COM   | 12       |
| LFE2-12E-6T144C | 93   | 1.2V    | -6    | TQFP    | 144  | COM   | 12       |
| LFE2-12E-7T144C | 93   | 1.2V    | -7    | TQFP    | 144  | COM   | 12       |
| LFE2-12E-5Q208C | 131  | 1.2V    | -5    | PQFP    | 208  | COM   | 12       |
| LFE2-12E-6Q208C | 131  | 1.2V    | -6    | PQFP    | 208  | COM   | 12       |
| LFE2-12E-7Q208C | 131  | 1.2V    | -7    | PQFP    | 208  | COM   | 12       |
| LFE2-12E-5F256C | 193  | 1.2V    | -5    | fpBGA   | 256  | COM   | 12       |
| LFE2-12E-6F256C | 193  | 1.2V    | -6    | fpBGA   | 256  | COM   | 12       |
| LFE2-12E-7F256C | 193  | 1.2V    | -7    | fpBGA   | 256  | COM   | 12       |
| LFE2-12E-5F484C | 297  | 1.2V    | -5    | fpBGA   | 484  | COM   | 12       |
| LFE2-12E-6F484C | 297  | 1.2V    | -6    | fpBGA   | 484  | COM   | 12       |
| LFE2-12E-7F484C | 297  | 1.2V    | -7    | fpBGA   | 484  | COM   | 12       |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-20E-5Q208C | 131  | 1.2V    | -5    | PQFP    | 208  | COM   | 20       |
| LFE2-20E-6Q208C | 131  | 1.2V    | -6    | PQFP    | 208  | COM   | 20       |
| LFE2-20E-7Q208C | 131  | 1.2V    | -7    | PQFP    | 208  | COM   | 20       |
| LFE2-20E-5F256C | 193  | 1.2V    | -5    | fpBGA   | 256  | COM   | 20       |
| LFE2-20E-6F256C | 193  | 1.2V    | -6    | fpBGA   | 256  | COM   | 20       |
| LFE2-20E-7F256C | 193  | 1.2V    | -7    | fpBGA   | 256  | COM   | 20       |
| LFE2-20E-5F484C | 331  | 1.2V    | -5    | fpBGA   | 484  | COM   | 20       |
| LFE2-20E-6F484C | 331  | 1.2V    | -6    | fpBGA   | 484  | COM   | 20       |
| LFE2-20E-7F484C | 331  | 1.2V    | -7    | fpBGA   | 484  | COM   | 20       |
| LFE2-20E-5F672C | 402  | 1.2V    | -5    | fpBGA   | 672  | COM   | 20       |
| LFE2-20E-6F672C | 402  | 1.2V    | -6    | fpBGA   | 672  | COM   | 20       |
| LFE2-20E-7F672C | 402  | 1.2V    | -7    | fpBGA   | 672  | COM   | 20       |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-35E-5F484C | 331  | 1.2V    | -5    | fpBGA   | 484  | COM   | 35       |
| LFE2-35E-6F484C | 331  | 1.2V    | -6    | fpBGA   | 484  | COM   | 35       |
| LFE2-35E-7F484C | 331  | 1.2V    | -7    | fpBGA   | 484  | COM   | 35       |
| LFE2-35E-5F672C | 450  | 1.2V    | -5    | fpBGA   | 672  | COM   | 35       |
| LFE2-35E-6F672C | 450  | 1.2V    | -6    | fpBGA   | 672  | COM   | 35       |
| LFE2-35E-7F672C | 450  | 1.2V    | -7    | fpBGA   | 672  | COM   | 35       |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-50E-5F484C | 339  | 1.2V    | -5    | fpBGA   | 484  | COM   | 50       |
| LFE2-50E-6F484C | 339  | 1.2V    | -6    | fpBGA   | 484  | COM   | 50       |
| LFE2-50E-7F484C | 339  | 1.2V    | -7    | fpBGA   | 484  | COM   | 50       |
| LFE2-50E-5F672C | 500  | 1.2V    | -5    | fpBGA   | 672  | COM   | 50       |
| LFE2-50E-6F672C | 500  | 1.2V    | -6    | fpBGA   | 672  | COM   | 50       |
| LFE2-50E-7F672C | 500  | 1.2V    | -7    | fpBGA   | 672  | COM   | 50       |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-70E-5F672C | 500  | 1.2V    | -5    | fpBGA   | 672  | COM   | 70       |
| LFE2-70E-6F672C | 500  | 1.2V    | -6    | fpBGA   | 672  | COM   | 70       |
| LFE2-70E-7F672C | 500  | 1.2V    | -7    | fpBGA   | 672  | COM   | 70       |
| LFE2-70E-5F900C | 583  | 1.2V    | -5    | fpBGA   | 900  | COM   | 70       |
| LFE2-70E-6F900C | 583  | 1.2V    | -6    | fpBGA   | 900  | COM   | 70       |
| LFE2-70E-7F900C | 583  | 1.2V    | -7    | fpBGA   | 900  | COM   | 70       |

### Industrial

| Part Number    | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-6E-5T144I | 90   | 1.2V    | -5    | TQFP    | 144  | IND   | 6        |
| LFE2-6E-6T144I | 90   | 1.2V    | -6    | TQFP    | 144  | IND   | 6        |
| LFE2-6E-5F256I | 190  | 1.2V    | -5    | fpBGA   | 256  | IND   | 6        |
| LFE2-6E-6F256I | 190  | 1.2V    | -6    | fpBGA   | 256  | IND   | 6        |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|---------|------|-------|----------|
| LFE2-12E-5T144I | 93   | 1.2V    | -5    | TQFP    | 144  | IND   | 12       |
| LFE2-12E-6T144I | 93   | 1.2V    | -6    | TQFP    | 144  | IND   | 12       |
| LFE2-12E-5Q208I | 131  | 1.2V    | -5    | PQFP    | 208  | IND   | 12       |
| LFE2-12E-6Q208I | 131  | 1.2V    | -6    | PQFP    | 208  | IND   | 12       |
| LFE2-12E-5F256I | 193  | 1.2V    | -5    | fpBGA   | 256  | IND   | 12       |
| LFE2-12E-6F256I | 193  | 1.2V    | -6    | fpBGA   | 256  | IND   | 12       |
| LFE2-12E-5F484I | 297  | 1.2V    | -5    | fpBGA   | 484  | IND   | 12       |
| LFE2-12E-6F484I | 297  | 1.2V    | -6    | fpBGA   | 484  | IND   | 12       |

| Date                   | Version         | Section                          | Change Summary                                                                                                                                                                                                                                                                     |
|------------------------|-----------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| August 2007<br>(cont.) | 02.8<br>(cont.) | DC and Switching<br>(cont.)      | sysCLOCK GPLL timing has been updated.                                                                                                                                                                                                                                             |
|                        |                 | Pinout Information               | Added ECP2M50 (484/672/900-fpBGA), ECP2M70 (900-fpBGA) and ECP2M100 (900-fpBGA) pinout information.                                                                                                                                                                                |
|                        |                 | Ordering Information             | 1156-fpBGA package option has been removed from the LatticeECP2M family.                                                                                                                                                                                                           |
| September 2007         | 02.9            | Pinout Information               | Added Thermal Management text section.                                                                                                                                                                                                                                             |
| February 2008          | 03.0            | Architecture                     | Added LVC MOS33D description.                                                                                                                                                                                                                                                      |
|                        |                 | DC and Switching                 | LatticeECP2M Supply Current has been updated.                                                                                                                                                                                                                                      |
|                        |                 |                                  | Typical Building Block Function Performance, External Switching Characteristics, Internal Switching Characteristics, Family Timing Adders, sysCLOCK GPLL Timing, sysCLOCK SPLL Timing, DLL Timing and sysCONFIG Port Timing Specifications have been updated (timing rev. A 0.11). |
|                        |                 |                                  | Figure 3-9. Read/Write Mode (Normal) and Figure 3-10. Read/Write Mode with Input and Output Registers have been updated.                                                                                                                                                           |
|                        |                 |                                  | Table 3-8. Channel output Jitter (Max) has been updated.                                                                                                                                                                                                                           |
|                        |                 | Pinout Information               | Signal description has been updated.                                                                                                                                                                                                                                               |
|                        |                 |                                  | Added 1152-fpBGA pinouts for the ECP2M70 and ECP2M100.                                                                                                                                                                                                                             |
| April 2008             | 03.1            | Pinout Information               | Available DDR Interfaces per I/O Bank for the LFE2M35 (484/672-fpBGA) have been updated.                                                                                                                                                                                           |
| June 2008              | 03.2            | Introduction                     | Family Selection Guide table - Updated number of EBR SRAM Blocks for the ECP2-70 device.                                                                                                                                                                                           |
|                        |                 | Architecture                     | Removed Read-Before-Write sysMEM EBR mode.                                                                                                                                                                                                                                         |
|                        |                 |                                  | Clarification of the operation of the secondary clock regions.                                                                                                                                                                                                                     |
|                        |                 | DC and Switching Characteristics | Removed Read-Before-Write sysMEM EBR mode.                                                                                                                                                                                                                                         |
| August 2008            | 03.3            | Architecture                     | Clarification of the operation of the secondary clock regions.                                                                                                                                                                                                                     |
|                        |                 | Pinout Information               | Added information for [LOC]DQ[num] to Signal Descriptions table.                                                                                                                                                                                                                   |
| January 2009           | 03.4            | DC and Switching Characteristics | Updated typical and max. jitter numbers in Channel Output Jitter table for x10 mode.                                                                                                                                                                                               |
|                        |                 |                                  | Added Channel Output Jitter table for x20 mode.                                                                                                                                                                                                                                    |
| November 2009          | 03.5            | DC and Switching Characteristics | Updated SPI/SPI <sub>m</sub> Configuration Waveforms diagram.                                                                                                                                                                                                                      |
|                        |                 |                                  | Updated footnotes in LatticeECP2 Initialization Supply Current table.                                                                                                                                                                                                              |
|                        |                 |                                  | Updated footnotes in LatticeECP2M Initialization Supply Current table.                                                                                                                                                                                                             |
|                        |                 |                                  | Updated footnotes in SERDES High Speed Data Receiver (LatticeECP2M Family Only) table.                                                                                                                                                                                             |
|                        |                 |                                  | Updated max. value for t <sub>DINIT</sub> parameter in LatticeECP2/M sysCONFIG Port Timing Specifications table.                                                                                                                                                                   |
|                        |                 |                                  | Updated Serial Output Timing and Levels table.                                                                                                                                                                                                                                     |
|                        |                 |                                  | Updated Figure 3-5 MLVDS                                                                                                                                                                                                                                                           |
|                        |                 |                                  | Updated Table 3-7 Serial Output Timing and Levels                                                                                                                                                                                                                                  |
|                        |                 |                                  | Updated Table 3-15 Power Down/Power Up Specification                                                                                                                                                                                                                               |
|                        |                 | Pinout Information               | Signal Descriptions table - corrected references to ULM, URM, LRM (changed to LUM, RUM and RLM), added footnote 5.                                                                                                                                                                 |