


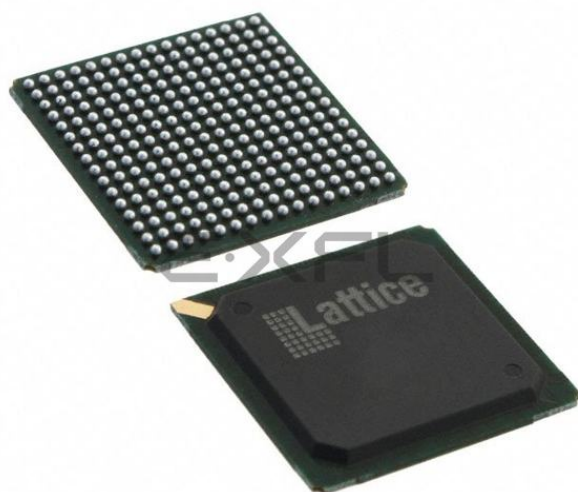

Welcome to [E-XFL.COM](#)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                            |
| Number of LABs/CLBs            | 4250                                                                                                                                                                |
| Number of Logic Elements/Cells | 34000                                                                                                                                                               |
| Total RAM Bits                 | 2151424                                                                                                                                                             |
| Number of I/O                  | 140                                                                                                                                                                 |
| Number of Gates                | -                                                                                                                                                                   |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                       |
| Mounting Type                  | Surface Mount                                                                                                                                                       |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                                                  |
| Package / Case                 | 256-BGA                                                                                                                                                             |
| Supplier Device Package        | 256-FPBGA (17x17)                                                                                                                                                   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2m35e-5f256i">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfe2m35e-5f256i</a> |


The DLLs in the LatticeECP2/M are used to shift the clock in relation to the data for source synchronous inputs. PLLs are used for frequency synthesis and clock generation for source synchronous interfaces. Cascading PLL and DLL blocks allows applications to utilize the unique benefits of both DLLs and PLLs.

For further information about the DLL, please see the list of additional technical documentation at the end of this data sheet.

## GPLL/SPLL/GDLL PIO Input Pin Connections (LatticeECP2M Family Only)

All LatticeECP2M devices contain two GDLLs, two GPLLs and six SPLLs, arranged in quadrants as shown in Figure 2-8. In the LatticeECP2M devices GPLLs, SPLLs and GDLLs share their input pins. Figure 2-8 shows the sharing of SPLLs input pin connections in the upper two quadrants and the sharing of GDLL, GPLL and SPLL input pin connections in the lower two quadrants.

**Figure 2-8. Sharing of PIO Pins by GPLL, SPLL and GDLL in LatticeECP2M Devices**

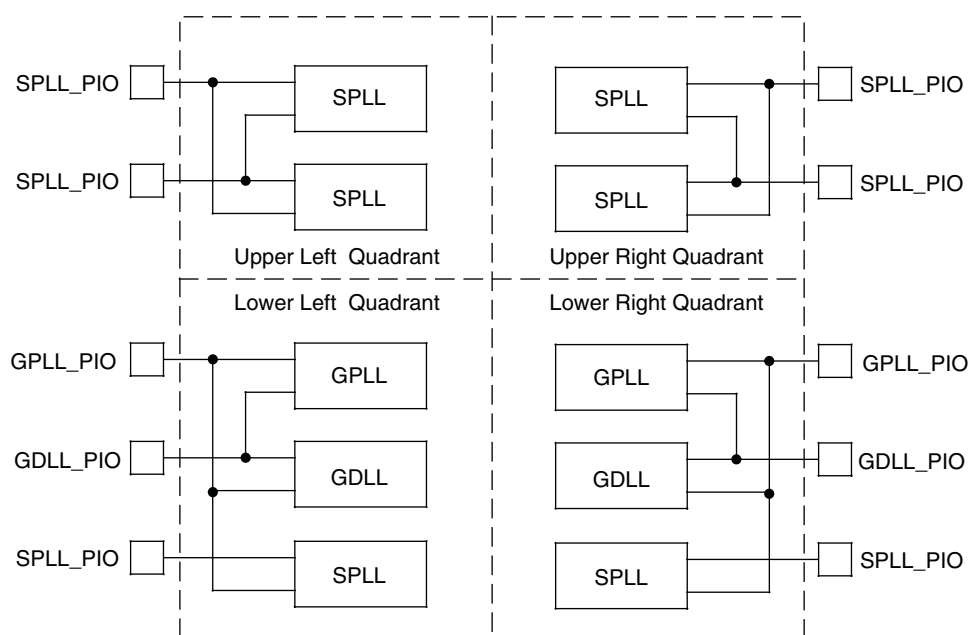

## Clock Dividers

LatticeECP2/M devices have two clock dividers, one on the left side and one on the right side of the device. These are intended to generate a slower-speed system clock from a high-speed edge clock. The block operates in a  $\div 2$ ,  $\div 4$  or  $\div 8$  mode and maintains a known phase relationship between the divided down clock and the high-speed clock based on the release of its reset signal. The clock dividers can be fed from selected PLL/DLL outputs, DLL-DELA delay blocks, routing or from an external clock input. The clock divider outputs serve as primary clock sources and feed into the clock distribution network. The Reset (RST) control signal resets input and synchronously forces all outputs to low. The RELEASE signal releases outputs synchronously to the input clock. For further information about clock dividers, please see the list of additional technical documentation at the end of this data sheet. Figure 2-9 shows the clock divider connections.

Figure 3-7. DDR and DDR2 Parameters


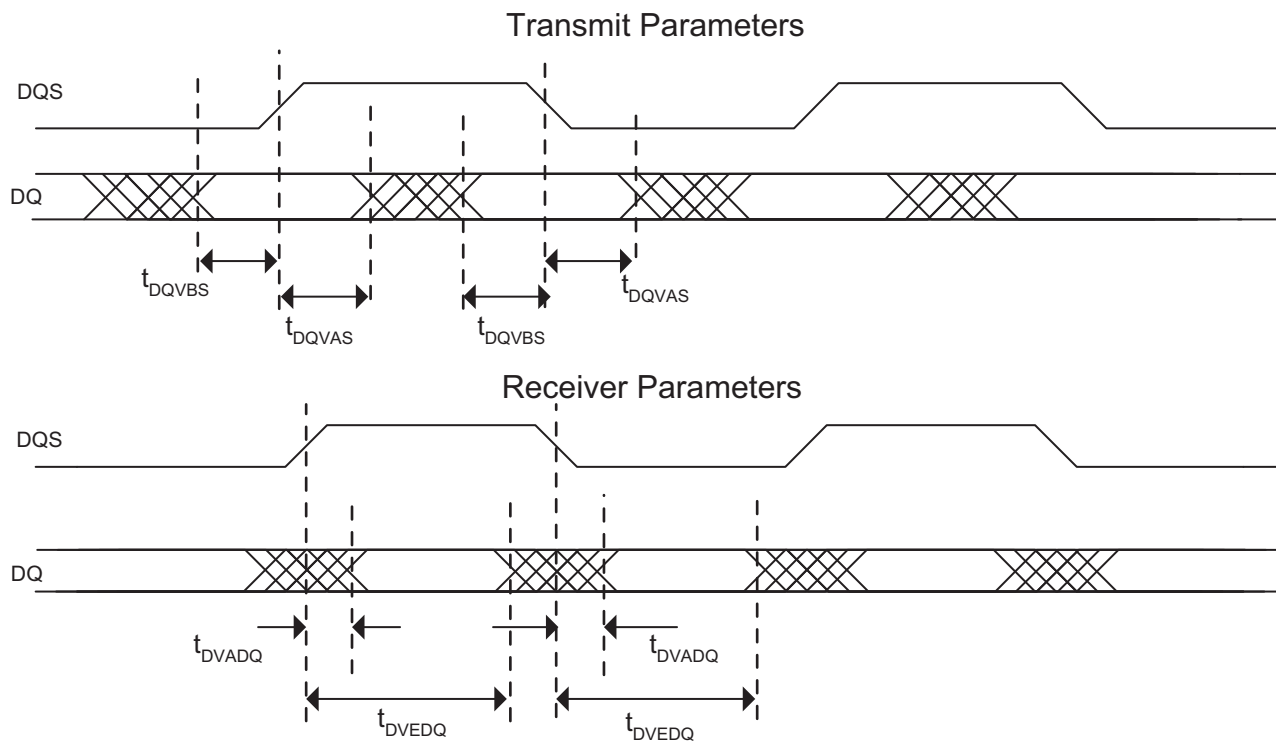


Figure 3-8. XGMII Parameters

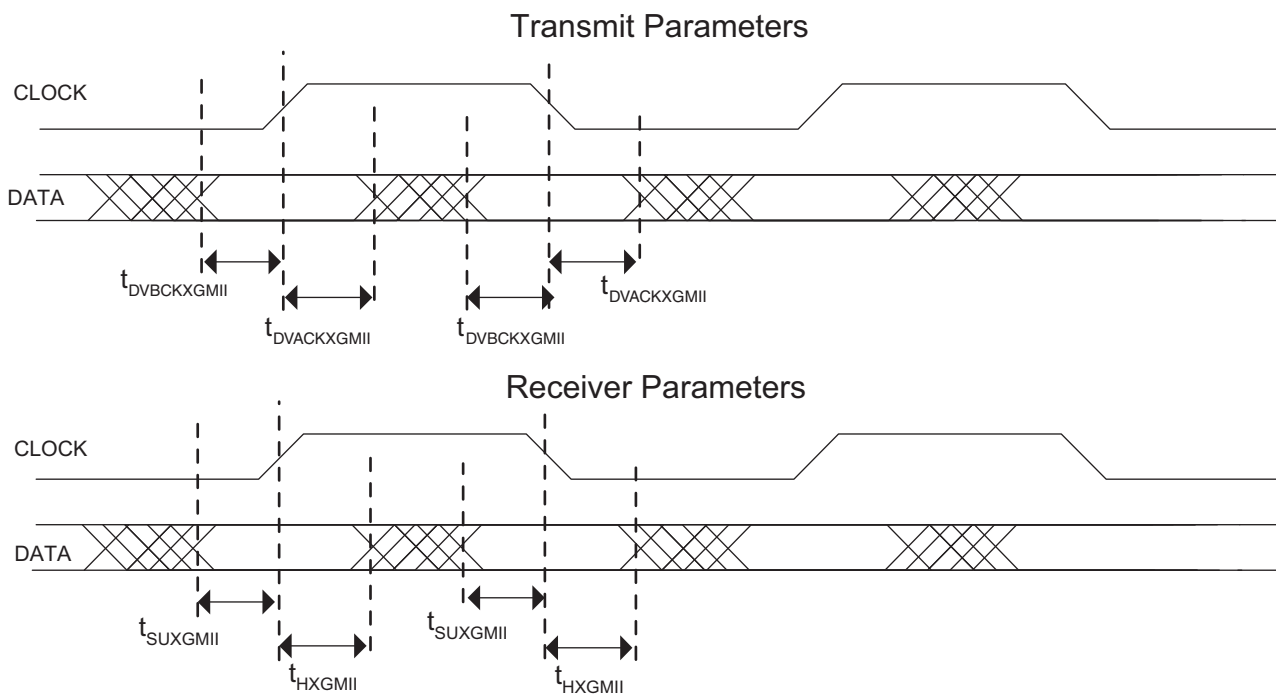

**LFE2-20E/SE Logic Signal Connections: 256 fpBGA (Cont.)**

| LFE2-20E/SE |             |                   |      |               |              |
|-------------|-------------|-------------------|------|---------------|--------------|
| Ball Number | Ball Number | Ball/Pad Function | Bank | Dual Function | Differential |
| VCCIO       | VCCIO       | VCCIO1            | 1    |               |              |
| D12         | D12         | PT62A             | 1    |               | T            |
| B14         | B14         | PT61B             | 1    |               | C            |
| C14         | C14         | PT60B             | 1    |               | C            |
| A14         | A14         | PT61A             | 1    |               | T            |
| D13         | D13         | PT60A             | 1    |               | T            |
| C13         | C13         | PT59B             | 1    |               | C            |
| GND         | GND         | GNDIO1            | -    |               |              |
| A13         | A13         | PT58B             | 1    |               | C            |
| B13         | B13         | PT59A             | 1    |               | T            |
| VCCIO       | VCCIO       | VCCIO1            | 1    |               |              |
| A12         | A12         | PT58A             | 1    |               | T            |
| B11         | B11         | PT57B             | 1    |               | C            |
| D11         | D11         | PT56B             | 1    |               | C            |
| A11         | A11         | PT57A             | 1    |               | T            |
| C11         | C11         | PT56A             | 1    |               | T            |
| -           | GND         | GNDIO1            | 1    |               |              |
| -           | VCC         | VCCIO             | 1    |               |              |
| D10         | D10         | PT46B             | 1    |               | C            |
| C10         | C10         | PT46A             | 1    |               | T            |
| GND         | GND         | GNDIO1            | -    |               |              |
| B10         | B10         | PT45B             | 1    |               | C            |
| A9          | A9          | PT44B             | 1    |               | C            |
| A10         | A10         | PT45A             | 1    |               | T            |
| B9          | B9          | PT44A             | 1    |               | T            |
| VCCIO       | VCCIO       | VCCIO1            | 1    |               |              |
| A8          | A8          | PT43B             | 1    |               | C            |
| D9          | D9          | PT42B             | 1    |               | C            |
| B8          | B8          | PT43A             | 1    |               | T            |
| C9          | C9          | PT42A             | 1    |               | T            |
| GND         | GND         | GNDIO1            | -    |               |              |
| B7          | B7          | PT41B             | 1    |               | C            |
| E9          | E9          | PT40B             | 1    |               | C            |
| A7          | A7          | PT41A             | 1    |               | T            |
| D8          | D8          | PT40A             | 1    |               | T            |
| VCCIO       | VCCIO       | VCCIO1            | 1    |               |              |
| A6          | A6          | PT39B             | 1    | PCLKC1_0      | C            |
| B6          | B6          | PT39A             | 1    | PCLKT1_0      | T            |
| E6          | E6          | XRES              | 1    |               |              |
| F8          | F8          | PT37B             | 0    | PCLKC0_0      | C            |
| GND         | GND         | GNDIO0            | -    |               |              |
| E8          | E8          | PT37A             | 0    | PCLKT0_0      | T            |

**LFE2-20E/SE Logic Signal Connections: 256 fpBGA (Cont.)**

| LFE2-20E/SE |             |                   |      |               |              |
|-------------|-------------|-------------------|------|---------------|--------------|
| Ball Number | Ball Number | Ball/Pad Function | Bank | Dual Function | Differential |
| P5          | P5          | VCCIO5            | 5    |               |              |
| K5          | K5          | VCCIO6            | 6    |               |              |
| M3          | M3          | VCCIO6            | 6    |               |              |
| E3          | E3          | VCCIO7            | 7    |               |              |
| G5          | G5          | VCCIO7            | 7    |               |              |
| T15         | T15         | VCCIO8            | 8    |               |              |
| A1          | A1          | GND               | -    |               |              |
| A16         | A16         | GND               | -    |               |              |
| B12         | B12         | GND               | -    |               |              |
| B5          | B5          | GND               | -    |               |              |
| C8          | C8          | GND               | -    |               |              |
| E15         | E15         | GND               | -    |               |              |
| E2          | E2          | GND               | -    |               |              |
| H14         | H14         | GND               | -    |               |              |
| H8          | H8          | GND               | -    |               |              |
| H9          | H9          | GND               | -    |               |              |
| J3          | J3          | GND               | -    |               |              |
| J8          | J8          | GND               | -    |               |              |
| J9          | J9          | GND               | -    |               |              |
| M15         | M15         | GND               | -    |               |              |
| M2          | M2          | GND               | -    |               |              |
| P9          | P9          | GND               | -    |               |              |
| R12         | R12         | GND               | -    |               |              |
| R5          | R5          | GND               | -    |               |              |
| T1          | T1          | GND               | -    |               |              |
| T16         | T16         | GND               | -    |               |              |

\* Supports true LVDS. Other differential signals must be emulated with external resistors.

\*\* These dedicated input pins can be used for GPLLs or GDLLs within the respective quadrant.

Note: VCCIO and GND pads are used to determine the average DC current drawn by I/Os between GND/VCCIO connections, or between the last GND/VCCIO in an I/O bank and the end of an I/O bank. The substrate pads listed in the Pin Table do not necessarily have a one to one connection with a package ball or pin.

## LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2-12E/12SE |                   |      |               |              | LFE2-20E/20SE     |      |               |              |  |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |  |
| R8            | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |  |
| J8            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| K7            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| L7            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| M7            | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |  |
| P15           | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |  |
| R15           | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |  |
| C5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| D11           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| E17           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| E6            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| F13           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| G18           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| G5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| K5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| M17           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| P17           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| R5            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V11           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V13           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V15           | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V7            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| V8            | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |  |
| A1            | GND               | -    |               |              | GND               | -    |               |              |  |
| A22           | GND               | -    |               |              | GND               | -    |               |              |  |
| AA19          | GND               | -    |               |              | GND               | -    |               |              |  |
| AA4           | GND               | -    |               |              | GND               | -    |               |              |  |
| AB1           | GND               | -    |               |              | GND               | -    |               |              |  |
| AB22          | GND               | -    |               |              | GND               | -    |               |              |  |
| B19           | GND               | -    |               |              | GND               | -    |               |              |  |
| B4            | GND               | -    |               |              | GND               | -    |               |              |  |
| C14           | GND               | -    |               |              | GND               | -    |               |              |  |
| C9            | GND               | -    |               |              | GND               | -    |               |              |  |
| D2            | GND               | -    |               |              | GND               | -    |               |              |  |
| D21           | GND               | -    |               |              | GND               | -    |               |              |  |
| F17           | GND               | -    |               |              | GND               | -    |               |              |  |
| F6            | GND               | -    |               |              | GND               | -    |               |              |  |
| H10           | GND               | -    |               |              | GND               | -    |               |              |  |
| H11           | GND               | -    |               |              | GND               | -    |               |              |  |
| H12           | GND               | -    |               |              | GND               | -    |               |              |  |
| H13           | GND               | -    |               |              | GND               | -    |               |              |  |
| J14           | GND               | -    |               |              | GND               | -    |               |              |  |
| J20           | GND               | -    |               |              | GND               | -    |               |              |  |
| J3            | GND               | -    |               |              | GND               | -    |               |              |  |

## LFE2-12E/SE and LFE2-20E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2-12E/12SE |                   |      |               |              | LFE2-20E/20SE     |      |               |              |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| H16           | NC                | -    |               |              | NC                | -    |               |              |
| H20           | NC                | -    |               |              | NC                | -    |               |              |
| H18           | NC                | -    |               |              | NC                | -    |               |              |
| K6            | NC                | -    |               |              | NC                | -    |               |              |
| J16           | NC                | -    |               |              | NC                | -    |               |              |
| N18           | VCC               | -    |               |              | VCC               | -    |               |              |
| N6            | VCC               | -    |               |              | VCC               | -    |               |              |

\* Supports true LVDS. Other differential signals must be emulated with external resistors.

\*\* These dedicated input pins can be used for GPLLs or GDLLs within the respective quadrant.

Note: VCCIO and GND pads are used to determine the average DC current drawn by I/Os between GND/VCCIO connections, or between the last GND/VCCIO in an I/O bank and the end of an I/O bank. The substrate pads listed in the Pin Table do not necessarily have a one to one connection with a package ball or pin.

## LFE2-20E/SE and LFE2-35E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-20E/20SE |                   |      |                        |              | LFE2-35E/35SE     |      |                        |              |  |
|---------------|-------------------|------|------------------------|--------------|-------------------|------|------------------------|--------------|--|
| Ball Number   | Ball/Pad Function | Bank | Dual Function          | Differential | Ball/Pad Function | Bank | Dual Function          | Differential |  |
| Y21           | PB64A             | 4    | VREF2_4/BDQ60          | T            | PB73A             | 4    | VREF2_4/BDQ69          | T            |  |
| AB23          | PB64B             | 4    | VREF1_4/BDQ60          | C            | PB73B             | 4    | VREF1_4/BDQ69          | C            |  |
| GND           | GNDIO4            | -    |                        |              | GNDIO4            | -    |                        |              |  |
| AD24          | CFG2              | 8    |                        |              | CFG2              | 8    |                        |              |  |
| W20           | CFG1              | 8    |                        |              | CFG1              | 8    |                        |              |  |
| AC24          | CFG0              | 8    |                        |              | CFG0              | 8    |                        |              |  |
| V19           | PROGRAMN          | 8    |                        |              | PROGRAMN          | 8    |                        |              |  |
| AA22          | CCLK              | 8    |                        |              | CCLK              | 8    |                        |              |  |
| AB24          | INITN             | 8    |                        |              | INITN             | 8    |                        |              |  |
| AD25          | DONE              | 8    |                        |              | DONE              | 8    |                        |              |  |
| GND           | GNDIO8            | -    |                        |              | GNDIO8            | -    |                        |              |  |
| W21           | PR44B             | 8    | WRITEN                 | C            | PR58B             | 8    | WRITEN                 | C            |  |
| Y22           | PR44A             | 8    | CS1N                   | T            | PR58A             | 8    | CS1N                   | T            |  |
| AC25          | PR43B             | 8    | CSN                    | C            | PR57B             | 8    | CSN                    | C            |  |
| AB25          | PR43A             | 8    | D0/SPIFASTN            | T            | PR57A             | 8    | D0/SPIFASTN            | T            |  |
| VCCIO         | VCCIO8            | 8    |                        |              | VCCIO8            | 8    |                        |              |  |
| AD26          | PR42B             | 8    | D1                     | C            | PR56B             | 8    | D1                     | C            |  |
| AC26          | PR42A             | 8    | D2                     | T            | PR56A             | 8    | D2                     | T            |  |
| Y23           | PR41B             | 8    | D3                     | C            | PR55B             | 8    | D3                     | C            |  |
| GND           | GNDIO8            | -    |                        |              | GNDIO8            | -    |                        |              |  |
| W22           | PR41A             | 8    | D4                     | T            | PR55A             | 8    | D4                     | T            |  |
| AA25          | PR40B             | 8    | D5                     | C            | PR54B             | 8    | D5                     | C            |  |
| AB26          | PR40A             | 8    | D6                     | T            | PR54A             | 8    | D6                     | T            |  |
| W23           | PR39B             | 8    | D7/SPID0               | C            | PR53B             | 8    | D7/SPID0               | C            |  |
| VCCIO         | VCCIO8            | 8    |                        |              | VCCIO8            | 8    |                        |              |  |
| V22           | PR39A             | 8    | DI/CSSPI0N             | T            | PR53A             | 8    | DI/CSSPI0N             | T            |  |
| Y24           | PR38B             | 8    | DOU/CSON               | C            | PR52B             | 8    | DOU/CSON               | C            |  |
| Y25           | PR38A             | 8    | BUSY/SISPI             | T            | PR52A             | 8    | BUSY/SISPI             | T            |  |
| W24           | PR37B             | 3    | RDQ34                  | C            | PR51B             | 3    | RDQ48                  | C            |  |
| GND           | GNDIO3            | -    |                        |              | GNDIO3            | -    |                        |              |  |
| V23           | PR37A             | 3    | RDQ34                  | T            | PR51A             | 3    | RDQ48                  | T            |  |
| AA26          | PR36B             | 3    | RDQ34                  | C (LVDS)*    | PR50B             | 3    | RDQ48                  | C (LVDS)*    |  |
| Y26           | PR36A             | 3    | RDQ34                  | T (LVDS)*    | PR50A             | 3    | RDQ48                  | T (LVDS)*    |  |
| U21           | PR35B             | 3    | RDQ34                  | C            | PR49B             | 3    | RDQ48                  | C            |  |
| VCCIO         | VCCIO3            | 3    |                        |              | VCCIO3            | 3    |                        |              |  |
| U19           | PR35A             | 3    | RDQ34                  | T            | PR49A             | 3    | RDQ48                  | T            |  |
| W25           | PR34B             | 3    | RDQ34                  | C (LVDS)*    | PR48B             | 3    | RDQ48                  | C (LVDS)*    |  |
| W26           | PR34A             | 3    | RDQS34                 | T (LVDS)*    | PR48A             | 3    | RDQS48                 | T (LVDS)*    |  |
| GND           | GNDIO3            | -    |                        |              | GNDIO3            | -    |                        |              |  |
| V24           | PR33B             | 3    | RDQ34                  | C            | PR47B             | 3    | RDQ48                  | C            |  |
| V25           | PR33A             | 3    | RDQ34                  | T            | PR47A             | 3    | RDQ48                  | T            |  |
| V26           | PR32B             | 3    | RDQ34                  | C (LVDS)*    | PR46B             | 3    | RDQ48                  | C (LVDS)*    |  |
| U26           | PR32A             | 3    | RDQ34                  | T (LVDS)*    | PR46A             | 3    | RDQ48                  | T (LVDS)*    |  |
| VCCIO         | VCCIO3            | 3    |                        |              | VCCIO3            | 3    |                        |              |  |
| U22           | PR31B             | 3    | RLM0_GPLL_C_FB_A/RDQ34 | C            | PR45B             | 3    | RLM0_GPLL_C_FB_A/RDQ48 | C            |  |
| U23           | PR31A             | 3    | RLM0_GPLL_T_FB_A/RDQ34 | T            | PR45A             | 3    | RLM0_GPLL_T_FB_A/RDQ48 | T            |  |

## LFE2-20E/SE and LFE2-35E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-20E/20SE |                   |      |               |              | LFE2-35E/35SE     |      |               |              |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| G24           | PR6B              | 2    | RDQ8          | C (LVDS)*    | PR12B             | 2    | RDQ14         | C (LVDS)*    |
| G23           | PR6A              | 2    | RDQ8          | T (LVDS)*    | PR12A             | 2    | RDQ14         | T (LVDS)*    |
| VCCIO         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| K19           | PR5B              | 2    | RDQ8          | C            | PR11B             | 2    | RDQ14         | C            |
| J19           | PR5A              | 2    | RDQ8          | T            | PR11A             | 2    | RDQ14         | T            |
| D26           | PR4B              | 2    | RDQ8          | C (LVDS)*    | PR10B             | 2    | RDQ14         | C (LVDS)*    |
| C26           | PR4A              | 2    | RDQ8          | T (LVDS)*    | PR10A             | 2    | RDQ14         | T (LVDS)*    |
| F22           | NC                | -    |               |              | PR9B              | 2    | RDQ6          | C            |
| E24           | NC                | -    |               |              | PR9A              | 2    | RDQ6          | T            |
| GND           | GNDIO2            | -    |               |              | GNDIO2            | -    |               |              |
| D25           | NC                | -    |               |              | PR8B              | 2    | RDQ6          | C (LVDS)*    |
| C25           | NC                | -    |               |              | PR8A              | 2    | RDQ6          | T (LVDS)*    |
| D24           | NC                | -    |               |              | PR7B              | 2    | RDQ6          | C            |
| B25           | NC                | -    |               |              | PR7A              | 2    | RDQ6          | T            |
| VCCIO         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| H21           | NC                | -    |               |              | PR6B              | 2    | RDQ6          | C (LVDS)*    |
| G22           | NC                | -    |               |              | PR6A              | 2    | RDQS6         | T (LVDS)*    |
| B24           | NC                | -    |               |              | PR5B              | 2    | RDQ6          | C            |
| GND           | GNDIO2            | -    |               |              | GNDIO2            | -    |               |              |
| C24           | NC                | -    |               |              | PR5A              | 2    | RDQ6          | T            |
| D23           | NC                | -    |               |              | PR4B              | 2    | RDQ6          | C (LVDS)*    |
| C23           | NC                | -    |               |              | PR4A              | 2    | RDQ6          | T (LVDS)*    |
| G21           | PR3B              | 2    |               | C            | PR3B              | 2    | RDQ6          | C            |
| VCCIO         | VCCIO2            | 2    |               |              | VCCIO2            | 2    |               |              |
| H20           | PR3A              | 2    |               | T            | PR3A              | 2    | RDQ6          | T            |
| GND           | GNDIO2            | -    |               |              | GNDIO2            | -    |               |              |
| E22           | PR2B              | 2    | VREF2_2       | C (LVDS)*    | PR2B              | 2    | VREF2_2/RDQ6  | C (LVDS)*    |
| F21           | PR2A              | 2    | VREF1_2       | T (LVDS)*    | PR2A              | 2    | VREF1_2/RDQ6  | T (LVDS)*    |
| E23           | PT64B             | 1    | VREF2_1       | C            | PT73B             | 1    | VREF2_1       | C            |
| GND           | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |
| D22           | PT64A             | 1    | VREF1_1       | T            | PT73A             | 1    | VREF1_1       | T            |
| G20           | PT63B             | 1    |               | C            | PT72B             | 1    |               | C            |
| J18           | PT63A             | 1    |               | T            | PT72A             | 1    |               | T            |
| F20           | PT62B             | 1    |               | C            | PT71B             | 1    |               | C            |
| VCCIO         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| H19           | PT62A             | 1    |               | T            | PT71A             | 1    |               | T            |
| A24           | PT61B             | 1    |               | C            | PT70B             | 1    |               | C            |
| A23           | PT61A             | 1    |               | T            | PT70A             | 1    |               | T            |
| E21           | PT60B             | 1    |               | C            | PT69B             | 1    |               | C            |
| F19           | PT60A             | 1    |               | T            | PT69A             | 1    |               | T            |
| C22           | PT59B             | 1    |               | C            | PT68B             | 1    |               | C            |
| GND           | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |
| E20           | PT59A             | 1    |               | T            | PT68A             | 1    |               | T            |
| B22           | PT58B             | 1    |               | C            | PT67B             | 1    |               | C            |
| VCCIO         | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| B23           | PT58A             | 1    |               | T            | PT67A             | 1    |               | T            |

## LFE2-20E/SE and LFE2-35E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-20E/20SE |                   |      |               |              | LFE2-35E/35SE     |      |               |              |
|---------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number   | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| A7            | PT26B             | 0    |               | C            | PT26B             | 0    |               | C            |
| B7            | PT26A             | 0    |               | T            | PT26A             | 0    |               | T            |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| F12           | PT25B             | 0    |               | C            | PT25B             | 0    |               | C            |
| D10           | PT25A             | 0    |               | T            | PT25A             | 0    |               | T            |
| H11           | PT24B             | 0    |               | C            | PT24B             | 0    |               | C            |
| G11           | PT24A             | 0    |               | T            | PT24A             | 0    |               | T            |
| GND           | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| A6            | PT23B             | 0    |               | C            | PT23B             | 0    |               | C            |
| B6            | PT23A             | 0    |               | T            | PT23A             | 0    |               | T            |
| D8            | PT22B             | 0    |               | C            | PT22B             | 0    |               | C            |
| C8            | PT22A             | 0    |               | T            | PT22A             | 0    |               | T            |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| F11           | PT21B             | 0    |               | C            | PT21B             | 0    |               | C            |
| E10           | PT21A             | 0    |               | T            | PT21A             | 0    |               | T            |
| E9            | PT20B             | 0    |               | C            | PT20B             | 0    |               | C            |
| D9            | PT20A             | 0    |               | T            | PT20A             | 0    |               | T            |
| G10           | PT19B             | 0    |               | C            | PT19B             | 0    |               | C            |
| GND           | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| H10           | PT19A             | 0    |               | T            | PT19A             | 0    |               | T            |
| A5            | PT18B             | 0    |               | C            | PT18B             | 0    |               | C            |
| B5            | PT18A             | 0    |               | T            | PT18A             | 0    |               | T            |
| C7            | PT17B             | 0    |               | C            | PT17B             | 0    |               | C            |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| D7            | PT17A             | 0    |               | T            | PT17A             | 0    |               | T            |
| E8            | PT16B             | 0    |               | C            | PT16B             | 0    |               | C            |
| F10           | PT16A             | 0    |               | T            | PT16A             | 0    |               | T            |
| F8            | PT15B             | 0    |               | C            | PT15B             | 0    |               | C            |
| H9            | PT15A             | 0    |               | T            | PT15A             | 0    |               | T            |
| C5            | PT14B             | 0    |               | C            | PT14B             | 0    |               | C            |
| GND           | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| D5            | PT14A             | 0    |               | T            | PT14A             | 0    |               | T            |
| B4            | PT13B             | 0    |               |              | PT13B             | 0    |               |              |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| GND           | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| GND           | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| C4            | PT10B             | 0    |               | C            | PT10B             | 0    |               | C            |
| GND           | GNDIO0            | -    |               |              | GNDIO0            | -    |               |              |
| C3            | PT10A             | 0    |               | T            | PT10A             | 0    |               | T            |
| A4            | PT9B              | 0    |               | C            | PT9B              | 0    |               | C            |
| A3            | PT9A              | 0    |               | T            | PT9A              | 0    |               | T            |
| B3            | PT8B              | 0    |               | C            | PT8B              | 0    |               | C            |
| VCCIO         | VCCIO0            | 0    |               |              | VCCIO0            | 0    |               |              |
| B2            | PT8A              | 0    |               | T            | PT8A              | 0    |               | T            |

## LFE2-50E/SE and LFE2-70E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-50E/SE |                   |      |               |              | LFE2-70E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| C20         | PT75B             | 1    |               | C            | PT93B             | 1    |               | C            |
| D20         | PT75A             | 1    |               | T            | PT93A             | 1    |               | T            |
| A22         | PT74B             | 1    |               | C            | PT92B             | 1    |               | C            |
| A21         | PT74A             | 1    |               | T            | PT92A             | 1    |               | T            |
| GND         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |
| E19         | PT71B             | 1    |               | C            | PT85B             | 1    |               | C            |
| C19         | PT71A             | 1    |               | T            | PT85A             | 1    |               | T            |
| VCCIO       | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| B21         | PT70B             | 1    |               | C            | PT79B             | 1    |               | C            |
| B20         | PT70A             | 1    |               | T            | PT79A             | 1    |               | T            |
| D19         | PT69B             | 1    |               | C            | PT78B             | 1    |               | C            |
| B19         | PT69A             | 1    |               | T            | PT78A             | 1    |               | T            |
| GND         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |
| G17         | PT68B             | 1    |               | C            | PT77B             | 1    |               | C            |
| E18         | PT68A             | 1    |               | T            | PT77A             | 1    |               | T            |
| G19         | PT67B             | 1    |               | C            | PT76B             | 1    |               | C            |
| F17         | PT67A             | 1    |               | T            | PT76A             | 1    |               | T            |
| VCCIO       | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| A20         | PT66B             | 1    |               | C            | PT75B             | 1    |               | C            |
| A19         | PT66A             | 1    |               | T            | PT75A             | 1    |               | T            |
| E17         | PT65B             | 1    |               | C            | PT74B             | 1    |               | C            |
| D18         | PT65A             | 1    |               | T            | PT74A             | 1    |               | T            |
| B18         | PT64B             | 1    |               | C            | PT73B             | 1    |               | C            |
| GND         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |
| A18         | PT64A             | 1    |               | T            | PT73A             | 1    |               | T            |
| E16         | PT63B             | 1    |               | C            | PT72B             | 1    |               | C            |
| G16         | PT63A             | 1    |               | T            | PT72A             | 1    |               | T            |
| F16         | PT62B             | 1    |               | C            | PT71B             | 1    |               | C            |
| VCCIO       | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| H18         | PT62A             | 1    |               | T            | PT71A             | 1    |               | T            |
| A17         | PT61B             | 1    |               | C            | PT70B             | 1    |               | C            |
| B17         | PT61A             | 1    |               | T            | PT70A             | 1    |               | T            |
| C18         | PT60B             | 1    |               | C            | PT69B             | 1    |               | C            |
| B16         | PT60A             | 1    |               | T            | PT69A             | 1    |               | T            |
| C17         | PT59B             | 1    |               | C            | PT68B             | 1    |               | C            |
| GND         | GNDIO1            | -    |               |              | GNDIO1            | -    |               |              |
| D17         | PT59A             | 1    |               | T            | PT68A             | 1    |               | T            |
| E15         | PT58B             | 1    |               | C            | PT67B             | 1    |               | C            |
| VCCIO       | VCCIO1            | 1    |               |              | VCCIO1            | 1    |               |              |
| G15         | PT58A             | 1    |               | T            | PT67A             | 1    |               | T            |
| A16         | PT57B             | 1    |               | C            | PT66B             | 1    |               | C            |
| B15         | PT57A             | 1    |               | T            | PT66A             | 1    |               | T            |
| D15         | PT56B             | 1    |               | C            | PT65B             | 1    |               | C            |
| F15         | PT56A             | 1    |               | T            | PT65A             | 1    |               | T            |
| A14         | PT55B             | 1    |               | C            | PT64B             | 1    |               | C            |
| B14         | PT55A             | 1    |               | T            | PT64A             | 1    |               | T            |

## LFE2-50E/SE and LFE2-70E/SE Logic Signal Connections: 672 fpBGA (Cont.)

| LFE2-50E/SE |                   |      |               |              | LFE2-70E/SE       |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| A2          | GND               | -    |               |              | GND               | -    |               |              |
| A25         | GND               | -    |               |              | GND               | -    |               |              |
| AA18        | GND               | -    |               |              | GND               | -    |               |              |
| AA24        | GND               | -    |               |              | GND               | -    |               |              |
| AA3         | GND               | -    |               |              | GND               | -    |               |              |
| AA9         | GND               | -    |               |              | GND               | -    |               |              |
| AD11        | GND               | -    |               |              | GND               | -    |               |              |
| AD16        | GND               | -    |               |              | GND               | -    |               |              |
| AD21        | GND               | -    |               |              | GND               | -    |               |              |
| AD6         | GND               | -    |               |              | GND               | -    |               |              |
| AE1         | GND               | -    |               |              | GND               | -    |               |              |
| AE26        | GND               | -    |               |              | GND               | -    |               |              |
| AF2         | GND               | -    |               |              | GND               | -    |               |              |
| AF25        | GND               | -    |               |              | GND               | -    |               |              |
| B1          | GND               | -    |               |              | GND               | -    |               |              |
| B26         | GND               | -    |               |              | GND               | -    |               |              |
| C11         | GND               | -    |               |              | GND               | -    |               |              |
| C16         | GND               | -    |               |              | GND               | -    |               |              |
| C21         | GND               | -    |               |              | GND               | -    |               |              |
| C6          | GND               | -    |               |              | GND               | -    |               |              |
| F18         | GND               | -    |               |              | GND               | -    |               |              |
| F24         | GND               | -    |               |              | GND               | -    |               |              |
| F3          | GND               | -    |               |              | GND               | -    |               |              |
| F9          | GND               | -    |               |              | GND               | -    |               |              |
| J13         | GND               | -    |               |              | GND               | -    |               |              |
| J14         | GND               | -    |               |              | GND               | -    |               |              |
| J21         | GND               | -    |               |              | GND               | -    |               |              |
| J6          | GND               | -    |               |              | GND               | -    |               |              |
| K10         | GND               | -    |               |              | GND               | -    |               |              |
| K11         | GND               | -    |               |              | GND               | -    |               |              |
| K13         | GND               | -    |               |              | GND               | -    |               |              |
| K14         | GND               | -    |               |              | GND               | -    |               |              |
| K16         | GND               | -    |               |              | GND               | -    |               |              |
| K17         | GND               | -    |               |              | GND               | -    |               |              |
| L10         | GND               | -    |               |              | GND               | -    |               |              |
| L11         | GND               | -    |               |              | GND               | -    |               |              |
| L16         | GND               | -    |               |              | GND               | -    |               |              |
| L17         | GND               | -    |               |              | GND               | -    |               |              |
| L24         | GND               | -    |               |              | GND               | -    |               |              |
| L3          | GND               | -    |               |              | GND               | -    |               |              |
| M13         | GND               | -    |               |              | GND               | -    |               |              |
| M14         | GND               | -    |               |              | GND               | -    |               |              |
| N10         | GND               | -    |               |              | GND               | -    |               |              |
| N12         | GND               | -    |               |              | GND               | -    |               |              |
| N13         | GND               | -    |               |              | GND               | -    |               |              |
| N14         | GND               | -    |               |              | GND               | -    |               |              |

## LFE2M20E/SE and LFE2M35E/SE Logic Signal Connections: 484 fpBGA (Cont.)

| LFE2M20E/SE |                   |      |                     |              | LFE2M35E/SE       |      |                            |              |  |
|-------------|-------------------|------|---------------------|--------------|-------------------|------|----------------------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function       | Differential | Ball/Pad Function | Bank | Dual Function              | Differential |  |
| T17         | PR51A             | 8    | D2***               | T            | PR66A             | 8    | D2***                      | T            |  |
| T22         | PR50B             | 8    | D3***               | C            | PR65B             | 8    | D3***                      | C            |  |
| GNDIO       | GNDIO8            | -    |                     |              | GNDIO8            | -    |                            |              |  |
| R22         | PR50A             | 8    | D4***               | T            | PR65A             | 8    | D4***                      | T            |  |
| T15         | PR49B             | 8    | D5***               | C            | PR64B             | 8    | D5***                      | C            |  |
| R17         | PR49A             | 8    | D6***               | T            | PR64A             | 8    | D6***                      | T            |  |
| T20         | PR48B             | 8    | D7/SPID0***         | C            | PR63B             | 8    | D7/SPID0***                | C            |  |
| VCCIO       | VCCIO8            | 8    |                     |              | VCCIO8            | 8    |                            |              |  |
| T21         | PR48A             | 8    | DI/CSSPI0N***       | T            | PR63A             | 8    | DI/CSSPI0N***              | T            |  |
| R21         | PR47B             | 8    | DOU/CSON/CSSPI1N*** | C            | PR62B             | 8    | DOU/CSON/CSSPI1N***        | C            |  |
| R20         | PR47A             | 8    | BUSY/SISPI***       | T            | PR62A             | 8    | BUSY/SISPI***              | T            |  |
| R16         | RLM0_PLLCAP       | 3    |                     |              | RLM0_PLLCAP       | 3    |                            |              |  |
| R18         | PR45B             | 3    | RLM0_GDLLC_FB_A     | C            | PR60B             | 3    | RLM0_GDLLC_FB_A/RDQ57      | C            |  |
| GNDIO       | GNDIO3            | -    |                     |              | GNDIO3            | -    |                            |              |  |
| R19         | PR45A             | 3    | RLM0_GDLLT_FB_A     | T            | PR60A             | 3    | RLM0_GDLLT_FB_A/RDQ57      | T            |  |
| P22         | PR44B             | 3    | RLM0_GDLLC_IN_A**   | C (LVDS)*    | PR59B             | 3    | RLM0_GDLLC_IN_A**/RDQ57    | C (LVDS)*    |  |
| P21         | PR44A             | 3    | RLM0_GDLLT_IN_A**   | T (LVDS)*    | PR59A             | 3    | RLM0_GDLLT_IN_A**/RDQ57    | T (LVDS)*    |  |
| P16         | PR43B             | 3    | RLM0_GPLLC_IN_A**   | C            | PR58B             | 3    | RLM0_GPLLC_IN_A**/RDQ57    | C            |  |
| VCCIO       | VCCIO3            | 3    |                     |              | VCCIO3            | 3    |                            |              |  |
| P17         | PR43A             | 3    | RLM0_GPLLT_IN_A**   | T            | PR58A             | 3    | RLM0_GPLLT_IN_A**/RDQ57    | T            |  |
| P20         | PR42B             | 3    | RLM0_GPLLC_FB_A     | C (LVDS)*    | PR57B             | 3    | RLM0_GPLLC_FB_A/RDQ57      | C (LVDS)*    |  |
| P19         | PR42A             | 3    | RLM0_GPLLT_FB_A     | T (LVDS)*    | PR57A             | 3    | RLM0_GPLLT_FB_A/RDQS57**** | T (LVDS)*    |  |
| GNDIO       | GNDIO3            | -    |                     |              | GNDIO3            | -    |                            |              |  |
| -           | -                 | -    |                     |              | VCCIO3            | 3    |                            |              |  |
| P18         | PR41B             | 3    | RDQ38               | C            | PR51B             | 3    | RDQ48                      | C            |  |
| N16         | PR41A             | 3    | RDQ38               | T            | PR51A             | 3    | RDQ48                      | T            |  |
| GNDIO       | GNDIO3            | -    |                     |              | GNDIO3            | -    |                            |              |  |
| N22         | PR40B             | 3    | RDQ38               | C (LVDS)*    | PR50B             | 3    | RDQ48                      | C (LVDS)*    |  |
| N21         | PR40A             | 3    | RDQ38               | T (LVDS)*    | PR50A             | 3    | RDQ48                      | T (LVDS)*    |  |
| N17         | PR39B             | 3    | RDQ38               | C            | PR49B             | 3    | RDQ48                      | C            |  |
| N18         | PR39A             | 3    | RDQ38               | T            | PR49A             | 3    | RDQ48                      | T            |  |
| VCCIO       | VCCIO3            | 3    |                     |              | VCCIO3            | 3    |                            |              |  |
| M22         | PR38B             | 3    | RDQ38               | C (LVDS)*    | PR48B             | 3    | RDQ48                      | C (LVDS)*    |  |
| M21         | PR38A             | 3    | RDQS38              | T (LVDS)*    | PR48A             | 3    | RDQS48                     | T (LVDS)*    |  |
| M16         | PR37B             | 3    | RDQ38               | C            | PR47B             | 3    | RDQ48                      | C            |  |
| GNDIO       | GNDIO3            | -    |                     |              | GNDIO3            | -    |                            |              |  |
| M17         | PR37A             | 3    | RDQ38               | T            | PR47A             | 3    | RDQ48                      | T            |  |
| M20         | PR36B             | 3    | RDQ38               | C (LVDS)*    | PR46B             | 3    | RDQ48                      | C (LVDS)*    |  |
| M19         | PR36A             | 3    | RDQ38               | T (LVDS)*    | PR46A             | 3    | RDQ48                      | T (LVDS)*    |  |
| M18         | PR35B             | 3    | RDQ38               | C            | PR45B             | 3    | RDQ48                      | C            |  |
| VCCIO       | VCCIO3            | 3    |                     |              | VCCIO3            | 3    |                            |              |  |
| L16         | PR35A             | 3    | RDQ38               | T            | PR45A             | 3    | RDQ48                      | T            |  |
| L22         | PR34B             | 3    | RDQ38               | C (LVDS)*    | PR44B             | 3    | RDQ48                      | C (LVDS)*    |  |
| L21         | PR34A             | 3    | RDQ38               | T (LVDS)*    | PR44A             | 3    | RDQ48                      | T (LVDS)*    |  |
| K22         | PR32B             | 3    | RLM1_SPLLC_FB_A     | C            | PR42B             | 3    | RLM2_SPLLC_FB_A            | C            |  |
| VCCIO       | VCCIO3            | 3    |                     |              | VCCIO3            | 3    |                            |              |  |
| K21         | PR32A             | 3    | RLM1_SPLLT_FB_A     | T            | PR42A             | 3    | RLM2_SPLLT_FB_A            | T            |  |
| L17         | PR31B             | 3    | RLM1_SPLLC_IN_A     | C (LVDS)*    | PR41B             | 3    | RLM2_SPLLC_IN_A            | C (LVDS)*    |  |

**LFE2M50E/SE Logic Signal Connections: 484 fpBGA (Cont.)**

| LFE2M50E/SE |                   |      |               |              |
|-------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential |
| W19         | NC                | -    |               |              |
| W18         | NC                | -    |               |              |
| V17         | NC                | -    |               |              |
| V18         | NC                | -    |               |              |
| D15         | NC                | -    |               |              |
| G14         | NC                | -    |               |              |
| G15         | NC                | -    |               |              |
| D14         | NC                | -    |               |              |
| E15         | NC                | -    |               |              |
| E14         | NC                | -    |               |              |
| F15         | NC                | -    |               |              |
| F14         | NC                | -    |               |              |
| F13         | NC                | -    |               |              |
| G12         | NC                | -    |               |              |
| G13         | NC                | -    |               |              |
| H8          | VCCPLL            | -    |               |              |
| H15         | VCCPLL            | -    |               |              |
| R8          | VCCPLL            | -    |               |              |
| R15         | VCCPLL            | -    |               |              |

\* Supports true LVDS. Other differential signals must be emulated with external resistors.

\*\* These dedicated input pins can be used for GPLLs or GDLLs within the respective quadrant.

\*\*\*For density migration, board design must take into account that these sysCONFIG pins are dual function for the lower density devices (ECP2M20 and ECP2M35). They can be either sysCONFIG pins or general purpose I/Os. These pins are dedicated pins for the higher density devices (ECP2M50, ECP2M70 and ECP2M100).

\*\*\*\*Due to packaging bond out option, this DQS does not have all the necessary DQ pins bonded out for a full 8-bit data width.

Note: VCCIO and GND pads are used to determine the average DC current drawn by I/Os between GND/VCCIO connections, or between the last GND/VCCIO in an I/O bank and the end of an I/O bank. The substrate pads listed in the Pin Table do not necessarily have a one to one connection with a package ball or pin.

## LFE2M50E/SE and LFE2M70E/SE Logic Signal Connections: 900 fpBGA (Cont.)

| LFE2M50E/SE |                   |      |                |              | LFE2M70E/SE       |      |                |              |  |
|-------------|-------------------|------|----------------|--------------|-------------------|------|----------------|--------------|--|
| Ball Number | Ball/Pad Function | Bank | Dual Function  | Differential | Ball/Pad Function | Bank | Dual Function  | Differential |  |
| AC15        | PB27B             | 5    | BDQ24          | C            | PB42B             | 5    | BDQ42          | C            |  |
| VCCIO       | VCCIO5            | 5    |                |              | VCCIO5            | 5    |                |              |  |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |  |
| AD15        | PB38A             | 5    | BDQ42          | T            | PB47A             | 5    | BDQ51          | T            |  |
| AF15        | PB38B             | 5    | BDQ42          | C            | PB47B             | 5    | BDQ51          | C            |  |
| AG10        | PB39A             | 5    | BDQ42          | T            | PB48A             | 5    | BDQ51          | T            |  |
| AG9         | PB39B             | 5    | BDQ42          | C            | PB48B             | 5    | BDQ51          | C            |  |
| AH14        | PB40A             | 5    | BDQ42          | T            | PB49A             | 5    | BDQ51          | T            |  |
| AG12        | PB40B             | 5    | BDQ42          | C            | PB49B             | 5    | BDQ51          | C            |  |
| VCCIO       | VCCIO5            | 5    |                |              | VCCIO5            | 5    |                |              |  |
| AG15        | PB41A             | 5    | BDQ42          | T            | PB50A             | 5    | BDQ51          | T            |  |
| AG13        | PB41B             | 5    | BDQ42          | C            | PB50B             | 5    | BDQ51          | C            |  |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |  |
| AF16        | PB42A             | 5    | BDQS42         | T            | PB51A             | 5    | BDQS51         | T            |  |
| AH15        | PB42B             | 5    | BDQ42          | C            | PB51B             | 5    | BDQ51          | C            |  |
| AC16        | PB43A             | 5    | VREF2_5/BDQ42  | T            | PB52A             | 5    | VREF2_5/BDQ51  | T            |  |
| AE16        | PB43B             | 5    | VREF1_5/BDQ42  | C            | PB52B             | 5    | VREF1_5/BDQ51  | C            |  |
| AG11        | PB44A             | 5    | PCLKT5_0/BDQ42 | T            | PB53A             | 5    | PCLKT5_0/BDQ51 | T            |  |
| AF11        | PB44B             | 5    | PCLKC5_0/BDQ42 | C            | PB53B             | 5    | PCLKC5_0/BDQ51 | C            |  |
| VCCIO       | VCCIO5            | 5    |                |              | VCCIO5            | 5    |                |              |  |
| GNDIO       | GNDIO5            | -    |                |              | GNDIO5            | -    |                |              |  |
| AJ14        | PB49A             | 4    | PCLKT4_0/BDQ51 | T            | PB58A             | 4    | PCLKT4_0/BDQ60 | T            |  |
| VCCIO       | VCCIO4            | 4    |                |              | VCCIO4            | 4    |                |              |  |
| AK14        | PB49B             | 4    | PCLKC4_0/BDQ51 | C            | PB58B             | 4    | PCLKC4_0/BDQ60 | C            |  |
| AK15        | PB50A             | 4    | VREF2_4/BDQ51  | T            | PB59A             | 4    | VREF2_4/BDQ60  | T            |  |
| AK16        | PB50B             | 4    | VREF1_4/BDQ51  | C            | PB59B             | 4    | VREF1_4/BDQ60  | C            |  |
| AF18        | PB51A             | 4    | BDQS51         | T            | PB60A             | 4    | BDQS60         | T            |  |
| GNDIO       | GNDIO4            | -    |                |              | GNDIO4            | -    |                |              |  |
| AD16        | PB51B             | 4    | BDQ51          | C            | PB60B             | 4    | BDQ60          | C            |  |
| AJ15        | PB52A             | 4    | BDQ51          | T            | PB61A             | 4    | BDQ60          | T            |  |
| AG16        | PB52B             | 4    | BDQ51          | C            | PB61B             | 4    | BDQ60          | C            |  |
| AE17        | PB53A             | 4    | BDQ51          | T            | PB62A             | 4    | BDQ60          | T            |  |
| VCCIO       | VCCIO4            | 4    |                |              | VCCIO4            | 4    |                |              |  |
| AC17        | PB53B             | 4    | BDQ51          | C            | PB62B             | 4    | BDQ60          | C            |  |
| AH16        | PB54A             | 4    | BDQ51          | T            | PB63A             | 4    | BDQ60          | T            |  |
| AK17        | PB54B             | 4    | BDQ51          | C            | PB63B             | 4    | BDQ60          | C            |  |
| AG20        | PB55A             | 4    | BDQ51          | T            | PB64A             | 4    | BDQ60          | T            |  |
| GNDIO       | GNDIO4            | -    |                |              | GNDIO4            | -    |                |              |  |
| AG21        | PB55B             | 4    | BDQ51          | C            | PB64B             | 4    | BDQ60          | C            |  |
| AG18        | PB56A             | 4    | BDQ60          | T            | PB65A             | 4    | BDQ69          | T            |  |
| AJ16        | PB56B             | 4    | BDQ60          | C            | PB65B             | 4    | BDQ69          | C            |  |
| AF21        | PB57A             | 4    | BDQ60          | T            | PB66A             | 4    | BDQ69          | T            |  |
| AG22        | PB57B             | 4    | BDQ60          | C            | PB66B             | 4    | BDQ69          | C            |  |
| AD17        | PB58A             | 4    | BDQ60          | T            | PB67A             | 4    | BDQ69          | T            |  |
| AF19        | PB58B             | 4    | BDQ60          | C            | PB67B             | 4    | BDQ69          | C            |  |
| VCCIO       | VCCIO4            | 4    |                |              | VCCIO4            | 4    |                |              |  |
| GNDIO       | GNDIO4            | -    |                |              | GNDIO4            | -    |                |              |  |
| AH17        | PB62A             | 4    | BDQ60          | T            | PB71A             | 4    | BDQ69          | T            |  |

## LFE2M70E/SE and LFE2M100E/SE Logic Signal Connections: 1152 fpBGA (Cont.)

| LFE2M70E/SE |                   |      |                          | LFE2M100E/SE |                   |      |                          |              |
|-------------|-------------------|------|--------------------------|--------------|-------------------|------|--------------------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function            | Differential | Ball/Pad Function | Bank | Dual Function            | Differential |
| AF1         | PL78B             | 6    | LDQ82                    | C (LVDS)*    | PL95B             | 6    | LDQ99                    | C (LVDS)*    |
| AE5         | PL79A             | 6    | LDQ82                    | T            | PL96A             | 6    | LDQ99                    | T            |
| AE6         | PL79B             | 6    | LDQ82                    | C            | PL96B             | 6    | LDQ99                    | C            |
| AF4         | PL80A             | 6    | LDQ82                    | T (LVDS)*    | PL97A             | 6    | LDQ99                    | T (LVDS)*    |
| VCCIO       | VCCIO6            | 6    |                          |              | VCCIO6            | 6    |                          |              |
| AF3         | PL80B             | 6    | LDQ82                    | C (LVDS)*    | PL97B             | 6    | LDQ99                    | C (LVDS)*    |
| AF5         | PL81A             | 6    | LDQ82                    | T            | PL98A             | 6    | LDQ99                    | T            |
| AF6         | PL81B             | 6    | LDQ82                    | C            | PL98B             | 6    | LDQ99                    | C            |
| AG1         | PL82A             | 6    | LLM0_GPLLT_IN_A**/LDQS82 | T (LVDS)*    | PL99A             | 6    | LLM0_GPLLT_IN_A**/LDQS99 | T (LVDS)*    |
| GNDIO       | GNDIO6            | -    |                          |              | GNDIO6            | -    |                          |              |
| AG2         | PL82B             | 6    | LLM0_GPLLC_IN_A**/LDQ82  | C (LVDS)*    | PL99B             | 6    | LLM0_GPLLC_IN_A**/LDQ99  | C (LVDS)*    |
| AE9         | PL83A             | 6    | LLM0_GPLLT_FB_A/LDQ82    | T            | PL100A            | 6    | LLM0_GPLLT_FB_A/LDQ99    | T            |
| AF7         | PL83B             | 6    | LLM0_GPLLC_FB_A/LDQ82    | C            | PL100B            | 6    | LLM0_GPLLC_FB_A/LDQ99    | C            |
| VCCIO       | VCCIO6            | 6    |                          |              | VCCIO6            | 6    |                          |              |
| AH1         | PL84A             | 6    | LLM0_GDLLT_IN_A**/LDQ82  | T (LVDS)*    | PL101A            | 6    | LLM0_GDLLT_IN_A**/LDQ99  | T (LVDS)*    |
| AH2         | PL84B             | 6    | LLM0_GDLLC_IN_A**/LDQ82  | C (LVDS)*    | PL101B            | 6    | LLM0_GDLLC_IN_A**/LDQ99  | C (LVDS)*    |
| AG5         | PL85A             | 6    | LLM0_GDLLT_FB_A/LDQ82    | T            | PL102A            | 6    | LLM0_GDLLT_FB_A/LDQ99    | T            |
| AG4         | PL85B             | 6    | LLM0_GDLLC_FB_A/LDQ82    | C            | PL102B            | 6    | LLM0_GDLLC_FB_A/LDQ99    | C            |
| GNDIO       | GNDIO6            | -    |                          |              | GNDIO6            | -    |                          |              |
| AG6         | LLM0_PLLCAP       | 6    |                          |              | LLM0_PLLCAP       | 6    |                          |              |
| AJ1         | PL87A             | 6    |                          | T            | PL104A            | 6    |                          | T            |
| AJ2         | PL87B             | 6    |                          | C            | PL104B            | 6    |                          | C            |
| AK2         | TCK               | -    |                          |              | TCK               | -    |                          |              |
| AK1         | TDI               | -    |                          |              | TDI               | -    |                          |              |
| AL1         | TMS               | -    |                          |              | TMS               | -    |                          |              |
| AF10        | TDO               | -    |                          |              | TDO               | -    |                          |              |
| AK3         | VCCJ              | -    |                          |              | VCCJ              | -    |                          |              |
| AN2         | LLC_SQ_VCCRX3     | 14   |                          |              | LLC_SQ_VCCRX3     | 14   |                          |              |
| AM2         | LLC_SQ_HDINP3     | 14   |                          | T            | LLC_SQ_HDINP3     | 14   |                          | T            |
| AN1         | LLC_SQ_VCCIB3     | 14   |                          |              | LLC_SQ_VCCIB3     | 14   |                          |              |
| AM3         | LLC_SQ_HDINN3     | 14   |                          | C            | LLC_SQ_HDINN3     | 14   |                          | C            |
| AN3         | LLC_SQ_VCCTX3     | 14   |                          |              | LLC_SQ_VCCTX3     | 14   |                          |              |
| AP2         | LLC_SQ_HDOUTP3    | 14   |                          | T            | LLC_SQ_HDOUTP3    | 14   |                          | T            |
| AM1         | LLC_SQ_VCCOB3     | 14   |                          |              | LLC_SQ_VCCOB3     | 14   |                          |              |
| AP3         | LLC_SQ_HDOUTN3    | 14   |                          | C            | LLC_SQ_HDOUTN3    | 14   |                          | C            |
| AN4         | LLC_SQ_VCCTX2     | 14   |                          |              | LLC_SQ_VCCTX2     | 14   |                          |              |
| AP4         | LLC_SQ_HDOUTN2    | 14   |                          | C            | LLC_SQ_HDOUTN2    | 14   |                          | C            |
| AL3         | LLC_SQ_VCCOB2     | 14   |                          |              | LLC_SQ_VCCOB2     | 14   |                          |              |
| AP5         | LLC_SQ_HDOUTP2    | 14   |                          | T            | LLC_SQ_HDOUTP2    | 14   |                          | T            |
| AN5         | LLC_SQ_VCCRX2     | 14   |                          |              | LLC_SQ_VCCRX2     | 14   |                          |              |
| AM4         | LLC_SQ_HDINN2     | 14   |                          | C            | LLC_SQ_HDINN2     | 14   |                          | C            |
| AL4         | LLC_SQ_VCCIB2     | 14   |                          |              | LLC_SQ_VCCIB2     | 14   |                          |              |
| AM5         | LLC_SQ_HDINP2     | 14   |                          | T            | LLC_SQ_HDINP2     | 14   |                          | T            |
| AL6         | LLC_SQ_VCCP       | 14   |                          |              | LLC_SQ_VCCP       | 14   |                          |              |
| AL5         | LLC_SQ_REFCLKP    | 14   |                          | T            | LLC_SQ_REFCLKP    | 14   |                          | T            |
| AK5         | LLC_SQ_REFCLKN    | 14   |                          | C            | LLC_SQ_REFCLKN    | 14   |                          | C            |
| AK6         | LLC_SQ_VCCAUX33   | 14   |                          |              | LLC_SQ_VCCAUX33   | 14   |                          |              |
| AM6         | LLC_SQ_HDINP1     | 14   |                          | T            | LLC_SQ_HDINP1     | 14   |                          | T            |

## LFE2M70E/SE and LFE2M100E/SE Logic Signal Connections: 1152 fpBGA (Cont.)

| LFE2M70E/SE |                   |      |               | LFE2M100E/SE |                   |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| E5          | ULC_SQ_REFCLKN    | 11   |               | C            | ULC_SQ_REFCLKN    | 11   |               | C            |
| D5          | ULC_SQ_REFCLKP    | 11   |               | T            | ULC_SQ_REFCLKP    | 11   |               | T            |
| D6          | ULC_SQ_VCCP       | 11   |               |              | ULC_SQ_VCCP       | 11   |               |              |
| C5          | ULC_SQ_HDINP2     | 11   |               | T            | ULC_SQ_HDINP2     | 11   |               | T            |
| D4          | ULC_SQ_VCCIB2     | 11   |               |              | ULC_SQ_VCCIB2     | 11   |               |              |
| C4          | ULC_SQ_HDINN2     | 11   |               | C            | ULC_SQ_HDINN2     | 11   |               | C            |
| B5          | ULC_SQ_VCCRX2     | 11   |               |              | ULC_SQ_VCCRX2     | 11   |               |              |
| A5          | ULC_SQ_HDOUTP2    | 11   |               | T            | ULC_SQ_HDOUTP2    | 11   |               | T            |
| D3          | ULC_SQ_VCCOB2     | 11   |               |              | ULC_SQ_VCCOB2     | 11   |               |              |
| A4          | ULC_SQ_HDOUTN2    | 11   |               | C            | ULC_SQ_HDOUTN2    | 11   |               | C            |
| B4          | ULC_SQ_VCCTX2     | 11   |               |              | ULC_SQ_VCCTX2     | 11   |               |              |
| A3          | ULC_SQ_HDOUTN3    | 11   |               | C            | ULC_SQ_HDOUTN3    | 11   |               | C            |
| C1          | ULC_SQ_VCCOB3     | 11   |               |              | ULC_SQ_VCCOB3     | 11   |               |              |
| A2          | ULC_SQ_HDOUTP3    | 11   |               | T            | ULC_SQ_HDOUTP3    | 11   |               | T            |
| B3          | ULC_SQ_VCCTX3     | 11   |               |              | ULC_SQ_VCCTX3     | 11   |               |              |
| C3          | ULC_SQ_HDINN3     | 11   |               | C            | ULC_SQ_HDINN3     | 11   |               | C            |
| B1          | ULC_SQ_VCCIB3     | 11   |               |              | ULC_SQ_VCCIB3     | 11   |               |              |
| C2          | ULC_SQ_HDINP3     | 11   |               | T            | ULC_SQ_HDINP3     | 11   |               | T            |
| B2          | ULC_SQ_VCCRX3     | 11   |               |              | ULC_SQ_VCCRX3     | 11   |               |              |
| AA13        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA14        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA15        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA16        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA17        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA18        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA19        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA20        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA21        | VCC               | -    |               |              | VCC               | -    |               |              |
| AA22        | VCC               | -    |               |              | VCC               | -    |               |              |
| AB14        | VCC               | -    |               |              | VCC               | -    |               |              |
| AB15        | VCC               | -    |               |              | VCC               | -    |               |              |
| AB20        | VCC               | -    |               |              | VCC               | -    |               |              |
| AB21        | VCC               | -    |               |              | VCC               | -    |               |              |
| N14         | VCC               | -    |               |              | VCC               | -    |               |              |
| N15         | VCC               | -    |               |              | VCC               | -    |               |              |
| N20         | VCC               | -    |               |              | VCC               | -    |               |              |
| N21         | VCC               | -    |               |              | VCC               | -    |               |              |
| P13         | VCC               | -    |               |              | VCC               | -    |               |              |
| P14         | VCC               | -    |               |              | VCC               | -    |               |              |
| P15         | VCC               | -    |               |              | VCC               | -    |               |              |
| P16         | VCC               | -    |               |              | VCC               | -    |               |              |
| P17         | VCC               | -    |               |              | VCC               | -    |               |              |
| P18         | VCC               | -    |               |              | VCC               | -    |               |              |
| P19         | VCC               | -    |               |              | VCC               | -    |               |              |
| P20         | VCC               | -    |               |              | VCC               | -    |               |              |
| P21         | VCC               | -    |               |              | VCC               | -    |               |              |
| P22         | VCC               | -    |               |              | VCC               | -    |               |              |
| R13         | VCC               | -    |               |              | VCC               | -    |               |              |
| R14         | VCC               | -    |               |              | VCC               | -    |               |              |

## LFE2M70E/SE and LFE2M100E/SE Logic Signal Connections: 1152 fpBGA (Cont.)

| LFE2M70E/SE |                   |      |               | LFE2M100E/SE |                   |      |               |              |
|-------------|-------------------|------|---------------|--------------|-------------------|------|---------------|--------------|
| Ball Number | Ball/Pad Function | Bank | Dual Function | Differential | Ball/Pad Function | Bank | Dual Function | Differential |
| AG23        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AK21        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AM19        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AM23        | VCCIO4            | 4    |               |              | VCCIO4            | 4    |               |              |
| AC14        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AC15        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AG12        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AG16        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AK14        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AM12        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AM16        | VCCIO5            | 5    |               |              | VCCIO5            | 5    |               |              |
| AA12        | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AB3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AB8         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AE3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AE7         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| AH3         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| W3          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| W8          | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| Y12         | VCCIO6            | 6    |               |              | VCCIO6            | 6    |               |              |
| G3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| K3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| K7          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| N3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| N8          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| P12         | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| R12         | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| T3          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| T8          | VCCIO7            | 7    |               |              | VCCIO7            | 7    |               |              |
| AD28        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| AG32        | VCCIO8            | 8    |               |              | VCCIO8            | 8    |               |              |
| AB12        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AB13        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AB22        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AB23        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AC13        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| AC22        | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| M13         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| M22         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N12         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N13         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N22         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| N23         | VCCAUX            | -    |               |              | VCCAUX            | -    |               |              |
| A1          | GND               | -    |               |              | GND               | -    |               |              |
| A10         | GND               | -    |               |              | GND               | -    |               |              |
| A13         | GND               | -    |               |              | GND               | -    |               |              |
| A22         | GND               | -    |               |              | GND               | -    |               |              |
| A25         | GND               | -    |               |              | GND               | -    |               |              |
| A34         | GND               | -    |               |              | GND               | -    |               |              |

| Part Number      | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2-35E-5FN484C | 331  | 1.2V    | -5    | Lead-Free fpBGA | 484  | COM   | 35       |
| LFE2-35E-6FN484C | 331  | 1.2V    | -6    | Lead-Free fpBGA | 484  | COM   | 35       |
| LFE2-35E-7FN484C | 331  | 1.2V    | -7    | Lead-Free fpBGA | 484  | COM   | 35       |
| LFE2-35E-5FN672C | 450  | 1.2V    | -5    | Lead-Free fpBGA | 672  | COM   | 35       |
| LFE2-35E-6FN672C | 450  | 1.2V    | -6    | Lead-Free fpBGA | 672  | COM   | 35       |
| LFE2-35E-7FN672C | 450  | 1.2V    | -7    | Lead-Free fpBGA | 672  | COM   | 35       |

| Part Number      | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2-50E-5FN484C | 339  | 1.2V    | -5    | Lead-Free fpBGA | 484  | COM   | 50       |
| LFE2-50E-6FN484C | 339  | 1.2V    | -6    | Lead-Free fpBGA | 484  | COM   | 50       |
| LFE2-50E-7FN484C | 339  | 1.2V    | -7    | Lead-Free fpBGA | 484  | COM   | 50       |
| LFE2-50E-5FN672C | 500  | 1.2V    | -5    | Lead-Free fpBGA | 672  | COM   | 50       |
| LFE2-50E-6FN672C | 500  | 1.2V    | -6    | Lead-Free fpBGA | 672  | COM   | 50       |
| LFE2-50E-7FN672C | 500  | 1.2V    | -7    | Lead-Free fpBGA | 672  | COM   | 50       |

| Part Number      | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2-70E-5FN672C | 500  | 1.2V    | -5    | Lead-Free fpBGA | 672  | COM   | 70       |
| LFE2-70E-6FN672C | 500  | 1.2V    | -6    | Lead-Free fpBGA | 672  | COM   | 70       |
| LFE2-70E-7FN672C | 500  | 1.2V    | -7    | Lead-Free fpBGA | 672  | COM   | 70       |
| LFE2-70E-5FN900C | 583  | 1.2V    | -5    | Lead-Free fpBGA | 900  | COM   | 70       |
| LFE2-70E-6FN900C | 583  | 1.2V    | -6    | Lead-Free fpBGA | 900  | COM   | 70       |
| LFE2-70E-7FN900C | 583  | 1.2V    | -7    | Lead-Free fpBGA | 900  | COM   | 70       |

### Industrial

| Part Number     | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|-----------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2-6E-5TN144I | 90   | 1.2V    | -5    | Lead-Free TQFP  | 144  | IND   | 6        |
| LFE2-6E-6TN144I | 90   | 1.2V    | -6    | Lead-Free TQFP  | 144  | IND   | 6        |
| LFE2-6E-5FN256I | 190  | 1.2V    | -5    | Lead-Free fpBGA | 256  | IND   | 6        |
| LFE2-6E-6FN256I | 190  | 1.2V    | -6    | Lead-Free fpBGA | 256  | IND   | 6        |

| Part Number      | I/Os | Voltage | Grade | Package         | Pins | Temp. | LUTs (K) |
|------------------|------|---------|-------|-----------------|------|-------|----------|
| LFE2-12E-5TN144I | 93   | 1.2V    | -5    | Lead-Free TQFP  | 144  | IND   | 12       |
| LFE2-12E-6TN144I | 93   | 1.2V    | -6    | Lead-Free TQFP  | 144  | IND   | 12       |
| LFE2-12E-5QN208I | 131  | 1.2V    | -5    | Lead-Free PQFP  | 208  | IND   | 12       |
| LFE2-12E-6QN208I | 131  | 1.2V    | -6    | Lead-Free PQFP  | 208  | IND   | 12       |
| LFE2-12E-5FN256I | 193  | 1.2V    | -5    | Lead-Free fpBGA | 256  | IND   | 12       |
| LFE2-12E-6FN256I | 193  | 1.2V    | -6    | Lead-Free fpBGA | 256  | IND   | 12       |
| LFE2-12E-5FN484I | 297  | 1.2V    | -5    | Lead-Free fpBGA | 484  | IND   | 12       |
| LFE2-12E-6FN484I | 297  | 1.2V    | -6    | Lead-Free fpBGA | 484  | IND   | 12       |

| Part Number       | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|-------------------|------|---------|-------|---------|------|-------|----------|
| LFE2M70SE-5F1152C | 436  | 1.2V    | -5    | fpBGA   | 1152 | Com   | 70       |
| LFE2M70SE-6F1152C | 436  | 1.2V    | -6    | fpBGA   | 1152 | Com   | 70       |
| LFE2M70SE-7F1152C | 436  | 1.2V    | -7    | fpBGA   | 1152 | Com   | 70       |
| LFE2M70SE-5F900C  | 416  | 1.2V    | -5    | fpBGA   | 900  | Com   | 70       |
| LFE2M70SE-6F900C  | 416  | 1.2V    | -6    | fpBGA   | 900  | Com   | 70       |
| LFE2M70SE-7F900C  | 416  | 1.2V    | -7    | fpBGA   | 900  | Com   | 70       |

| Part Number        | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs (K) |
|--------------------|------|---------|-------|---------|------|-------|----------|
| LFE2M100SE-5F1152C | 520  | 1.2V    | -5    | fpBGA   | 1152 | Com   | 100      |
| LFE2M100SE-6F1152C | 520  | 1.2V    | -6    | fpBGA   | 1152 | Com   | 100      |
| LFE2M100SE-7F1152C | 520  | 1.2V    | -7    | fpBGA   | 1152 | Com   | 100      |
| LFE2M100SE-5F900C  | 416  | 1.2V    | -5    | fpBGA   | 900  | Com   | 100      |
| LFE2M100SE-6F900C  | 416  | 1.2V    | -6    | fpBGA   | 900  | Com   | 100      |
| LFE2M100SE-7F900C  | 416  | 1.2V    | -7    | fpBGA   | 900  | Com   | 100      |



# LatticeECP2/M Family Data Sheet

## Revision History

September 2013

Data Sheet DS1006

| Date          | Version | Section                          | Change Summary                                                                                                              |
|---------------|---------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| February 2006 | 01.0    | —                                | Initial release.                                                                                                            |
| August 2006   | 01.1    | Introduction                     |                                                                                                                             |
|               |         |                                  | Updated Table 1-1 "LatticeECP2 Family Selection Guide".                                                                     |
|               |         | Architecture                     | Updated Figure 2-2 "PFU Diagram".                                                                                           |
|               |         |                                  | Updated Figure 2-13 "Secondary Clock Regions ECP2-50".                                                                      |
|               |         |                                  | Updated Figure 2-25 "PIC Diagram".                                                                                          |
|               |         |                                  | Updated Figure 2-26 "Input Register Block for Left, Right and Bottom Edges".                                                |
|               |         |                                  | Updated Figure 2-28 "Output Register Block for Left, Right and Bottom Edges".                                               |
|               |         |                                  | Updated Figure 2-30 "DQS Input Routing for Left and Right Edges".                                                           |
|               |         |                                  | Updated Figure 2-32 "Edge Clock, DLL Calibration and DQS Local Bus Distribution".                                           |
|               |         |                                  | Table 2-15 Selectable Master Clock (CCLK) Frequencies - Removed frequencies 15, 20, 21, 22, 23, 30, 34, 41, 45, 51, 55, 60. |
|               |         |                                  | Replaced "CLKINDEL" with "CLKO".                                                                                            |
|               |         |                                  | Updated SED section.                                                                                                        |
|               |         |                                  | Qualified device migration capability when using DQS banks for DDR interfaces.                                              |
|               |         | DC and Switching Characteristics | Added VCCPLL to the Recommended Operating Conditions table.                                                                 |
|               |         |                                  | Removed note 5 from "Hot Specifications" section.                                                                           |
|               |         |                                  | Added notes 7 and 8 to "Initialization Supply" Current table.                                                               |
|               |         |                                  | Change note 6 - "...down to 95MHz" to "...down to 95MHz for DDR and 133MHz for DDR2" .                                      |
|               |         |                                  | New "Typical Building Block Function Performance" numbers.                                                                  |
|               |         |                                  | New External Switching Characteristics numbers.                                                                             |
|               |         |                                  | New Internal Switching Characteristics numbers.                                                                             |
|               |         |                                  | New Family Timing Adders numbers.                                                                                           |
|               |         |                                  | Updated Timings for GPLLs, SPLLs and DLLs.                                                                                  |
|               |         |                                  | Added sysCONFIG waveforms.                                                                                                  |
|               |         |                                  | Remove HSTL15D_II from sysIO Recommended Operating Conditions table.                                                        |
|               |         |                                  | Updated Supply and Initialization Currents for ECP2-50.                                                                     |
|               |         | Pinout Information               | Added VCCPLL to the Signal Descriptions table.                                                                              |
|               |         |                                  | Updated Logic Signal Connections tables to include 484-fpBGA for the ECP2-50.                                               |
|               |         |                                  | Added Logic Signal Connections tables for ECP2-12 devices.                                                                  |
|               |         |                                  | Updated Pin Information Summary table to include ECP2-12.                                                                   |
|               |         |                                  | Updated Power Supply and NC Connections table to include ECP2-12.                                                           |
|               |         |                                  | Added note 2 to DDR Strobe (DQS) Pin table.                                                                                 |
|               |         |                                  | Added Information on: PCI, DDR & SPI4.2 Capabilities of the device-Package combination.                                     |

© 2013 Lattice Semiconductor Corp. All Lattice trademarks, registered trademarks, patents, and disclaimers are as listed at [www.latticesemi.com/legal](http://www.latticesemi.com/legal). All other brand or product names are trademarks or registered trademarks of their respective holders. The specifications and information herein are subject to change without notice.