


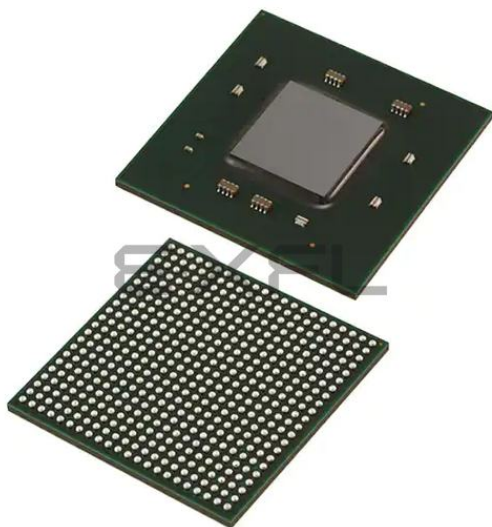

Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	12675
Number of Logic Elements/Cells	162240
Total RAM Bits	11980800
Number of I/O	285
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 100°C (TJ)
Package / Case	484-BBGA, FCBGA
Supplier Device Package	484-FCBGA (23x23)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7k160t-3fbg484e

Table 2: Recommended Operating Conditions ⁽¹⁾ (Cont'd)

Symbol	Description	Min	Typ	Max	Units
$V_{MGTAVTTRCAL}$ ⁽⁸⁾	Analog supply voltage for the resistor calibration circuit of the GTX transceiver column	1.17	1.2	1.23	V
XADC					
V_{CCADC}	XADC supply relative to GNDADC	1.71	1.80	1.89	V
V_{REFP}	Externally supplied reference voltage	1.20	1.25	1.30	V
Temperature					
T_j	Junction temperature operating range for commercial (C) temperature devices	0	–	85	°C
	Junction temperature operating range for extended (E) temperature devices	0	–	100	°C
	Junction temperature operating range for industrial (I) temperature devices	–40	–	100	°C

Notes:

- All voltages are relative to ground.
- V_{CCINT} and V_{CCBRAM} should be connected to the same supply.
- Configuration data is retained even if V_{CCO} drops to 0V.
- Includes V_{CCO} of 1.2V, 1.5V, 1.8V, 2.5V, and 3.3V.
- The lower absolute voltage specification always applies.
- A total of 200 mA per bank should not be exceeded.
- V_{CCBATT} is required only when using bitstream encryption. If battery is not used, connect V_{CCBATT} to either ground or V_{CCAUX} .
- Each voltage listed requires the filter circuit described in [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#).
- For data rates ≤ 10.3125 Gb/s, $V_{MGTAVCC}$ should be $1.0V \pm 3\%$ for lower power consumption.
- For lower power consumption, $V_{MGTAVCC}$ should be $1.0V \pm 3\%$ over the entire CPLL frequency range.

Table 3: DC Characteristics Over Recommended Operating Conditions

Symbol	Description	Min	Typ ⁽¹⁾	Max	Units
V_{DRINT}	Data retention V_{CCINT} voltage (below which configuration data might be lost)	0.75	–	–	V
V_{DRI}	Data retention V_{CCAUX} voltage (below which configuration data might be lost)	1.5	–	–	V
I_{REF}	V_{REF} leakage current per pin	–	–	15	μA
I_L	Input or output leakage current per pin (sample-tested)	–	–	15	μA
C_{IN} ⁽²⁾	Die input capacitance at the pad	–	–	8	pF
I_{RPU}	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 3.3V$	90	–	330	μA
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 2.5V$	68	–	250	μA
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 1.8V$	34	–	220	μA
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 1.5V$	23	–	150	μA
	Pad pull-up (when selected) @ $V_{IN} = 0V$, $V_{CCO} = 1.2V$	12	–	120	μA
I_{RPD}	Pad pull-down (when selected) @ $V_{IN} = 3.3V$	68	–	330	μA
	Pad pull-down (when selected) @ $V_{IN} = 1.8V$	45	–	180	μA
I_{CCADC}	Analog supply current, analog circuits in powered up state	–	–	25	mA
I_{BATT} ⁽³⁾	Battery supply current	–	–	150	nA

Table 5: Maximum Allowed AC Voltage Overshoot and Undershoot for 1.8V HP I/O Banks⁽¹⁾⁽²⁾ (Cont'd)

AC Voltage Overshoot	% of UI @-40°C to 100°C	AC Voltage Undershoot	% of UI @-40°C to 100°C
$V_{CCO} + 0.80$	9.71	-0.80	50.0
$V_{CCO} + 0.85$	4.51	-0.85	28.4
$V_{CCO} + 0.90$	2.12	-0.90	12.7
$V_{CCO} + 0.95$	1.01	-0.95	5.79

Notes:

1. A total of 200 mA per bank should not be exceeded.
2. For UI smaller than 20 μ s.

Table 6: Typical Quiescent Supply Current

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC7K70T	241	241	241	187	mA
		XC7K160T	474	474	474	368	mA
		XC7K325T	810	810	810	629	mA
		XC7K355T	993	993	993	771	mA
		XC7K410T	1080	1080	1080	838	mA
		XC7K420T	1313	1313	1313	1019	mA
		XC7K480T	1313	1313	1313	1019	mA
I_{CCOQ}	Quiescent V_{CCO} supply current	XC7K70T	1	1	1	1	mA
		XC7K160T	1	1	1	1	mA
		XC7K325T	1	1	1	1	mA
		XC7K355T	1	1	1	1	mA
		XC7K410T	1	1	1	1	mA
		XC7K420T	1	1	1	1	mA
		XC7K480T	1	1	1	1	mA
I_{CCAUXQ}	Quiescent V_{CCAUX} supply current	XC7K70T	21	21	21	21	mA
		XC7K160T	40	40	40	40	mA
		XC7K325T	68	68	68	68	mA
		XC7K355T	75	75	75	75	mA
		XC7K410T	85	85	85	85	mA
		XC7K420T	99	99	99	99	mA
		XC7K480T	99	99	99	99	mA
$I_{CCAUX_{IO}Q}$	Quiescent $V_{CCAUX_{IO}}$ supply current	XC7K70T	N/A	N/A	N/A	N/A	mA
		XC7K160T	2	2	2	2	mA
		XC7K325T	2	2	2	2	mA
		XC7K355T	N/A	N/A	N/A	N/A	mA
		XC7K410T	2	2	2	2	mA
		XC7K420T	N/A	N/A	N/A	N/A	mA
		XC7K480T	N/A	N/A	N/A	N/A	mA

Table 7 shows the minimum current, in addition to I_{CCQ} , that are required by Kintex-7 devices for proper power-on and configuration. If the current minimums shown in Table 6 and Table 7 are met, the device powers on after all five supplies have passed through their power-on reset threshold voltages. The FPGA must not be configured until after V_{CCINT} is applied.

Once initialized and configured, use the XPower tools to estimate current drain on these supplies.

Table 7: Power-On Current for Kintex-7 Devices

Device	$I_{CCINTMIN}$ Typ ⁽¹⁾	$I_{CCAUXMIN}$ Typ ⁽¹⁾	I_{CCOMIN} Typ ⁽¹⁾	I_{CCAUX_IOMIN} Typ ⁽¹⁾	$I_{CCBRAMMIN}$ Typ ⁽¹⁾	Units
XC7K70T	$I_{CCINTQ} + 450$	$I_{CCAUXQ} + 40$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 40$	mA
XC7K160T	$I_{CCINTQ} + 550$	$I_{CCAUXQ} + 50$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 40$	mA
XC7K325T	$I_{CCINTQ} + 600$	$I_{CCAUXQ} + 80$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 40$	mA
XC7K355T	$I_{CCINTQ} + 1450$	$I_{CCAUXQ} + 109$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 81$	mA
XC7K410T	$I_{CCINTQ} + 1500$	$I_{CCAUXQ} + 125$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 90$	mA
XC7K420T	$I_{CCINTQ} + 2200$	$I_{CCAUXQ} + 180$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 108$	mA
XC7K480T	$I_{CCINTQ} + 2200$	$I_{CCAUXQ} + 180$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 108$	mA

Notes:

- Typical values are specified at nominal voltage, 25°C.
- Use the XPower Estimator (XPE) spreadsheet tool (download at <http://www.xilinx.com/power>) to calculate maximum power-on currents.

Table 8: Power Supply Ramp Time

Symbol	Description	Conditions	Min	Max	Units
T_{VCCINT}	Ramp time from GND to 90% of V_{CCINT}		0.2	50	ms
T_{VCCO}	Ramp time from GND to 90% of V_{CCO}		0.2	50	ms
T_{VCCAUX}	Ramp time from GND to 90% of V_{CCAUX}		0.2	50	ms
T_{VCCAUX_IO}	Ramp time from GND to 90% of V_{CCAUX_IO}		0.2	50	ms
$T_{VCCBRAM}$	Ramp time from GND to 90% of V_{CCBRAM}		0.2	50	ms
$T_{VCCO2VCCAUX}$	Allowed time per power cycle for $V_{CCO} - V_{CCAUX} > 2.625V$	$T_J = 100^{\circ}C^{(1)}$	–	500	ms
		$T_J = 85^{\circ}C^{(1)}$	–	800	
$T_{MGTAVCC}$	Ramp time from GND to 90% of $V_{MGTAVCC}$		0.2	50	ms
$T_{MGTAVTT}$	Ramp time from GND to 90% of $V_{MGTAVTT}$		0.2	50	ms
$T_{MGTVCCAUX}$	Ramp time from GND to 90% of $V_{MGTVCCAUX}$		0.2	50	ms

Notes:

- Based on 240,000 power cycles with nominal V_{CCO} of 3.3V or 36,500 power cycles with a worst case V_{CCO} of 3.465V.

LVDS DC Specifications (LVDS_25)

The LVDS_25 standard is available in the HR I/O banks. See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information.

Table 12: LVDS_25 DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		2.375	2.500	2.625	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	0.700	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High		100	350	600	mV
V_{ICM}	Input Common-Mode Voltage		0.300	1.200	1.425	V

LVDS DC Specifications (LVDS)

The LVDS standard is available in the HP I/O banks. See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information.

Table 13: LVDS DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		1.710	1.800	1.890	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	0.825	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	Common-mode input voltage = 1.25V	100	350	600	mV
V_{ICM}	Input Common-Mode Voltage	Differential input voltage = ± 350 mV	0.300	1.200	1.425	V

Production Silicon and ISE Software Status

In some cases, a particular family member (and speed grade) is released to production before a speed specification is released with the correct label (Advance, Preliminary, Production). Any labeling discrepancies are corrected in subsequent speed specification releases.

Table 15 lists the production released Kintex-7 device, speed grade, and the minimum corresponding supported speed specification version and ISE software revisions. The ISE software and speed specifications listed are the minimum releases required for production. All subsequent releases of software and speed specifications are valid.

Table 15: Kintex-7 Device Production Software and Speed Specification Release

Device	Speed Grade Designations			
	1.0V			0.9V
	-3	-2/-2L	-1	-2L
XC7K70T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K160T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K325T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K355T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K410T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K420T	ISE 14.2 v1.06			ISE 14.3 v1.06
XC7K480T	ISE 14.2 v1.06			ISE 14.3 v1.06

Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Kintex-7 devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 11](#). In each table, the I/O bank type is either High Performance (HP) or High Range (HR).

Table 16: Networking Applications Interface Performances

Description	I/O Bank Type	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14)	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s
SDR LVDS receiver (SFI-4.1) ⁽¹⁾	HR	710	710	625	625	Mb/s
	HP	710	710	625	625	Mb/s
DDR LVDS receiver (SFI-4.2) ⁽¹⁾	HR	1250	1250	950	950	Mb/s
	HP	1600	1400	1250	1250	Mb/s

Notes:

1. LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 17: Maximum Physical Interface (PHY) Rate for Memory Interfaces (FFG Packages)⁽¹⁾⁽²⁾

Memory Standard	I/O Bank Type	V _{CCAUX_IO}	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
4:1 Memory Controllers							
DDR3	HP	2.0V	1866	1866	1600	1333	Mb/s
	HP	1.8V	1600	1333	1066	1066	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1600	1600	1333	1066	Mb/s
	HP	1.8V	1333	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	800	800	800	Mb/s
RLDRAM III ⁽³⁾	HP	2.0V	800	667	667	533	MHz
	HP	1.8V	550	500	450	450	MHz
	HR	N/A	N/A				
2:1 Memory Controllers							
DDR3	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V					
	HR	N/A					
QDR II+ ⁽⁴⁾	HP	2.0V	550	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
RLDRAM II	HP	2.0V	533	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
LPDDR2 ⁽³⁾	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	667	667	667	Mb/s

Notes:

1. V_{REF} tracking is required. For more information, see [UG586](#), 7 Series FPGAs Memory Interface Solutions User Guide.
2. When using the internal V_{REF} the maximum data rate is 800 Mb/s (400 MHz).
3. RLDRAM III (BL = 4, BL = 8) and LPDDR2 specifications have not been validated with memory IP.
4. The maximum QDRII+ performance specifications are for burst-length 4 (BL = 4) implementations. Burst length 2 (BL = 2) implementations are limited to 333 MHz for all speed grades and I/O bank types.

Table 19: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOP1}				T _{IOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
HSTL_I_F	0.61	0.64	0.73	0.79	1.10	1.19	1.23	1.41	1.86	2.05	2.22	1.92	ns
HSTL_II_F	0.61	0.64	0.73	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
HSTL_I_18_F	0.64	0.67	0.76	0.79	1.05	1.18	1.28	1.44	1.81	2.04	2.27	1.95	ns
HSTL_II_18_F	0.64	0.67	0.76	0.79	1.03	1.14	1.23	1.42	1.79	2.00	2.22	1.94	ns
DIFF_HSTL_I_F	0.63	0.67	0.77	0.78	1.09	1.18	1.22	1.48	1.85	2.04	2.21	2.00	ns
DIFF_HSTL_II_F	0.63	0.67	0.77	0.79	1.02	1.11	1.14	1.48	1.78	1.97	2.13	2.00	ns
DIFF_HSTL_I_18_F	0.65	0.69	0.78	0.79	1.08	1.17	1.21	1.48	1.84	2.03	2.20	2.00	ns
DIFF_HSTL_II_18_F	0.65	0.69	0.78	0.81	1.01	1.10	1.13	1.48	1.77	1.96	2.12	2.00	ns
LVC MOS33_S4	1.31	1.40	1.60	1.54	5.23	5.61	6.09	4.13	5.99	6.47	7.08	4.64	ns
LVC MOS33_S8	1.31	1.40	1.60	1.54	4.46	4.85	5.33	3.84	5.22	5.71	6.32	4.36	ns
LVC MOS33_S12	1.31	1.40	1.60	1.54	3.46	3.89	4.42	3.41	4.22	4.75	5.41	3.92	ns
LVC MOS33_S16	1.31	1.40	1.60	1.54	3.06	3.43	3.88	3.72	3.82	4.29	4.87	4.23	ns
LVC MOS33_F4	1.31	1.40	1.60	1.54	4.70	5.01	5.36	3.58	5.46	5.87	6.35	4.09	ns
LVC MOS33_F8	1.31	1.40	1.60	1.54	3.62	4.04	4.56	3.06	4.38	4.90	5.55	3.58	ns
LVC MOS33_F12	1.31	1.40	1.60	1.54	2.57	2.85	3.15	2.88	3.33	3.71	4.14	3.39	ns
LVC MOS33_F16	1.31	1.40	1.60	1.54	2.44	2.69	2.96	2.88	3.20	3.55	3.95	3.39	ns
LVC MOS25_S4	1.08	1.16	1.32	1.36	4.49	4.80	5.16	3.44	5.25	5.66	6.15	3.95	ns
LVC MOS25_S8	1.08	1.16	1.32	1.36	3.66	4.04	4.49	3.20	4.42	4.90	5.48	3.72	ns
LVC MOS25_S12	1.08	1.16	1.32	1.36	2.77	3.10	3.49	2.80	3.53	3.96	4.48	3.31	ns
LVC MOS25_S16	1.08	1.16	1.32	1.36	3.24	3.62	4.09	3.14	4.00	4.48	5.08	3.66	ns
LVC MOS25_F4	1.08	1.16	1.32	1.36	3.96	4.31	4.72	3.06	4.72	5.17	5.71	3.58	ns
LVC MOS25_F8	1.08	1.16	1.32	1.36	2.43	2.87	3.42	2.50	3.19	3.73	4.41	3.02	ns
LVC MOS25_F12	1.08	1.16	1.32	1.36	2.23	2.63	3.13	2.48	2.99	3.49	4.12	3.00	ns
LVC MOS25_F16	1.08	1.16	1.32	1.36	1.92	2.17	2.45	2.33	2.68	3.03	3.44	2.84	ns
LVC MOS18_S4	0.64	0.66	0.74	0.87	3.24	3.45	3.66	1.91	4.00	4.31	4.65	2.42	ns
LVC MOS18_S8	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S12	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S16	0.64	0.66	0.74	0.87	1.82	2.03	2.24	1.84	2.58	2.89	3.23	2.36	ns
LVC MOS18_S24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.74	1.92	2.08	1.92	2.50	2.78	3.07	2.44	ns
LVC MOS18_F4	0.64	0.66	0.74	0.87	3.12	3.31	3.49	1.77	3.88	4.17	4.48	2.28	ns
LVC MOS18_F8	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F12	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F16	0.64	0.66	0.74	0.87	1.52	1.68	1.81	1.72	2.28	2.54	2.80	2.23	ns
LVC MOS18_F24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.34	1.46	1.55	1.66	2.10	2.32	2.54	2.17	ns
LVC MOS15_S4	0.66	0.69	0.81	0.90	3.48	3.74	4.03	2.22	4.24	4.60	5.02	2.73	ns
LVC MOS15_S8	0.66	0.69	0.81	0.90	2.37	2.67	3.01	2.41	3.13	3.53	4.00	2.92	ns
LVC MOS15_S12	0.66	0.69	0.81	0.90	1.83	2.03	2.23	1.91	2.59	2.89	3.22	2.42	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVDS	0.75	0.79	0.92	0.89	1.05	1.17	1.24	1.43	1.68	1.92	2.06	2.04	ns
HSUL_12	0.69	0.72	0.82	0.95	1.65	1.84	2.05	1.80	2.29	2.59	2.87	2.41	ns
DIFF_HSUL_12	0.69	0.72	0.82	0.92	1.65	1.84	2.05	1.47	2.29	2.59	2.87	2.08	ns
HSTL_I_S	0.68	0.72	0.82	0.84	1.15	1.28	1.38	1.46	1.79	2.03	2.20	2.07	ns
HSTL_II_S	0.68	0.72	0.82	0.84	1.05	1.17	1.26	1.44	1.69	1.93	2.08	2.05	ns
HSTL_I_18_S	0.70	0.72	0.82	0.86	1.12	1.24	1.34	1.41	1.75	2.00	2.16	2.02	ns
HSTL_II_18_S	0.70	0.72	0.82	0.86	1.06	1.18	1.26	1.44	1.70	1.94	2.08	2.05	ns
HSTL_I_12_S	0.68	0.72	0.82	0.94	1.14	1.27	1.37	1.43	1.78	2.02	2.20	2.04	ns
HSTL_I_DCI_S	0.68	0.72	0.82	0.78	1.11	1.23	1.33	1.36	1.74	1.99	2.15	1.98	ns
HSTL_II_DCI_S	0.68	0.72	0.82	0.78	1.05	1.17	1.26	1.33	1.69	1.93	2.08	1.94	ns
HSTL_II_T_DCI_S	0.70	0.72	0.82	0.76	1.15	1.28	1.38	1.40	1.78	2.03	2.20	2.01	ns
HSTL_I_DCI_18_S	0.70	0.72	0.82	0.76	1.11	1.23	1.33	1.36	1.74	1.99	2.15	1.98	ns
HSTL_II_DCI_18_S	0.70	0.72	0.82	0.76	1.05	1.16	1.24	1.32	1.69	1.92	2.06	1.93	ns
HSTL_II_T_DCI_18_S	0.70	0.72	0.82	0.76	1.11	1.23	1.33	1.36	1.74	1.99	2.15	1.98	ns
DIFF_HSTL_I_S	0.75	0.79	0.92	0.89	1.15	1.28	1.38	1.47	1.79	2.03	2.20	2.08	ns
DIFF_HSTL_II_S	0.75	0.79	0.92	0.89	1.05	1.17	1.26	1.47	1.69	1.93	2.08	2.08	ns
DIFF_HSTL_I_DCI_S	0.75	0.79	0.92	0.76	1.15	1.28	1.38	1.47	1.78	2.03	2.20	2.08	ns
DIFF_HSTL_II_DCI_S	0.75	0.79	0.92	0.76	1.05	1.17	1.26	1.40	1.69	1.93	2.08	2.01	ns
DIFF_HSTL_I_18_S	0.75	0.79	0.92	0.89	1.12	1.24	1.34	1.46	1.75	2.00	2.16	2.07	ns
DIFF_HSTL_II_18_S	0.75	0.79	0.92	0.89	1.06	1.18	1.26	1.47	1.70	1.94	2.08	2.08	ns
DIFF_HSTL_I_DCI_18_S	0.75	0.79	0.92	0.75	1.11	1.23	1.33	1.46	1.74	1.99	2.15	2.07	ns
DIFF_HSTL_II_DCI_18_S	0.75	0.79	0.92	0.75	1.05	1.16	1.24	1.41	1.69	1.92	2.06	2.02	ns
DIFF_HSTL_II_T_DCI_18_S	0.75	0.79	0.92	0.76	1.11	1.23	1.33	1.46	1.74	1.99	2.15	2.07	ns
HSTL_I_F	0.68	0.72	0.82	0.84	1.02	1.14	1.22	1.26	1.66	1.90	2.04	1.87	ns
HSTL_II_F	0.68	0.72	0.82	0.84	0.97	1.08	1.15	1.29	1.61	1.84	1.97	1.90	ns
HSTL_I_18_F	0.70	0.72	0.82	0.86	1.04	1.16	1.24	1.32	1.68	1.91	2.06	1.93	ns
HSTL_II_18_F	0.70	0.72	0.82	0.86	0.98	1.09	1.16	1.35	1.62	1.85	1.98	1.96	ns
HSTL_I_12_F	0.68	0.72	0.82	0.94	1.02	1.13	1.21	1.26	1.65	1.88	2.03	1.87	ns
HSTL_I_DCI_F	0.68	0.72	0.82	0.78	1.04	1.16	1.24	1.30	1.67	1.91	2.06	1.91	ns
HSTL_II_DCI_F	0.68	0.72	0.82	0.78	0.97	1.08	1.15	1.22	1.61	1.84	1.97	1.83	ns
HSTL_II_T_DCI_F	0.70	0.72	0.82	0.76	1.02	1.14	1.22	1.26	1.66	1.90	2.04	1.87	ns
HSTL_I_DCI_18_F	0.70	0.72	0.82	0.76	1.04	1.16	1.24	1.30	1.67	1.91	2.06	1.91	ns
HSTL_II_DCI_18_F	0.70	0.72	0.82	0.76	0.98	1.09	1.16	1.27	1.61	1.85	1.98	1.88	ns
HSTL_II_T_DCI_18_F	0.70	0.72	0.82	0.76	1.04	1.16	1.24	1.30	1.67	1.91	2.06	1.91	ns
DIFF_HSTL_I_F	0.75	0.79	0.92	0.89	1.02	1.14	1.22	1.35	1.66	1.90	2.04	1.96	ns
DIFF_HSTL_II_F	0.75	0.79	0.92	0.89	0.97	1.08	1.15	1.35	1.61	1.84	1.97	1.96	ns
DIFF_HSTL_I_DCI_F	0.75	0.79	0.92	0.76	1.02	1.14	1.22	1.35	1.66	1.90	2.04	1.96	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
SSTL18_I_F	0.68	0.72	0.82	0.86	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
SSTL18_II_F	0.68	0.72	0.82	0.87	0.97	1.09	1.16	1.36	1.61	1.84	1.99	1.98	ns
SSTL18_I_DCI_F	0.68	0.72	0.82	0.76	0.89	1.02	1.10	1.30	1.53	1.77	1.92	1.91	ns
SSTL18_II_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.24	1.53	1.77	1.92	1.85	ns
SSTL18_II_T_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.27	1.53	1.77	1.92	1.88	ns
SSTL15_F	0.68	0.72	0.82	0.81	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
SSTL15_DCI_F	0.68	0.72	0.82	0.78	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL15_T_DCI_F	0.68	0.72	0.82	0.80	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL135_F	0.69	0.72	0.82	0.89	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_T_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL12_F	0.69	0.72	0.82	0.95	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
SSTL12_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
SSTL12_T_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.26	1.54	1.79	1.93	1.87	ns
DIFF_SSTL18_I_F	0.75	0.79	0.92	0.89	0.94	1.06	1.15	1.38	1.58	1.82	1.97	1.99	ns
DIFF_SSTL18_II_F	0.75	0.79	0.92	0.89	0.97	1.09	1.16	1.40	1.61	1.84	1.99	2.01	ns
DIFF_SSTL18_I_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.36	1.53	1.77	1.92	1.98	ns
DIFF_SSTL18_II_DCI_F	0.75	0.79	0.92	0.75	0.89	1.02	1.10	1.32	1.53	1.77	1.92	1.93	ns
DIFF_SSTL18_II_T_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.38	1.53	1.77	1.92	1.99	ns
DIFF_SSTL15_F	0.68	0.72	0.82	0.89	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
DIFF_SSTL15_DCI_F	0.68	0.72	0.82	0.75	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
DIFF_SSTL15_T_DCI_F	0.68	0.72	0.82	0.76	0.89	1.01	1.09	1.35	1.53	1.77	1.91	1.96	ns
DIFF_SSTL135_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_T_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.35	1.52	1.76	1.90	1.96	ns
DIFF_SSTL12_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
DIFF_SSTL12_DCI_F	0.69	0.72	0.82	0.78	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
DIFF_SSTL12_T_DCI_F	0.69	0.72	0.82	0.80	0.91	1.03	1.11	1.33	1.54	1.79	1.93	1.94	ns

Notes:

1. This I/O standard is only available in the 1.8V high-performance (HP) banks.

Table 21 specifies the values of T_{IOTPHZ} and $T_{IOIBUFDISABLE}$. T_{IOTPHZ} is described as the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is enabled (i.e., a high impedance state). $T_{IOIBUFDISABLE}$ is described as the IOB delay from IBUFDISABLE to O output. In HP I/O banks, the internal DCI termination turn-off time is always faster than T_{IOTPHZ} when the DCITERMDISABLE pin is used. In HR I/O banks, the internal IN_TERM termination turn-off time is always faster than T_{IOTPHZ} when the INTERMDISABLE pin is used.

Table 21: IOB 3-state Output Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
T_{IOTPHZ}	T input to pad high-impedance	0.76	0.86	0.99	0.62	ns
$T_{IOIBUFDISABLE_HR}$	IBUF turn-on time from IBUFDISABLE to O output for HR I/O banks	1.72	1.89	2.14	2.17	ns
$T_{IOIBUFDISABLE_HP}$	IBUF turn-on time from IBUFDISABLE to O output for HP I/O banks	1.31	1.46	1.76	1.86	ns

Input/Output Logic Switching Characteristics

Table 22: ILOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ICE1CK} /T _{ICKCE1}	CE1 pin Setup/Hold with respect to CLK	0.42/0.00	0.48/0.00	0.67/0.00	0.56/−0.16	ns
T _{ISRCK} /T _{ICKSR}	SR pin Setup/Hold with respect to CLK	0.53/0.01	0.61/0.01	0.99/0.01	0.88/−0.30	ns
T _{IDOCKE2} /T _{IOCKDE2}	D pin Setup/Hold with respect to CLK without Delay (HP I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE2} /T _{IOCKDDE2}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HP I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
T _{IDOCKE3} /T _{IOCKDE3}	D pin Setup/Hold with respect to CLK without Delay (HR I/O banks only)	0.01/0.27	0.01/0.29	0.01/0.34	0.01/0.41	ns
T _{IDOCKDE3} /T _{IOCKDDE3}	DDLY pin Setup/Hold with respect to CLK (using IDELAY) (HR I/O banks only)	0.01/0.27	0.02/0.29	0.02/0.34	0.01/0.41	ns
Combinatorial						
T _{IDIE2}	D pin to O pin propagation delay, no Delay (HP I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE2}	DDLY pin to O pin propagation delay (using IDELAY) (HP I/O banks only)	0.10	0.11	0.13	0.15	ns
T _{IDIE3}	D pin to O pin propagation delay, no Delay (HR I/O banks only)	0.09	0.10	0.12	0.14	ns
T _{IDIDE3}	DDLY pin to O pin propagation delay (using IDELAY) (HR I/O banks only)	0.10	0.11	0.13	0.15	ns
Sequential Delays						
T _{IDLOE2}	D pin to Q1 pin using flip-flop as a latch without Delay (HP I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE2}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HP I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{IDLOE3}	D pin to Q1 pin using flip-flop as a latch without Delay (HR I/O banks only)	0.36	0.39	0.45	0.54	ns
T _{IDLODE3}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY) (HR I/O banks only)	0.36	0.39	0.45	0.55	ns
T _{ICKQ}	CLK to Q outputs	0.47	0.50	0.58	0.71	ns
T _{RQ_ILOGICE2}	SR pin to OQ/TQ out (HP I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE2}	Global Set/Reset to Q outputs (HP I/O banks only)	7.60	7.60	10.51	11.39	ns
T _{RQ_ILOGICE3}	SR pin to OQ/TQ out (HR I/O banks only)	0.84	0.94	1.16	1.32	ns
T _{GSRQ_ILOGICE3}	Global Set/Reset to Q outputs (HR I/O banks only)	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_ILOGICE2}	Minimum Pulse Width, SR inputs (HP I/O banks only)	0.54	0.63	0.63	0.68	ns, Min
T _{RPW_ILOGICE3}	Minimum Pulse Width, SR inputs (HR I/O banks only)	0.54	0.63	0.63	0.68	ns, Min

Input/Output Delay Switching Characteristics

Table 26: Input/Output Delay Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
IDELAYCTRL						
T _{DLYCCO_RDY}	Reset to Ready for IDELAYCTRL	3.22	3.22	3.22	3.22	μs
F _{IDELAYCTRL_REF}	Attribute REFCLK frequency = 200.00 ⁽¹⁾	200.00	200.00	200.00	200.00	MHz
	Attribute REFCLK frequency = 300.00 ⁽¹⁾	300.00	300.00	N/A	N/A	MHz
IDELAYCTRL_REF_PRECISION	REFCLK precision	±10	±10	±10	±10	MHz
T _{IDELAYCTRL_RPW}	Minimum Reset pulse width	52.00	52.00	52.00	52.00	ns
IDELAY/ODELAY						
T _{IDELAYRESOLUTION}	IDELAY/ODELAY chain delay resolution	1/(32 x 2 x F _{REF})				ps
T _{IDELAYPAT_JIT} and T _{ODELAYPAT_JIT}	Pattern dependent period jitter in delay chain for clock pattern. ⁽²⁾	0	0	0	0	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23) ⁽³⁾	±5	±5	±5	±5	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23) ⁽⁴⁾	±9	±9	±9	±9	ps per tap
T _{IDELAY_CLK_MAX} / T _{ODELAY_CLK_MAX}	Maximum frequency of CLK input to IDELAY/ODELAY	800.00	800.00	710.00	710.00	MHz
T _{IDCCK_CE} / T _{IDCKC_CE}	CE pin Setup/Hold with respect to C for IDELAY	0.11/0.10	0.14/0.12	0.18/0.14	0.14/0.16	ns
T _{ODCCK_CE} / T _{ODCKC_CE}	CE pin Setup/Hold with respect to C for ODELAY	0.14/0.03	0.16/0.04	0.19/0.05	0.28/0.06	ns
T _{IDCCK_INC} / T _{IDCKC_INC}	INC pin Setup/Hold with respect to C for IDELAY	0.10/0.14	0.12/0.16	0.14/0.20	0.10/0.23	ns
T _{ODCCK_INC} / T _{ODCKC_INC}	INC pin Setup/Hold with respect to C for ODELAY	0.10/0.07	0.12/0.08	0.13/0.09	0.19/0.16	ns
T _{IDCCK_RST} / T _{IDCKC_RST}	RST pin Setup/Hold with respect to C for IDELAY	0.13/0.08	0.14/0.10	0.16/0.12	0.22/0.19	ns
T _{ODCCK_RST} / T _{ODCKC_RST}	RST pin Setup/Hold with respect to C for ODELAY	0.16/0.04	0.19/0.06	0.24/0.08	0.32/0.11	ns
T _{IDDO_IDATAIN}	Propagation delay through IDELAY	Note 5	Note 5	Note 5	Note 5	ps
T _{ODDO_ODATAIN}	Propagation delay through ODELAY	Note 5	Note 5	Note 5	Note 5	ps

Notes:

1. Average Tap Delay at 200 MHz = 78 ps, at 300 MHz = 52 ps.
2. When HIGH_PERFORMANCE mode is set to TRUE or FALSE.
3. When HIGH_PERFORMANCE mode is set to TRUE.
4. When HIGH_PERFORMANCE mode is set to FALSE.
5. Delay depends on IDELAY/ODELAY tap setting. See TRACE report for actual values.

CLB Switching Characteristics

Table 28: CLB Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Combinatorial Delays						
T _{ILO}	An – Dn LUT address to A	0.05	0.05	0.06	0.07	ns, Max
T _{ILO_2}	An – Dn LUT address to AMUX/CMUX	0.15	0.16	0.19	0.22	ns, Max
T _{ILO_3}	An – Dn LUT address to BMUX_A	0.24	0.25	0.30	0.37	ns, Max
T _{ITO}	An – Dn inputs to A – D Q outputs	0.58	0.61	0.74	0.91	ns, Max
T _{AXA}	AX inputs to AMUX output	0.38	0.40	0.49	0.62	ns, Max
T _{AXB}	AX inputs to BMUX output	0.40	0.42	0.52	0.66	ns, Max
T _{AXC}	AX inputs to CMUX output	0.39	0.41	0.50	0.62	ns, Max
T _{AXD}	AX inputs to DMUX output	0.43	0.44	0.52	0.67	ns, Max
T _{BXB}	BX inputs to BMUX output	0.31	0.33	0.40	0.51	ns, Max
T _{BXD}	BX inputs to DMUX output	0.38	0.39	0.47	0.62	ns, Max
T _{CXC}	CX inputs to CMUX output	0.27	0.28	0.34	0.43	ns, Max
T _{CXD}	CX inputs to DMUX output	0.33	0.34	0.41	0.54	ns, Max
T _{DXD}	DX inputs to DMUX output	0.32	0.33	0.40	0.52	ns, Max
Sequential Delays						
T _{CKO}	Clock to AQ – DQ outputs	0.26	0.27	0.32	0.40	ns, Max
T _{SHCKO}	Clock to AMUX – DMUX outputs	0.32	0.32	0.39	0.46	ns, Max
Setup and Hold Times of CLB Flip-Flops Before/After Clock CLK						
T _{AS} /T _{AH}	A _N – D _N input to CLK on A – D Flip Flops	0.01/0.12	0.02/0.13	0.03/0.18	0.02/0.18	ns, Min
T _{DICK} /T _{CKDI}	A _X – D _X input to CLK on A – D Flip Flops	0.04/0.14	0.04/0.14	0.05/0.20	0.05/0.21	ns, Min
	A _X – D _X input through MUXs and/or carry logic to CLK on A – D Flip Flops	0.36/0.10	0.37/0.11	0.46/0.16	0.56/0.15	ns, Min
T _{CECK_CLB} /T _{CKCE_CLB}	CE input to CLK on A – D Flip Flops	0.19/0.05	0.20/0.05	0.25/0.05	0.24/0.04	ns, Min
T _{SRCK} /T _{CKSR}	SR input to CLK on A – D Flip Flops	0.30/0.05	0.31/0.07	0.37/0.09	0.48/0.05	ns, Min
Set/Reset						
T _{SRMIN}	SR input minimum pulse width	0.52	0.78	1.04	0.95	ns, Min
T _{RQ}	Delay from SR input to AQ – DQ flip-flops	0.38	0.38	0.46	0.59	ns, Max
T _{CEO}	Delay from CE input to AQ – DQ flip-flops	0.34	0.35	0.43	0.54	ns, Max
F _{TOG}	Toggle frequency (for export control)	1818	1818	1818	1286	MHz

Block RAM and FIFO Switching Characteristics

Table 31: Block RAM and FIFO Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Block RAM and FIFO Clock-to-Out Delays						
T_{RCKO_DO} and $T_{RCKO_DO_REG}^{(1)}$	Clock CLK to DOUT output (without output register) ⁽²⁾⁽³⁾	1.57	1.80	2.08	2.44	ns, Max
	Clock CLK to DOUT output (with output register) ⁽⁴⁾⁽⁵⁾	0.54	0.63	0.75	0.86	ns, Max
$T_{RCKO_DO_ECC}$ and $T_{RCKO_DO_ECC_REG}$	Clock CLK to DOUT output with ECC (without output register) ⁽²⁾⁽³⁾	2.35	2.58	3.26	4.49	ns, Max
	Clock CLK to DOUT output with ECC (with output register) ⁽⁴⁾⁽⁵⁾	0.62	0.69	0.80	0.94	ns, Max
$T_{RCKO_DO_CASCOUT}$ and $T_{RCKO_DO_CASCOUT_REG}$	Clock CLK to DOUT output with Cascade (without output register) ⁽²⁾	2.21	2.45	2.80	3.19	ns, Max
	Clock CLK to DOUT output with Cascade (with output register) ⁽⁴⁾	0.98	1.08	1.24	1.32	ns, Max
T_{RCKO_FLAGS}	Clock CLK to FIFO flags outputs ⁽⁶⁾	0.65	0.74	0.89	0.97	ns, Max
$T_{RCKO_POINTERS}$	Clock CLK to FIFO pointers outputs ⁽⁷⁾	0.79	0.87	0.98	1.10	ns, Max
$T_{RCKO_PARITY_ECC}$	Clock CLK to ECCPARITY in ECC encode only mode	0.66	0.72	0.80	0.93	ns, Max
$T_{RCKO_SDBIT_ECC}$ and $T_{RCKO_SDBIT_ECC_REG}$	Clock CLK to BITERR (without output register)	2.17	2.38	3.01	4.15	ns, Max
	Clock CLK to BITERR (with output register)	0.57	0.65	0.76	0.89	ns, Max
$T_{RCKO_RDADDR_ECC}$ and $T_{RCKO_RDADDR_ECC_REG}$	Clock CLK to RDADDR output with ECC (without output register)	0.64	0.74	0.90	0.98	ns, Max
	Clock CLK to RDADDR output with ECC (with output register)	0.71	0.79	0.92	1.10	ns, Max
Setup and Hold Times Before/After Clock CLK						
$T_{RCK_ADDR}/T_{RCKC_ADDR}$	ADDR inputs ⁽⁸⁾	0.38/0.27	0.42/0.28	0.48/0.31	0.65/0.38	ns, Min
$T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$	Data input setup/hold time when block RAM is configured in WRITE_FIRST or NO_CHANGE mode ⁽⁹⁾	0.49/0.51	0.55/0.53	0.63/0.57	0.78/0.64	ns, Min
$T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$	Data input setup/hold time when block RAM is configured in READ_FIRST mode ⁽⁹⁾	0.17/0.25	0.19/0.29	0.21/0.35	0.25/0.32	ns, Min
$T_{RDCK_DI_ECC}/T_{RCKD_DI_ECC}$	DIN inputs with block RAM ECC in standard mode ⁽⁹⁾	0.42/0.37	0.47/0.39	0.53/0.43	0.66/0.46	ns, Min
$T_{RDCK_DI_ECCW}/T_{RCKD_DI_ECCW}$	DIN inputs with block RAM ECC encode only ⁽⁹⁾	0.79/0.37	0.87/0.39	0.99/0.43	1.17/0.41	ns, Min
$T_{RDCK_DI_ECC_FIFO}/T_{RCKD_DI_ECC_FIFO}$	DIN inputs with FIFO ECC in standard mode ⁽⁹⁾	0.89/0.47	0.98/0.50	1.12/0.54	1.32/0.65	ns, Min
$T_{RCK_INJECTBITERR}/T_{RCKC_INJECTBITERR}$	Inject single/double bit error in ECC mode	0.49/0.30	0.55/0.31	0.63/0.34	0.78/0.41	ns, Min
T_{RCK_EN}/T_{RCKC_EN}	Block RAM Enable (EN) input	0.30/0.17	0.33/0.18	0.38/0.20	0.48/0.22	ns, Min
$T_{RCK_REGCE}/T_{RCKC_REGCE}$	CE input of output register	0.21/0.13	0.25/0.13	0.31/0.14	0.34/0.16	ns, Min
$T_{RCK_RSTREG}/T_{RCKC_RSTREG}$	Synchronous RSTREG input	0.25/0.06	0.27/0.06	0.29/0.06	0.35/0.06	ns, Min

Table 38: MMCM Specification (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$T_{\text{MMCM DCK_DEN}}/$ $T_{\text{MMCMCKD_DEN}}$	DEN Setup/Hold	1.76/0.00	1.97/0.00	2.29/0.00	2.40/0.00	ns, Min
$T_{\text{MMCM DCK_DWE}}/$ $T_{\text{MMCMCKD_DWE}}$	DWE Setup/Hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
$T_{\text{MMCMCKO_DRDY}}$	CLK to out of DRDY	0.65	0.72	0.99	0.70	ns, Max
F_{DCK}	DCLK frequency	200.00	200.00	200.00	100.00	MHz, Max

Notes:

1. The MMCM does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
2. The static offset is measured between any MMCM outputs with identical phase.
3. Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
4. Includes global clock buffer.
5. Calculated as $F_{\text{VCO}}/128$ assuming output duty cycle is 50%.
6. When $\text{CLKOUT4_CASCADE} = \text{TRUE}$, $\text{MMCM_F}_{\text{OUTMIN}}$ is 0.036 MHz.

PLL Switching Characteristics

Table 39: PLL Specification

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
$\text{PLL_F}_{\text{INMAX}}$	Maximum Input Clock Frequency	1066.00	933.00	800.00	800.00	MHz
$\text{PLL_F}_{\text{INMIN}}$	Minimum Input Clock Frequency	19.00	19.00	19.00	19.00	MHz
$\text{PLL_F}_{\text{INJITTER}}$	Maximum Input Clock Period Jitter	< 20% of clock input period or 1 ns Max				
$\text{PLL_F}_{\text{INDUTY}}$	Allowable Input Duty Cycle: 19—49 MHz	25.00	25.00	25.00	25.00	%
	Allowable Input Duty Cycle: 50—199 MHz	30.00	30.00	30.00	30.00	%
	Allowable Input Duty Cycle: 200—399 MHz	35.00	35.00	35.00	35.00	%
	Allowable Input Duty Cycle: 400—499 MHz	40.00	40.00	40.00	40.00	%
	Allowable Input Duty Cycle: >500 MHz	45.00	45.00	45.00	45.00	%
$\text{PLL_F}_{\text{VCOMIN}}$	Minimum PLL VCO Frequency	800.00	800.00	800.00	800.00	MHz
$\text{PLL_F}_{\text{VCOMAX}}$	Maximum PLL VCO Frequency	2133.00	1866.00	1600.00	1600.00	MHz
$\text{PLL_F}_{\text{BANDWIDTH}}$	Low PLL Bandwidth at Typical ⁽¹⁾	1.00	1.00	1.00	1.00	MHz
	High PLL Bandwidth at Typical ⁽¹⁾	4.00	4.00	4.00	4.00	MHz
$\text{PLL_T}_{\text{STATPHAOFFSET}}$	Static Phase Offset of the PLL Outputs ⁽²⁾	0.12	0.12	0.12	0.12	ns
$\text{PLL_T}_{\text{OUTJITTER}}$	PLL Output Jitter	Note 3				
$\text{PLL_T}_{\text{OUTDUTY}}$	PLL Output Clock Duty Cycle Precision ⁽⁴⁾	0.20	0.20	0.20	0.25	ns
$\text{PLL_T}_{\text{LOCKMAX}}$	PLL Maximum Lock Time	100	100	100	100	μs
$\text{PLL_F}_{\text{OUTMAX}}$	PLL Maximum Output Frequency	1066.00	933.00	800.00	800.00	MHz
$\text{PLL_F}_{\text{OUTMIN}}$	PLL Minimum Output Frequency ⁽⁵⁾	6.25	6.25	6.25	6.25	MHz
$\text{PLL_T}_{\text{EXTFDVAR}}$	External Clock Feedback Variation	< 20% of clock input period or 1 ns Max				
$\text{PLL_RST}_{\text{MINPULSE}}$	Minimum Reset Pulse Width	5.00	5.00	5.00	5.00	ns

Device Pin-to-Pin Input Parameter Guidelines

All devices are 100% functionally tested. Values are expressed in nanoseconds unless otherwise noted.

Table 45: Global Clock Input Setup and Hold Without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSFD} / T _{PHFD}	Full Delay (Legacy Delay or Default Delay) Global Clock Input and IFF ⁽²⁾ without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks	XC7K70T	2.83/−0.29	2.95/−0.29	3.15/−0.29	4.96/−0.33	ns
		XC7K160T	3.17/−0.35	3.29/−0.35	3.55/−0.35	5.54/−0.49	ns
		XC7K325T	2.83/−0.06	2.94/−0.06	3.15/−0.06	5.18/−0.14	ns
		XC7K355T	3.26/−0.32	3.41/−0.32	3.67/−0.32	5.84/−0.49	ns
		XC7K410T	3.43/−0.34	3.59/−0.34	3.88/−0.34	6.21/−0.54	ns
		XC7K420T	3.37/−0.27	3.48/−0.27	3.76/−0.27	6.00/−0.52	ns
		XC7K480T	3.37/−0.27	3.48/−0.27	3.76/−0.27	6.00/−0.52	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- A Zero "0" Hold Time listing indicates no hold time or a negative hold time.

Table 46: Clock-Capable Clock Input Setup and Hold With MMCM

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾							
T _{PSMMCMCC} / T _{PHMMCMCC}	No Delay clock-capable clock input and IFF ⁽²⁾ with MMCM	XC7K70T	2.39/−0.22	2.65/−0.22	2.94/−0.22	2.21/−0.44	ns
		XC7K160T	2.49/−0.20	2.77/−0.20	3.07/−0.20	2.38/−0.47	ns
		XC7K325T	2.55/−0.16	2.85/−0.16	3.14/−0.16	2.60/−0.47	ns
		XC7K355T	2.43/−0.16	2.73/−0.16	3.00/−0.16	2.47/−0.43	ns
		XC7K410T	2.55/−0.16	2.84/−0.16	3.14/−0.16	2.58/−0.47	ns
		XC7K420T	2.47/−0.09	2.73/−0.09	3.02/−0.09	2.40/−0.41	ns
		XC7K480T	2.47/−0.09	2.73/−0.09	3.02/−0.09	2.40/−0.41	ns

Notes:

- Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch
- Use IBIS to determine any duty-cycle distortion incurred using various standards.

Table 58: GTX Transceiver Transmitter Switching Characteristics (Cont'd)

Symbol	Description	Condition	Min	Typ	Max	Units
TJ _{10.3125}	Total Jitter ⁽²⁾⁽⁴⁾	10.3125 Gb/s	–	–	0.28	UI
DJ _{10.3125}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.17	UI
TJ _{9.953}	Total Jitter ⁽²⁾⁽⁴⁾	9.953 Gb/s	–	–	0.28	UI
DJ _{9.953}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.17	UI
TJ _{9.8}	Total Jitter ⁽²⁾⁽⁴⁾	9.8 Gb/s	–	–	0.28	UI
DJ _{9.8}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.17	UI
TJ _{8.0}	Total Jitter ⁽²⁾⁽⁴⁾	8.0 Gb/s	–	–	0.30	UI
DJ _{8.0}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.15	UI
TJ _{6.6_QPLL}	Total Jitter ⁽²⁾⁽⁴⁾	6.6 Gb/s	–	–	0.28	UI
DJ _{6.6_QPLL}	Deterministic Jitter ⁽²⁾⁽⁴⁾		–	–	0.17	UI
TJ _{6.6_CPLL}	Total Jitter ⁽³⁾⁽⁴⁾	6.6 Gb/s	–	–	0.30	UI
DJ _{6.6_CPLL}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.15	UI
TJ _{5.0}	Total Jitter ⁽³⁾⁽⁴⁾	5.0 Gb/s	–	–	0.30	UI
DJ _{5.0}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.15	UI
TJ _{4.25}	Total Jitter ⁽³⁾⁽⁴⁾	4.25 Gb/s	–	–	0.30	UI
DJ _{4.25}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.15	UI
TJ _{3.75}	Total Jitter ⁽³⁾⁽⁴⁾	3.75 Gb/s	–	–	0.30	UI
DJ _{3.75}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.15	UI
TJ _{3.2}	Total Jitter ⁽³⁾⁽⁴⁾	3.20 Gb/s ⁽⁵⁾	–	–	0.2	UI
DJ _{3.2}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.1	UI
TJ _{3.2L}	Total Jitter ⁽³⁾⁽⁴⁾	3.20 Gb/s ⁽⁶⁾	–	–	0.32	UI
DJ _{3.2L}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.16	UI
TJ _{2.5}	Total Jitter ⁽³⁾⁽⁴⁾	2.5 Gb/s ⁽⁷⁾	–	–	0.20	UI
DJ _{2.5}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.08	UI
TJ _{1.25}	Total Jitter ⁽³⁾⁽⁴⁾	1.25 Gb/s ⁽⁸⁾	–	–	0.15	UI
DJ _{1.25}	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.06	UI
TJ ₅₀₀	Total Jitter ⁽³⁾⁽⁴⁾	500 Mb/s	–	–	0.1	UI
DJ ₅₀₀	Deterministic Jitter ⁽³⁾⁽⁴⁾		–	–	0.03	UI

Notes:

- Using same REFCLK input with TX phase alignment enabled for up to 12 consecutive transmitters (three fully populated GTX Quads).
- Using QPLL_FBDIV = 40, 20-bit internal data width. These values are NOT intended for protocol specific compliance determinations.
- Using CPLL_FBDIV = 2, 20-bit internal data width. These values are NOT intended for protocol specific compliance determinations.
- All jitter values are based on a bit-error ratio of $1e^{-12}$.
- CPLL frequency at 3.2 GHz and TXOUT_DIV = 2.
- CPLL frequency at 1.6 GHz and TXOUT_DIV = 1.
- CPLL frequency at 2.5 GHz and TXOUT_DIV = 2.
- CPLL frequency at 2.5 GHz and TXOUT_DIV = 4.

Table 59: GTX Transceiver Receiver Switching Characteristics

Symbol	Description		Min	Typ	Max	Units
F _{GTXRX}	Serial data rate	RX oversampler not enabled	0.500	–	F _{GTXMAX}	Gb/s
T _{RXELECIDLE}	Time for RXELECIDLE to respond to loss or restoration of data		–	10	–	ns
RX _{OOBVDPP}	OOB detect threshold peak-to-peak		60	–	150	mV
RX _{SST}	Receiver spread-spectrum tracking ⁽¹⁾	Modulated @ 33 KHz	–5000	–	0	ppm
RX _{RL}	Run length (CID)		–	–	512	UI
RX _{PPMTOL}	Data/REFCLK PPM offset tolerance	Bit rates ≤ 6.6 Gb/s	–1250	–	1250	ppm
		Bit rates > 6.6 Gb/s and ≤ 8.0 Gb/s	–700	–	700	ppm
		Bit rates > 8.0 Gb/s	–200	–	200	ppm
SJ Jitter Tolerance ⁽²⁾						
JT_SJ _{12.5}	Sinusoidal Jitter (QPLL) ⁽³⁾	12.5 Gb/s	0.3	–	–	UI
JT_SJ _{11.18}	Sinusoidal Jitter (QPLL) ⁽³⁾	11.18 Gb/s	0.3	–	–	UI
JT_SJ _{10.32}	Sinusoidal Jitter (QPLL) ⁽³⁾	10.32 Gb/s	0.3	–	–	UI
JT_SJ _{9.95}	Sinusoidal Jitter (QPLL) ⁽³⁾	9.95 Gb/s	0.3	–	–	UI
JT_SJ _{9.8}	Sinusoidal Jitter (QPLL) ⁽³⁾	9.8 Gb/s	0.3	–	–	UI
JT_SJ _{8.0}	Sinusoidal Jitter (QPLL) ⁽³⁾	8.0 Gb/s	0.44	–	–	UI
JT_SJ _{6.6_QPLL}	Sinusoidal Jitter (QPLL) ⁽³⁾	6.6 Gb/s	0.48	–	–	UI
JT_SJ _{6.6_CPLL}	Sinusoidal Jitter (CPLL) ⁽³⁾	6.6 Gb/s	0.44	–	–	UI
JT_SJ _{5.0}	Sinusoidal Jitter (CPLL) ⁽³⁾	5.0 Gb/s	0.44	–	–	UI
JT_SJ _{4.25}	Sinusoidal Jitter (CPLL) ⁽³⁾	4.25 Gb/s	0.44	–	–	UI
JT_SJ _{3.75}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.75 Gb/s	0.44	–	–	UI
JT_SJ _{3.2}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁴⁾	0.45	–	–	UI
JT_SJ _{3.2L}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁵⁾	0.45	–	–	UI
JT_SJ _{2.5}	Sinusoidal Jitter (CPLL) ⁽³⁾	2.5 Gb/s ⁽⁶⁾	0.5	–	–	UI
JT_SJ _{1.25}	Sinusoidal Jitter (CPLL) ⁽³⁾	1.25 Gb/s ⁽⁷⁾	0.5	–	–	UI
JT_SJ ₅₀₀	Sinusoidal Jitter (CPLL) ⁽³⁾	500 Mb/s	0.4	–	–	UI
SJ Jitter Tolerance with Stressed Eye ⁽²⁾						
JT_TJSE _{3.2}	Total Jitter with Stressed Eye ⁽⁸⁾	3.2 Gb/s	0.70	–	–	UI
JT_TJSE _{6.6}		6.6 Gb/s	0.70	–	–	UI
JT_SJSE _{3.2}	Sinusoidal Jitter with Stressed Eye ⁽⁸⁾	3.2 Gb/s	0.1	–	–	UI
JT_SJSE _{6.6}		6.6 Gb/s	0.1	–	–	UI

Notes:

- Using RXOUT_DIV = 1, 2, and 4.
- All jitter values are based on a bit error ratio of $1e^{-12}$.
- The frequency of the injected sinusoidal jitter is 10 MHz.
- CPLL frequency at 3.2 GHz and RXOUT_DIV = 2.
- CPLL frequency at 1.6 GHz and RXOUT_DIV = 1.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 2.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 4.
- Composite jitter with RX and LPM or DFE mode.

GTX Transceiver Protocol Jitter Characteristics

For Table 60 through Table 65, the [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) contains recommended settings for optimal usage of protocol specific characteristics.

Table 60: Gigabit Ethernet Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
Gigabit Ethernet Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	1250	–	0.24	UI
Gigabit Ethernet Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	1250	0.749	–	UI

Table 61: XAUI Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
XAUI Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	3125	–	0.35	UI
XAUI Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	3125	0.65	–	UI

Table 62: PCI Express Protocol Characteristics⁽¹⁾

Standard	Description		Line Rate (Mb/s)	Min	Max	Units
PCI Express Transmitter Jitter Generation						
PCI Express Gen 1	Total transmitter jitter		2500	–	0.25	UI
PCI Express Gen 2	Total transmitter jitter		5000	–	0.25	UI
PCI Express Gen 3 ⁽²⁾	Total transmitter jitter uncorrelated		8000	–	31.25	ps
	Deterministic transmitter jitter uncorrelated			–	12	ps
PCI Express Receiver High Frequency Jitter Tolerance						
PCI Express Gen 1	Total receiver jitter tolerance		2500	0.65	–	UI
PCI Express Gen 2 ⁽³⁾	Receiver inherent timing error		5000	0.40	–	UI
	Receiver inherent deterministic timing error			0.30	–	UI
PCI Express Gen 3 ⁽²⁾	Receiver sinusoidal jitter tolerance	0.03 MHz–1.0 MHz	8000	1.00	–	UI
		1.0 MHz–10 MHz		Note 4	–	UI
		10 MHz–100 MHz		0.10	–	UI

Notes:

1. Tested per card electromechanical (CEM) methodology.
2. PCI-SIG 3.0 certification and compliance test boards are currently not available.
3. Using common REFCLK.
4. Between 1 MHz and 10 MHz the minimum sinusoidal jitter roll-off with a slope of 20dB/decade.

Date	Version	Description
07/25/12	1.6	Updated the descriptions, changed V_{IN} and Note 2 and added Note 4 in Table 1. In Table 2, changed descriptions and notes, removed Note 7, changed GTX transceiver parameters and values and added Note 9. Updated parameters in Table 3. Added Table 4 and Table 5. Changed the typical values for many of the devices in Table 7. Updated LVCMOS12 and the SSTLs in Table 9. Updated many of the specifications in Table 10 and Table 11. Updated speed specification to v1.06 (-3, -2, -2L(1.0V), -1) and v1.05 (-2L(0.9V)) with appropriate changes to Table 14 and Table 15 including production release of the XC7K325T and the XC7K410T in the -2, -2L(1.0V), and -1 speed designations. Added notes and specifications to Table 17 and Table 18. Updated the IOB Pad Input/Output/3-State discussion and changed Table 21 by adding $T_{IOIBUFDISABLE}$. Removed many of the combinatorial delay specifications and T_{CINCK}/T_{CKCIN} from Table 28. Rearranged Table 51 including moving some parameters to Table 1. Added Table 56. Updated Table 57. In Table 59, updated SJ Jitter Tolerance with Stressed Eye section, page 51 and Note 8. Added Note 1, Note 2, and Note 3 to Table 62. Added Note 1 and Note 2 to Table 63, and line rate ranges. Updated Table 64 including adding Note 1. Updated Table 65 including adding Note 1. In Table 67 updated Note 1 and added Note 4. In Table 68, updated T_{POR} and F_{EMCCK}.
09/04/12	1.7	Updated Table 14 and Table 15 for production release of the XC7K160T in the -2, -2L(1.0V), and -1 speed designations.
09/26/12	1.8	In Table 2 , revised V_{CCINT} and V_{CCBRAM} and added Note 2 . Updated Table 14 and Table 15 for production release of the XC7K480T in the -2, -2L(1.0V), and -1 speed designations and the XC7K325T and XC7K410T in the -3 speed designation.
10/10/12	1.9	Updated the $I_{CCINTMIN}$ value for the XC7K355T in Table 7 . Updated Table 14 and Table 15 for production release of the XC7K420T in the -2, -2L(1.0V), and -1 speed designations.
10/25/12	2.0	Updated the AC Switching Characteristics based upon ISE 14.3 v1.07 for the -3, -2, -2L (1.0V), -1 speed specifications, and ISE 14.3 v1.06 for the -2L (0.9V) speed specifications throughout the document. Updated Table 14 and Table 15 for production release of the XC7K355T in the -2, -2L(1.0V), and -1 speed designations. Also updated Table 14 and Table 15 for production release of the XC7K325T and XC7K410T in the -2L (0.9V). Added values for Table 16 -2L (0.9V). Added package skew values to Table 50. In Table 53, increased -1 speed grade (FF package) F_{GTMAX} value from 6.6 Gb/s to 8.0 Gb/s.
10/31/12	2.1	Updated Table 14 and Table 15 for production release of the XC7K70T in the -2, -2L(1.0V), and -1 speed designations.
11/26/12	2.2	Updated Table 14 and Table 15 for production release of -3 speed designation for XC7K70T, XC7K160T, XC7K355T, XC7K420T, and XC7K480T. Removed Note 4 from Table 67 .
12/05/12	2.3	Updated Table 14 and Table 15 for production release of the -2L (0.9V) speed designation for XC7K160T, XC7K420T, and XC7K480T. Updated Note 1 in Table 50 .
12/12/12	2.4	Updated Table 14 and Table 15 for production release of the -2L (0.9V) speed designation for XC7K70T and XC7K355T. Added Internal Configuration Access Port section to Table 68 .