



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	25475
Number of Logic Elements/Cells	326080
Total RAM Bits	16404480
Number of I/O	400
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 85°C (TJ)
Package / Case	676-BBGA, FCBGA
Supplier Device Package	676-FCBGA (27x27)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7k325t-2fbg676c

Table 1: Absolute Maximum Ratings ⁽¹⁾ (Cont'd)

Symbol	Description	Min	Max	Units
I_{DCIN}	DC input current for receiver input pins DC coupled $V_{MGTAVTT} = 1.2V$	–	14	mA
I_{DCOUT}	DC output current for transmitter pins DC coupled $V_{MGTAVTT} = 1.2V$	–	14	mA
XADC				
V_{CCADC}	XADC supply relative to GNDADC	–0.5	2.0	V
V_{REFP}	XADC reference input relative to GNDADC	–0.5	2.0	V
Temperature				
T_{STG}	Storage temperature (ambient)	–65	150	°C
T_{SOL}	Maximum soldering temperature for Pb/Sn component bodies ⁽⁶⁾	–	+220	°C
	Maximum soldering temperature for Pb-free component bodies ⁽⁶⁾	–	+260	°C
T_j	Maximum junction temperature ⁽⁶⁾	–	+125	°C

Notes:

- Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.
- The lower absolute voltage specification always applies.
- For I/O operation, refer to [UG471: 7 Series FPGAs SelectIO Resources User Guide](#).
- The maximum limit applied to DC and AC signals.
- For maximum undershoot and overshoot AC specifications, see [Table 4](#) and [Table 5](#).
- For soldering guidelines and thermal considerations, see [UG475: 7 Series FPGA Packaging and Pinout Specification](#).

Table 2: Recommended Operating Conditions ⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
FPGA Logic					
$V_{CCINT}^{(2)}$	Internal supply voltage	0.97	1.00	1.03	V
	For -2L (0.9V) devices: internal supply voltage	0.87	0.90	0.93	V
$V_{CCBRAM}^{(2)}$	Block RAM supply voltage	0.97	1.00	1.03	V
	For -2L (0.9V) devices: block RAM supply voltage	0.87	0.90	1.03	V
V_{CCAUX}	Auxiliary supply voltage	1.71	1.80	1.89	V
$V_{CCO}^{(3)(4)}$	Supply voltage for 3.3V HR I/O banks	1.14	–	3.465	V
	Supply voltage for 1.8V HP I/O banks	1.14	–	1.89	V
V_{CCAUX_IO}	Auxiliary supply voltage when set to 1.8V	1.71	1.80	1.89	V
	Auxiliary supply voltage when set to 2.0V	1.94	2.00	2.06	V
$V_{IN}^{(5)}$	I/O input voltage	–0.20	–	$V_{CCO} + 0.2$	V
	I/O input voltage for V_{REF} and differential I/O standards	–0.20	–	2.625	V
$I_{IN}^{(6)}$	Maximum current through any pin in a powered or unpowered bank when forward biasing the clamp diode.	–	–	10	mA
$V_{CCBATT}^{(7)}$	Battery voltage	1.0	–	1.89	V
GTX Transceiver					
$V_{MGTAVCC}^{(8)}$	Analog supply voltage for the GTX transceiver QPLL frequency range ≤ 10.3125 GHz ⁽⁹⁾⁽¹⁰⁾	0.97	1.0	1.08	V
	Analog supply voltage for the GTX transceiver QPLL frequency range > 10.3125 GHz	1.02	1.05	1.08	V
$V_{MGTAVTT}^{(8)}$	Analog supply voltage for the GTX transmitter and receiver termination circuits	1.17	1.2	1.23	V
$V_{MGTVCCAUX}^{(8)}$	Auxiliary analog QPLL voltage supply for the transceivers	1.75	1.80	1.85	V

Table 5: Maximum Allowed AC Voltage Overshoot and Undershoot for 1.8V HP I/O Banks⁽¹⁾⁽²⁾ (Cont'd)

AC Voltage Overshoot	% of UI @–40°C to 100°C	AC Voltage Undershoot	% of UI @–40°C to 100°C
$V_{CCO} + 0.80$	9.71	–0.80	50.0
$V_{CCO} + 0.85$	4.51	–0.85	28.4
$V_{CCO} + 0.90$	2.12	–0.90	12.7
$V_{CCO} + 0.95$	1.01	–0.95	5.79

Notes:

1. A total of 200 mA per bank should not be exceeded.
2. For UI smaller than 20 μ s.

Table 6: Typical Quiescent Supply Current

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC7K70T	241	241	241	187	mA
		XC7K160T	474	474	474	368	mA
		XC7K325T	810	810	810	629	mA
		XC7K355T	993	993	993	771	mA
		XC7K410T	1080	1080	1080	838	mA
		XC7K420T	1313	1313	1313	1019	mA
		XC7K480T	1313	1313	1313	1019	mA
I_{CCOQ}	Quiescent V_{CCO} supply current	XC7K70T	1	1	1	1	mA
		XC7K160T	1	1	1	1	mA
		XC7K325T	1	1	1	1	mA
		XC7K355T	1	1	1	1	mA
		XC7K410T	1	1	1	1	mA
		XC7K420T	1	1	1	1	mA
		XC7K480T	1	1	1	1	mA
I_{CCAUXQ}	Quiescent V_{CCAUX} supply current	XC7K70T	21	21	21	21	mA
		XC7K160T	40	40	40	40	mA
		XC7K325T	68	68	68	68	mA
		XC7K355T	75	75	75	75	mA
		XC7K410T	85	85	85	85	mA
		XC7K420T	99	99	99	99	mA
		XC7K480T	99	99	99	99	mA
I_{CCAUX_IOQ}	Quiescent V_{CCAUX_IO} supply current	XC7K70T	N/A	N/A	N/A	N/A	mA
		XC7K160T	2	2	2	2	mA
		XC7K325T	2	2	2	2	mA
		XC7K355T	N/A	N/A	N/A	N/A	mA
		XC7K410T	2	2	2	2	mA
		XC7K420T	N/A	N/A	N/A	N/A	mA
		XC7K480T	N/A	N/A	N/A	N/A	mA

Table 6: Typical Quiescent Supply Current (Cont'd)

Symbol	Description	Device	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
I _{CCBRAMQ}	Quiescent V _{CCBRAM} supply current	XC7K70T	6	6	6	6	mA
		XC7K160T	14	14	14	14	mA
		XC7K325T	19	19	19	19	mA
		XC7K355T	31	31	31	31	mA
		XC7K410T	34	34	34	34	mA
		XC7K420T	41	41	41	41	mA
		XC7K480T	41	41	41	41	mA

Notes:

- Typical values are specified at nominal voltage, 85°C junction temperatures (T_j) with single-ended SelectIO resources.
- Typical values are for blank configured devices with no output current loads, no active input pull-up resistors, all I/O pins are 3-state and floating.
- Use the XPower™ Estimator (XPE) spreadsheet tool (download at <http://www.xilinx.com/power>) to calculate static power consumption for conditions other than those specified.

Power-On/Off Power Supply Sequencing

The recommended power-on sequence is V_{CCINT}, V_{CCBRAM}, V_{CCAUX}, V_{CCAUX_IO}, and V_{CCO} to achieve minimum current draw and ensure that the I/Os are 3-stated at power-on. The recommended power-off sequence is the reverse of the power-on sequence. If V_{CCINT} and V_{CCBRAM} have the same recommended voltage levels then both can be powered by the same supply and ramped simultaneously. If V_{CCAUX}, V_{CCAUX_IO}, and V_{CCO} have the same recommended voltage levels then they can be powered by the same supply and ramped simultaneously.

For V_{CCO} voltages of 3.3V in HR I/O banks and configuration bank 0:

- The voltage difference between V_{CCO} and V_{CCAUX} must not exceed 2.625V for longer than T_{VCCO2VCCAUX} for each power-on/off cycle to maintain device reliability levels.
- The T_{VCCO2VCCAUX} time can be allocated in any percentage between the power-on and power-off ramps.

The recommended power-on sequence to achieve minimum current draw for the GTX transceivers is V_{CCINT}, V_{MGTAVCC}, V_{MGTAVTT} OR V_{MGTAVCC}, V_{CCINT}, V_{MGTAVTT}. There is no recommended sequencing for V_{MGTVCCAUX}. Both V_{MGTAVCC} and V_{CCINT} can be ramped simultaneously. The recommended power-off sequence is the reverse of the power-on sequence to achieve minimum current draw.

If these recommended sequences are not met, current drawn from V_{MGTAVTT} can be higher than specifications during power-up and power-down.

- When V_{MGTAVTT} is powered before V_{MGTAVCC} and V_{MGTAVTT} - V_{MGTAVCC} > 150 mV and V_{MGTAVCC} < 0.7V, the V_{MGTAVTT} current draw can increase by 460 mA per transceiver during V_{MGTAVCC} ramp up. The duration of the current draw can be up to 0.3 x T_{MGTAVCC} (ramp time from GND to 90% of V_{MGTAVCC}). The reverse is true for power-down.
- When V_{MGTAVTT} is powered before V_{CCINT} and V_{MGTAVTT} - V_{CCINT} > 150 mV and V_{CCINT} < 0.7V, the V_{MGTAVTT} current draw can increase by 50 mA per transceiver during V_{CCINT} ramp up. The duration of the current draw can be up to 0.3 x T_{VCCINT} (ramp time from GND to 90% of V_{CCINT}). The reverse is true for power-down.

LVDS DC Specifications (LVDS_25)

The LVDS_25 standard is available in the HR I/O banks. See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information.

Table 12: LVDS_25 DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		2.375	2.500	2.625	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	0.700	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High		100	350	600	mV
V_{ICM}	Input Common-Mode Voltage		0.300	1.200	1.425	V

LVDS DC Specifications (LVDS)

The LVDS standard is available in the HP I/O banks. See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information.

Table 13: LVDS DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		1.710	1.800	1.890	V
V_{OH}	Output High Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and $\overline{Q}$	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	0.825	–	–	V
V_{ODIFF}	Differential Output Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100\ \Omega$ across Q and $\overline{Q}$ signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage (Q – $\overline{Q}$), Q = High ($\overline{Q}$ – Q), $\overline{Q}$ = High	Common-mode input voltage = 1.25V	100	350	600	mV
V_{ICM}	Input Common-Mode Voltage	Differential input voltage = ± 350 mV	0.300	1.200	1.425	V

Table 17: Maximum Physical Interface (PHY) Rate for Memory Interfaces (FFG Packages)⁽¹⁾⁽²⁾

Memory Standard	I/O Bank Type	V _{CCAUX_IO}	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
4:1 Memory Controllers							
DDR3	HP	2.0V	1866	1866	1600	1333	Mb/s
	HP	1.8V	1600	1333	1066	1066	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1600	1600	1333	1066	Mb/s
	HP	1.8V	1333	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	800	800	800	Mb/s
RLDRAM III ⁽³⁾	HP	2.0V	800	667	667	533	MHz
	HP	1.8V	550	500	450	450	MHz
	HR	N/A	N/A				
2:1 Memory Controllers							
DDR3	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	1066	1066	800	800	Mb/s
DDR3L	HP	2.0V	1066	1066	800	800	Mb/s
	HP	1.8V	1066	1066	800	800	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V					
	HR	N/A					
QDR II+ ⁽⁴⁾	HP	2.0V	550	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
RLDRAM II	HP	2.0V	533	500	450	450	MHz
	HP	1.8V					
	HR	N/A					
LPDDR2 ⁽³⁾	HP	2.0V	800	800	800	800	Mb/s
	HP	1.8V	800	800	800	800	Mb/s
	HR	N/A	800	667	667	667	Mb/s

Notes:

1. V_{REF} tracking is required. For more information, see [UG586, 7 Series FPGAs Memory Interface Solutions User Guide](#).
2. When using the internal V_{REF} the maximum data rate is 800 Mb/s (400 MHz).
3. RLDRAM III (BL = 4, BL = 8) and LPDDR2 specifications have not been validated with memory IP.
4. The maximum QDRII+ performance specifications are for burst-length 4 (BL = 4) implementations. Burst length 2 (BL = 2) implementations are limited to 333 MHz for all speed grades and I/O bank types.

Table 18: Maximum Physical Interface (PHY) Rate for Memory Interfaces (FBG Packages)⁽¹⁾⁽²⁾

Memory Standard	I/O Bank Type	V _{CCAUX_IO} ⁽³⁾	Speed Grade				Units
			1.0V			0.9V	
			-3	-2/-2L	-1	-2L	
4:1 Memory Controllers							
DDR3	HP	N/A	1333	1066	800	800	Mb/s
	HR	N/A	1066	800	800	800	Mb/s
DDR3L	HP	N/A	1066	800	667	667	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	N/A	800	800	800	800	Mb/s
	HR	N/A	800	667	667	667	Mb/s
RLDRAM III ⁽⁴⁾	HP	N/A	550	500	450	450	MHz
	HR	N/A	N/A				
2:1 Memory Controllers							
DDR3	HP	N/A	1066	1066	800	800	Mb/s
	HR	N/A	1066	800	800	800	Mb/s
DDR3L	HP	N/A	1066	800	667	667	Mb/s
	HR	N/A	800	800	667	667	Mb/s
DDR2	HP	N/A	800	800	800	800	Mb/s
	HR	N/A	800	667	667	667	Mb/s
QDR II+ ⁽⁵⁾	HP	N/A	550	500	450	450	MHz
	HR	N/A	450	400	350	350	MHz
RLDRAM II	HP	N/A	533	500	450	450	MHz
	HR	N/A					
LPDDR2 ⁽⁴⁾	HP	N/A	667	667	667	667	Mb/s
	HR	N/A	667	667	533	533	Mb/s

Notes:

1. V_{REF} tracking is required. For more information, see [UG586](#), 7 Series FPGAs Memory Interface Solutions User Guide.
2. When using the internal V_{REF} the maximum data rate is 800 Mb/s (400 MHz).
3. FBG packages do not have separate V_{CCAUX_IO} supply pins to adjust the pre-driver voltage of the HP I/O banks.
4. RLDRAM III (BL = 4, BL = 8) and LPDDR2 specifications have not been validated with memory IP.
5. The maximum QDRII+ performance specifications are for burst-length 4 (BL = 4) implementations. Burst length 2 (BL = 2) implementations are limited to 333 MHz for all speed grades and I/O bank types.

Table 19: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
HSTL_I_F	0.61	0.64	0.73	0.79	1.10	1.19	1.23	1.41	1.86	2.05	2.22	1.92	ns
HSTL_II_F	0.61	0.64	0.73	0.78	1.05	1.18	1.28	1.42	1.81	2.04	2.27	1.94	ns
HSTL_I_18_F	0.64	0.67	0.76	0.79	1.05	1.18	1.28	1.44	1.81	2.04	2.27	1.95	ns
HSTL_II_18_F	0.64	0.67	0.76	0.79	1.03	1.14	1.23	1.42	1.79	2.00	2.22	1.94	ns
DIFF_HSTL_I_F	0.63	0.67	0.77	0.78	1.09	1.18	1.22	1.48	1.85	2.04	2.21	2.00	ns
DIFF_HSTL_II_F	0.63	0.67	0.77	0.79	1.02	1.11	1.14	1.48	1.78	1.97	2.13	2.00	ns
DIFF_HSTL_I_18_F	0.65	0.69	0.78	0.79	1.08	1.17	1.21	1.48	1.84	2.03	2.20	2.00	ns
DIFF_HSTL_II_18_F	0.65	0.69	0.78	0.81	1.01	1.10	1.13	1.48	1.77	1.96	2.12	2.00	ns
LVC MOS33_S4	1.31	1.40	1.60	1.54	5.23	5.61	6.09	4.13	5.99	6.47	7.08	4.64	ns
LVC MOS33_S8	1.31	1.40	1.60	1.54	4.46	4.85	5.33	3.84	5.22	5.71	6.32	4.36	ns
LVC MOS33_S12	1.31	1.40	1.60	1.54	3.46	3.89	4.42	3.41	4.22	4.75	5.41	3.92	ns
LVC MOS33_S16	1.31	1.40	1.60	1.54	3.06	3.43	3.88	3.72	3.82	4.29	4.87	4.23	ns
LVC MOS33_F4	1.31	1.40	1.60	1.54	4.70	5.01	5.36	3.58	5.46	5.87	6.35	4.09	ns
LVC MOS33_F8	1.31	1.40	1.60	1.54	3.62	4.04	4.56	3.06	4.38	4.90	5.55	3.58	ns
LVC MOS33_F12	1.31	1.40	1.60	1.54	2.57	2.85	3.15	2.88	3.33	3.71	4.14	3.39	ns
LVC MOS33_F16	1.31	1.40	1.60	1.54	2.44	2.69	2.96	2.88	3.20	3.55	3.95	3.39	ns
LVC MOS25_S4	1.08	1.16	1.32	1.36	4.49	4.80	5.16	3.44	5.25	5.66	6.15	3.95	ns
LVC MOS25_S8	1.08	1.16	1.32	1.36	3.66	4.04	4.49	3.20	4.42	4.90	5.48	3.72	ns
LVC MOS25_S12	1.08	1.16	1.32	1.36	2.77	3.10	3.49	2.80	3.53	3.96	4.48	3.31	ns
LVC MOS25_S16	1.08	1.16	1.32	1.36	3.24	3.62	4.09	3.14	4.00	4.48	5.08	3.66	ns
LVC MOS25_F4	1.08	1.16	1.32	1.36	3.96	4.31	4.72	3.06	4.72	5.17	5.71	3.58	ns
LVC MOS25_F8	1.08	1.16	1.32	1.36	2.43	2.87	3.42	2.50	3.19	3.73	4.41	3.02	ns
LVC MOS25_F12	1.08	1.16	1.32	1.36	2.23	2.63	3.13	2.48	2.99	3.49	4.12	3.00	ns
LVC MOS25_F16	1.08	1.16	1.32	1.36	1.92	2.17	2.45	2.33	2.68	3.03	3.44	2.84	ns
LVC MOS18_S4	0.64	0.66	0.74	0.87	3.24	3.45	3.66	1.91	4.00	4.31	4.65	2.42	ns
LVC MOS18_S8	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S12	0.64	0.66	0.74	0.87	2.58	2.91	3.31	2.50	3.34	3.77	4.30	3.02	ns
LVC MOS18_S16	0.64	0.66	0.74	0.87	1.82	2.03	2.24	1.84	2.58	2.89	3.23	2.36	ns
LVC MOS18_S24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.74	1.92	2.08	1.92	2.50	2.78	3.07	2.44	ns
LVC MOS18_F4	0.64	0.66	0.74	0.87	3.12	3.31	3.49	1.77	3.88	4.17	4.48	2.28	ns
LVC MOS18_F8	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F12	0.64	0.66	0.74	0.87	1.91	2.13	2.36	2.00	2.67	2.99	3.35	2.52	ns
LVC MOS18_F16	0.64	0.66	0.74	0.87	1.52	1.68	1.81	1.72	2.28	2.54	2.80	2.23	ns
LVC MOS18_F24 ⁽¹⁾	0.64	0.66	0.74	0.87	1.34	1.46	1.55	1.66	2.10	2.32	2.54	2.17	ns
LVC MOS15_S4	0.66	0.69	0.81	0.90	3.48	3.74	4.03	2.22	4.24	4.60	5.02	2.73	ns
LVC MOS15_S8	0.66	0.69	0.81	0.90	2.37	2.67	3.01	2.41	3.13	3.53	4.00	2.92	ns
LVC MOS15_S12	0.66	0.69	0.81	0.90	1.83	2.03	2.23	1.91	2.59	2.89	3.22	2.42	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
LVDS	0.75	0.79	0.92	0.89	1.05	1.17	1.24	1.43	1.68	1.92	2.06	2.04	ns
HSUL_12	0.69	0.72	0.82	0.95	1.65	1.84	2.05	1.80	2.29	2.59	2.87	2.41	ns
DIFF_HSUL_12	0.69	0.72	0.82	0.92	1.65	1.84	2.05	1.47	2.29	2.59	2.87	2.08	ns
HSTL_I_S	0.68	0.72	0.82	0.84	1.15	1.28	1.38	1.46	1.79	2.03	2.20	2.07	ns
HSTL_II_S	0.68	0.72	0.82	0.84	1.05	1.17	1.26	1.44	1.69	1.93	2.08	2.05	ns
HSTL_I_18_S	0.70	0.72	0.82	0.86	1.12	1.24	1.34	1.41	1.75	2.00	2.16	2.02	ns
HSTL_II_18_S	0.70	0.72	0.82	0.86	1.06	1.18	1.26	1.44	1.70	1.94	2.08	2.05	ns
HSTL_I_12_S	0.68	0.72	0.82	0.94	1.14	1.27	1.37	1.43	1.78	2.02	2.20	2.04	ns
HSTL_I_DCI_S	0.68	0.72	0.82	0.78	1.11	1.23	1.33	1.36	1.74	1.99	2.15	1.98	ns
HSTL_II_DCI_S	0.68	0.72	0.82	0.78	1.05	1.17	1.26	1.33	1.69	1.93	2.08	1.94	ns
HSTL_II_T_DCI_S	0.70	0.72	0.82	0.76	1.15	1.28	1.38	1.40	1.78	2.03	2.20	2.01	ns
HSTL_I_DCI_18_S	0.70	0.72	0.82	0.76	1.11	1.23	1.33	1.36	1.74	1.99	2.15	1.98	ns
HSTL_II_DCI_18_S	0.70	0.72	0.82	0.76	1.05	1.16	1.24	1.32	1.69	1.92	2.06	1.93	ns
HSTL_II_T_DCI_18_S	0.70	0.72	0.82	0.76	1.11	1.23	1.33	1.36	1.74	1.99	2.15	1.98	ns
DIFF_HSTL_I_S	0.75	0.79	0.92	0.89	1.15	1.28	1.38	1.47	1.79	2.03	2.20	2.08	ns
DIFF_HSTL_II_S	0.75	0.79	0.92	0.89	1.05	1.17	1.26	1.47	1.69	1.93	2.08	2.08	ns
DIFF_HSTL_I_DCI_S	0.75	0.79	0.92	0.76	1.15	1.28	1.38	1.47	1.78	2.03	2.20	2.08	ns
DIFF_HSTL_II_DCI_S	0.75	0.79	0.92	0.76	1.05	1.17	1.26	1.40	1.69	1.93	2.08	2.01	ns
DIFF_HSTL_I_18_S	0.75	0.79	0.92	0.89	1.12	1.24	1.34	1.46	1.75	2.00	2.16	2.07	ns
DIFF_HSTL_II_18_S	0.75	0.79	0.92	0.89	1.06	1.18	1.26	1.47	1.70	1.94	2.08	2.08	ns
DIFF_HSTL_I_DCI_18_S	0.75	0.79	0.92	0.75	1.11	1.23	1.33	1.46	1.74	1.99	2.15	2.07	ns
DIFF_HSTL_II_DCI_18_S	0.75	0.79	0.92	0.75	1.05	1.16	1.24	1.41	1.69	1.92	2.06	2.02	ns
DIFF_HSTL_II_T_DCI_18_S	0.75	0.79	0.92	0.76	1.11	1.23	1.33	1.46	1.74	1.99	2.15	2.07	ns
HSTL_I_F	0.68	0.72	0.82	0.84	1.02	1.14	1.22	1.26	1.66	1.90	2.04	1.87	ns
HSTL_II_F	0.68	0.72	0.82	0.84	0.97	1.08	1.15	1.29	1.61	1.84	1.97	1.90	ns
HSTL_I_18_F	0.70	0.72	0.82	0.86	1.04	1.16	1.24	1.32	1.68	1.91	2.06	1.93	ns
HSTL_II_18_F	0.70	0.72	0.82	0.86	0.98	1.09	1.16	1.35	1.62	1.85	1.98	1.96	ns
HSTL_I_12_F	0.68	0.72	0.82	0.94	1.02	1.13	1.21	1.26	1.65	1.88	2.03	1.87	ns
HSTL_I_DCI_F	0.68	0.72	0.82	0.78	1.04	1.16	1.24	1.30	1.67	1.91	2.06	1.91	ns
HSTL_II_DCI_F	0.68	0.72	0.82	0.78	0.97	1.08	1.15	1.22	1.61	1.84	1.97	1.83	ns
HSTL_II_T_DCI_F	0.70	0.72	0.82	0.76	1.02	1.14	1.22	1.26	1.66	1.90	2.04	1.87	ns
HSTL_I_DCI_18_F	0.70	0.72	0.82	0.76	1.04	1.16	1.24	1.30	1.67	1.91	2.06	1.91	ns
HSTL_II_DCI_18_F	0.70	0.72	0.82	0.76	0.98	1.09	1.16	1.27	1.61	1.85	1.98	1.88	ns
HSTL_II_T_DCI_18_F	0.70	0.72	0.82	0.76	1.04	1.16	1.24	1.30	1.67	1.91	2.06	1.91	ns
DIFF_HSTL_I_F	0.75	0.79	0.92	0.89	1.02	1.14	1.22	1.35	1.66	1.90	2.04	1.96	ns
DIFF_HSTL_II_F	0.75	0.79	0.92	0.89	0.97	1.08	1.15	1.35	1.61	1.84	1.97	1.96	ns
DIFF_HSTL_I_DCI_F	0.75	0.79	0.92	0.76	1.02	1.14	1.22	1.35	1.66	1.90	2.04	1.96	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOP1}				T _{IOP0}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
DIFF_HSTL_II_DCI_F	0.75	0.79	0.92	0.76	0.97	1.08	1.15	1.30	1.61	1.84	1.97	1.91	ns
DIFF_HSTL_I_18_F	0.75	0.79	0.92	0.89	1.04	1.16	1.24	1.38	1.68	1.91	2.06	1.99	ns
DIFF_HSTL_II_18_F	0.75	0.79	0.92	0.89	0.98	1.09	1.16	1.40	1.62	1.85	1.98	2.01	ns
DIFF_HSTL_I_DCI_18_F	0.75	0.79	0.92	0.75	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
DIFF_HSTL_II_DCI_18_F	0.75	0.79	0.92	0.75	0.98	1.09	1.16	1.33	1.61	1.85	1.98	1.94	ns
DIFF_HSTL_II_T_DCI_18_F	0.75	0.79	0.92	0.76	1.04	1.16	1.24	1.38	1.67	1.91	2.06	1.99	ns
LVC MOS18_S2	0.47	0.50	0.60	0.87	3.95	4.28	4.85	3.40	4.59	5.04	5.67	4.01	ns
LVC MOS18_S4	0.47	0.50	0.60	0.87	2.67	2.98	3.43	2.69	3.31	3.73	4.26	3.30	ns
LVC MOS18_S6	0.47	0.50	0.60	0.87	2.14	2.38	2.72	2.18	2.77	3.14	3.54	2.79	ns
LVC MOS18_S8	0.47	0.50	0.60	0.87	1.98	2.21	2.52	2.02	2.61	2.97	3.35	2.63	ns
LVC MOS18_S12	0.47	0.50	0.60	0.87	1.70	1.91	2.17	1.85	2.34	2.67	2.99	2.46	ns
LVC MOS18_S16	0.47	0.50	0.60	0.87	1.57	1.75	1.97	1.76	2.20	2.51	2.79	2.37	ns
LVC MOS18_F2	0.47	0.50	0.60	0.87	3.50	3.87	4.48	2.85	4.14	4.63	5.30	3.46	ns
LVC MOS18_F4	0.47	0.50	0.60	0.87	2.23	2.50	2.87	2.26	2.87	3.25	3.69	2.87	ns
LVC MOS18_F6	0.47	0.50	0.60	0.87	1.80	2.00	2.26	1.52	2.43	2.76	3.08	2.13	ns
LVC MOS18_F8	0.47	0.50	0.60	0.87	1.46	1.72	2.04	1.51	2.10	2.47	2.86	2.12	ns
LVC MOS18_F12	0.47	0.50	0.60	0.87	1.26	1.40	1.53	1.46	1.89	2.16	2.35	2.07	ns
LVC MOS18_F16	0.47	0.50	0.60	0.87	1.19	1.33	1.44	1.46	1.83	2.08	2.26	2.07	ns
LVC MOS15_S2	0.59	0.62	0.73	0.86	3.55	3.89	4.45	3.11	4.19	4.65	5.27	3.73	ns
LVC MOS15_S4	0.59	0.62	0.73	0.86	2.45	2.70	3.06	2.46	3.08	3.45	3.89	3.07	ns
LVC MOS15_S6	0.59	0.62	0.73	0.86	2.24	2.51	2.88	2.33	2.88	3.26	3.71	2.94	ns
LVC MOS15_S8	0.59	0.62	0.73	0.86	1.91	2.16	2.49	2.05	2.55	2.91	3.31	2.66	ns
LVC MOS15_S12	0.59	0.62	0.73	0.86	1.77	1.98	2.23	1.97	2.41	2.73	3.05	2.58	ns
LVC MOS15_S16	0.59	0.62	0.73	0.86	1.62	1.81	2.02	1.85	2.26	2.56	2.84	2.46	ns
LVC MOS15_F2	0.59	0.62	0.73	0.86	3.38	3.69	4.18	2.74	4.02	4.44	5.00	3.35	ns
LVC MOS15_F4	0.59	0.62	0.73	0.86	2.04	2.21	2.44	1.72	2.68	2.97	3.26	2.33	ns
LVC MOS15_F6	0.59	0.62	0.73	0.86	1.47	1.74	2.09	1.49	2.10	2.50	2.91	2.10	ns
LVC MOS15_F8	0.59	0.62	0.73	0.86	1.31	1.46	1.61	1.47	1.95	2.22	2.43	2.08	ns
LVC MOS15_F12	0.59	0.62	0.73	0.86	1.21	1.34	1.45	1.44	1.84	2.10	2.27	2.05	ns
LVC MOS15_F16	0.59	0.62	0.73	0.86	1.18	1.31	1.41	1.41	1.82	2.07	2.23	2.02	ns
LVC MOS12_S2	0.64	0.67	0.78	0.95	3.38	3.80	4.48	3.27	4.02	4.55	5.30	3.88	ns
LVC MOS12_S4	0.64	0.67	0.78	0.95	2.62	2.94	3.43	2.76	3.26	3.70	4.25	3.37	ns
LVC MOS12_S6	0.64	0.67	0.78	0.95	2.05	2.33	2.72	2.24	2.69	3.08	3.54	2.85	ns
LVC MOS12_S8	0.64	0.67	0.78	0.95	1.94	2.18	2.51	2.16	2.58	2.94	3.33	2.77	ns
LVC MOS12_F2	0.64	0.67	0.78	0.95	2.84	3.15	3.62	2.47	3.48	3.90	4.44	3.08	ns
LVC MOS12_F4	0.64	0.67	0.78	0.95	1.97	2.18	2.44	1.69	2.61	2.93	3.26	2.30	ns
LVC MOS12_F6	0.64	0.67	0.78	0.95	1.33	1.51	1.70	1.43	1.96	2.26	2.52	2.04	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units
	Speed Grade				Speed Grade				Speed Grade				
	1.0V			0.9V	1.0V			0.9V	1.0V			0.9V	
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	
SSTL18_I_F	0.68	0.72	0.82	0.86	0.94	1.06	1.15	1.32	1.58	1.82	1.97	1.93	ns
SSTL18_II_F	0.68	0.72	0.82	0.87	0.97	1.09	1.16	1.36	1.61	1.84	1.99	1.98	ns
SSTL18_I_DCI_F	0.68	0.72	0.82	0.76	0.89	1.02	1.10	1.30	1.53	1.77	1.92	1.91	ns
SSTL18_II_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.24	1.53	1.77	1.92	1.85	ns
SSTL18_II_T_DCI_F	0.68	0.72	0.82	0.78	0.89	1.02	1.10	1.27	1.53	1.77	1.92	1.88	ns
SSTL15_F	0.68	0.72	0.82	0.81	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
SSTL15_DCI_F	0.68	0.72	0.82	0.78	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL15_T_DCI_F	0.68	0.72	0.82	0.80	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
SSTL135_F	0.69	0.72	0.82	0.89	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL135_T_DCI_F	0.69	0.72	0.82	0.84	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
SSTL12_F	0.69	0.72	0.82	0.95	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
SSTL12_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
SSTL12_T_DCI_F	0.69	0.72	0.82	0.91	0.91	1.03	1.11	1.26	1.54	1.79	1.93	1.87	ns
DIFF_SSTL18_I_F	0.75	0.79	0.92	0.89	0.94	1.06	1.15	1.38	1.58	1.82	1.97	1.99	ns
DIFF_SSTL18_II_F	0.75	0.79	0.92	0.89	0.97	1.09	1.16	1.40	1.61	1.84	1.99	2.01	ns
DIFF_SSTL18_I_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.36	1.53	1.77	1.92	1.98	ns
DIFF_SSTL18_II_DCI_F	0.75	0.79	0.92	0.75	0.89	1.02	1.10	1.32	1.53	1.77	1.92	1.93	ns
DIFF_SSTL18_II_T_DCI_F	0.75	0.79	0.92	0.76	0.89	1.02	1.10	1.38	1.53	1.77	1.92	1.99	ns
DIFF_SSTL15_F	0.68	0.72	0.82	0.89	0.89	1.01	1.09	1.24	1.53	1.77	1.91	1.85	ns
DIFF_SSTL15_DCI_F	0.68	0.72	0.82	0.75	0.89	1.01	1.09	1.27	1.53	1.77	1.91	1.88	ns
DIFF_SSTL15_T_DCI_F	0.68	0.72	0.82	0.76	0.89	1.01	1.09	1.35	1.53	1.77	1.91	1.96	ns
DIFF_SSTL135_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.27	1.52	1.76	1.90	1.88	ns
DIFF_SSTL135_T_DCI_F	0.69	0.72	0.82	0.76	0.89	1.00	1.08	1.35	1.52	1.76	1.90	1.96	ns
DIFF_SSTL12_F	0.69	0.72	0.82	0.91	0.88	1.00	1.08	1.26	1.52	1.76	1.90	1.87	ns
DIFF_SSTL12_DCI_F	0.69	0.72	0.82	0.78	0.91	1.03	1.11	1.24	1.54	1.79	1.93	1.85	ns
DIFF_SSTL12_T_DCI_F	0.69	0.72	0.82	0.80	0.91	1.03	1.11	1.33	1.54	1.79	1.93	1.94	ns

Notes:

1. This I/O standard is only available in the 1.8V high-performance (HP) banks.

Output Serializer/Deserializer Switching Characteristics

Table 25: OSERDES Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{OSDCK_D} /T _{OSCKD_D}	D input Setup/Hold with respect to CLKDIV	0.37/0.02	0.40/0.02	0.55/0.02	0.44/−0.24	ns
T _{OSDCK_T} /T _{OSCKD_T} ⁽¹⁾	T input Setup/Hold with respect to CLK	0.49/−0.15	0.56/−0.15	0.68/−0.15	0.67/−0.25	ns
T _{OSDCK_T2} /T _{OSCKD_T2} ⁽¹⁾	T input Setup/Hold with respect to CLKDIV	0.27/−0.15	0.30/−0.15	0.34/−0.15	0.46/−0.25	ns
T _{OSCCK_OCE} /T _{OSCKC_OCE}	OCE input Setup/Hold with respect to CLK	0.28/0.03	0.29/0.03	0.45/0.03	0.35/−0.15	ns
T _{OSCCK_S}	SR (Reset) input Setup with respect to CLKDIV	0.41	0.46	0.75	0.70	ns
T _{OSCCK_TCE} /T _{OSCKC_TCE}	TCE input Setup/Hold with respect to CLK	0.28/0.01	0.30/0.01	0.45/0.01	0.31/−0.15	ns
Sequential Delays						
T _{OSCKO_OQ}	Clock to out from CLK to OQ	0.35	0.37	0.42	0.54	ns
T _{OSCKO_TQ}	Clock to out from CLK to TQ	0.41	0.43	0.49	0.63	ns
Combinatorial						
T _{OSDO_TTQ}	T input to TQ Out	0.73	0.81	0.97	1.18	ns

Notes:

- T_{OSDCK_T2} and T_{OSCKD_T2} are reported as T_{OSDCK_T}/T_{OSCKD_T} in TRACE report.

Input/Output Delay Switching Characteristics

Table 26: Input/Output Delay Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
IDELAYCTRL						
T _{DLYCCO_RDY}	Reset to Ready for IDELAYCTRL	3.22	3.22	3.22	3.22	µs
F _{IDELAYCTRL_REF}	Attribute REFCLK frequency = 200.00 ⁽¹⁾	200.00	200.00	200.00	200.00	MHz
	Attribute REFCLK frequency = 300.00 ⁽¹⁾	300.00	300.00	N/A	N/A	MHz
IDELAYCTRL_REF_PRECISION	REFCLK precision	±10	±10	±10	±10	MHz
T _{IDELAYCTRL_RPW}	Minimum Reset pulse width	52.00	52.00	52.00	52.00	ns
IDELAY/ODELAY						
T _{IDELAYRESOLUTION}	IDELAY/ODELAY chain delay resolution	1/(32 x 2 x F _{REF})				ps
T _{IDELAYPAT_JIT} and T _{ODELAYPAT_JIT}	Pattern dependent period jitter in delay chain for clock pattern. ⁽²⁾	0	0	0	0	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23) ⁽³⁾	±5	±5	±5	±5	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23) ⁽⁴⁾	±9	±9	±9	±9	ps per tap
T _{IDELAY_CLK_MAX} / T _{ODELAY_CLK_MAX}	Maximum frequency of CLK input to IDELAY/ODELAY	800.00	800.00	710.00	710.00	MHz
T _{IDCCK_CE} / T _{IDCKC_CE}	CE pin Setup/Hold with respect to C for IDELAY	0.11/0.10	0.14/0.12	0.18/0.14	0.14/0.16	ns
T _{ODCCK_CE} / T _{ODCKC_CE}	CE pin Setup/Hold with respect to C for ODELAY	0.14/0.03	0.16/0.04	0.19/0.05	0.28/0.06	ns
T _{IDCCK_INC} / T _{IDCKC_INC}	INC pin Setup/Hold with respect to C for IDELAY	0.10/0.14	0.12/0.16	0.14/0.20	0.10/0.23	ns
T _{ODCCK_INC} / T _{ODCKC_INC}	INC pin Setup/Hold with respect to C for ODELAY	0.10/0.07	0.12/0.08	0.13/0.09	0.19/0.16	ns
T _{IDCCK_RST} / T _{IDCKC_RST}	RST pin Setup/Hold with respect to C for IDELAY	0.13/0.08	0.14/0.10	0.16/0.12	0.22/0.19	ns
T _{ODCCK_RST} / T _{ODCKC_RST}	RST pin Setup/Hold with respect to C for ODELAY	0.16/0.04	0.19/0.06	0.24/0.08	0.32/0.11	ns
T _{IDDO_IDATAIN}	Propagation delay through IDELAY	Note 5	Note 5	Note 5	Note 5	ps
T _{ODDO_ODATAIN}	Propagation delay through ODELAY	Note 5	Note 5	Note 5	Note 5	ps

Notes:

1. Average Tap Delay at 200 MHz = 78 ps, at 300 MHz = 52 ps.
2. When HIGH_PERFORMANCE mode is set to TRUE or FALSE.
3. When HIGH_PERFORMANCE mode is set to TRUE.
4. When HIGH_PERFORMANCE mode is set to FALSE.
5. Delay depends on IDELAY/ODELAY tap setting. See TRACE report for actual values.

Additional Package Parameter Guidelines

The parameters in this section provide the necessary values for calculating timing budgets for Kintex-7 FPGA clock transmitter and receiver data-valid windows.

Table 50: Package Skew

Symbol	Description	Device	Package	Value	Units
T _{PKGSKEW}	Package Skew ⁽¹⁾	XC7K70T	FBG484	108	ps
			FBG676	135	ps
		XC7K160T	FBG484	118	ps
			FBG676	136	ps
			FFG676	161	ps
		XC7K325T	FBG676	146	ps
			FFG676	154	ps
			FBG900	163	ps
			FFG900	161	ps
		XC7K355T	FFG901	149	ps
		XC7K410T	FBG676	165	ps
			FFG676	168	ps
			FBG900	151	ps
			FFG900	146	ps
		XC7K420T	FFG901	149	ps
			FFG1156	145	ps
		XC7K480T	FFG901	149	ps
			FFG1156	145	ps

Notes:

1. These values represent the worst-case skew between any two SelectIO resources in the package: shortest delay to longest delay from die pad to ball.
2. Package delay information is available for these device/package combinations. This information can be used to deskew the package.

Table 52 summarizes the DC specifications of the clock input of the GTX transceiver. Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further details.

Table 52: GTX Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V _{IDIFF}	Differential peak-to-peak input voltage	250	–	2000	mV
R _{IN}	Differential input resistance	–	100	–	Ω
C _{EXT}	Required external AC coupling capacitor	–	100	–	nF

GTX Transceiver Switching Characteristics

Consult [UG476: 7 Series FPGAs GTX/GTH Transceiver User Guide](#) for further information.

Table 53: GTX Transceiver Performance

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3		-2/-2L		-1 ⁽¹⁾		-2L ⁽²⁾		
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
F _{GTXMAX} ⁽³⁾	Maximum GTX transceiver data rate		12.5	6.6	10.3125	6.6	8.0	6.6	6.6	6.6	Gb/s
F _{GTXMIN} ⁽³⁾	Minimum GTX transceiver data rate		0.500	0.500	0.500	0.500	0.500	0.500	0.500	0.500	Gb/s
F _{GTXCRANGE}	CPLL line rate range	1	3.2–6.6								Gb/s
		2	1.6–3.3								Gb/s
		4	0.8–1.65								Gb/s
		8	0.5–0.825								Gb/s
		16	N/A								Gb/s
F _{GTXQRANGE1}	QPLL line rate range 1	1	5.93– 8.0	5.93– 6.6	5.93– 8.0	5.93– 6.6	5.93– 8.0	5.93– 6.6	5.93–6.6		Gb/s
		2	2.965–4.0		2.965–4.0		2.965–4.0		2.965–3.3		Gb/s
		4	1.4825–2.0		1.4825–2.0		1.4825–2.0		1.4825–1.65		Gb/s
		8	0.74125–1.0		0.74125–1.0		0.74125–1.0		0.74125–0.825		Gb/s
		16	N/A		N/A		N/A		N/A		Gb/s
F _{GTXQRANGE2}	QPLL line rate range 2 ⁽⁴⁾	1	9.8– 12.5	N/A	9.8– 10.3125	N/A	N/A		N/A		Gb/s
		2	4.9–6.25		4.9–5.15625		N/A		N/A		Gb/s
		4	2.45–3.125		2.45–2.578125		N/A		N/A		Gb/s
		8	1.225–1.5625		1.225–1.2890625		N/A		N/A		Gb/s
		16	0.6125–0.78125		0.6125– 0.64453125		N/A		N/A		Gb/s
F _{GCPLLRANGE}	GTX transceiver CPLL frequency range		1.6–3.3		1.6–3.3		1.6–3.3		1.6–3.3		GHz
F _{GQPLLRange1}	GTX transceiver QPLL frequency range 1		5.93–8.0		5.93–8.0		5.93–8.0		5.93–6.6		GHz

Table 53: GTX Transceiver Performance (Cont'd)

Symbol	Description	Output Divider	Speed Grade								Units
			1.0V						0.9V		
			-3	-2/-2L		-1 ⁽¹⁾		-2L ⁽²⁾			
			Package Type								
			FF	FB	FF	FB	FF	FB	FF	FB	
F _{GQPLL} RANGE2	GTX transceiver QPLL frequency range 2		9.8–12.5		9.8–10.3125		N/A		N/A		GHz

Notes:

1. The -1 speed grade requires a 4-byte internal data width for operation above 5.0 Gb/s.
2. The -2L (0.9V) speed grade requires a 4-byte internal data width for operation above 3.8 Gb/s.
3. Data rates between 8.0 Gb/s and 9.8 Gb/s are not available.
4. For QPLL line rate range 2, the maximum line rate with the divider N set to 66 is 10.3125Gb/s.

Table 54: GTX Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
F _{GTXDRPCLK}	GTXDRPCLK maximum frequency	175.01	175.01	156.25	125.00	MHz

Table 55: GTX Transceiver Reference Clock Switching Characteristics

Symbol	Description	Conditions	All Speed Grades			Units
			Min	Typ	Max	
F _{GCLK}	Reference clock frequency range	-3 speed grade	60	–	700	MHz
		All other speed grades	60	–	670	MHz
T _{RCLK}	Reference clock rise time	20% – 80%	–	200	–	ps
T _{FCLK}	Reference clock fall time	80% – 20%	–	200	–	ps
T _{DCREF}	Reference clock duty cycle	Transceiver PLL only	40	50	60	%

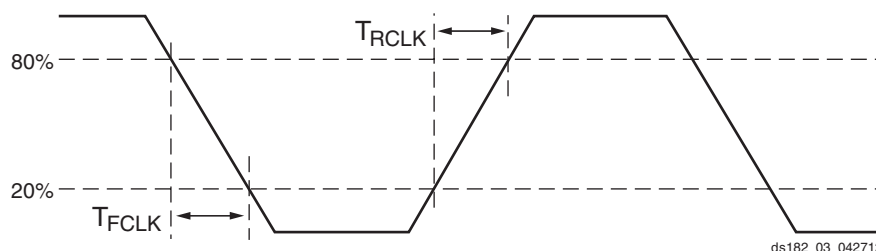


Figure 3: Reference Clock Timing Parameters

Table 59: GTX Transceiver Receiver Switching Characteristics

Symbol	Description		Min	Typ	Max	Units
F _{GTXRX}	Serial data rate	RX oversampler not enabled	0.500	–	F _{GTXMAX}	Gb/s
T _{RXELECIDLE}	Time for RXELECIDLE to respond to loss or restoration of data		–	10	–	ns
RX _{OOBVDPP}	OOB detect threshold peak-to-peak		60	–	150	mV
RX _{SST}	Receiver spread-spectrum tracking ⁽¹⁾	Modulated @ 33 KHz	–5000	–	0	ppm
RX _{RL}	Run length (CID)		–	–	512	UI
RX _{PPMTOL}	Data/REFCLK PPM offset tolerance	Bit rates ≤ 6.6 Gb/s	–1250	–	1250	ppm
		Bit rates > 6.6 Gb/s and ≤ 8.0 Gb/s	–700	–	700	ppm
		Bit rates > 8.0 Gb/s	–200	–	200	ppm
SJ Jitter Tolerance ⁽²⁾						
JT_SJ _{12.5}	Sinusoidal Jitter (QPLL) ⁽³⁾	12.5 Gb/s	0.3	–	–	UI
JT_SJ _{11.18}	Sinusoidal Jitter (QPLL) ⁽³⁾	11.18 Gb/s	0.3	–	–	UI
JT_SJ _{10.32}	Sinusoidal Jitter (QPLL) ⁽³⁾	10.32 Gb/s	0.3	–	–	UI
JT_SJ _{9.95}	Sinusoidal Jitter (QPLL) ⁽³⁾	9.95 Gb/s	0.3	–	–	UI
JT_SJ _{9.8}	Sinusoidal Jitter (QPLL) ⁽³⁾	9.8 Gb/s	0.3	–	–	UI
JT_SJ _{8.0}	Sinusoidal Jitter (QPLL) ⁽³⁾	8.0 Gb/s	0.44	–	–	UI
JT_SJ _{6.6_QPLL}	Sinusoidal Jitter (QPLL) ⁽³⁾	6.6 Gb/s	0.48	–	–	UI
JT_SJ _{6.6_CPLL}	Sinusoidal Jitter (CPLL) ⁽³⁾	6.6 Gb/s	0.44	–	–	UI
JT_SJ _{5.0}	Sinusoidal Jitter (CPLL) ⁽³⁾	5.0 Gb/s	0.44	–	–	UI
JT_SJ _{4.25}	Sinusoidal Jitter (CPLL) ⁽³⁾	4.25 Gb/s	0.44	–	–	UI
JT_SJ _{3.75}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.75 Gb/s	0.44	–	–	UI
JT_SJ _{3.2}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁴⁾	0.45	–	–	UI
JT_SJ _{3.2L}	Sinusoidal Jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁵⁾	0.45	–	–	UI
JT_SJ _{2.5}	Sinusoidal Jitter (CPLL) ⁽³⁾	2.5 Gb/s ⁽⁶⁾	0.5	–	–	UI
JT_SJ _{1.25}	Sinusoidal Jitter (CPLL) ⁽³⁾	1.25 Gb/s ⁽⁷⁾	0.5	–	–	UI
JT_SJ ₅₀₀	Sinusoidal Jitter (CPLL) ⁽³⁾	500 Mb/s	0.4	–	–	UI
SJ Jitter Tolerance with Stressed Eye ⁽²⁾						
JT_TJSE _{3.2}	Total Jitter with Stressed Eye ⁽⁸⁾	3.2 Gb/s	0.70	–	–	UI
JT_TJSE _{6.6}		6.6 Gb/s	0.70	–	–	UI
JT_SJSE _{3.2}	Sinusoidal Jitter with Stressed Eye ⁽⁸⁾	3.2 Gb/s	0.1	–	–	UI
JT_SJSE _{6.6}		6.6 Gb/s	0.1	–	–	UI

Notes:

- Using RXOUT_DIV = 1, 2, and 4.
- All jitter values are based on a bit error ratio of $1e^{-12}$.
- The frequency of the injected sinusoidal jitter is 10 MHz.
- CPLL frequency at 3.2 GHz and RXOUT_DIV = 2.
- CPLL frequency at 1.6 GHz and RXOUT_DIV = 1.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 2.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 4.
- Composite jitter with RX and LPM or DFE mode.

Table 65: CPRI Protocol Characteristics

Description	Line Rate (Mb/s)	Min	Max	Units
CPRI Transmitter Jitter Generation				
Total transmitter jitter	614.4	–	0.35	UI
	1228.8	–	0.35	UI
	2457.6	–	0.35	UI
	3072.0	–	0.35	UI
	4915.2	–	0.3	UI
	6144.0	–	0.3	UI
	9830.4	–	Note 1	UI
CPRI Receiver Frequency Jitter Tolerance				
Total receiver jitter tolerance	614.4	0.65	–	UI
	1228.8	0.65	–	UI
	2457.6	0.65	–	UI
	3072.0	0.65	–	UI
	4915.2	0.95	–	UI
	6144.0	0.95	–	UI
	9830.4	Note 1	–	UI

Notes:

1. Tested per SFP+ specification, see Table 64.

Integrated Interface Block for PCI Express Designs Switching Characteristics

More information and documentation on solutions for PCI Express designs can be found at:

<http://www.xilinx.com/technology/protocols/pciexpress.htm>

Table 66: Maximum Performance for PCI Express Designs

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
F _{PIPECLK}	Pipe clock maximum frequency	250.00	250.00	250.00	250.00	MHz
F _{USERCLK}	User clock maximum frequency	500.00	500.00	250.00	250.00	MHz
F _{USERCLK2}	User clock 2 maximum frequency	250.00	250.00	250.00	250.00	MHz
F _{DRPCLK}	DRP clock maximum frequency	250.00	250.00	250.00	250.00	MHz

Table 68: Configuration Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V			0.9V	
		-3	-2/-2L	-1	-2L	
Master/Slave Serial Mode Programming Switching						
T _{DCC} /T _{CCKD}	DIN Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{CCO}	DOUT clock to out	8.00	8.00	8.00	9.00	ns, Max
SelectMAP Mode Programming Switching						
T _{SMDCC} /T _{SMCCKD}	D[31:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
T _{SMCSCCK} /T _{SMCCKCS}	CSI_B Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{SMWCC} /T _{SMCCKW}	RDWR_B Setup/Hold	10.00/0.00	10.00/0.00	10.00/0.00	12.00/0.00	ns, Min
T _{SMCKCSO}	CSO_B clock to out (330 Ω pull-up resistor required)	7.00	7.00	7.00	8.00	ns, Max
T _{SMCO}	D[31:00] clock to out in readback	8.00	8.00	8.00	10.00	ns, Max
F _{RBCK}	Readback frequency	100.00	100.00	100.00	70.00	MHz, Max
Boundary-Scan Port Timing Specifications						
T _{TAPTCK} /T _{TCKTAP}	TMS and TDI Setup/Hold	3.00/2.00	3.00/2.00	3.00/2.00	3.00/2.00	ns, Min
T _{TCKTDO}	TCK falling edge to TDO output	7.00	7.00	7.00	8.50	ns, Max
F _{TCK}	TCK frequency	66.00	66.00	66.00	50.00	MHz, Max
BPI Master Flash Mode Programming Switching						
T _{BPICCO} ⁽²⁾	A[28:00], RS[1:0], FCS_B, FOE_B, FWE_B, ADV_B clock to out	8.50	8.50	8.50	10.00	ns, Max
T _{BPIDCC} /T _{BPICCD}	D[15:00] Setup/Hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
SPI Master Flash Mode Programming Switching						
T _{SPIDCC} /T _{SPICCD}	D[03:00] Setup/Hold	3.00/0.00	3.00/0.00	3.00/0.00	3.00/0.00	ns, Min
T _{SPICCM}	MOSI clock to out	8.00	8.00	8.00	9.00	ns, Max
T _{SPICCF}	FCS_B clock to out	8.00	8.00	8.00	9.00	ns, Max

Notes:

- To support longer delays in configuration, use the design solutions described in [UG470: 7 Series FPGA Configuration User Guide](#).
- Only during configuration, the last edge is determined by a weak pull-up/pull-down resistor in the I/O.

eFUSE Programming Conditions

Table 69 lists the programming conditions specifically for eFUSE. For more information, see [UG470: 7 Series FPGA Configuration User Guide](#).

Table 69: eFUSE Programming Conditions⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
I_{FS}	V_{CCAUX} supply current	—	—	115	mA
t_j	Temperature range	15	—	125	°C

Notes:

- The FPGA must not be configured during eFUSE programming.

Revision History

The following table shows the revision history for this document:

Date	Version	Description
03/01/11	1.0	Initial Xilinx release.
04/01/11	1.1	Added the XC7K355T, XC7K420T, and XC7K480T devices throughout data sheet. Added the extended temperature range discussion to page 1 . Updated V_{CCAUX_IO} in Table 2 . Edits to clarify Power-On/Off Power Supply Sequencing power sequencing discussion. Added I_{CCAUX_IO} and I_{CCBRAM} to Table 6 and Table 7 . Updated $MMCM_F_{INDUTY}$ and added $F_{INJITTER}$, $T_{OUTJITTER}$, $T_{EXTFVAR}$, and Note 3 to Table 38 . Removed the SBG324 package from Table 50 . Updated the Notice of Disclaimer .
10/04/11	1.2	Replaced -1L with -2L throughout this data sheet. Updated Min/Max values and removed Note 5 from Table 2 . Clarified Power-On/Off Power Supply Sequencing power sequencing discussion including adding $T_{VCCO2VCCAUX}$ to Table 8 . Updated V_{ICM} in Table 12 and Table 13 . Added Note 1 to Table 12 . Updated Table 69 including adding Note 1 . Added <i>Absolute Maximum Ratings for GTX Transceivers</i> . Revised the reference clock maximum frequency (F_{GCLK}) in Table 55 . Added Table 57 . Added LVTTTL and removed SSTL135_II and SSTL15_II specifications from Table 19 . Removed HSTL_III from Table 20 . Removed the <i>I/O Standard Adjustment Measurement Methodology</i> section. Use IBIS for more accurate information and measurements. Updated $T_{DELAYPAT_JIT}$ in Table 26 . Added T_{AS}/T_{AH} to Table 28 . Added $T_{RDCK_DI_WF_NC}/T_{RCKD_DI_WF_NC}$ and $T_{RDCK_DI_RF}/T_{RCKD_DI_RF}$ to Table 31 . Completely updated Table 68 . Updated the AC Switching Characteristics in Table 19 , Table 20 , Table 21 , Table 22 , Table 23 , Table 24 , Table 26 through Table 38 , Table 40 through Table 37 , and Table 67 .
11/03/11	1.3	Revised the V_{OCM} specification in Table 12 . Updated the AC Switching Characteristics based upon the ISE 13.3 v1.02 speed specification throughout document including Table 19 and Table 20 . Added $MMCM_T_{FBDELAY}$ while adding $MMCM_$ to the symbol names of a few specifications in Table 38 and PLL to the symbol names in Table 39 . In Table 40 through Table 47 , updated the pin-to-pin descriptions with the SSTL15 standard. Updated units in Table 49 .
02/13/12	1.4	Updated summary description on page 1 . In Table 2 , revised V_{CCO} for the 3.3V HR I/O banks and updated T_j . Added typical values to Table 3 . Updated the notes in Table 6 . Added MGTAVCC, MGTAVTT, and MGTVCCAUX power supply ramp times to Table 8 . Rearranged Table 9 , added Mobile_DDR, HSTL_I_18, HSTL_II_18, HSUL_12, SSTL135_R, SSTL15_R, and SSTL12 and removed DIFF_SSTL135, DIFF_SSTL18_I, DIFF_SSTL18_II, DIFF_HSTL_I, and DIFF_HSTL_II. Added Table 10 and Table 11 . Revised the specifications in Table 12 and Table 13 . Updated the eFUSE Programming Conditions section and removed the endurance table. Added the IO_FIFO Switching Characteristics table. Revised I_{CCADC} and updated Note 1 in Table 67 . Revised DDR LVDS transmitter data width in Table 16 . Updated the AC Switching Characteristics based upon the ISE 13.4 v1.03 speed specification throughout document. Removed notes from Table 28 as they are no longer applicable. Updated specifications in Table 68 . Updated Note 1 in Table 37 . In the GTX Transceiver DC Input and Output Levels section: Revised V_{IN} , and added I_{DCIN} and I_{DCOUT} to Table 51 . Added Note 4 to Table 53 . In Table 55 , revised F_{GCLK} , removed T_{PHASE} , and added T_{DLOCK} . Revised specifications and added Note 2 to Table 57 . Added Table 58 and Table 59 along with GTX Transceiver Protocol Jitter Characteristics in Table 60 through Table 65 .
05/23/12	1.5	Reorganized entire data sheet including adding Table 44 and Table 48 . Updated T_{SOL} in Table 1 . Updated I_{BATT} and added R_{IN_TERM} to Table 3 . Added values to Table 6 and Table 7 . Updated Power-On/Off Power Supply Sequencing , page 6 with regards to GTX transceivers. Updated many parameters in Table 9 including SSTL135 and SSTL135_R. Removed V_{OX} column and added DIFF_HSUL_12 to Table 11 . Updated V_{OL} in Table 12 . Updated Table 16 and removed notes 2 and 3. Updated Table 17 . Updated the AC Switching Characteristics based upon the ISE 14.1 v1.04 for the -3, -2, -2L (1.0V), -1, and -2L (0.9V) speed specifications throughout the document. In Table 31 , updated Reset Delays section including Note 10 and Note 11 . Added data for T_{LOCK} and T_{DLOCK} in Table 55 . Updated many of the XADC specifications in Table 67 and added Note 2 . Updated and moved <i>Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK</i> section from Table 68 to Table 38 and Table 39 .

Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials, or to advise you of any corrections or update. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

AUTOMOTIVE APPLICATIONS DISCLAIMER

XILINX PRODUCTS ARE NOT DESIGNED OR INTENDED TO BE FAIL-SAFE, OR FOR USE IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE, SUCH AS APPLICATIONS RELATED TO: (I) THE DEPLOYMENT OF AIRBAGS, (II) CONTROL OF A VEHICLE, UNLESS THERE IS A FAIL-SAFE OR REDUNDANCY FEATURE (WHICH DOES NOT INCLUDE USE OF SOFTWARE IN THE XILINX DEVICE TO IMPLEMENT THE REDUNDANCY) AND A WARNING SIGNAL UPON FAILURE TO THE OPERATOR, OR (III) USES THAT COULD LEAD TO DEATH OR PERSONAL INJURY. CUSTOMER ASSUMES THE SOLE RISK AND LIABILITY OF ANY USE OF XILINX PRODUCTS IN SUCH APPLICATIONS.