


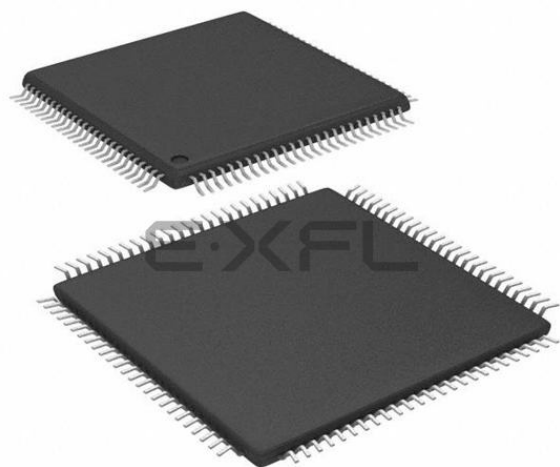

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                      |
| Core Processor             | PIC                                                                                                                                                                         |
| Core Size                  | 16-Bit                                                                                                                                                                      |
| Speed                      | 60 MIPS                                                                                                                                                                     |
| Connectivity               | CANbus, I <sup>2</sup> C, IrDA, LINbus, SPI, UART/USART, USB OTG                                                                                                            |
| Peripherals                | Brown-out Detect/Reset, DMA, POR, PWM, WDT                                                                                                                                  |
| Number of I/O              | 83                                                                                                                                                                          |
| Program Memory Size        | 256KB (85.5K x 24)                                                                                                                                                          |
| Program Memory Type        | FLASH                                                                                                                                                                       |
| EEPROM Size                | -                                                                                                                                                                           |
| RAM Size                   | 12K x 16                                                                                                                                                                    |
| Voltage - Supply (Vcc/Vdd) | 3V ~ 3.6V                                                                                                                                                                   |
| Data Converters            | A/D 32x10b/12b                                                                                                                                                              |
| Oscillator Type            | Internal                                                                                                                                                                    |
| Operating Temperature      | -40°C ~ 125°C (TA)                                                                                                                                                          |
| Mounting Type              | Surface Mount                                                                                                                                                               |
| Package / Case             | 100-TQFP                                                                                                                                                                    |
| Supplier Device Package    | 100-TQFP (12x12)                                                                                                                                                            |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic24ep256gu810-e-pt">https://www.e-xfl.com/product-detail/microchip-technology/pic24ep256gu810-e-pt</a> |

## **TO OUR VALUED CUSTOMERS**

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at [docerrors@microchip.com](mailto:docerrors@microchip.com) or fax the **Reader Response Form** in the back of this data sheet to (480) 792-4150. We welcome your feedback.

### **Most Current Data Sheet**

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000A is version A of document DS30000).

### **Errata**

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include literature number) you are using.

### **Customer Notification System**

Register on our web site at [www.microchip.com](http://www.microchip.com) to receive the most current information on all of our products.

**TABLE 4-5: INTERRUPT CONTROLLER REGISTER MAP FOR dsPIC33EPXXXMU806 DEVICES ONLY**

| File Name | Addr. | Bit 15 | Bit 14      | Bit 13 | Bit 12 | Bit 11 | Bit 10       | Bit 9   | Bit 8   | Bit 7  | Bit 6        | Bit 5  | Bit 4   | Bit 3   | Bit 2        | Bit 1   | Bit 0   | All Resets |
|-----------|-------|--------|-------------|--------|--------|--------|--------------|---------|---------|--------|--------------|--------|---------|---------|--------------|---------|---------|------------|
| IFS0      | 0800  | NVMIF  | DMA1IF      | AD1IF  | U1TXIF | U1RXIF | SPI1IF       | SPI1EIF | T3IF    | T2IF   | OC2IF        | IC2IF  | DMA0IF  | T1IF    | OC1IF        | IC1IF   | INT0IF  | 0000       |
| IFS1      | 0802  | U2TXIF | U2RXIF      | INT2IF | T5IF   | T4IF   | OC4IF        | OC3IF   | DMA2IF  | IC8IF  | IC7IF        | AD2IF  | INT1IF  | CNIF    | CMIF         | MI2C1IF | SI2C1IF | 0000       |
| IFS2      | 0804  | T6IF   | DMA4IF      | PMPIF  | OC8IF  | OC7IF  | OC6IF        | OC5IF   | IC6IF   | IC5IF  | IC4IF        | IC3IF  | DMA3IF  | C1IF    | C1RXIF       | SPI2IF  | SPI2EIF | 0000       |
| IFS3      | 0806  | —      | RTCIF       | DMA5IF | DCIIF  | DCIEIF | QE11IF       | PSEMIIF | C2IF    | C2RXIF | INT4IF       | INT3IF | T9IF    | T8IF    | MI2C2IF      | SI2C2IF | T7IF    | 0000       |
| IFS4      | 0808  | —      | —           | —      | —      | QE12IF | —            | PSESMIF | —       | C2TXIF | C1TXIF       | DMA7IF | DMA6IF  | CRCIF   | U2EIF        | U1EIF   | —       | 0000       |
| IFS5      | 080A  | PWM2IF | PWM1IF      | IC9IF  | OC9IF  | SPI3IF | SPI3EIF      | U4TXIF  | U4RXIF  | U4EIF  | USB1IF       | —      | —       | U3TXIF  | U3RXIF       | U3EIF   | —       | 0000       |
| IFS6      | 080C  | —      | —           | —      | —      | —      | —            | —       | —       | —      | —            | —      | —       | —       | —            | PWM4IF  | PWM3IF  | 0000       |
| IFS7      | 080E  | IC11IF | OC11IF      | IC10IF | OC10IF | SPI4IF | SPI4EIF      | DMA11IF | DMA10IF | DMA9IF | DMA8IF       | —      | —       | —       | —            | —       | —       | 0000       |
| IFS8      | 0810  | —      | ICDIF       | IC16IF | OC16IF | IC15IF | OC15IF       | IC14IF  | OC14IF  | IC13IF | OC13IF       | —      | DMA14IF | DMA13IF | DMA12IF      | IC12IF  | OC12IF  | 0000       |
| IEC0      | 0820  | NVMIE  | DMA1IE      | AD1IE  | U1TXIE | U1RXIE | SPI1IE       | SPI1EIE | T3IE    | T2IE   | OC2IE        | IC2IE  | DMA0IE  | T1IE    | OC1IE        | IC1IE   | INT0IE  | 0000       |
| IEC1      | 0822  | U2TXIE | U2RXIE      | INT2IE | T5IE   | T4IE   | OC4IE        | OC3IE   | DMA2IE  | IC8IE  | IC7IE        | AD2IE  | INT1IE  | CNIE    | CMIE         | MI2C1IE | SI2C1IE | 0000       |
| IEC2      | 0824  | T6IE   | DMA4IE      | PMPIE  | OC8IE  | OC7IE  | OC6IE        | OC5IE   | IC6IE   | IC5IE  | IC4IE        | IC3IE  | DMA3IE  | C1IE    | C1RXIE       | SPI2IE  | SPI2EIE | 0000       |
| IEC3      | 0826  | —      | RTCIE       | DMA5IE | DCIIE  | DCIEIE | QE11IE       | PSEMIIE | C2IE    | C2RXIE | INT4IE       | INT3IE | T9IE    | T8IE    | MI2C2IE      | SI2C2IE | T7IE    | 0000       |
| IEC4      | 0828  | —      | —           | —      | —      | QE12IE | —            | PSESMIE | —       | C2TXIE | C1TXIE       | DMA7IE | DMA6IE  | CRCIE   | U2EIE        | U1EIE   | —       | 0000       |
| IEC5      | 082A  | PWM2IE | PWM1IE      | IC9IE  | OC9IE  | SPI3IE | SPI3EIE      | U4TXIE  | U4RXIE  | U4EIE  | USB1IE       | —      | —       | U3TXIE  | U3RXIE       | U3EIE   | —       | 0000       |
| IEC6      | 082C  | —      | —           | —      | —      | —      | —            | —       | —       | —      | —            | —      | —       | —       | —            | PWM4IE  | PWM3IE  | 0000       |
| IEC7      | 082E  | IC11IE | OC11IE      | IC10IE | OC10IE | SPI4IE | SPI4EIE      | DMA11IE | DMA10IE | DMA9IE | DMA8IE       | —      | —       | —       | —            | —       | —       | 0000       |
| IEC8      | 0830  | —      | ICDIE       | IC16IE | OC16IE | IC15IE | OC15IE       | IC14IE  | OC14IE  | IC13IE | OC13IE       | —      | DMA14IE | DMA13IE | DMA12IE      | IC12IE  | OC12IE  | 0000       |
| IPC0      | 0840  | —      | T1IP<2:0>   |        |        | —      | OC1IP<2:0>   |         |         | —      | IC1IP<2:0>   |        |         | —       | INT0IP<2:0>  |         |         | 4444       |
| IPC1      | 0842  | —      | T2IP<2:0>   |        |        | —      | OC2IP<2:0>   |         |         | —      | IC2IP<2:0>   |        |         | —       | DMA0IP<2:0>  |         |         | 4444       |
| IPC2      | 0844  | —      | U1RXIP<2:0> |        |        | —      | SPI1IP<2:0>  |         |         | —      | SPI1EIP<2:0> |        |         | —       | T3IP<2:0>    |         |         | 4444       |
| IPC3      | 0846  | —      | NVMIP<2:0>  |        |        | —      | DMA1IP<2:0>  |         |         | —      | AD1IP<2:0>   |        |         | —       | U1TXIP<2:0>  |         |         | 4444       |
| IPC4      | 0848  | —      | CNIP<2:0>   |        |        | —      | CMIP<2:0>    |         |         | —      | MI2C1IP<2:0> |        |         | —       | SI2C1IP<2:0> |         |         | 4444       |
| IPC5      | 084A  | —      | IC8IP<2:0>  |        |        | —      | IC7IP<2:0>   |         |         | —      | AD2IP<2:0>   |        |         | —       | INT1IP<2:0>  |         |         | 4444       |
| IPC6      | 084C  | —      | T4IP<2:0>   |        |        | —      | OC4IP<2:0>   |         |         | —      | OC3IP<2:0>   |        |         | —       | DMA2IP<2:0>  |         |         | 4444       |
| IPC7      | 084E  | —      | U2TXIP<2:0> |        |        | —      | U2RXIP<2:0>  |         |         | —      | INT2IP<2:0>  |        |         | —       | T5IP<2:0>    |         |         | 4444       |
| IPC8      | 0850  | —      | C1IP<2:0>   |        |        | —      | C1RXIP<2:0>  |         |         | —      | SPI2IP<2:0>  |        |         | —       | SPI2EIP<2:0> |         |         | 4444       |
| IPC9      | 0852  | —      | IC5IP<2:0>  |        |        | —      | IC4IP<2:0>   |         |         | —      | IC3IP<2:0>   |        |         | —       | DMA3IP<2:0>  |         |         | 4444       |
| IPC10     | 0854  | —      | OC7IP<2:0>  |        |        | —      | OC6IP<2:0>   |         |         | —      | OC5IP<2:0>   |        |         | —       | IC6IP<2:0>   |         |         | 4444       |
| IPC11     | 0856  | —      | T6IP<2:0>   |        |        | —      | DMA4IP<2:0>  |         |         | —      | PMPIP<2:0>   |        |         | —       | OC8IP<2:0>   |         |         | 4444       |
| IPC12     | 0858  | —      | T8IP<2:0>   |        |        | —      | MI2C2IP<2:0> |         |         | —      | SI2C2IP<2:0> |        |         | —       | T7IP<2:0>    |         |         | 4444       |
| IPC13     | 085A  | —      | C2RXIP<2:0> |        |        | —      | INT4IP<2:0>  |         |         | —      | INT3IP<2:0>  |        |         | —       | T9IP<2:0>    |         |         | 4444       |
| IPC14     | 085C  | —      | DCIEIP<2:0> |        |        | —      | QE11IP<2:0>  |         |         | —      | PSEMIP<2:0>  |        |         | —       | C2IP<2:0>    |         |         | 4444       |
| IPC15     | 085E  | —      | —           | —      | —      | —      | RTCIP<2:0>   |         |         | —      | DMA5IP<2:0>  |        |         | —       | DCIIP<2:0>   |         |         | 0444       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-30: ECAN1 REGISTER MAP WHEN WIN (C1CTRL<0>) = 1**

| File Name  | Addr      | Bit 15         | Bit 14 | Bit 13 | Bit 12 | Bit 11     | Bit 10 | Bit 9 | Bit 8 | Bit 7      | Bit 6 | Bit 5 | Bit 4 | Bit 3      | Bit 2      | Bit 1 | Bit 0 | All Resets |  |  |
|------------|-----------|----------------|--------|--------|--------|------------|--------|-------|-------|------------|-------|-------|-------|------------|------------|-------|-------|------------|--|--|
| —          | 0400-041E | See Table 4-28 |        |        |        |            |        |       |       |            |       |       |       |            |            |       |       | —          |  |  |
| C1BUFNT1   | 0420      | F3BP<3:0>      |        |        |        | F2BP<3:0>  |        |       |       | F1BP<3:0>  |       |       |       | F0BP<3:0>  |            |       |       | 0000       |  |  |
| C1BUFNT2   | 0422      | F7BP<3:0>      |        |        |        | F6BP<3:0>  |        |       |       | F5BP<3:0>  |       |       |       | F4BP<3:0>  |            |       |       | 0000       |  |  |
| C1BUFNT3   | 0424      | F11BP<3:0>     |        |        |        | F10BP<3:0> |        |       |       | F9BP<3:0>  |       |       |       | F8BP<3:0>  |            |       |       | 0000       |  |  |
| C1BUFNT4   | 0426      | F15BP<3:0>     |        |        |        | F14BP<3:0> |        |       |       | F13BP<3:0> |       |       |       | F12BP<3:0> |            |       |       | 0000       |  |  |
| C1RXM0SID  | 0430      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | MIDE  | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXM0EID  | 0432      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXM1SID  | 0434      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | MIDE  | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXM1EID  | 0436      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXM2SID  | 0438      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | MIDE  | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXM2EID  | 043A      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF0SID  | 0440      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF0EID  | 0442      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF1SID  | 0444      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF1EID  | 0446      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF2SID  | 0448      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF2EID  | 044A      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF3SID  | 044C      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF3EID  | 044E      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF4SID  | 0450      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF4EID  | 0452      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF5SID  | 0454      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF5EID  | 0456      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF6SID  | 0458      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF6EID  | 045A      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF7SID  | 045C      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF7EID  | 045E      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF8SID  | 0460      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF8EID  | 0462      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF9SID  | 0464      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF9EID  | 0466      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF10SID | 0468      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |
| C1RXF10EID | 046A      | EID<15:8>      |        |        |        |            |        |       |       | EID<7:0>   |       |       |       |            |            |       |       | xxxx       |  |  |
| C1RXF11SID | 046C      | SID<10:3>      |        |        |        |            |        |       |       | SID<2:0>   |       | —     | EXIDE | —          | EID<17:16> |       |       | xxxx       |  |  |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-34: PARALLEL MASTER/SLAVE PORT REGISTER MAP**

| File Name              | Addr. | Bit 15                                                    | Bit 14    | Bit 13                             | Bit 12      | Bit 11 | Bit 10 | Bit 9     | Bit 8  | Bit 7      | Bit 6 | Bit 5      | Bit 4 | Bit 3 | Bit 2      | Bit 1 | Bit 0 | All Resets |
|------------------------|-------|-----------------------------------------------------------|-----------|------------------------------------|-------------|--------|--------|-----------|--------|------------|-------|------------|-------|-------|------------|-------|-------|------------|
| PMCON                  | 0600  | PMPEN                                                     | —         | PSIDL                              | ADRMUX<1:0> |        | PTBEEN | PTWREN    | PTRDEN | CSF<1:0>   |       | ALP        | CS2P  | CS1P  | BEP        | WRSP  | RDSP  | 0000       |
| PMMODE                 | 0602  | BUSY                                                      | IRQM<1:0> |                                    | INCM<1:0>   |        | MODE16 | MODE<1:0> |        | WAITB<1:0> |       | WAITM<3:0> |       |       | WAITE<1:0> |       |       | 0000       |
| PMADDR <sup>(1)</sup>  | 0604  | CS2                                                       | CS1       | Parallel Port Address (ADDR<13:0>) |             |        |        |           |        |            |       |            |       |       |            |       |       | 0000       |
| PMDOUT1 <sup>(1)</sup> | 0604  | Parallel Port Data Out Register 1 (Buffers Level 0 and 1) |           |                                    |             |        |        |           |        |            |       |            |       |       |            |       |       | 0000       |
| PMDOUT2                | 0606  | Parallel Port Data Out Register 2 (Buffers Level 2 and 3) |           |                                    |             |        |        |           |        |            |       |            |       |       |            |       |       | 0000       |
| PMDIN1                 | 0608  | Parallel Port Data In Register 1 (Buffers Level 0 and 1)  |           |                                    |             |        |        |           |        |            |       |            |       |       |            |       |       | 0000       |
| PMDIN2                 | 060A  | Parallel Port Data In Register 2 (Buffers Level 2 and 3)  |           |                                    |             |        |        |           |        |            |       |            |       |       |            |       |       | 0000       |
| PMAEN                  | 060C  | PTEN15                                                    | PTEN14    | PTEN13                             | PTEN12      | PTEN11 | PTEN10 | PTEN9     | PTEN8  | PTEN7      | PTEN6 | PTEN5      | PTEN4 | PTEN3 | PTEN2      | PTEN1 | PTEN0 | 0000       |
| PMSTAT                 | 060E  | IBF                                                       | IBOV      | —                                  | —           | IB3F   | IB2F   | IB1F      | IB0F   | OBE        | OBUF  | —          | —     | OB3E  | OB2E       | OB1E  | OB0E  | 008F       |

**Legend:** — = unimplemented, read as '0'. Shaded bits are not used in the operation of the PMP module.

**Note 1:** PMADDR and PMDOUT1 are the same physical register, but are defined differently depending on the module's operating mode.

**TABLE 4-35: CRC REGISTER MAP**

| File Name | Addr. | Bit 15                   | Bit 14 | Bit 13 | Bit 12      | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7  | Bit 6  | Bit 5   | Bit 4     | Bit 3   | Bit 2 | Bit 1 | Bit 0 | All Resets |
|-----------|-------|--------------------------|--------|--------|-------------|--------|--------|-------|-------|--------|--------|---------|-----------|---------|-------|-------|-------|------------|
| CRCCON1   | 0640  | CRCEN                    | —      | CSIDL  | VWORD<4:0>  |        |        |       |       | CRCFUL | CRCMPT | CRCISEL | CRCGO     | LENDIAN | —     | —     | —     | 0000       |
| CRCCON2   | 0642  | —                        | —      | —      | DWIDTH<4:0> |        |        |       |       | —      | —      | —       | PLEN<4:0> |         |       |       |       | 0000       |
| CRCXORL   | 0644  | X<15:1>                  |        |        |             |        |        |       |       |        |        |         |           |         |       |       | —     | 0000       |
| CRCXORH   | 0646  | X<31:16>                 |        |        |             |        |        |       |       |        |        |         |           |         |       |       |       | 0000       |
| CRCDATL   | 0648  | CRC Data Input Low Word  |        |        |             |        |        |       |       |        |        |         |           |         |       |       |       | 0000       |
| CRCDATH   | 064A  | CRC Data Input High Word |        |        |             |        |        |       |       |        |        |         |           |         |       |       |       | 0000       |
| CRCWDATL  | 064C  | CRC Result Low Word      |        |        |             |        |        |       |       |        |        |         |           |         |       |       |       | 0000       |
| CRCWDATH  | 064E  | CRC Result High Word     |        |        |             |        |        |       |       |        |        |         |           |         |       |       |       | 0000       |

**Legend:** — = unimplemented, read as '0'. Shaded bits are not used in the operation of the programmable CRC module.

**TABLE 4-36: REAL-TIME CLOCK AND CALENDAR REGISTER MAP**

| File Name | Addr. | Bit 15                                            | Bit 14 | Bit 13     | Bit 12  | Bit 11  | Bit 10 | Bit 9       | Bit 8        | Bit 7 | Bit 6    | Bit 5     | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | All Resets |      |
|-----------|-------|---------------------------------------------------|--------|------------|---------|---------|--------|-------------|--------------|-------|----------|-----------|-------|-------|-------|-------|-------|------------|------|
| ALRMVAL   | 0620  | Alarm Value Register Window based on ALRMPTR<1:0> |        |            |         |         |        |             |              |       |          |           |       |       |       |       |       |            | xxxx |
| ALCFGRPT  | 0622  | ALRMEN                                            | CHIME  | AMASK<3:0> |         |         |        |             | ALRMPTR<1:0> |       |          | ARPT<7:0> |       |       |       |       |       | 0000       |      |
| RTCVAL    | 0624  | RTCC Value Register Window based on RTCPTR<1:0>   |        |            |         |         |        |             |              |       |          |           |       |       |       |       |       |            | xxxx |
| RCFGCAL   | 0626  | RTCEN                                             | —      | RTCWREN    | RTCSYNC | HALFSEC | RTCOE  | RTCPTR<1:0> |              |       | CAL<7:0> |           |       |       |       |       | 0000  |            |      |

**Legend:** x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-53: COMPARATOR REGISTER MAP**

| File Name | Addr. | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11       | Bit 10  | Bit 9      | Bit 8 | Bit 7        | Bit 6      | Bit 5 | Bit 4 | Bit 3        | Bit 2      | Bit 1    | Bit 0 | All Resets |
|-----------|-------|--------|--------|--------|--------|--------------|---------|------------|-------|--------------|------------|-------|-------|--------------|------------|----------|-------|------------|
| CMSTAT    | 0A80  | CMSIDL | —      | —      | —      | —            | C3EVT   | C2EVT      | C1EVT | —            | —          | —     | —     | —            | C3OUT      | C2OUT    | C1OUT | 0000       |
| CVRCON    | 0A82  | —      | —      | —      | —      | —            | VREFSEL | BGSEL<1:0> |       | CVREN        | CVROE      | CVRR  | CVRSS | CVR<3:0>     |            |          |       | 0000       |
| CM1CON    | 0A84  | CON    | COE    | CPOL   | —      | —            | —       | CEVT       | COUT  | EVPOL<1:0>   |            | —     | CREF  | —            | —          | CCH<1:0> |       | 0000       |
| CM1MSKSRC | 0A86  | —      | —      | —      | —      | SELSRCC<3:0> |         |            |       | SELSRCB<3:0> |            |       |       | SELSRCA<3:0> |            |          |       | 0000       |
| CM1MSKCON | 0A88  | HLMS   | —      | OCEN   | OCNEN  | OBEN         | OBNEN   | OAEN       | OANEN | NAGS         | PAGS       | ACEN  | ACNEN | ABEN         | ABNEN      | AAEN     | AANEN | 0000       |
| CM1FLTR   | 0A8A  | —      | —      | —      | —      | —            | —       | —          | —     | —            | CFSEL<2:0> |       |       | CFLTREN      | CFDIV<2:0> |          |       | 0000       |
| CM2CON    | 0A8C  | CON    | COE    | CPOL   | —      | —            | —       | CEVT       | COUT  | EVPOL<1:0>   |            | —     | CREF  | —            | —          | CCH<1:0> |       | 0000       |
| CM2MSKSRC | 0A8E  | —      | —      | —      | —      | SELSRCC<3:0> |         |            |       | SELSRCB<3:0> |            |       |       | SELSRCA<3:0> |            |          |       | 0000       |
| CM2MSKCON | 0A90  | HLMS   | —      | OCEN   | OCNEN  | OBEN         | OBNEN   | OAEN       | OANEN | NAGS         | PAGS       | ACEN  | ACNEN | ABEN         | ABNEN      | AAEN     | AANEN | 0000       |
| CM2FLTR   | 0A92  | —      | —      | —      | —      | —            | —       | —          | —     | —            | CFSEL<2:0> |       |       | CFLTREN      | CFDIV<2:0> |          |       | 0000       |
| CM3CON    | 0A94  | CON    | COE    | CPOL   | —      | —            | —       | CEVT       | COUT  | EVPOL<1:0>   |            | —     | CREF  | —            | —          | CCH<1:0> |       | 0000       |
| CM3MSKSRC | 0A96  | —      | —      | —      | —      | SELSRCC<3:0> |         |            |       | SELSRCB<3:0> |            |       |       | SELSRCA<3:0> |            |          |       | 0000       |
| CM3MSKCON | 0A98  | HLMS   | —      | OCEN   | OCNEN  | OBEN         | OBNEN   | OAEN       | OANEN | NAGS         | PAGS       | ACEN  | ACNEN | ABEN         | ABNEN      | AAEN     | AANEN | 0000       |
| CM3FLTR   | 0A9A  | —      | —      | —      | —      | —            | —       | —          | —     | —            | CFSEL<2:0> |       |       | CFLTREN      | CFDIV<2:0> |          |       | 0000       |

**Legend:**    x = unknown value on Reset, — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

#### 4.6.3 MODULO ADDRESSING APPLICABILITY

Modulo Addressing can be applied to the Effective Address (EA) calculation associated with any W register. Address boundaries check for addresses equal to:

- The upper boundary addresses for incrementing buffers
- The lower boundary addresses for decrementing buffers

It is important to realize that the address boundaries check for addresses less than or greater than the upper (for incrementing buffers) and lower (for decrementing buffers) boundary addresses (not just equal to). Address changes can, therefore, jump beyond boundaries and still be adjusted correctly.

**Note:** The modulo corrected Effective Address is written back to the register only when Pre-Modify or Post-Modify Addressing mode is used to compute the Effective Address. When an address offset (such as  $[W7 + W2]$ ) is used, Modulo Addressing correction is performed but the contents of the register remain unchanged.

#### 4.7 Bit-Reversed Addressing (dsPIC33EPXXXMU806/810/814 Devices Only)

Bit-Reversed Addressing mode is intended to simplify data reordering for radix-2 FFT algorithms. It is supported by the X AGU for data writes only.

The modifier, which can be a constant value or register contents, is regarded as having its bit order reversed. The address source and destination are kept in normal order. Thus, the only operand requiring reversal is the modifier.

##### 4.7.1 BIT-REVERSED ADDRESSING IMPLEMENTATION

Bit-Reversed Addressing mode is enabled in any of these situations:

- BWMx bits (W register selection) in the MODCON register are any value other than '1111' (the stack cannot be accessed using Bit-Reversed Addressing)
- The BREN bit is set in the XBREV register
- The addressing mode used is Register Indirect with Pre-Increment or Post-Increment

If the length of a bit-reversed buffer is  $M = 2^N$  bytes, the last 'N' bits of the data buffer start address must be zeros.

$XB<14:0>$  is the Bit-Reversed Address modifier, or 'pivot point,' which is typically a constant. In the case of an FFT computation, its value is equal to half of the FFT data buffer size.

**Note:** All bit-reversed EA calculations assume word-sized data (LSb of every EA is always clear). The XB value is scaled accordingly to generate compatible (byte) addresses.

When enabled, Bit-Reversed Addressing is executed only for Register Indirect with Pre-Increment or Post-Increment Addressing and word-sized data writes. It does not function for any other addressing mode or for byte-sized data and normal addresses are generated instead. When Bit-Reversed Addressing is active, the W Address Pointer is always added to the address modifier (XB) and the offset associated with the Register Indirect Addressing mode is ignored. In addition, as word-sized data is a requirement, the LSb of the EA is ignored (and always clear).

**Note:** Modulo Addressing and Bit-Reversed Addressing can be enabled simultaneously using the same W register, but Bit-Reversed Addressing operation will always take precedence for data writes when enabled.

If Bit-Reversed Addressing has already been enabled by setting the BREN ( $XBREV<15>$ ) bit, a write to the XBREV register should not be immediately followed by an indirect read operation using the W register that has been designated as the Bit-Reversed Pointer.

## 9.1 CPU Clocking System

The dsPIC33EPXXX(GP/MC/MU)806/810/814 and PIC24EPXXX(GP/GU)810/814 family of devices provides seven system clock options:

- Fast RC (FRC) Oscillator
- FRC Oscillator with Phase-Locked Loop (PLL)
- Primary (XT, HS or EC) Oscillator
- Primary Oscillator with PLL
- Secondary (LP) Oscillator
- Low-Power RC (LPRC) Oscillator
- FRC Oscillator with postscaler

Instruction execution speed or device operating frequency,  $F_{CY}$ , is given by Equation 9-1.

### EQUATION 9-1: DEVICE OPERATING FREQUENCY


$$F_{CY} = F_{OSC}/2$$

Figure 9-2 is a block diagram of the PLL module.

Equation 9-2 provides the relation between input frequency ( $F_{IN}$ ) and output frequency ( $F_{OSC}$ ).

Equation 9-3 provides the relation between input frequency ( $F_{IN}$ ) and VCO frequency ( $F_{VCO}$ ).

**FIGURE 9-2: PLL BLOCK DIAGRAM**

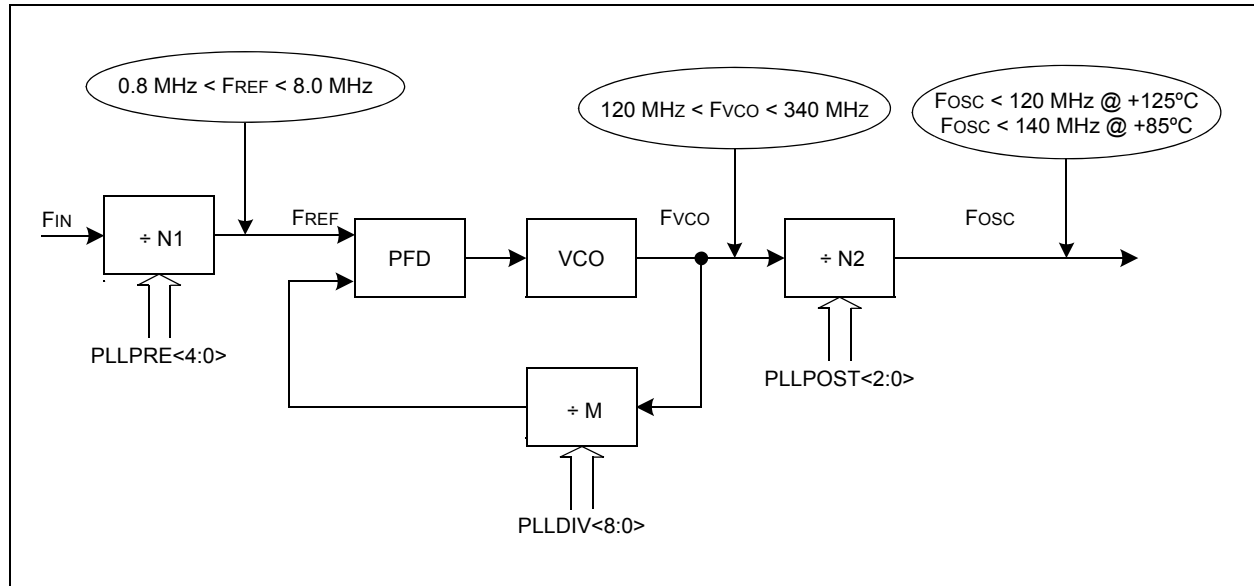

### EQUATION 9-2: $F_{OSC}$ CALCULATION

$$F_{OSC} = F_{IN} \times \left( \frac{M}{N1 \times N2} \right) = F_{IN} \times \left( \frac{(PLLDIV + 2)}{(PLLPRE + 2) \times 2(PLLPOST + 1)} \right)$$

Where,

$$N1 = PLLPRE + 2$$

$$N2 = 2 \times (PLLPOST + 1)$$

$$M = PLLDIV + 2$$

### EQUATION 9-3: $F_{VCO}$ CALCULATION

$$F_{VCO} = F_{IN} \times \left( \frac{M}{N1} \right) = F_{IN} \times \left( \frac{(PLLDIV + 2)}{(PLLPRE + 2)} \right)$$

**REGISTER 11-17: RPINR16: PERIPHERAL PIN SELECT INPUT REGISTER 16  
(dsPIC33EPXXXMU806/810/814 DEVICES ONLY)**

|        |                           |       |       |       |       |       |       |       |
|--------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| U-0    | R/W-0                     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |       |
| —      | QEB2R<6:0> <sup>(1)</sup> |       |       |       |       |       |       |       |
| bit 15 |                           |       |       |       |       |       |       | bit 8 |

|       |                           |       |       |       |       |       |       |       |
|-------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| U-0   | R/W-0                     | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |       |
| —     | QEA2R<6:0> <sup>(1)</sup> |       |       |       |       |       |       |       |
| bit 7 |                           |       |       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **QEB2R<6:0>:** Assign B (QE12) to the Corresponding RPn/RPIn Pin bits<sup>(1)</sup>  
(see Table 11-2 for input pin selection numbers)

1111111 = Input tied to RP127

.

.

.

0000001 = Input tied to CMP1

0000000 = Input tied to Vss

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **QEA2R<6:0>:** Assign A (QE12) to the Corresponding RPn/RPIn Pin bits<sup>(1)</sup>  
(see Table 11-2 for input pin selection numbers)

1111111 = Input tied to RP127

.

.

.

0000001 = Input tied to CMP1

0000000 = Input tied to Vss

**Note 1:** These bits are available on dsPIC33EPXXX(MC/MU)806/810/814 devices only.



**REGISTER 25-3: CMxMSKSRC: COMPARATOR x MASK SOURCE SELECT CONTROL REGISTER**

|        |     |     |     |              |       |       |      |
|--------|-----|-----|-----|--------------|-------|-------|------|
| U-0    | U-0 | U-0 | U-0 | R/W-0        | R/W-0 | R/W-0 | RW-0 |
| —      | —   | —   | —   | SELSRCC<3:0> |       |       |      |
| bit 15 |     |     |     | bit 8        |       |       |      |

|              |       |       |       |              |       |       |       |
|--------------|-------|-------|-------|--------------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0        | R/W-0 | R/W-0 | R/W-0 |
| SELSRCB<3:0> |       |       |       | SELSRCA<3:0> |       |       |       |
| bit 7        |       |       |       | bit 0        |       |       |       |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-12 **Unimplemented:** Read as '0'bit 11-8 **SELSRCC<3:0>:** Mask C Input Select bits

1111 = FLT4  
 1110 = FLT2  
 1101 = PWM7H  
 1100 = PWM7L  
 1011 = PWM6H  
 1010 = PWM6L  
 1001 = PWM5H  
 1000 = PWM5L  
 0111 = PWM4H  
 0110 = PWM4L  
 0101 = PWM3H  
 0100 = PWM3L  
 0011 = PWM2H  
 0010 = PWM2L  
 0001 = PWM1H  
 0000 = PWM1L

bit 7-4 **SELSRCB<3:0>:** Mask B Input Select bits

1111 = FLT4  
 1110 = FLT2  
 1101 = PWM7H  
 1100 = PWM7L  
 1011 = PWM6H  
 1010 = PWM6L  
 1001 = PWM5H  
 1000 = PWM5L  
 0111 = PWM4H  
 0110 = PWM4L  
 0101 = PWM3H  
 0100 = PWM3L  
 0011 = PWM2H  
 0010 = PWM2L  
 0001 = PWM1H  
 0000 = PWM1L

TABLE 30-2: INSTRUCTION SET OVERVIEW (CONTINUED)

| Base Instr # | Assembly Mnemonic | Assembly Syntax                          | Description                                   | # of Words | # of Cycles <sup>(2)</sup> | Status Flags Affected |
|--------------|-------------------|------------------------------------------|-----------------------------------------------|------------|----------------------------|-----------------------|
| 8            | BSW               | BSW.C Ws,Wb                              | Write C bit to Ws<Wb>                         | 1          | 1                          | None                  |
|              |                   | BSW.Z Ws,Wb                              | Write Z bit to Ws<Wb>                         | 1          | 1                          | None                  |
| 9            | BTG               | BTG f,#bit4                              | Bit Toggle f                                  | 1          | 1                          | None                  |
|              |                   | BTG Ws,#bit4                             | Bit Toggle Ws                                 | 1          | 1                          | None                  |
| 10           | BTSC              | BTSC f,#bit4                             | Bit Test f, Skip if Clear                     | 1          | 1<br>(2 or 3)              | None                  |
|              |                   | BTSC Ws,#bit4                            | Bit Test Ws, Skip if Clear                    | 1          | 1<br>(2 or 3)              | None                  |
| 11           | BTSS              | BTSS f,#bit4                             | Bit Test f, Skip if Set                       | 1          | 1<br>(2 or 3)              | None                  |
|              |                   | BTSS Ws,#bit4                            | Bit Test Ws, Skip if Set                      | 1          | 1<br>(2 or 3)              | None                  |
| 12           | BTST              | BTST f,#bit4                             | Bit Test f                                    | 1          | 1                          | Z                     |
|              |                   | BTST.C Ws,#bit4                          | Bit Test Ws to C                              | 1          | 1                          | C                     |
|              |                   | BTST.Z Ws,#bit4                          | Bit Test Ws to Z                              | 1          | 1                          | Z                     |
|              |                   | BTST.C Ws,Wb                             | Bit Test Ws<Wb> to C                          | 1          | 1                          | C                     |
|              |                   | BTST.Z Ws,Wb                             | Bit Test Ws<Wb> to Z                          | 1          | 1                          | Z                     |
| 13           | BTSTS             | BTSTS f,#bit4                            | Bit Test then Set f                           | 1          | 1                          | Z                     |
|              |                   | BTSTS.C Ws,#bit4                         | Bit Test Ws to C, then Set                    | 1          | 1                          | C                     |
|              |                   | BTSTS.Z Ws,#bit4                         | Bit Test Ws to Z, then Set                    | 1          | 1                          | Z                     |
| 14           | CALL              | CALL lit23                               | Call subroutine                               | 2          | 4                          | SFA                   |
|              |                   | CALL Wn                                  | Call indirect subroutine                      | 1          | 4                          | SFA                   |
|              |                   | CALL.L Wn                                | Call indirect subroutine (long address)       | 1          | 4                          | SFA                   |
| 15           | CLR               | CLR f                                    | f = 0x0000                                    | 1          | 1                          | None                  |
|              |                   | CLR WREG                                 | WREG = 0x0000                                 | 1          | 1                          | None                  |
|              |                   | CLR Ws                                   | Ws = 0x0000                                   | 1          | 1                          | None                  |
|              |                   | CLR Acc,Wx,Wxd,Wy,Wyd,AWB <sup>(1)</sup> | Clear Accumulator                             | 1          | 1                          | OA,OB,SA,SB           |
| 16           | CLRWDT            | CLRWDT                                   | Clear Watchdog Timer                          | 1          | 1                          | WDTO,Sleep            |
| 17           | COM               | COM f                                    | f = $\bar{f}$                                 | 1          | 1                          | N,Z                   |
|              |                   | COM f,WREG                               | WREG = $\bar{f}$                              | 1          | 1                          | N,Z                   |
|              |                   | COM Ws,Wd                                | Wd = $\bar{Ws}$                               | 1          | 1                          | N,Z                   |
| 18           | CP                | CP f                                     | Compare f with WREG                           | 1          | 1                          | C,DC,N,OV,Z           |
|              |                   | CP Wb,#lit8                              | Compare Wb with lit8                          | 1          | 1                          | C,DC,N,OV,Z           |
|              |                   | CP Wb,Ws                                 | Compare Wb with Ws (Wb – Ws)                  | 1          | 1                          | C,DC,N,OV,Z           |
| 19           | CP0               | CP0 f                                    | Compare f with 0x0000                         | 1          | 1                          | C,DC,N,OV,Z           |
|              |                   | CP0 Ws                                   | Compare Ws with 0x0000                        | 1          | 1                          | C,DC,N,OV,Z           |
| 20           | CPB               | CPB f                                    | Compare f with WREG, with Borrow              | 1          | 1                          | C,DC,N,OV,Z           |
|              |                   | CPB Wb,#lit8                             | Compare Wb with lit8, with Borrow             | 1          | 1                          | C,DC,N,OV,Z           |
|              |                   | CPB Wb,Ws                                | Compare Wb with Ws, with Borrow (Wb – Ws – C) | 1          | 1                          | C,DC,N,OV,Z           |
| 21           | CPSEQ             | CPSEQ Wb,Wn                              | Compare Wb with Wn, skip if =                 | 1          | 1<br>(2 or 3)              | None                  |
|              | CPBEQ             | CPBEQ Wb,Wn,Expr                         | Compare Wb with Wn, branch if =               | 1          | 1 (5)                      | None                  |
| 22           | CPSGT             | CPSGT Wb,Wn                              | Compare Wb with Wn, skip if >                 | 1          | 1<br>(2 or 3)              | None                  |
|              | CPBGT             | CPBGT Wb,Wn,Expr                         | Compare Wb with Wn, branch if >               | 1          | 1 (5)                      | None                  |
| 23           | CPSLT             | CPSLT Wb,Wn                              | Compare Wb with Wn, skip if <                 | 1          | 1<br>(2 or 3)              | None                  |
|              | CPBLT             | CPBLT Wb,Wn,Expr                         | Compare Wb with Wn, branch if <               | 1          | 1 (5)                      | None                  |
| 24           | CPSNE             | CPSNE Wb,Wn                              | Compare Wb with Wn, skip if ≠                 | 1          | 1<br>(2 or 3)              | None                  |
|              | CPBNE             | CPBNE Wb,Wn,Expr                         | Compare Wb with Wn, branch if ≠               | 1          | 1 (5)                      | None                  |

**Note 1:** This instruction is available in dsPIC33EPXXX(GP/MC/MU)806/810/814 devices only.

**Note 2:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

TABLE 30-2: INSTRUCTION SET OVERVIEW (CONTINUED)

| Base Instr # | Assembly Mnemonic | Assembly Syntax                                                                                               | Description                                                                    | # of Words | # of Cycles <sup>(2)</sup> | Status Flags Affected |
|--------------|-------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------|----------------------------|-----------------------|
| 46           | MOV               | MOV <i>f</i> , <i>Wn</i>                                                                                      | Move <i>f</i> to <i>Wn</i>                                                     | 1          | 1                          | None                  |
|              |                   | MOV <i>f</i>                                                                                                  | Move <i>f</i> to <i>f</i>                                                      | 1          | 1                          | None                  |
|              |                   | MOV <i>f</i> , WREG                                                                                           | Move <i>f</i> to WREG                                                          | 1          | 1                          | None                  |
|              |                   | MOV #lit16, <i>Wn</i>                                                                                         | Move 16-bit literal to <i>Wn</i>                                               | 1          | 1                          | None                  |
|              |                   | MOV.b #lit8, <i>Wn</i>                                                                                        | Move 8-bit literal to <i>Wn</i>                                                | 1          | 1                          | None                  |
|              |                   | MOV <i>Wn</i> , <i>f</i>                                                                                      | Move <i>Wn</i> to <i>f</i>                                                     | 1          | 1                          | None                  |
|              |                   | MOV <i>Wso</i> , <i>Wdo</i>                                                                                   | Move <i>Ws</i> to <i>Wd</i>                                                    | 1          | 1                          | None                  |
|              |                   | MOV WREG, <i>f</i>                                                                                            | Move WREG to <i>f</i>                                                          | 1          | 1                          | None                  |
|              |                   | MOV.D <i>Wns</i> , <i>Wd</i>                                                                                  | Move Double from <i>W(ns):W(ns + 1)</i> to <i>Wd</i>                           | 1          | 2                          | None                  |
|              |                   | MOV.D <i>Ws</i> , <i>Wnd</i>                                                                                  | Move Double from <i>Ws</i> to <i>W(nd + 1):W(nd)</i>                           | 1          | 2                          | None                  |
| 47           | MOVFPAG           | MOVFPAG #lit10, DSRPAG                                                                                        | Move 10-bit literal to DSRPAG                                                  | 1          | 1                          | None                  |
|              |                   | MOVFPAG #lit9, DSWPAG                                                                                         | Move 9-bit literal to DSWPAG                                                   | 1          | 1                          | None                  |
|              |                   | MOVFPAG #lit8, TBLPAG                                                                                         | Move 8-bit literal to TBLPAG                                                   | 1          | 1                          | None                  |
|              |                   | MOVFPAGW <i>Ws</i> , DSRPAG                                                                                   | Move <i>Ws</i> <9:0> to DSRPAG                                                 | 1          | 1                          | None                  |
|              |                   | MOVFPAGW <i>Ws</i> , DSWPAG                                                                                   | Move <i>Ws</i> <8:0> to DSWPAG                                                 | 1          | 1                          | None                  |
|              |                   | MOVFPAGW <i>Ws</i> , TBLPAG                                                                                   | Move <i>Ws</i> <7:0> to TBLPAG                                                 | 1          | 1                          | None                  |
| 48           | MOVSAC            | MOVSAC <i>Acc</i> , <i>Wx</i> , <i>Wxd</i> , <i>Wy</i> , <i>Wyd</i> , AWB <sup>(1)</sup>                      | Prefetch and store accumulator                                                 | 1          | 1                          | None                  |
| 49           | MPY               | MPY <i>Wm</i> * <i>Wn</i> , <i>Acc</i> , <i>Wx</i> , <i>Wxd</i> , <i>Wy</i> , <i>Wyd</i> <sup>(1)</sup>       | Multiply <i>Wm</i> by <i>Wn</i> to Accumulator                                 | 1          | 1                          | OA,OB,OAB,SA,SB,SAB   |
|              |                   | MPY <i>Wm</i> * <i>Wm</i> , <i>Acc</i> , <i>Wx</i> , <i>Wxd</i> , <i>Wy</i> , <i>Wyd</i> <sup>(1)</sup>       | Square <i>Wm</i> to Accumulator                                                | 1          | 1                          | OA,OB,OAB,SA,SB,SAB   |
| 50           | MPY.N             | MPY.N <i>Wm</i> * <i>Wn</i> , <i>Acc</i> , <i>Wx</i> , <i>Wxd</i> , <i>Wy</i> , <i>Wyd</i> <sup>(1)</sup>     | -(Multiply <i>Wm</i> by <i>Wn</i> ) to Accumulator                             | 1          | 1                          | None                  |
| 51           | MSC               | MSC <i>Wm</i> * <i>Wm</i> , <i>Acc</i> , <i>Wx</i> , <i>Wxd</i> , <i>Wy</i> , <i>Wyd</i> , AWB <sup>(1)</sup> | Multiply and Subtract from Accumulator                                         | 1          | 1                          | OA,OB,OAB,SA,SB,SAB   |
| 52           | MUL               | MUL.SS <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                     | { <i>Wnd</i> + 1, <i>Wnd</i> } = signed( <i>Wb</i> ) * signed( <i>Ws</i> )     | 1          | 1                          | None                  |
|              |                   | MUL.SS <i>Wb</i> , <i>Ws</i> , <i>Acc</i> <sup>(1)</sup>                                                      | Accumulator = signed( <i>Wb</i> ) * signed( <i>Ws</i> )                        | 1          | 1                          | None                  |
|              |                   | MUL.SU <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                     | { <i>Wnd</i> + 1, <i>Wnd</i> } = signed( <i>Wb</i> ) * unsigned( <i>Ws</i> )   | 1          | 1                          | None                  |
|              |                   | MUL.SU <i>Wb</i> , <i>Ws</i> , <i>Acc</i> <sup>(1)</sup>                                                      | Accumulator = signed( <i>Wb</i> ) * unsigned( <i>Ws</i> )                      | 1          | 1                          | None                  |
|              |                   | MUL.SU <i>Wb</i> , #lit5, <i>Acc</i> <sup>(1)</sup>                                                           | Accumulator = signed( <i>Wb</i> ) * unsigned(lit5)                             | 1          | 1                          | None                  |
|              |                   | MUL.US <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                     | { <i>Wnd</i> + 1, <i>Wnd</i> } = unsigned( <i>Wb</i> ) * signed( <i>Ws</i> )   | 1          | 1                          | None                  |
|              |                   | MUL.US <i>Wb</i> , <i>Ws</i> , <i>Acc</i> <sup>(1)</sup>                                                      | Accumulator = unsigned( <i>Wb</i> ) * signed( <i>Ws</i> )                      | 1          | 1                          | None                  |
|              |                   | MUL.UU <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                     | { <i>Wnd</i> + 1, <i>Wnd</i> } = unsigned( <i>Wb</i> ) * unsigned( <i>Ws</i> ) | 1          | 1                          | None                  |
|              |                   | MUL.UU <i>Wb</i> , #lit5, <i>Acc</i> <sup>(1)</sup>                                                           | Accumulator = unsigned( <i>Wb</i> ) * unsigned(lit5)                           | 1          | 1                          | None                  |
|              |                   | MUL.UU <i>Wb</i> , <i>Ws</i> , <i>Acc</i> <sup>(1)</sup>                                                      | Accumulator = unsigned( <i>Wb</i> ) * unsigned( <i>Ws</i> )                    | 1          | 1                          | None                  |
|              |                   | MULW.SS <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                    | <i>Wnd</i> = signed( <i>Wb</i> ) * signed( <i>Ws</i> )                         | 1          | 1                          | None                  |
|              |                   | MULW.SU <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                    | <i>Wnd</i> = signed( <i>Wb</i> ) * unsigned( <i>Ws</i> )                       | 1          | 1                          | None                  |
|              |                   | MULW.US <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                    | <i>Wnd</i> = unsigned( <i>Wb</i> ) * signed( <i>Ws</i> )                       | 1          | 1                          | None                  |
|              |                   | MULW.UU <i>Wb</i> , <i>Ws</i> , <i>Wnd</i>                                                                    | <i>Wnd</i> = unsigned( <i>Wb</i> ) * unsigned( <i>Ws</i> )                     | 1          | 1                          | None                  |
|              |                   | MUL.SU <i>Wb</i> , #lit5, <i>Wnd</i>                                                                          | { <i>Wnd</i> + 1, <i>Wnd</i> } = signed( <i>Wb</i> ) * unsigned(lit5)          | 1          | 1                          | None                  |
|              |                   | MUL.SU <i>Wb</i> , #lit5, <i>Wnd</i>                                                                          | <i>Wnd</i> = signed( <i>Wb</i> ) * unsigned(lit5)                              | 1          | 1                          | None                  |
|              |                   | MUL.UU <i>Wb</i> , #lit5, <i>Wnd</i>                                                                          | { <i>Wnd</i> + 1, <i>Wnd</i> } = unsigned( <i>Wb</i> ) * unsigned(lit5)        | 1          | 1                          | None                  |
|              |                   | MUL.UU <i>Wb</i> , #lit5, <i>Wnd</i>                                                                          | <i>Wnd</i> = unsigned( <i>Wb</i> ) * unsigned(lit5)                            | 1          | 1                          | None                  |
|              |                   | MUL <i>f</i>                                                                                                  | W3:W2 = <i>f</i> * WREG                                                        | 1          | 1                          | None                  |

**Note 1:** This instruction is available in dsPIC33EPXXX(GP/MC/MU)806/810/814 devices only.

**Note 2:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

### **31.2 MPLAB C Compilers for Various Device Families**

The MPLAB C Compiler code development systems are complete ANSI C compilers for Microchip's PIC18, PIC24 and PIC32 families of microcontrollers and the dsPIC30 and dsPIC33 families of digital signal controllers. These compilers provide powerful integration capabilities, superior code optimization and ease of use.

For easy source level debugging, the compilers provide symbol information that is optimized to the MPLAB IDE debugger.

### **31.3 HI-TECH C for Various Device Families**

The HI-TECH C Compiler code development systems are complete ANSI C compilers for Microchip's PIC family of microcontrollers and the dsPIC family of digital signal controllers. These compilers provide powerful integration capabilities, omniscient code generation and ease of use.

For easy source level debugging, the compilers provide symbol information that is optimized to the MPLAB IDE debugger.

The compilers include a macro assembler, linker, pre-processor, and one-step driver, and can run on multiple platforms.

### **31.4 MPASM Assembler**

The MPASM Assembler is a full-featured, universal macro assembler for PIC10/12/16/18 MCUs.

The MPASM Assembler generates relocatable object files for the MPLINK Object Linker, Intel® standard HEX files, MAP files to detail memory usage and symbol reference, absolute LST files that contain source lines and generated machine code and COFF files for debugging.

The MPASM Assembler features include:

- Integration into MPLAB IDE projects
- User-defined macros to streamline assembly code
- Conditional assembly for multi-purpose source files
- Directives that allow complete control over the assembly process

### **31.5 MPLINK Object Linker/ MPLIB Object Librarian**

The MPLINK Object Linker combines relocatable objects created by the MPASM Assembler and the MPLAB C18 C Compiler. It can link relocatable objects from precompiled libraries, using directives from a linker script.

The MPLIB Object Librarian manages the creation and modification of library files of precompiled code. When a routine from a library is called from a source file, only the modules that contain that routine will be linked in with the application. This allows large libraries to be used efficiently in many different applications.

The object linker/library features include:

- Efficient linking of single libraries instead of many smaller files
- Enhanced code maintainability by grouping related modules together
- Flexible creation of libraries with easy module listing, replacement, deletion and extraction

### **31.6 MPLAB Assembler, Linker and Librarian for Various Device Families**

MPLAB Assembler produces relocatable machine code from symbolic assembly language for PIC24, PIC32 and dsPIC devices. MPLAB C Compiler uses the assembler to produce its object file. The assembler generates relocatable object files that can then be archived or linked with other relocatable object files and archives to create an executable file. Notable features of the assembler include:

- Support for the entire device instruction set
- Support for fixed-point and floating-point data
- Command line interface
- Rich directive set
- Flexible macro language
- MPLAB IDE compatibility

TABLE 32-9: DC CHARACTERISTICS: I/O PIN INPUT SPECIFICATIONS (CONTINUED)

| DC CHARACTERISTICS |                  |                                                                 | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |                    |                       |       |                                                                                                                                                                                                                                                                                                    |
|--------------------|------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Param.             | Symbol           | Characteristic                                                  | Min.                                                                                                                                                                                                                                              | Typ <sup>(1)</sup> | Max.                  | Units | Conditions                                                                                                                                                                                                                                                                                         |
| DI60a              | I <sub>ICL</sub> | Input Low Injection Current                                     | 0                                                                                                                                                                                                                                                 | —                  | -5 <sup>(5,8)</sup>   | mA    | All pins except V <sub>DD</sub> , V <sub>SS</sub> , AV <sub>DD</sub> , AV <sub>SS</sub> , M <sub>CLR</sub> , V <sub>CAP</sub> , RB11, SOSC <sub>I</sub> , SOSC <sub>O</sub> , D <sup>+</sup> , D <sup>-</sup> , V <sub>USB3V3</sub> and V <sub>BUS</sub>                                           |
| DI60b              | I <sub>ICH</sub> | Input High Injection Current                                    | 0                                                                                                                                                                                                                                                 | —                  | +5 <sup>(6,7,4)</sup> | mA    | All pins except V <sub>DD</sub> , V <sub>SS</sub> , AV <sub>DD</sub> , AV <sub>SS</sub> , M <sub>CLR</sub> , V <sub>CAP</sub> , RB11, SOSC <sub>I</sub> , SOSC <sub>O</sub> , D <sup>+</sup> , D <sup>-</sup> , V <sub>USB3V3</sub> and V <sub>BUS</sub> , and all 5V tolerant pins <sup>(7)</sup> |
| DI60c              | $\Sigma I_{ICT}$ | Total Input Injection Current (sum of all I/O and control pins) | -20 <sup>(9)</sup>                                                                                                                                                                                                                                | —                  | +20 <sup>(9)</sup>    | mA    | Absolute instantaneous sum of all $\pm$ input injection currents from all I/O pins<br>( $ I_{ICL}  +  I_{ICH}  \leq \Sigma I_{ICT}$ )                                                                                                                                                              |

**Note 1:** Data in “Typ” column is at 3.3V, +25°C unless otherwise stated.

- 2:** The leakage current on the M<sub>CLR</sub> pin is strongly dependent on the applied voltage level. The specified levels represent normal operating conditions. Higher leakage current can be measured at different input voltages.
- 3:** Negative current is defined as current sourced by the pin.
- 4:** See “Pin Diagrams” for the 5V tolerant I/O pins.
- 5:** V<sub>IL</sub> source < (V<sub>SS</sub> – 0.3). Characterized but not tested.
- 6:** Non-5V tolerant pins V<sub>IH</sub> source > (V<sub>DD</sub> + 0.3), 5V tolerant pins V<sub>IH</sub> source > 5.5V. Characterized but not tested.
- 7:** Digital 5V tolerant pins cannot tolerate any “positive” input injection current from input sources > 5.5V.
- 8:** Injection currents > |0| can affect the ADC results by approximately 4-6 counts.
- 9:** Any number and/or combination of I/O pins not excluded under I<sub>ICL</sub> or I<sub>ICH</sub> conditions are permitted, provided the mathematical “absolute instantaneous” sum of the input injection currents from all pins do not exceed the specified limit. Characterized but not tested.
- 10:** These parameters are characterized, but not tested.

FIGURE 32-7: TIMERQ (QEI MODULE) EXTERNAL CLOCK TIMING CHARACTERISTICS

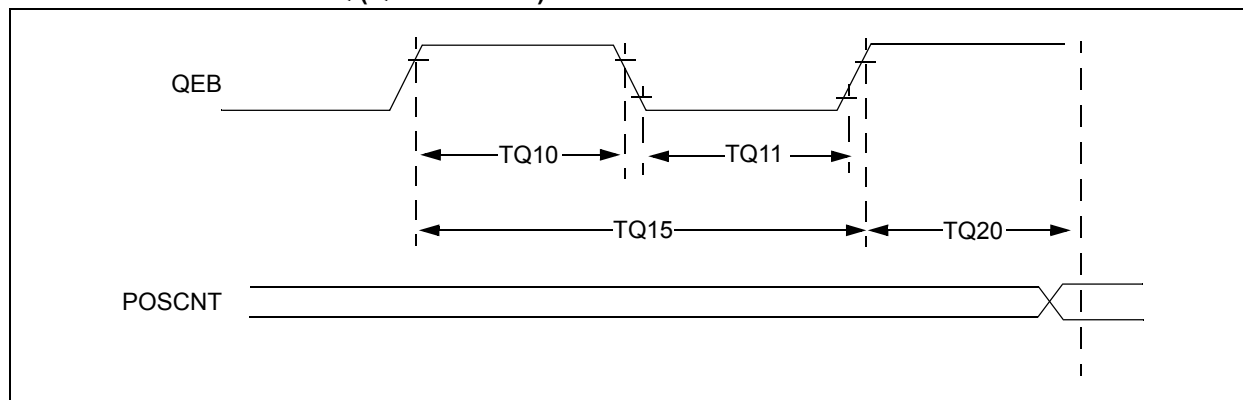


TABLE 32-26: QEI MODULE EXTERNAL CLOCK TIMING REQUIREMENTS

| AC CHARACTERISTICS |           |                                                        |                             | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |      |      |       |                               |
|--------------------|-----------|--------------------------------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-------------------------------|
| Param.             | Symbol    | Characteristic <sup>(1)</sup>                          |                             | Min.                                                                                                                                                                                                                                              | Typ. | Max. | Units | Conditions                    |
| TQ10               | TtQH      | TQCK High Time                                         | Synchronous, with Prescaler | [Greater of (12.5 or 0.5 Tcy)/N] + 25                                                                                                                                                                                                             | —    | —    | ns    | Must also meet Parameter TQ15 |
| TQ11               | TtQL      | TQCK Low Time                                          | Synchronous, with Prescaler | [Greater of (12.5 or 0.5 Tcy)/N] + 25                                                                                                                                                                                                             | —    | —    | ns    | Must also meet Parameter TQ15 |
| TQ15               | TtQP      | TQCP Input Period                                      | Synchronous, with Prescaler | [Greater of (25 or Tcy)/N] + 50                                                                                                                                                                                                                   | —    | —    | ns    |                               |
| TQ20               | TckEXTMRL | Delay from External TxCK Clock Edge to Timer Increment |                             | —                                                                                                                                                                                                                                                 | 1    | Tcy  | —     |                               |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**TABLE 32-46: SPI2 SLAVE MODE (FULL-DUPLEX, CKE = 1, CKP = 1, SMP = 0) TIMING REQUIREMENTS**

| AC CHARACTERISTICS |                       |                                                    | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |                     |      |       |                                      |
|--------------------|-----------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|-------|--------------------------------------|
| Param.             | Symbol                | Characteristic <sup>(1)</sup>                      | Min.                                                                                                                                                                    | Typ. <sup>(2)</sup> | Max. | Units | Conditions                           |
| SP70               | TscP                  | Maximum SCKx Input Frequency                       | —                                                                                                                                                                       | —                   | 11   | MHz   | See <b>Note 3</b>                    |
| SP72               | TscF                  | SCKx Input Fall Time                               | —                                                                                                                                                                       | —                   | —    | ns    | See Parameter DO32 and <b>Note 4</b> |
| SP73               | TscR                  | SCKx Input Rise Time                               | —                                                                                                                                                                       | —                   | —    | ns    | See Parameter DO31 and <b>Note 4</b> |
| SP30               | TdoF                  | SDOx Data Output Fall Time                         | —                                                                                                                                                                       | —                   | —    | ns    | See Parameter DO32 and <b>Note 4</b> |
| SP31               | TdoR                  | SDOx Data Output Rise Time                         | —                                                                                                                                                                       | —                   | —    | ns    | See Parameter DO31 and <b>Note 4</b> |
| SP35               | Tsch2doV,<br>TscL2doV | SDOx Data Output Valid after SCKx Edge             | —                                                                                                                                                                       | 6                   | 20   | ns    |                                      |
| SP36               | TdoV2sch,<br>TdoV2scL | SDOx Data Output Setup to First SCKx Edge          | 30                                                                                                                                                                      | —                   | —    | ns    |                                      |
| SP40               | TdiV2sch,<br>TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge         | 30                                                                                                                                                                      | —                   | —    | ns    |                                      |
| SP41               | Tsch2diL,<br>TscL2diL | Hold Time of SDIx Data Input to SCKx Edge          | 30                                                                                                                                                                      | —                   | —    | ns    |                                      |
| SP50               | TssL2sch,<br>TssL2scL | $\overline{SSx}$ ↓ to SCKx ↑ or SCKx ↓ Input       | 120                                                                                                                                                                     | —                   | —    | ns    |                                      |
| SP51               | TssH2doZ              | $\overline{SSx}$ ↑ to SDOx Output, High-Impedance  | 10                                                                                                                                                                      | —                   | 50   | ns    | See <b>Note 4</b>                    |
| SP52               | Tsch2ssH,<br>TscL2ssH | $\overline{SSx}$ ↑ after SCKx Edge                 | 1.5 TCY + 40                                                                                                                                                            | —                   | —    | ns    | See <b>Note 4</b>                    |
| SP60               | TssL2doV              | SDOx Data Output Valid after $\overline{SSx}$ Edge | —                                                                                                                                                                       | —                   | 50   | ns    |                                      |

**Note 1:** These parameters are characterized, but are not tested in manufacturing.

**2:** Data in “Typ” column is at 3.3V, +25°C unless otherwise stated.

**3:** The minimum clock period for SCKx is 91 ns. Therefore, the SCKx clock generated by the master must not violate this specification.

**4:** Assumes 50 pF load on all SPIx pins.

TABLE 32-56: ADC MODULE SPECIFICATIONS (10-BIT MODE)



| AC CHARACTERISTICS                                                         |        |                                | Standard Operating Conditions: 3.0V to 3.6V (see Note 1)<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |      |      |       |                                                                      |
|----------------------------------------------------------------------------|--------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|----------------------------------------------------------------------|
| Param.                                                                     | Symbol | Characteristic                 | Min.                                                                                                                                                                                                                                                           | Typ. | Max. | Units | Conditions                                                           |
| <b>ADC Accuracy (10-Bit Mode) – Measurements with External VREF+/VREF-</b> |        |                                |                                                                                                                                                                                                                                                                |      |      |       |                                                                      |
| AD20b                                                                      | Nr     | Resolution                     | 10 data bits                                                                                                                                                                                                                                                   |      |      | bits  |                                                                      |
| AD21b                                                                      | INL    | Integral Nonlinearity          | -1                                                                                                                                                                                                                                                             | —    | +1   | LSb   | $V_{INL} = AV_{SS} = V_{REFL} = 0V$ ,<br>$AV_{DD} = V_{REFH} = 3.6V$ |
| AD22b                                                                      | DNL    | Differential Nonlinearity      | >-1                                                                                                                                                                                                                                                            | —    | <1   | LSb   | $V_{INL} = AV_{SS} = V_{REFL} = 0V$ ,<br>$AV_{DD} = V_{REFH} = 3.6V$ |
| AD23b                                                                      | GERR   | Gain Error                     | 1                                                                                                                                                                                                                                                              | 3    | 6    | LSb   | $V_{INL} = AV_{SS} = V_{REFL} = 0V$ ,<br>$AV_{DD} = V_{REFH} = 3.6V$ |
| AD24b                                                                      | EOFF   | Offset Error                   | 1                                                                                                                                                                                                                                                              | 2    | 3    | LSb   | $V_{INL} = AV_{SS} = V_{REFL} = 0V$ ,<br>$AV_{DD} = V_{REFH} = 3.6V$ |
| AD25b                                                                      | —      | Monotonicity                   | —                                                                                                                                                                                                                                                              | —    | —    | —     | Guaranteed <sup>(2)</sup>                                            |
| <b>ADC Accuracy (10-Bit Mode) – Measurements with Internal VREF+/VREF-</b> |        |                                |                                                                                                                                                                                                                                                                |      |      |       |                                                                      |
| AD20b                                                                      | Nr     | Resolution                     | 10 data bits                                                                                                                                                                                                                                                   |      |      | bits  |                                                                      |
| AD21b                                                                      | INL    | Integral Nonlinearity          | -1.5                                                                                                                                                                                                                                                           | —    | +1.5 | LSb   | $V_{INL} = AV_{SS} = 0V$ , $AV_{DD} = 3.6V$                          |
| AD22b                                                                      | DNL    | Differential Nonlinearity      | >-1                                                                                                                                                                                                                                                            | —    | <1   | LSb   | $V_{INL} = AV_{SS} = 0V$ , $AV_{DD} = 3.6V$                          |
| AD23b                                                                      | GERR   | Gain Error                     | 1                                                                                                                                                                                                                                                              | 5    | 6    | LSb   | $V_{INL} = AV_{SS} = 0V$ , $AV_{DD} = 3.6V$                          |
| AD24b                                                                      | EOFF   | Offset Error                   | 1                                                                                                                                                                                                                                                              | 2    | 5    | LSb   | $V_{INL} = AV_{SS} = 0V$ , $AV_{DD} = 3.6V$                          |
| AD25b                                                                      | —      | Monotonicity                   | —                                                                                                                                                                                                                                                              | —    | —    | —     | Guaranteed <sup>(2)</sup>                                            |
| <b>Dynamic Performance (10-Bit Mode)</b>                                   |        |                                |                                                                                                                                                                                                                                                                |      |      |       |                                                                      |
| AD30b                                                                      | THD    | Total Harmonic Distortion      | —                                                                                                                                                                                                                                                              | —    | -64  | dB    |                                                                      |
| AD31b                                                                      | SINAD  | Signal to Noise and Distortion | 57                                                                                                                                                                                                                                                             | 58.5 | —    | dB    |                                                                      |
| AD32b                                                                      | SFDR   | Spurious Free Dynamic Range    | 72                                                                                                                                                                                                                                                             | —    | —    | dB    |                                                                      |
| AD33b                                                                      | FNYQ   | Input Signal Bandwidth         | —                                                                                                                                                                                                                                                              | —    | 550  | kHz   |                                                                      |
| AD34b                                                                      | ENOB   | Effective Number of Bits       | 9.16                                                                                                                                                                                                                                                           | 9.4  | —    | bits  |                                                                      |

**Note 1:** Device is functional at  $V_{BORMIN} < V_{DD} < V_{DDMIN}$ . Analog modules: ADC, Comparator and DAC will have degraded performance. Device functionality is tested but not characterized. Refer to Parameter BO10 in Table 32-11 for the minimum and maximum BOR values.

**2:** The Analog-to-Digital conversion result never decreases with an increase in input voltage and has no missing codes.

**144-Lead Plastic Thin Quad Flatpack (PH)-16x16x1mm Body, 2.00 mm Footprint [TQFP]**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

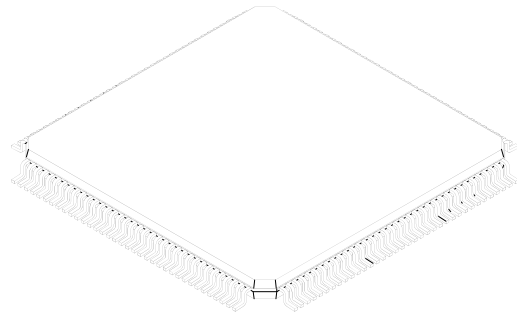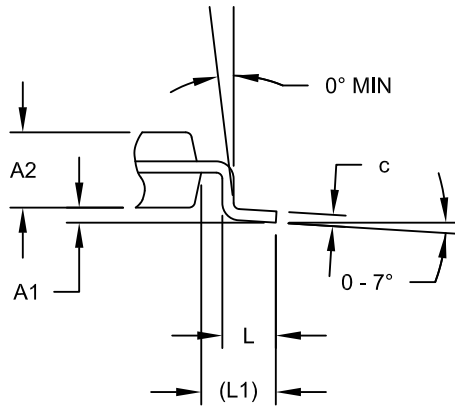**DETAIL A**

| Dimension                | Units | MILLIMETERS |      |      |
|--------------------------|-------|-------------|------|------|
|                          |       | MIN         | NOM  | MAX  |
| Number of Pins           | N     | 144         |      |      |
| Lead Pitch               | e     | 0.40 BSC    |      |      |
| Overall Height           | A     | -           | -    | 1.20 |
| Molded Package Thickness | A2    | 0.95        | 1.00 | 1.05 |
| Standoff                 | A1    | 0.05        | -    | 0.15 |
| Foot Length              | L     | 0.45        | 0.60 | 0.75 |
| Footprint                | L1    | 1.00 REF    |      |      |
| Overall Width            | D     | 18.00 BSC   |      |      |
| Overall Length           | E     | 18.00 BSC   |      |      |
| Molded Body Width        | D1    | 16.00 BSC   |      |      |
| Molded Body Length       | E1    | 16.00 BSC   |      |      |
| Lead Thickness           | c     | 0.09        | -    | 0.20 |
| Lead Width               | b     | 0.13        | -    | 0.23 |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M.  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-155B Sheet 2 of 2

## **Revision G (October 2012)**

This revision includes updates to the packaging diagrams in **Section 34.0 “Packaging Information”**. Preliminary has been removed and there are minor text edits throughout the document.

## S

|                                            |     |
|--------------------------------------------|-----|
| Serial Peripheral Interface (SPI) .....    | 337 |
| Software Simulator (MPLAB SIM) .....       | 497 |
| Software Stack Pointer, Frame Pointer      |     |
| CALL Stack Frame .....                     | 128 |
| Special Features                           |     |
| Code Protection .....                      | 477 |
| CodeGuard Security .....                   | 477 |
| Flexible Configuration .....               | 477 |
| In-Circuit Emulation .....                 | 477 |
| In-Circuit Serial Programming (ICSP) ..... | 477 |
| JTAG Boundary Scan Interface .....         | 477 |
| Watchdog Timer (WDT) .....                 | 477 |
| Special Features of the CPU .....          | 477 |
| SPI                                        |     |
| Control Registers .....                    | 339 |
| Helpful Tips .....                         | 338 |
| Resources .....                            | 338 |
| Symbols Used in Opcode Descriptions .....  | 486 |

## T

|                                                                                                                    |     |
|--------------------------------------------------------------------------------------------------------------------|-----|
| Timer1 .....                                                                                                       | 271 |
| Control Register .....                                                                                             | 273 |
| Timer2/3, Timer4/5, Timer6/7 and Timer8/9 .....                                                                    | 275 |
| Timerx/y                                                                                                           |     |
| Control Registers .....                                                                                            | 278 |
| Timing Diagrams                                                                                                    |     |
| 10-Bit ADC Conversion (CHPS<1:0> = 01, SIMSAM = 0, ASAM = 0, SSR<2:0> = 000, SSR<CG> = 0) .....                    | 561 |
| 10-Bit ADC Conversion (CHPS<1:0> = 01, SIMSAM = 0, ASAM = 1, SSR<2:0> = 111, SSR<CG> = 0, SAMC<4:0> = 00010) ..... | 561 |
| 12-Bit ADC Conversion (12-Bit Mode, ASAM = 0, SSR<2:0> = 000, SSR<CG> = 0) .....                                   | 559 |
| BOR and Master Clear Reset .....                                                                                   | 517 |
| DCI AC-Link Mode .....                                                                                             | 565 |
| DCI Multi-Channel, I <sup>2</sup> S Modes .....                                                                    | 563 |
| ECAN I/O .....                                                                                                     | 554 |
| External Clock .....                                                                                               | 512 |
| High-Speed PWMx (dsPIC33EPXXX(MC/MU)806/810/814 Devices) .....                                                     | 523 |
| High-Speed PWMx Fault (dsPIC33EPXXX(MC/MU)806/810/814 Devices) .....                                               | 523 |
| I/O Pins .....                                                                                                     | 515 |
| I2Cx Bus Data (Master Mode) .....                                                                                  | 550 |
| I2Cx Bus Data (Slave Mode) .....                                                                                   | 552 |
| I2Cx Bus Start/Stop Bits (Master Mode) .....                                                                       | 550 |
| I2Cx Bus Start/Stop Bits (Slave Mode) .....                                                                        | 552 |
| Input Capture (ICx) .....                                                                                          | 521 |
| OCx/PWMx .....                                                                                                     | 522 |
| Output Compare (OCx) .....                                                                                         | 522 |
| Parallel Master Port Read .....                                                                                    | 570 |
| Parallel Master Port Write .....                                                                                   | 571 |
| Parallel Slave Port .....                                                                                          | 569 |
| Power-on Reset .....                                                                                               | 516 |
| QEA/QEB Input .....                                                                                                | 524 |
| QEI Module Index Pulse .....                                                                                       | 525 |
| SPI1, SPI3 and SPI4 Master Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) .....                                     | 529 |
| SPI1, SPI3 and SPI4 Master Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) .....                                     | 528 |
| SPI1, SPI3 and SPI4 Master Mode (Half-Duplex, Transmit Only, CKE = 0) .....                                        | 526 |
| SPI1, SPI3 and SPI4 Master Mode (Half-Duplex, Transmit Only, CKE = 1) .....                                        | 527 |

|                                                                                     |     |
|-------------------------------------------------------------------------------------|-----|
| SPI1, SPI3 and SPI4 Slave Mode (Full-Duplex, CKE = 0, CKP = 0, SMP = 0) .....       | 536 |
| SPI1, SPI3 and SPI4 Slave Mode (Full-Duplex, CKE = 0, CKP = 1, SMP = 0) .....       | 534 |
| SPI1, SPI3 and SPI4 Slave Mode (Full-Duplex, CKE = 1, CKP = 0, SMP = 0) .....       | 530 |
| SPI1, SPI3 and SPI4 Slave Mode (Full-Duplex, CKE = 1, CKP = 1, SMP = 0) .....       | 532 |
| SPI2 Master Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) .....                     | 541 |
| SPI2 Master Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) .....                     | 540 |
| SPI2 Master Mode (Half-Duplex, Transmit Only, CKE = 0) .....                        | 538 |
| SPI2 Master Mode (Half-Duplex, Transmit Only, CKE = 1) .....                        | 539 |
| SPI2 Slave Mode (Full-Duplex, CKE = 0, CKP = 0, SMP = 0) .....                      | 548 |
| SPI2 Slave Mode (Full-Duplex, CKE = 0, CKP = 1, SMP = 0) .....                      | 546 |
| SPI2 Slave Mode (Full-Duplex, CKE = 1, CKP = 0, SMP = 0) .....                      | 542 |
| SPI2 Slave Mode (Full-Duplex, CKE = 1, CKP = 1, SMP = 0) .....                      | 544 |
| Timer1-Timer9 External Clock .....                                                  | 518 |
| TimerQ (QEI Module) External Clock .....                                            | 520 |
| UARTx I/O .....                                                                     | 554 |
| Timing Specifications                                                               |     |
| 10-Bit ADC Conversion Requirements .....                                            | 562 |
| 12-Bit Mode ADC Conversion Requirements .....                                       | 560 |
| ADC .....                                                                           | 556 |
| ADC (10-Bit Mode) .....                                                             | 558 |
| ADC (12-Bit Mode) .....                                                             | 557 |
| Auxiliary PLL Clock .....                                                           | 513 |
| DCI AC-Link Mode .....                                                              | 566 |
| DCI Multi-Channel, I <sup>2</sup> S Modes .....                                     | 564 |
| DMA Module .....                                                                    | 571 |
| ECAN I/O .....                                                                      | 554 |
| External Clock Requirements .....                                                   | 512 |
| High-Speed PWMx Requirements (dsPIC33EPXXX(MC/MU)806/810/814 Devices) .....         | 523 |
| I2Cx Bus Data Requirements (Master Mode) .....                                      | 551 |
| I2Cx Bus Data Requirements (Slave Mode) .....                                       | 553 |
| Input Capture (ICx) Requirements .....                                              | 521 |
| OCx/PWMx Mode Requirements .....                                                    | 522 |
| Output Compare (OCx) Requirements .....                                             | 522 |
| Parallel Master Port Read .....                                                     | 570 |
| Parallel Master Port Write .....                                                    | 571 |
| Parallel Slave Port .....                                                           | 569 |
| PLL Clock .....                                                                     | 513 |
| QEI External Clock Requirements .....                                               | 520 |
| QEI Index Pulse Requirements .....                                                  | 525 |
| Quadrature Decoder Requirements .....                                               | 524 |
| Reset, Watchdog Timer, Oscillator Start-up Timer, Power-up Timer Requirements ..... | 517 |
| SPI1, SPI3 and SPI4 Master Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) .....      | 529 |
| SPI1, SPI3 and SPI4 Master Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) .....      | 528 |
| SPI1, SPI3 and SPI4 Master Mode (Half-Duplex, Transmit Only) .....                  | 527 |
| SPI1, SPI3 and SPI4 Maximum Data/Clock Rate Summary .....                           | 526 |
| SPI1, SPI3 and SPI4 Slave Mode (Full-Duplex, CKE = 0, CKP = 0, SMP = 0) .....       | 537 |