


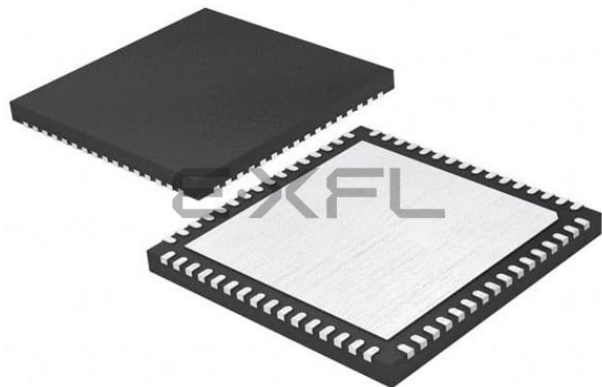

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?


"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details


|                            |                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                          |
| Core Processor             | dsPIC                                                                                                                                                                           |
| Core Size                  | 16-Bit                                                                                                                                                                          |
| Speed                      | 70 MIPS                                                                                                                                                                         |
| Connectivity               | I <sup>2</sup> C, IrDA, LINbus, QEI, SPI, UART/USART                                                                                                                            |
| Peripherals                | Brown-out Detect/Reset, DMA, Motor Control PWM, POR, PWM, WDT                                                                                                                   |
| Number of I/O              | 53                                                                                                                                                                              |
| Program Memory Size        | 128KB (43K x 24)                                                                                                                                                                |
| Program Memory Type        | FLASH                                                                                                                                                                           |
| EEPROM Size                | -                                                                                                                                                                               |
| RAM Size                   | 8K x 16                                                                                                                                                                         |
| Voltage - Supply (Vcc/Vdd) | 3V ~ 3.6V                                                                                                                                                                       |
| Data Converters            | A/D 16x10b/12b                                                                                                                                                                  |
| Oscillator Type            | Internal                                                                                                                                                                        |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                               |
| Mounting Type              | Surface Mount                                                                                                                                                                   |
| Package / Case             | 64-VFQFN Exposed Pad                                                                                                                                                            |
| Supplier Device Package    | 64-VQFN (9x9)                                                                                                                                                                   |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep128mc206-i-mr">https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep128mc206-i-mr</a> |

FIGURE 4-4: PROGRAM MEMORY MAP FOR dsPIC33EP256GP50X, dsPIC33EP256MC20X/50X AND PIC24EP256GP/MC20X DEVICES

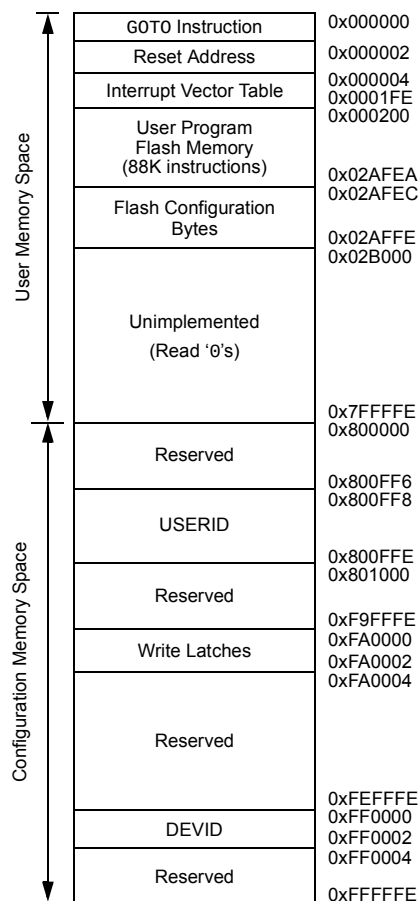

**Note:** Memory areas are not shown to scale.

FIGURE 4-12: DATA MEMORY MAP FOR PIC24EP32GP/MC20X/50X DEVICES

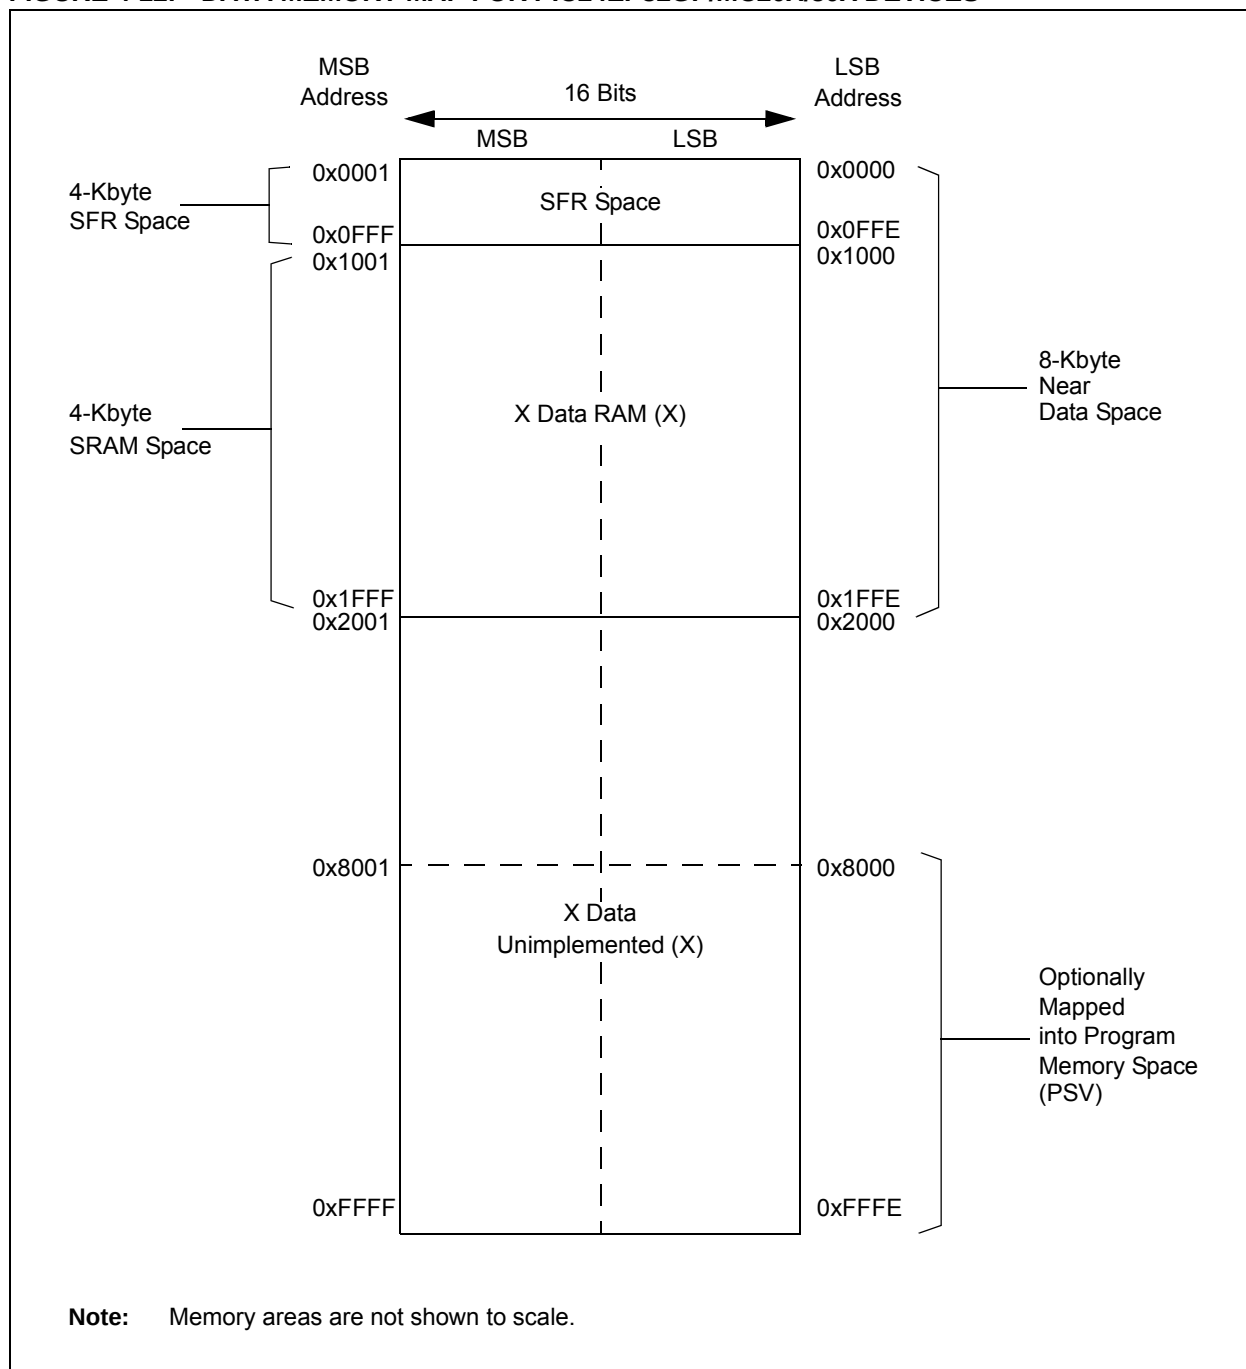

**REGISTER 5-1: NVMCON: NONVOLATILE MEMORY (NVM) CONTROL REGISTER**

|                       |                      |                      |                        |       |     |     |     |
|-----------------------|----------------------|----------------------|------------------------|-------|-----|-----|-----|
| R/SO-0 <sup>(1)</sup> | R/W-0 <sup>(1)</sup> | R/W-0 <sup>(1)</sup> | R/W-0                  | U-0   | U-0 | U-0 | U-0 |
| WR                    | WREN                 | WRERR                | NVMSIDL <sup>(2)</sup> | —     | —   | —   | —   |
| bit 15                |                      |                      |                        | bit 8 |     |     |     |

|       |     |     |     |                         |                         |                         |                         |
|-------|-----|-----|-----|-------------------------|-------------------------|-------------------------|-------------------------|
| U-0   | U-0 | U-0 | U-0 | R/W-0 <sup>(1)</sup>    | R/W-0 <sup>(1)</sup>    | R/W-0 <sup>(1)</sup>    | R/W-0 <sup>(1)</sup>    |
| —     | —   | —   | —   | NVMOP3 <sup>(3,4)</sup> | NVMOP2 <sup>(3,4)</sup> | NVMOP1 <sup>(3,4)</sup> | NVMOP0 <sup>(3,4)</sup> |
| bit 7 |     |     |     | bit 0                   |                         |                         |                         |

|                   |                        |                                    |                    |
|-------------------|------------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | SO = Settable Only bit |                                    |                    |
| R = Readable bit  | W = Writable bit       | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set       | '0' = Bit is cleared               | x = Bit is unknown |

- bit 15      **WR:** Write Control bit<sup>(1)</sup>  
1 = Initiates a Flash memory program or erase operation; the operation is self-timed and the bit is cleared by hardware once the operation is complete  
0 = Program or erase operation is complete and inactive
- bit 14      **WREN:** Write Enable bit<sup>(1)</sup>  
1 = Enables Flash program/erase operations  
0 = Inhibits Flash program/erase operations
- bit 13      **WRERR:** Write Sequence Error Flag bit<sup>(1)</sup>  
1 = An improper program or erase sequence attempt or termination has occurred (bit is set automatically on any set attempt of the WR bit)  
0 = The program or erase operation completed normally
- bit 12      **NVMSIDL:** NVM Stop in Idle Control bit<sup>(2)</sup>  
1 = Flash voltage regulator goes into Standby mode during Idle mode  
0 = Flash voltage regulator is active during Idle mode
- bit 11-4    **Unimplemented:** Read as '0'
- bit 3-0      **NVMOP<3:0>:** NVM Operation Select bits<sup>(1,3,4)</sup>  
1111 = Reserved  
1110 = Reserved  
1101 = Reserved  
1100 = Reserved  
1011 = Reserved  
1010 = Reserved  
0011 = Memory page erase operation  
0010 = Reserved  
0001 = Memory double-word program operation<sup>(5)</sup>  
0000 = Reserved

- Note 1:** These bits can only be reset on a POR.
- 2:** If this bit is set, there will be minimal power savings (IDLE) and upon exiting Idle mode, there is a delay (TVREG) before Flash memory becomes operational.
- 3:** All other combinations of NVMOP<3:0> are unimplemented.
- 4:** Execution of the PWRSAV instruction is ignored while any of the NVM operations are in progress.
- 5:** Two adjacent words on a 4-word boundary are programmed during execution of this operation.

**REGISTER 7-2: CORCON: CORE CONTROL REGISTER<sup>(1)</sup>**

|            |     |       |       |       |     |     |       |
|------------|-----|-------|-------|-------|-----|-----|-------|
| R/W-0      | U-0 | R/W-0 | R/W-0 | R/W-0 | R-0 | R-0 | R-0   |
| <b>VAR</b> | —   | US1   | US0   | EDT   | DL2 | DL1 | DL0   |
| bit 15     |     |       |       |       |     |     | bit 8 |

|             |             |              |               |                           |            |            |           |
|-------------|-------------|--------------|---------------|---------------------------|------------|------------|-----------|
| R/W-0       | R/W-0       | R/W-1        | R/W-0         | R/C-0                     | R-0        | R/W-0      | R/W-0     |
| <b>SATA</b> | <b>SATB</b> | <b>SATDW</b> | <b>ACCSAT</b> | <b>IPL3<sup>(2)</sup></b> | <b>SFA</b> | <b>RND</b> | <b>IF</b> |
| bit 7       |             |              |               |                           |            |            | bit 0     |

|                   |                   |                                    |                    |
|-------------------|-------------------|------------------------------------|--------------------|
| <b>Legend:</b>    | C = Clearable bit |                                    |                    |
| R = Readable bit  | W = Writable bit  | U = Unimplemented bit, read as '0' |                    |
| -n = Value at POR | '1' = Bit is set  | '0' = Bit is cleared               | x = Bit is unknown |

bit 15      **VAR:** Variable Exception Processing Latency Control bit  
              1 = Variable exception processing is enabled  
              0 = Fixed exception processing is enabled

bit 3      **IPL3:** CPU Interrupt Priority Level Status bit 3<sup>(2)</sup>  
              1 = CPU Interrupt Priority Level is greater than 7  
              0 = CPU Interrupt Priority Level is 7 or less

**Note 1:** For complete register details, see Register 3-2.

**2:** The IPL3 bit is concatenated with the IPL<2:0> bits (SR<7:5>) to form the CPU Interrupt Priority Level.

**REGISTER 8-9: DSADRH: DMA MOST RECENT RAM HIGH ADDRESS REGISTER**

|        |     |     |     |       |     |     |     |
|--------|-----|-----|-----|-------|-----|-----|-----|
| U-0    | U-0 | U-0 | U-0 | U-0   | U-0 | U-0 | U-0 |
| —      | —   | —   | —   | —     | —   | —   | —   |
| bit 15 |     |     |     | bit 8 |     |     |     |

|              |     |     |     |       |     |     |     |
|--------------|-----|-----|-----|-------|-----|-----|-----|
| R-0          | R-0 | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| DSADR<23:16> |     |     |     |       |     |     |     |
| bit 7        |     |     |     | bit 0 |     |     |     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-8 **Unimplemented:** Read as '0'bit 7-0 **DSADR<23:16>:** Most Recent DMA Address Accessed by DMA bits**REGISTER 8-10: DSADRL: DMA MOST RECENT RAM LOW ADDRESS REGISTER**

|             |     |     |     |       |     |     |     |
|-------------|-----|-----|-----|-------|-----|-----|-----|
| R-0         | R-0 | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| DSADR<15:8> |     |     |     |       |     |     |     |
| bit 15      |     |     |     | bit 8 |     |     |     |

|            |     |     |     |       |     |     |     |
|------------|-----|-----|-----|-------|-----|-----|-----|
| R-0        | R-0 | R-0 | R-0 | R-0   | R-0 | R-0 | R-0 |
| DSADR<7:0> |     |     |     |       |     |     |     |
| bit 7      |     |     |     | bit 0 |     |     |     |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-0 **DSADR<15:0>:** Most Recent DMA Address Accessed by DMA bits

**REGISTER 9-4: OSCTUN: FRC OSCILLATOR TUNING REGISTER**

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |     |       |       |       |       |       |       |
|-------|-----|-------|-------|-------|-------|-------|-------|
| U-0   | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | —   | TUN5  | TUN4  | TUN3  | TUN2  | TUN1  | TUN0  |
| bit 7 |     |       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-6

**Unimplemented:** Read as '0'

bit 5-0

**TUN<5:0>:** FRC Oscillator Tuning bits

011111 = Maximum frequency deviation of 1.453% (7.477 MHz)

011110 = Center frequency + 1.406% (7.474 MHz)

• • •

000001 = Center frequency + 0.047% (7.373 MHz)

000000 = Center frequency (7.37 MHz nominal)

111111 = Center frequency – 0.047% (7.367 MHz)

• • •

100001 = Center frequency – 1.453% (7.263 MHz)

100000 = Minimum frequency deviation of -1.5% (7.259 MHz)

**REGISTER 11-8: RPINR14: PERIPHERAL PIN SELECT INPUT REGISTER 14**  
**(dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X DEVICES ONLY)**

|        |            |       |       |       |       |       |       |
|--------|------------|-------|-------|-------|-------|-------|-------|
| U-0    | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —      | QEB1R<6:0> |       |       |       |       |       |       |
| bit 15 |            |       |       |       |       |       | bit 8 |

|       |            |       |       |       |       |       |       |
|-------|------------|-------|-------|-------|-------|-------|-------|
| U-0   | R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| —     | QEA1R<6:0> |       |       |       |       |       |       |
| bit 7 |            |       |       |       |       |       | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **QEB1R<6:0>:** Assign B (QEB) to the Corresponding RPN Pin bits  
 (see Table 11-2 for input pin selection numbers)

1111001 = Input tied to RPI121

.

.

.

0000001 = Input tied to CMP1

0000000 = Input tied to Vss

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **QEA1R<6:0>:** Assign A (QEA) to the Corresponding RPN Pin bits  
 (see Table 11-2 for input pin selection numbers)

1111001 = Input tied to RPI121

.

.

.

0000001 = Input tied to CMP1

0000000 = Input tied to Vss



## 12.2 Timer1 Control Register

**REGISTER 12-1: T1CON: TIMER1 CONTROL REGISTER**

|                    |     |       |     |     |     |     |       |
|--------------------|-----|-------|-----|-----|-----|-----|-------|
| R/W-0              | U-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| TON <sup>(1)</sup> | —   | TSIDL | —   | —   | —   | —   | —     |
| bit 15             |     |       |     |     |     |     | bit 8 |

|       |       |        |        |     |                      |                    |       |
|-------|-------|--------|--------|-----|----------------------|--------------------|-------|
| U-0   | R/W-0 | R/W-0  | R/W-0  | U-0 | R/W-0                | R/W-0              | U-0   |
| —     | TGATE | TCKPS1 | TCKPS0 | —   | TSYNC <sup>(1)</sup> | TCS <sup>(1)</sup> | —     |
| bit 7 |       |        |        |     |                      |                    | bit 0 |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

- bit 15      **TON:** Timer1 On bit<sup>(1)</sup>  
               1 = Starts 16-bit Timer1  
               0 = Stops 16-bit Timer1
- bit 14      **Unimplemented:** Read as '0'
- bit 13      **TSIDL:** Timer1 Stop in Idle Mode bit  
               1 = Discontinues module operation when device enters Idle mode  
               0 = Continues module operation in Idle mode
- bit 12-7    **Unimplemented:** Read as '0'
- bit 6        **TGATE:** Timer1 Gated Time Accumulation Enable bit  
               When TCS = 1:  
               This bit is ignored.  
               When TCS = 0:  
               1 = Gated time accumulation is enabled  
               0 = Gated time accumulation is disabled
- bit 5-4     **TCKPS<1:0>:** Timer1 Input Clock Prescale Select bits  
               11 = 1:256  
               10 = 1:64  
               01 = 1:8  
               00 = 1:1
- bit 3        **Unimplemented:** Read as '0'
- bit 2        **TSYNC:** Timer1 External Clock Input Synchronization Select bit<sup>(1)</sup>  
               When TCS = 1:  
               1 = Synchronizes external clock input  
               0 = Does not synchronize external clock input  
               When TCS = 0:  
               This bit is ignored.
- bit 1        **TCS:** Timer1 Clock Source Select bit<sup>(1)</sup>  
               1 = External clock is from pin, T1CK (on the rising edge)  
               0 = Internal clock (Fp)
- bit 0        **Unimplemented:** Read as '0'

**Note 1:** When Timer1 is enabled in External Synchronous Counter mode (TCS = 1, TSYNC = 1, TON = 1), any attempts by user software to write to the TMR1 register are ignored.

NOTES:

**REGISTER 16-1: PTCON: PWMx TIME BASE CONTROL REGISTER (CONTINUED)**

- bit 6-4      **SYNCSRC<2:0>**: Synchronous Source Selection bits<sup>(1)</sup>
- 111 = Reserved
  - 
  - 
  - 
  - 100 = Reserved
  - 011 = PTGO17<sup>(2)</sup>
  - 010 = PTGO16<sup>(2)</sup>
  - 001 = Reserved
  - 000 = SYNCI1 input from PPS
- bit 3-0      **SEVTPS<3:0>**: PWMx Special Event Trigger Output Postscaler Select bits<sup>(1)</sup>
- 1111 = 1:16 Postscaler generates Special Event Trigger on every sixteenth compare match event
  - 
  - 
  - 
  - 0001 = 1:2 Postscaler generates Special Event Trigger on every second compare match event
  - 0000 = 1:1 Postscaler generates Special Event Trigger on every compare match event

**Note 1:** These bits should be changed only when PTEN = 0. In addition, when using the SYNCI1 feature, the user application must program the period register with a value that is slightly larger than the expected period of the external synchronization input signal.

**2:** See **Section 24.0 “Peripheral Trigger Generator (PTG) Module”** for information on this selection.

**REGISTER 21-10: CxCFG2: ECANx BAUD RATE CONFIGURATION REGISTER 2**

|        |        |     |     |     |         |         |         |
|--------|--------|-----|-----|-----|---------|---------|---------|
| U-0    | R/W-x  | U-0 | U-0 | U-0 | R/W-x   | R/W-x   | R/W-x   |
| —      | WAKFIL | —   | —   | —   | SEG2PH2 | SEG2PH1 | SEG2PH0 |
| bit 15 |        |     |     |     |         | bit 8   |         |

|          |       |         |         |         |        |        |        |
|----------|-------|---------|---------|---------|--------|--------|--------|
| R/W-x    | R/W-x | R/W-x   | R/W-x   | R/W-x   | R/W-x  | R/W-x  | R/W-x  |
| SEG2PHTS | SAM   | SEG1PH2 | SEG1PH1 | SEG1PH0 | PRSEG2 | PRSEG1 | PRSEG0 |
| bit 7    |       |         |         |         |        | bit 0  |        |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15 **Unimplemented:** Read as '0'

bit 14 **WAKFIL:** Select CAN Bus Line Filter for Wake-up bit

1 = Uses CAN bus line filter for wake-up

0 = CAN bus line filter is not used for wake-up

bit 13-11 **Unimplemented:** Read as '0'

bit 10-8 **SEG2PH<2:0>:** Phase Segment 2 bits

111 = Length is 8 x T<sub>Q</sub>

•

•

•

000 = Length is 1 x T<sub>Q</sub>

bit 7 **SEG2PHTS:** Phase Segment 2 Time Select bit

1 = Freely programmable

0 = Maximum of SEG1PHx bits or Information Processing Time (IPT), whichever is greater

bit 6 **SAM:** Sample of the CAN Bus Line bit

1 = Bus line is sampled three times at the sample point

0 = Bus line is sampled once at the sample point

bit 5-3 **SEG1PH<2:0>:** Phase Segment 1 bits

111 = Length is 8 x T<sub>Q</sub>

•

•

•

000 = Length is 1 x T<sub>Q</sub>

bit 2-0 **PRSEG<2:0>:** Propagation Time Segment bits

111 = Length is 8 x T<sub>Q</sub>

•

•

•

000 = Length is 1 x T<sub>Q</sub>

NOTES:

REGISTER 23-5: AD1CHS123: ADC1 INPUT CHANNEL 1, 2, 3 SELECT REGISTER (CONTINUED)

bit 0

**CH123SA:** Channel 1, 2, 3 Positive Input Select for Sample MUXA bit

In 12-bit mode (AD21B = 1), CH123SA is Unimplemented and is Read as '0':

| Value              | ADC Channel |         |         |
|--------------------|-------------|---------|---------|
|                    | CH1         | CH2     | CH3     |
| 1 <sup>(2)</sup>   | OA1/AN3     | OA2/AN0 | OA3/AN6 |
| 0 <sup>(1,2)</sup> | OA2/AN0     | AN1     | AN2     |

**Note 1:** AN0 through AN7 are repurposed when comparator and op amp functionality is enabled. See Figure 23-1 to determine how enabling a particular op amp or comparator affects selection choices for Channels 1, 2 and 3.

**2:** The OAx input is used if the corresponding op amp is selected (OPMODE (CMxCON<10>) = 1); otherwise, the ANx input is used.

**REGISTER 24-10: PTGADJ: PTG ADJUST REGISTER<sup>(1)</sup>**

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGADJ<15:8> |       |       |       |       |       |       |       |
| bit 15       |       |       |       | bit 8 |       |       |       |

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGADJ<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 15-0                      **PTGADJ<15:0>**: PTG Adjust Register bits  
This register holds user-supplied data to be added to the PTGTxLIM, PTGCxLIM, PTGSDLIM or PTGL0 registers with the PTGADD command.

**Note 1:** This register is read-only when the PTG module is executing Step commands (PTGEN = 1 and PTGSTRT = 1).

**REGISTER 24-11: PTGL0: PTG LITERAL 0 REGISTER<sup>(1)</sup>**

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGL0<15:8> |       |       |       |       |       |       |       |
| bit 15      |       |       |       | bit 8 |       |       |       |

|            |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0      | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| PTGL0<7:0> |       |       |       |       |       |       |       |
| bit 7      |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

bit 15-0                      **PTGL0<15:0>**: PTG Literal 0 Register bits  
This register holds the 16-bit value to be written to the AD1CHS0 register with the PTGCTRL Step command.

**Note 1:** This register is read-only when the PTG module is executing Step commands (PTGEN = 1 and PTGSTRT = 1).

**REGISTER 27-1: DEVID: DEVICE ID REGISTER**

|                             |   |   |   |        |   |   |   |
|-----------------------------|---|---|---|--------|---|---|---|
| R                           | R | R | R | R      | R | R | R |
| DEVID<23:16> <sup>(1)</sup> |   |   |   |        |   |   |   |
| bit 23                      |   |   |   | bit 16 |   |   |   |

|                            |   |   |   |       |   |   |   |
|----------------------------|---|---|---|-------|---|---|---|
| R                          | R | R | R | R     | R | R | R |
| DEVID<15:8> <sup>(1)</sup> |   |   |   |       |   |   |   |
| bit 15                     |   |   |   | bit 8 |   |   |   |

|                           |   |   |   |       |   |   |   |
|---------------------------|---|---|---|-------|---|---|---|
| R                         | R | R | R | R     | R | R | R |
| DEVID<7:0> <sup>(1)</sup> |   |   |   |       |   |   |   |
| bit 7                     |   |   |   | bit 0 |   |   |   |

**Legend:** R = Read-Only bit U = Unimplemented bit

bit 23-0 **DEVID<23:0>:** Device Identifier bits<sup>(1)</sup>

**Note 1:** Refer to the “dsPIC33E/PIC24E Flash Programming Specification for Devices with Volatile Configuration Bits” (DS70663) for the list of device ID values.

**REGISTER 27-2: DEVREV: DEVICE REVISION REGISTER**

|                              |   |   |   |        |   |   |   |
|------------------------------|---|---|---|--------|---|---|---|
| R                            | R | R | R | R      | R | R | R |
| DEVREV<23:16> <sup>(1)</sup> |   |   |   |        |   |   |   |
| bit 23                       |   |   |   | bit 16 |   |   |   |

|                             |   |   |   |       |   |   |   |
|-----------------------------|---|---|---|-------|---|---|---|
| R                           | R | R | R | R     | R | R | R |
| DEVREV<15:8> <sup>(1)</sup> |   |   |   |       |   |   |   |
| bit 15                      |   |   |   | bit 8 |   |   |   |

|                            |   |   |   |       |   |   |   |
|----------------------------|---|---|---|-------|---|---|---|
| R                          | R | R | R | R     | R | R | R |
| DEVREV<7:0> <sup>(1)</sup> |   |   |   |       |   |   |   |
| bit 7                      |   |   |   | bit 0 |   |   |   |

**Legend:** R = Read-only bit U = Unimplemented bit

bit 23-0 **DEVREV<23:0>:** Device Revision bits<sup>(1)</sup>

**Note 1:** Refer to the “dsPIC33E/PIC24E Flash Programming Specification for Devices with Volatile Configuration Bits” (DS70663) for the list of device revision values.




## 30.2 AC Characteristics and Timing Parameters

This section defines dsPIC33EPXXXGP50X, dsPIC33EPXXXMC20X/50X and PIC24EPXXXGP/MC20X AC characteristics and timing parameters.

**TABLE 30-15: TEMPERATURE AND VOLTAGE SPECIFICATIONS – AC**

|                           |                                                                                                                                                                                                                                                                      |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC CHARACTERISTICS</b> | <b>Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)</b>                                                                                                                                                                                         |
|                           | Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended<br>Operating voltage $V_{DD}$ range as described in <b>Section 30.1 “DC Characteristics”</b> . |

**FIGURE 30-1: LOAD CONDITIONS FOR DEVICE TIMING SPECIFICATIONS**

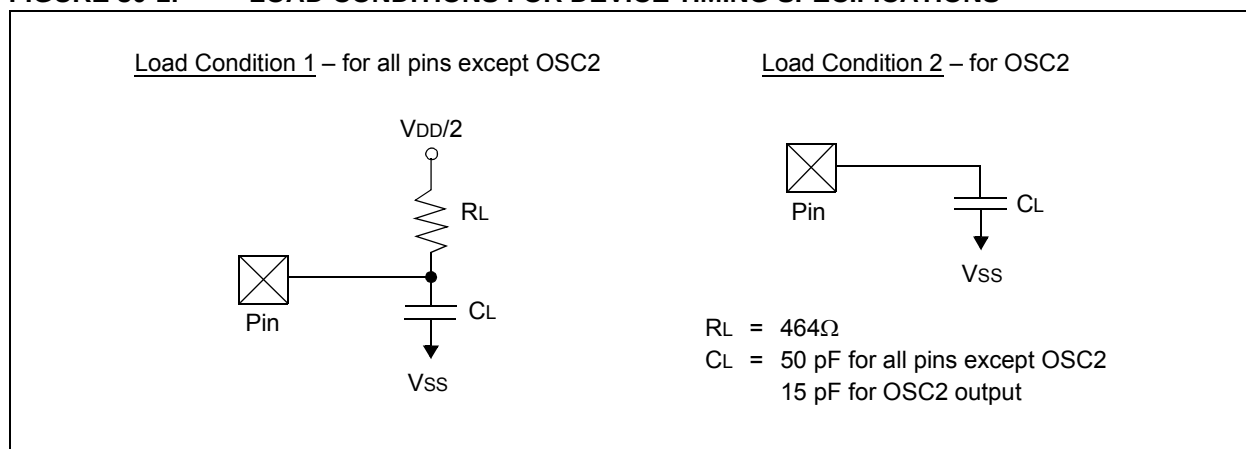

**TABLE 30-16: CAPACITIVE LOADING REQUIREMENTS ON OUTPUT PINS**

| Param No. | Symbol | Characteristic        | Min. | Typ. | Max. | Units | Conditions                                                    |
|-----------|--------|-----------------------|------|------|------|-------|---------------------------------------------------------------|
| DO50      | Cosco  | OSC2 Pin              | —    | —    | 15   | pF    | In XT and HS modes, when external clock is used to drive OSC1 |
| DO56      | Cio    | All I/O Pins and OSC2 | —    | —    | 50   | pF    | EC mode                                                       |
| DO58      | Cb     | SCLx, SDAx            | —    | —    | 400  | pF    | In I <sup>2</sup> C™ mode                                     |

TABLE 30-18: PLL CLOCK TIMING SPECIFICATIONS

| AC CHARACTERISTICS |        |                                                               | Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |                     |      |       |                    |
|--------------------|--------|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|-------|--------------------|
| Param No.          | Symbol | Characteristic                                                | Min.                                                                                                                                                                 | Typ. <sup>(1)</sup> | Max. | Units | Conditions         |
| OS50               | FPLLI  | PLL Voltage Controlled Oscillator (VCO) Input Frequency Range | 0.8                                                                                                                                                                  | —                   | 8.0  | MHz   | ECPLL, XTPLL modes |
| OS51               | FVCO   | On-Chip VCO System Frequency                                  | 120                                                                                                                                                                  | —                   | 340  | MHz   |                    |
| OS52               | TLOCK  | PLL Start-up Time (Lock Time)                                 | 0.9                                                                                                                                                                  | 1.5                 | 3.1  | ms    |                    |
| OS53               | DCLK   | CLKO Stability (Jitter) <sup>(2)</sup>                        | -3                                                                                                                                                                   | 0.5                 | 3    | %     |                    |

**Note 1:** Data in "Typical" column is at 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**2:** This jitter specification is based on clock cycle-by-clock cycle measurements. To get the effective jitter for individual time bases, or communication clocks used by the application, use the following formula:

$$\text{Effective Jitter} = \frac{DCLK}{\sqrt{\frac{FOSC}{\text{Time Base or Communication Clock}}}}$$

For example, if Fosc = 120 MHz and the SPIx bit rate = 10 MHz, the effective jitter is as follows:

$$\text{Effective Jitter} = \frac{DCLK}{\sqrt{\frac{120}{10}}} = \frac{DCLK}{\sqrt{12}} = \frac{DCLK}{3.464}$$

TABLE 30-19: INTERNAL FRC ACCURACY

| AC CHARACTERISTICS                                              |                | Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |      |      |       |                     |                |
|-----------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|---------------------|----------------|
| Param No.                                                       | Characteristic | Min.                                                                                                                                                                    | Typ. | Max. | Units | Conditions          |                |
| Internal FRC Accuracy @ FRC Frequency = 7.37 MHz <sup>(1)</sup> |                |                                                                                                                                                                         |      |      |       |                     |                |
| F20a                                                            | FRC            | -1.5                                                                                                                                                                    | 0.5  | +1.5 | %     | -40°C ≤ TA ≤ -10°C  | VDD = 3.0-3.6V |
|                                                                 |                | -1                                                                                                                                                                      | 0.5  | +1   | %     | -10°C ≤ TA ≤ +85°C  | VDD = 3.0-3.6V |
| F20b                                                            | FRC            | -2                                                                                                                                                                      | 1    | +2   | %     | +85°C ≤ TA ≤ +125°C | VDD = 3.0-3.6V |

**Note 1:** Frequency is calibrated at +25°C and 3.3V. TUNx bits can be used to compensate for temperature drift.

TABLE 30-20: INTERNAL LPRC ACCURACY

| AC CHARACTERISTICS               |                | Standard Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |      |      |       |                     |                |
|----------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|---------------------|----------------|
| Param No.                        | Characteristic | Min.                                                                                                                                                                    | Typ. | Max. | Units | Conditions          |                |
| LPRC @ 32.768 kHz <sup>(1)</sup> |                |                                                                                                                                                                         |      |      |       |                     |                |
| F21a                             | LPRC           | -30                                                                                                                                                                     | —    | +30  | %     | -40°C ≤ TA ≤ -10°C  | VDD = 3.0-3.6V |
|                                  |                | -20                                                                                                                                                                     | —    | +20  | %     | -10°C ≤ TA ≤ +85°C  | VDD = 3.0-3.6V |
| F21b                             | LPRC           | -30                                                                                                                                                                     | —    | +30  | %     | +85°C ≤ TA ≤ +125°C | VDD = 3.0-3.6V |

**Note 1:** The change of LPRC frequency as VDD changes.

TABLE 30-61: ADC CONVERSION (10-BIT MODE) TIMING REQUIREMENTS

| AC CHARACTERISTICS       |        |                                                                                                     | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated) <sup>(1)</sup><br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |         |       |       |                                      |
|--------------------------|--------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------|-------|--------------------------------------|
| Param No.                | Symbol | Characteristic                                                                                      | Min.                                                                                                                                                                                   | Typ.    | Max.  | Units | Conditions                           |
| <b>Clock Parameters</b>  |        |                                                                                                     |                                                                                                                                                                                        |         |       |       |                                      |
| AD50                     | TAD    | ADC Clock Period                                                                                    | 76                                                                                                                                                                                     | —       | —     | ns    |                                      |
| AD51                     | tRC    | ADC Internal RC Oscillator Period <sup>(2)</sup>                                                    | —                                                                                                                                                                                      | 250     | —     | ns    |                                      |
| <b>Conversion Rate</b>   |        |                                                                                                     |                                                                                                                                                                                        |         |       |       |                                      |
| AD55                     | tCONV  | Conversion Time                                                                                     | —                                                                                                                                                                                      | 12 TAD  | —     | —     |                                      |
| AD56                     | FCNV   | Throughput Rate                                                                                     | —                                                                                                                                                                                      | —       | 1.1   | Msp/s | Using simultaneous sampling          |
| AD57a                    | TSAMP  | Sample Time when Sampling any ANx Input                                                             | 2 TAD                                                                                                                                                                                  | —       | —     | —     |                                      |
| AD57b                    | TSAMP  | Sample Time when Sampling the Op Amp Outputs (Configuration A and Configuration B) <sup>(4,5)</sup> | 4 TAD                                                                                                                                                                                  | —       | —     | —     |                                      |
| <b>Timing Parameters</b> |        |                                                                                                     |                                                                                                                                                                                        |         |       |       |                                      |
| AD60                     | tPCS   | Conversion Start from Sample Trigger <sup>(2,3)</sup>                                               | 2 TAD                                                                                                                                                                                  | —       | 3 TAD | —     | Auto-convert trigger is not selected |
| AD61                     | tPSS   | Sample Start from Setting Sample (SAMP) bit <sup>(2,3)</sup>                                        | 2 TAD                                                                                                                                                                                  | —       | 3 TAD | —     |                                      |
| AD62                     | tCSS   | Conversion Completion to Sample Start (ASAM = 1) <sup>(2,3)</sup>                                   | —                                                                                                                                                                                      | 0.5 TAD | —     | —     |                                      |
| AD63                     | tDPU   | Time to Stabilize Analog Stage from ADC Off to ADC On <sup>(2,3)</sup>                              | —                                                                                                                                                                                      | —       | 20    | μs    | (Note 6)                             |

**Note 1:** Device is functional at VBORMIN < VDD < VDDMIN, but will have degraded performance. Device functionality is tested, but not characterized. Analog modules (ADC, op amp/comparator and comparator voltage reference) may have degraded performance. Refer to Parameter BO10 in Table 30-13 for the minimum and maximum BOR values.

**2:** Parameters are characterized but not tested in manufacturing.

**3:** Because the sample caps will eventually lose charge, clock rates below 10 kHz may affect linearity performance, especially at elevated temperatures.

**4:** See Figure 25-6 for configuration information.

**5:** See Figure 25-7 for configuration information.

**6:** The parameter, tDPU, is the time required for the ADC module to stabilize at the appropriate level when the module is turned on (ADON (AD1CON1<15>) = 1). During this time, the ADC result is indeterminate.

TABLE 30-62: DMA MODULE TIMING REQUIREMENTS

| AC CHARACTERISTICS |                                | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |                     |      |       |            |
|--------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|-------|------------|
| Param No.          | Characteristic                 | Min.                                                                                                                                                                    | Typ. <sup>(1)</sup> | Max. | Units | Conditions |
| DM1                | DMA Byte/Word Transfer Latency | 1 Tcy <sup>(2)</sup>                                                                                                                                                    | —                   | —    | ns    |            |

**Note 1:** These parameters are characterized, but not tested in manufacturing.

**2:** Because DMA transfers use the CPU data bus, this time is dependent on other functions on the bus.

## APPENDIX A: REVISION HISTORY

### Revision A (April 2011)

This is the initial released version of the document.

### Revision B (July 2011)

This revision includes minor typographical and formatting changes throughout the data sheet text.

All other major changes are referenced by their respective section in Table A-1.

**TABLE A-1: MAJOR SECTION UPDATES**

| Section Name                                                                      | Update Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>“High-Performance, 16-bit Digital Signal Controllers and Microcontrollers”</b> | Changed all pin diagrams references of VLAP to TLA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Section 4.0 “Memory Organization”</b>                                          | Updated the All Resets values for CLKDIV and PLLFBD in the System Control Register Map (see Table 4-35).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Section 5.0 “Flash Program Memory”</b>                                         | Updated “one word” to “two words” in the first paragraph of <b>Section 5.2 “RTSP Operation”</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Section 9.0 “Oscillator Configuration”</b>                                     | Updated the PLL Block Diagram (see Figure 9-2).<br>Updated the Oscillator Mode, Fast RC Oscillator (FRC) with divide-by-N and PLL (FRCPLL), by changing (FRCDIVN + PLL) to (FRCPLL).<br>Changed (FRCDIVN + PLL) to (FRCPLL) for COSC<2:0> = 001 and NOSC<2:0> = 001 in the Oscillator Control Register (see Register 9-1).<br>Changed the POR value from 0 to 1 for the DOZE<1:0> bits, from 1 to 0 for the FRCDIV<0> bit, and from 0 to 1 for the PLLPOST<0> bit; Updated the default definitions for the DOZE<2:0> and FRCDIV<2:0> bits and updated all bit definitions for the PLLPOST<1:0> bits in the Clock Divisor Register (see Register 9-2).<br>Changed the POR value from 0 to 1 for the PLLDIV<5:4> bits and updated the default definitions for all PLLDIV<8:0> bits in the PLL Feedback Division Register (see Register 9-2). |
| <b>Section 22.0 “Charge Time Measurement Unit (CTMU)”</b>                         | Updated the bit definitions for the IRNG<1:0> bits in the CTMU Current Control Register (see Register 22-3).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Section 25.0 “Op amp/ Comparator Module”</b>                                   | Updated the voltage reference block diagrams (see Figure 25-1 and Figure 25-2).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**P**

|                                                  |          |
|--------------------------------------------------|----------|
| Packaging .....                                  | 479      |
| Details .....                                    | 505      |
| Marking .....                                    | 479, 481 |
| Peripheral Module Disable (PMD).....             | 165      |
| Peripheral Pin Select (PPS) .....                | 175      |
| Available Peripherals .....                      | 175      |
| Available Pins .....                             | 175      |
| Control .....                                    | 175      |
| Control Registers .....                          | 183      |
| Input Mapping .....                              | 176      |
| Output Selection for Remappable Pins .....       | 180      |
| Pin Selection for Selectable Input Sources ..... | 178      |
| Selectable Input Sources .....                   | 177      |
| Peripheral Trigger Generator (PTG) Module.....   | 337      |
| PICkit 3 In-Circuit Debugger/Programmer .....    | 399      |
| Pinout I/O Descriptions (table) .....            | 26       |
| Power-Saving Features.....                       | 163      |
| Clock Frequency .....                            | 163      |
| Clock Switching .....                            | 163      |
| Instruction-Based Modes .....                    | 163      |
| Idle .....                                       | 164      |
| Interrupts Coincident with Power                 |          |
| Save Instructions .....                          | 164      |
| Sleep .....                                      | 164      |
| Resources .....                                  | 165      |
| Program Address Space .....                      | 45       |
| Construction .....                               | 117      |
| Data Access from Program Memory Using            |          |
| Table Instructions.....                          | 118      |
| Memory Map (dsPIC33EP128GP50X,                   |          |
| dsPIC33EP128MC20X/50X,                           |          |
| PIC24EP128GP/MC20X Devices) .....                | 47       |
| Memory Map (dsPIC33EP256GP50X,                   |          |
| dsPIC33EP256MC20X/50X,                           |          |
| PIC24EP256GP/MC20X Devices) .....                | 48       |
| Memory Map (dsPIC33EP32GP50X,                    |          |
| dsPIC33EP32MC20X/50X,                            |          |
| PIC24EP32GP/MC20X Devices) .....                 | 45       |
| Memory Map (dsPIC33EP512GP50X,                   |          |
| dsPIC33EP512MC20X/50X,                           |          |
| PIC24EP512GP/MC20X Devices) .....                | 49       |
| Memory Map (dsPIC33EP64GP50X,                    |          |
| dsPIC33EP64MC20X/50X,                            |          |
| PIC24EP64GP/MC20X Devices) .....                 | 46       |
| Table Read High Instructions                     |          |
| TBLRDH .....                                     | 118      |
| Table Read Low Instructions (TBLRDL) .....       | 118      |
| Program Memory                                   |          |
| Organization .....                               | 50       |
| Reset Vector .....                               | 50       |
| Programmable CRC Generator.....                  | 373      |
| Control Registers .....                          | 375      |
| Overview .....                                   | 374      |
| Resources .....                                  | 374      |
| Programmer's Model.....                          | 37       |
| Register Descriptions .....                      | 37       |
| PTG                                              |          |
| Control Registers .....                          | 340      |
| Introduction .....                               | 337      |
| Output Descriptions .....                        | 353      |
| Resources .....                                  | 339      |
| Step Commands and Format.....                    | 350      |

**Q**

|                                         |     |
|-----------------------------------------|-----|
| QE1                                     |     |
| Control Registers .....                 | 252 |
| Resources .....                         | 251 |
| Quadrature Encoder Interface (QE1)..... | 249 |

**R**

|                                                 |    |
|-------------------------------------------------|----|
| Register Maps                                   |    |
| ADC1 .....                                      | 84 |
| CPU Core (dsPIC33EPXXXMC20X/50X,                |    |
| dsPIC33EPXXXGP50X Devices) .....                | 63 |
| CPU Core (PIC24EPXXXGP/MC20X Devices) .....     | 65 |
| CRC .....                                       | 88 |
| CTMU .....                                      | 97 |
| DMAC .....                                      | 98 |
| ECAN1 (When WIN (C1CTRL1) = 0 or 1)             |    |
| for dsPIC33EPXXXMC/GP50X Devices.....           | 85 |
| ECAN1 (When WIN (C1CTRL1) = 0) for              |    |
| dsPIC33EPXXXMC/GP50X Devices .....              | 85 |
| ECAN1 (WIN (C1CTRL1) = 1) for                   |    |
| dsPIC33EPXXXMC/GP50X Devices .....              | 86 |
| I2C1 and I2C2 .....                             | 82 |
| Input Capture 1 through Input Capture 4 .....   | 76 |
| Interrupt Controller                            |    |
| (dsPIC33EPXXXGP50X Devices) .....               | 69 |
| Interrupt Controller                            |    |
| (dsPIC33EPXXXMC20X Devices).....                | 71 |
| Interrupt Controller                            |    |
| (dsPIC33EPXXXMC50X Devices).....                | 73 |
| Interrupt Controller                            |    |
| (PIC24EPXXXGP20X Devices) .....                 | 66 |
| Interrupt Controller                            |    |
| (PIC24EPXXXMC20X Devices) .....                 | 67 |
| JTAG Interface .....                            | 97 |
| NVM.....                                        | 93 |
| Op Amp/Comparator.....                          | 97 |
| Output Compare 1 through Output Compare 4 ..... | 77 |
| Peripheral Pin Select Input                     |    |
| (dsPIC33EPXXXGP50X Devices) .....               | 91 |
| Peripheral Pin Select Input                     |    |
| (dsPIC33EPXXXMC20X Devices).....                | 92 |
| Peripheral Pin Select Input                     |    |
| (dsPIC33EPXXXMC50X Devices).....                | 91 |
| Peripheral Pin Select Input                     |    |
| (PIC24EPXXXGP20X Devices).....                  | 90 |
| Peripheral Pin Select Input                     |    |
| (PIC24EPXXXMC20X Devices) .....                 | 90 |
| Peripheral Pin Select Output                    |    |
| (dsPIC33EPXXXGP/MC202/502,                      |    |
| PIC24EPXXXGP/MC202 Devices).....                | 88 |
| Peripheral Pin Select Output                    |    |
| (dsPIC33EPXXXGP/MC203/503,                      |    |
| PIC24EPXXXGP/MC203 Devices).....                | 88 |
| Peripheral Pin Select Output                    |    |
| (dsPIC33EPXXXGP/MC204/504,                      |    |
| PIC24EPXXXGP/MC204 Devices).....                | 89 |
| Peripheral Pin Select Output                    |    |
| (dsPIC33EPXXXGP/MC206/506,                      |    |
| PIC24EPXXXGP/MC206 Devices) .....               | 89 |
| PMD (dsPIC33EPXXXGP50X Devices) .....           | 95 |
| PMD (dsPIC33EPXXXMC20X Devices).....            | 96 |
| PMD (dsPIC33EPXXXMC50X Devices).....            | 95 |
| PMD (PIC24EPXXXGP20X Devices) .....             | 94 |