


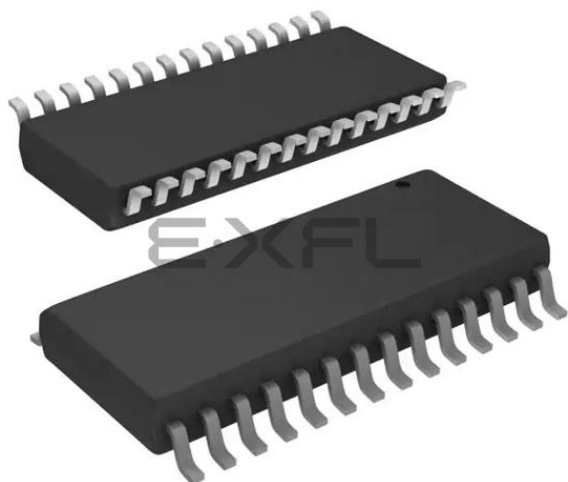

Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"


#### Details

|                            |                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                          |
| Core Processor             | dsPIC                                                                                                                                                                           |
| Core Size                  | 16-Bit                                                                                                                                                                          |
| Speed                      | 70 MIPS                                                                                                                                                                         |
| Connectivity               | CANbus, I <sup>2</sup> C, IrDA, LINbus, QEI, SPI, UART/USART                                                                                                                    |
| Peripherals                | Brown-out Detect/Reset, DMA, Motor Control PWM, POR, PWM, WDT                                                                                                                   |
| Number of I/O              | 21                                                                                                                                                                              |
| Program Memory Size        | 512KB (170K x 24)                                                                                                                                                               |
| Program Memory Type        | FLASH                                                                                                                                                                           |
| EEPROM Size                | -                                                                                                                                                                               |
| RAM Size                   | 24K x 16                                                                                                                                                                        |
| Voltage - Supply (Vcc/Vdd) | 3V ~ 3.6V                                                                                                                                                                       |
| Data Converters            | A/D 6x10b/12b                                                                                                                                                                   |
| Oscillator Type            | Internal                                                                                                                                                                        |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                               |
| Mounting Type              | Surface Mount                                                                                                                                                                   |
| Package / Case             | 28-SOIC (0.295", 7.50mm Width)                                                                                                                                                  |
| Supplier Device Package    | 28-SOIC                                                                                                                                                                         |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep512mc502-i-so">https://www.e-xfl.com/product-detail/microchip-technology/dspic33ep512mc502-i-so</a> |

## Pin Diagrams (Continued)

36-Pin VTLA<sup>(1,2,3)</sup>

■ = Pins are up to 5V tolerant

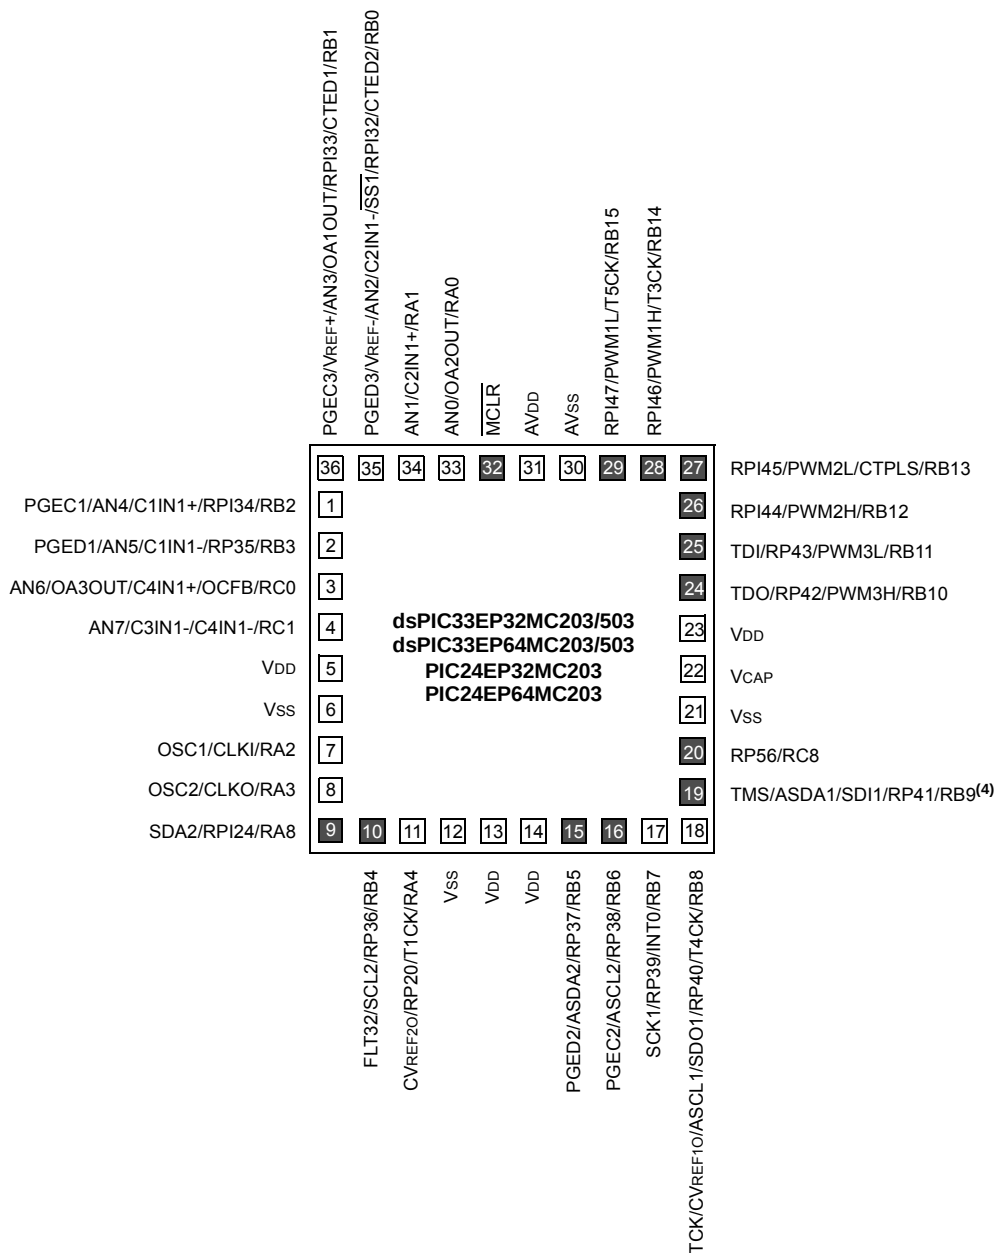


- Note**
- 1: The RPN/RPIn pins can be used by any remappable peripheral with some limitation. See **Section 11.4 “Peripheral Pin Select (PPS)”** for available peripherals and for information on limitations.
  - 2: Every I/O port pin (RAX-RGx) can be used as a Change Notification pin (CNAX-CNGx). See **Section 11.0 “I/O Ports”** for more information.
  - 3: The metal pad at the bottom of the device is not connected to any pins and is recommended to be connected to VSS externally.
  - 4: There is an internal pull-up resistor connected to the TMS pin when the JTAG interface is active. See the JTAGEN bit field in Table 27-2.

## Pin Diagrams (Continued)

44-Pin TQFP<sup>(1,2)</sup>

■ = Pins are up to 5V tolerant

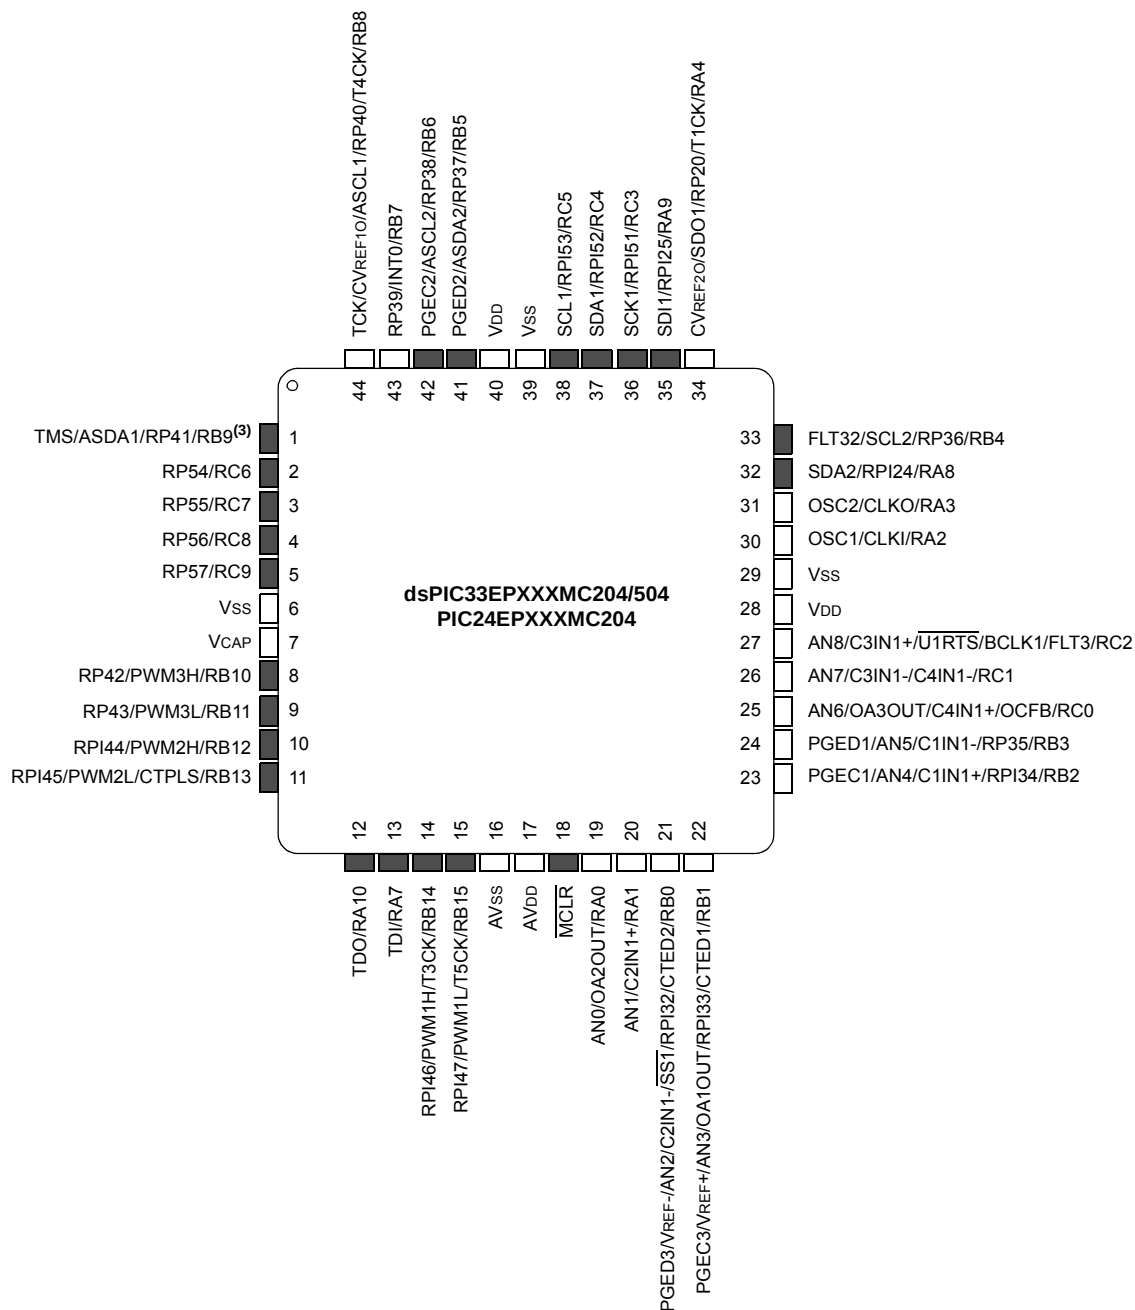

- Note 1:** The RPN/RPIN pins can be used by any remappable peripheral with some limitation. See **Section 11.4 "Peripheral Pin Select (PPS)"** for available peripherals and for information on limitations.
- Note 2:** Every I/O port pin (RAX-RGX) can be used as a Change Notification pin (CNAX-CNGX). See **Section 11.0 "I/O Ports"** for more information.
- Note 3:** There is an internal pull-up resistor connected to the TMS pin when the JTAG interface is active. See the JTAGEN bit field in Table 27-2.

**Table of Contents**

|      |                                                                                                          |     |
|------|----------------------------------------------------------------------------------------------------------|-----|
| 1.0  | Device Overview .....                                                                                    | 25  |
| 2.0  | Guidelines for Getting Started with 16-bit Digital Signal Controllers and Microcontrollers .....         | 29  |
| 3.0  | CPU .....                                                                                                | 35  |
| 4.0  | Memory Organization .....                                                                                | 45  |
| 5.0  | Flash Program Memory .....                                                                               | 119 |
| 6.0  | Resets .....                                                                                             | 123 |
| 7.0  | Interrupt Controller .....                                                                               | 127 |
| 8.0  | Direct Memory Access (DMA) .....                                                                         | 139 |
| 9.0  | Oscillator Configuration .....                                                                           | 153 |
| 10.0 | Power-Saving Features .....                                                                              | 163 |
| 11.0 | I/O Ports .....                                                                                          | 173 |
| 12.0 | Timer1 .....                                                                                             | 203 |
| 13.0 | Timer2/3 and Timer4/5 .....                                                                              | 207 |
| 14.0 | Input Capture .....                                                                                      | 213 |
| 15.0 | Output Compare .....                                                                                     | 219 |
| 16.0 | High-Speed PWM Module (dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X Devices Only) .....                     | 225 |
| 17.0 | Quadrature Encoder Interface (QEI) Module (dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X Devices Only) ..... | 249 |
| 18.0 | Serial Peripheral Interface (SPI) .....                                                                  | 265 |
| 19.0 | Inter-Integrated Circuit™ (I <sup>2</sup> C™) .....                                                      | 273 |
| 20.0 | Universal Asynchronous Receiver Transmitter (UART) .....                                                 | 281 |
| 21.0 | Enhanced CAN (ECAN™) Module (dsPIC33EPXXXGP/MC50X Devices Only) .....                                    | 287 |
| 22.0 | Charge Time Measurement Unit (CTMU) .....                                                                | 315 |
| 23.0 | 10-Bit/12-Bit Analog-to-Digital Converter (ADC) .....                                                    | 321 |
| 24.0 | Peripheral Trigger Generator (PTG) Module .....                                                          | 337 |
| 25.0 | Op Amp/Comparator Module .....                                                                           | 355 |
| 26.0 | Programmable Cyclic Redundancy Check (CRC) Generator .....                                               | 373 |
| 27.0 | Special Features .....                                                                                   | 379 |
| 28.0 | Instruction Set Summary .....                                                                            | 387 |
| 29.0 | Development Support .....                                                                                | 397 |
| 30.0 | Electrical Characteristics .....                                                                         | 401 |
| 31.0 | High-Temperature Electrical Characteristics .....                                                        | 467 |
| 32.0 | DC and AC Device Characteristics Graphs .....                                                            | 475 |
| 33.0 | Packaging Information .....                                                                              | 479 |
|      | Appendix A: Revision History .....                                                                       | 507 |
|      | Index .....                                                                                              | 517 |
|      | The Microchip Web Site .....                                                                             | 525 |
|      | Customer Change Notification Service .....                                                               | 525 |
|      | Customer Support .....                                                                                   | 525 |
|      | Product Identification System .....                                                                      | 527 |


**TABLE 1-1: PINOUT I/O DESCRIPTIONS**

| Pin Name <sup>(4)</sup> | Pin Type | Buffer Type | PPS | Description                                                                                                                                                                        |
|-------------------------|----------|-------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AN0-AN15                | I        | Analog      | No  | Analog input channels.                                                                                                                                                             |
| CLKI                    | I        | ST/<br>CMOS | No  | External clock source input. Always associated with OSC1 pin function.                                                                                                             |
| CLKO                    | O        | —           | No  | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes. Always associated with OSC2 pin function. |
| OSC1                    | I        | ST/<br>CMOS | No  | Oscillator crystal input. ST buffer when configured in RC mode; CMOS otherwise.                                                                                                    |
| OSC2                    | I/O      | —           | No  | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes.                                           |
| REFCLKO                 | O        | —           | Yes | Reference clock output.                                                                                                                                                            |
| IC1-IC4                 | I        | ST          | Yes | Capture Inputs 1 through 4.                                                                                                                                                        |
| OCFA                    | I        | ST          | Yes | Compare Fault A input (for Compare channels).                                                                                                                                      |
| OCFB                    | I        | ST          | No  | Compare Fault B input (for Compare channels).                                                                                                                                      |
| OC1-OC4                 | O        | —           | Yes | Compare Outputs 1 through 4.                                                                                                                                                       |
| INT0                    | I        | ST          | No  | External Interrupt 0.                                                                                                                                                              |
| INT1                    | I        | ST          | Yes | External Interrupt 1.                                                                                                                                                              |
| INT2                    | I        | ST          | Yes | External Interrupt 2.                                                                                                                                                              |
| RA0-RA4, RA7-RA12       | I/O      | ST          | No  | PORTA is a bidirectional I/O port.                                                                                                                                                 |
| RB0-RB15                | I/O      | ST          | No  | PORTB is a bidirectional I/O port.                                                                                                                                                 |
| RC0-RC13, RC15          | I/O      | ST          | No  | PORTC is a bidirectional I/O port.                                                                                                                                                 |
| RD5, RD6, RD8           | I/O      | ST          | No  | PORTD is a bidirectional I/O port.                                                                                                                                                 |
| RE12-RE15               | I/O      | ST          | No  | PORTE is a bidirectional I/O port.                                                                                                                                                 |
| RF0, RF1                | I/O      | ST          | No  | PORTF is a bidirectional I/O port.                                                                                                                                                 |
| RG6-RG9                 | I/O      | ST          | No  | PORTG is a bidirectional I/O port.                                                                                                                                                 |
| T1CK                    | I        | ST          | No  | Timer1 external clock input.                                                                                                                                                       |
| T2CK                    | I        | ST          | Yes | Timer2 external clock input.                                                                                                                                                       |
| T3CK                    | I        | ST          | No  | Timer3 external clock input.                                                                                                                                                       |
| T4CK                    | I        | ST          | No  | Timer4 external clock input.                                                                                                                                                       |
| T5CK                    | I        | ST          | No  | Timer5 external clock input.                                                                                                                                                       |
| CTPLS                   | O        | ST          | No  | CTMU pulse output.                                                                                                                                                                 |
| CTED1                   | I        | ST          | No  | CTMU External Edge Input 1.                                                                                                                                                        |
| CTED2                   | I        | ST          | No  | CTMU External Edge Input 2.                                                                                                                                                        |
| U1CTS                   | I        | ST          | No  | UART1 Clear-To-Send.                                                                                                                                                               |
| U1RTS                   | O        | —           | No  | UART1 Ready-To-Send.                                                                                                                                                               |
| U1RX                    | I        | ST          | Yes | UART1 receive.                                                                                                                                                                     |
| U1TX                    | O        | —           | Yes | UART1 transmit.                                                                                                                                                                    |
| BCLK1                   | O        | ST          | No  | UART1 IrDA <sup>®</sup> baud clock output.                                                                                                                                         |

**Legend:** CMOS = CMOS compatible input or output      Analog = Analog input      P = Power  
ST = Schmitt Trigger input with CMOS levels      O = Output      I = Input  
PPS = Peripheral Pin Select      TTL = TTL input buffer

- Note 1:** This pin is available on dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X devices only.
- 2:** This pin is available on dsPIC33EPXXXGP/MC50X devices only.
- 3:** This is the default Fault on Reset for dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X devices. See **Section 16.0 “High-Speed PWM Module (dsPIC33EPXXXMC20X/50X and PIC24EPXXXMC20X Devices Only)”** for more information.
- 4:** Not all pins are available in all packages variants. See the **“Pin Diagrams”** section for pin availability.
- 5:** There is an internal pull-up resistor connected to the TMS pin when the JTAG interface is active. See the JTAGEN bit field in Table 27-2.

FIGURE 4-5: PROGRAM MEMORY MAP FOR dsPIC33EP512GP50X, dsPIC33EP512MC20X/50X AND PIC24EP512GP/MC20X DEVICES

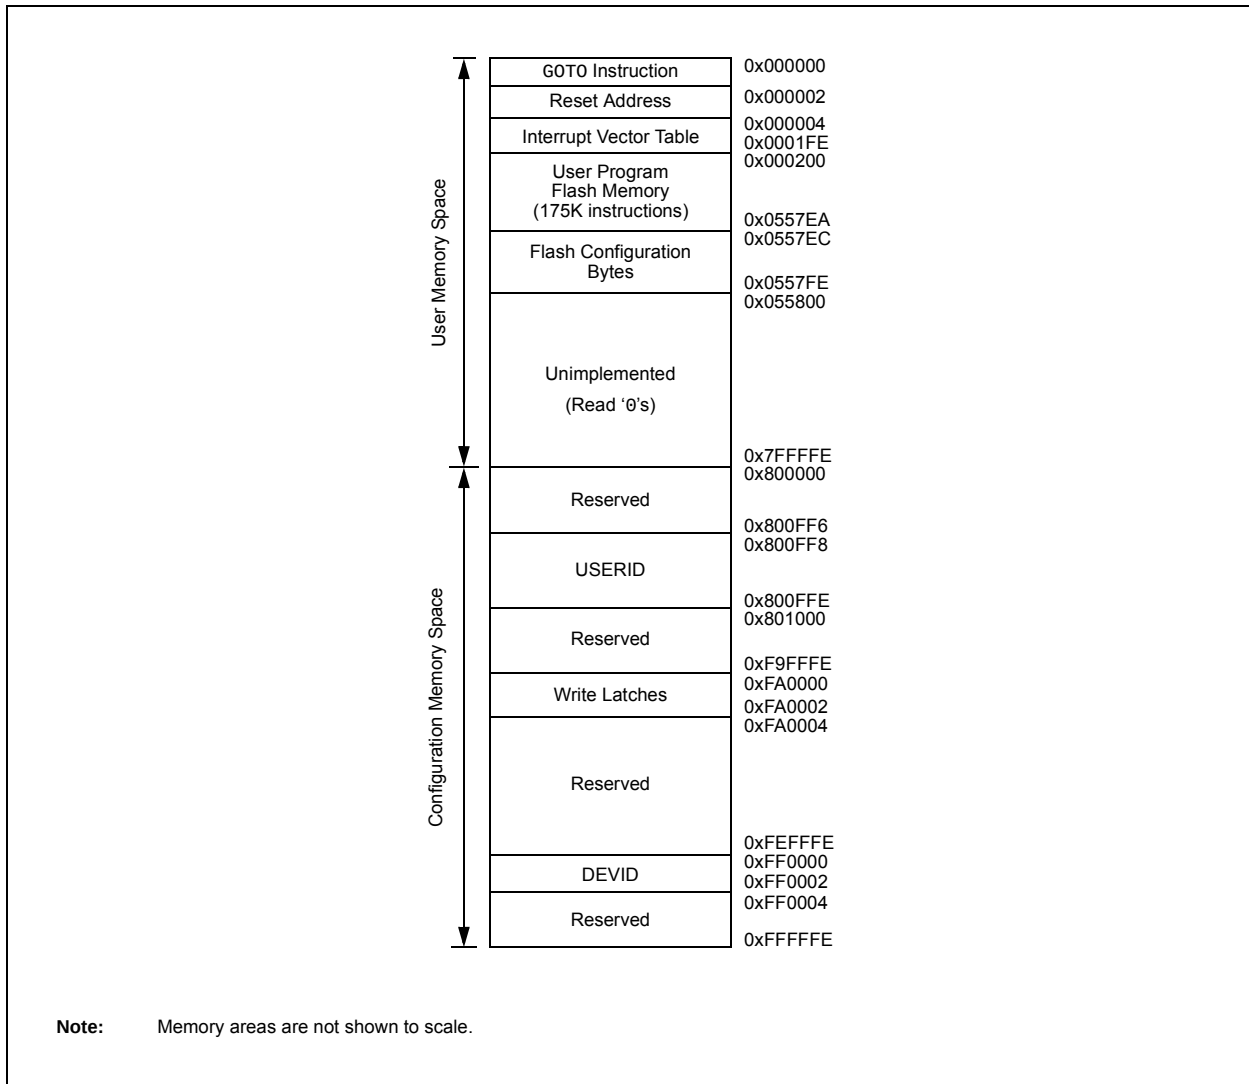

**TABLE 4-6: INTERRUPT CONTROLLER REGISTER MAP FOR dsPIC33EPXXXMC20X DEVICES ONLY**

| File Name | Addr. | Bit 15 | Bit 14      | Bit 13 | Bit 12 | Bit 11 | Bit 10       | Bit 9   | Bit 8  | Bit 7 | Bit 6        | Bit 5  | Bit 4  | Bit 3  | Bit 2        | Bit 1     | Bit 0   | All Resets |
|-----------|-------|--------|-------------|--------|--------|--------|--------------|---------|--------|-------|--------------|--------|--------|--------|--------------|-----------|---------|------------|
| IFS0      | 0800  | —      | DMA1IF      | AD1IF  | U1TXIF | U1RXIF | SPI1IF       | SPI1EIF | T3IF   | T2IF  | OC2IF        | IC2IF  | DMA0IF | T1IF   | OC1IF        | IC1IF     | INT0IF  | 0000       |
| IFS1      | 0802  | U2TXIF | U2RXIF      | INT2IF | T5IF   | T4IF   | OC4IF        | OC3IF   | DMA2IF | —     | —            | —      | INT1IF | CNIF   | CMIF         | MI2C1IF   | SI2C1IF | 0000       |
| IFS2      | 0804  | —      | —           | —      | —      | —      | —            | —       | —      | —     | IC4IF        | IC3IF  | DMA3IF | —      | —            | SPI2IF    | SPI2EIF | 0000       |
| IFS3      | 0806  | —      | —           | —      | —      | —      | QE11IF       | PSEMIF  | —      | —     | —            | —      | —      | —      | MI2C2IF      | SI2C2IF   | —       | 0000       |
| IFS4      | 0808  | —      | —           | CTMUIF | —      | —      | —            | —       | —      | —     | —            | —      | —      | CRCIF  | U2EIF        | U1EIF     | —       | 0000       |
| IFS5      | 080A  | PWM2IF | PWM1IF      | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IFS6      | 080C  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | PWM3IF  | 0000       |
| IFS8      | 0810  | JTAGIF | ICDIF       | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IFS9      | 0812  | —      | —           | —      | —      | —      | —            | —       | —      | —     | PTG3IF       | PTG2IF | PTG1IF | PTG0IF | PTGWDTIF     | PTGSTIEIF | —       | 0000       |
| IEC0      | 0820  | —      | DMA1IE      | AD1IE  | U1TXIE | U1RXIE | SPI1IE       | SPI1EIE | T3IE   | T2IE  | OC2IE        | IC2IE  | DMA0IE | T1IE   | OC1IE        | IC1IE     | INT0IE  | 0000       |
| IEC1      | 0822  | U2TXIE | U2RXIE      | INT2IE | T5IE   | T4IE   | OC4IE        | OC3IE   | DMA2IE | —     | —            | —      | INT1IE | CNIE   | CMIE         | MI2C1IE   | SI2C1IE | 0000       |
| IEC2      | 0824  | —      | —           | —      | —      | —      | —            | —       | —      | —     | IC4IE        | IC3IE  | DMA3IE | —      | —            | SPI2IE    | SPI2EIE | 0000       |
| IEC3      | 0826  | —      | —           | —      | —      | —      | QE11IE       | PSEMIE  | —      | —     | —            | —      | —      | —      | MI2C2IE      | SI2C2IE   | —       | 0000       |
| IEC4      | 0828  | —      | —           | CTMUIE | —      | —      | —            | —       | —      | —     | —            | —      | —      | CRCIE  | U2EIE        | U1EIE     | —       | 0000       |
| IEC5      | 082A  | PWM2IE | PWM1IE      | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IEC6      | 082C  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | PWM3IE  | 0000       |
| IEC8      | 0830  | JTAGIE | ICDIE       | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | —            | —         | —       | 0000       |
| IEC9      | 0832  | —      | —           | —      | —      | —      | —            | —       | —      | —     | PTG3IE       | PTG2IE | PTG1IE | PTG0IE | PTGWDTIE     | PTGSTIEIE | —       | 0000       |
| IPC0      | 0840  | —      | T1IP<2:0>   |        |        | —      | OC1IP<2:0>   |         |        | —     | IC1IP<2:0>   |        |        | —      | INT0IP<2:0>  |           |         | 4444       |
| IPC1      | 0842  | —      | T2IP<2:0>   |        |        | —      | OC2IP<2:0>   |         |        | —     | IC2IP<2:0>   |        |        | —      | DMA0IP<2:0>  |           |         | 4444       |
| IPC2      | 0844  | —      | U1RXIP<2:0> |        |        | —      | SPI1IP<2:0>  |         |        | —     | SPI1EIP<2:0> |        |        | —      | T3IP<2:0>    |           |         | 4444       |
| IPC3      | 0846  | —      | —           | —      | —      | —      | DMA1IP<2:0>  |         |        | —     | AD1IP<2:0>   |        |        | —      | U1TXIP<2:0>  |           |         | 0444       |
| IPC4      | 0848  | —      | CNIP<2:0>   |        |        | —      | CMIP<2:0>    |         |        | —     | MI2C1IP<2:0> |        |        | —      | SI2C1IP<2:0> |           |         | 4444       |
| IPC5      | 084A  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | INT1IP<2:0>  |           |         | 0004       |
| IPC6      | 084C  | —      | T4IP<2:0>   |        |        | —      | OC4IP<2:0>   |         |        | —     | OC3IP<2:0>   |        |        | —      | DMA2IP<2:0>  |           |         | 4444       |
| IPC7      | 084E  | —      | U2TXIP<2:0> |        |        | —      | U2RXIP<2:0>  |         |        | —     | INT2IP<2:0>  |        |        | —      | T5IP<2:0>    |           |         | 4444       |
| IPC8      | 0850  | —      | —           | —      | —      | —      | C1RXIP<2:0>  |         |        | —     | SPI2IP<2:0>  |        |        | —      | SPI2EIP<2:0> |           |         | 0444       |
| IPC9      | 0852  | —      | —           | —      | —      | —      | IC4IP<2:0>   |         |        | —     | IC3IP<2:0>   |        |        | —      | DMA3IP<2:0>  |           |         | 0444       |
| IPC12     | 0858  | —      | —           | —      | —      | —      | MI2C2IP<2:0> |         |        | —     | SI2C2IP<2:0> |        |        | —      | —            | —         | —       | 0440       |
| IPC14     | 085C  | —      | —           | —      | —      | —      | QE11IP<2:0>  |         |        | —     | PSEMIP<2:0>  |        |        | —      | —            | —         | —       | 0440       |
| IPC16     | 0860  | —      | CRCIP<2:0>  |        |        | —      | U2EIP<2:0>   |         |        | —     | U1EIP<2:0>   |        |        | —      | —            | —         | —       | 4440       |
| IPC19     | 0866  | —      | —           | —      | —      | —      | —            | —       | —      | —     | CTMUIP<2:0>  |        |        | —      | —            | —         | —       | 0040       |
| IPC23     | 086E  | —      | PWM2IP<2:0> |        |        | —      | PWM1IP<2:0>  |         |        | —     | —            | —      | —      | —      | —            | —         | —       | 4400       |
| IPC24     | 0870  | —      | —           | —      | —      | —      | —            | —       | —      | —     | —            | —      | —      | —      | PWM3IP<2:0>  |           |         | 0004       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

TABLE 4-11: PTG REGISTER MAP

| File Name | Addr. | Bit 15         | Bit 14 | Bit 13  | Bit 12      | Bit 11 | Bit 10 | Bit 9   | Bit 8   | Bit 7       | Bit 6  | Bit 5 | Bit 4        | Bit 3  | Bit 2       | Bit 1       | Bit 0  | All Resets |
|-----------|-------|----------------|--------|---------|-------------|--------|--------|---------|---------|-------------|--------|-------|--------------|--------|-------------|-------------|--------|------------|
| PTGCST    | 0AC0  | PTGEN          | —      | PTGSIDL | PTGTOGL     | —      | PTGSWT | PTGSSEN | PTGIVIS | PTGSTRT     | PTGWTO | —     | —            | —      | —           | PTGITM<1:0> |        | 0000       |
| PTGCON    | 0AC2  | PTGCLK<2:0>    |        |         | PTGDIV<4:0> |        |        |         |         | PTGPWD<3:0> |        |       |              | —      | PTGWDT<2:0> |             |        | 0000       |
| PTGBTE    | 0AC4  | ADCTS<4:1>     |        |         |             | IC4TSS | IC3TSS | IC2TSS  | IC1TSS  | OC4CS       | OC3CS  | OC2CS | OC1CS        | OC4TSS | OC3TSS      | OC2TSS      | OC1TSS | 0000       |
| PTGHOLD   | 0AC6  | PTGHOLD<15:0>  |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGT0LIM  | 0AC8  | PTGT0LIM<15:0> |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGT1LIM  | 0ACA  | PTGT1LIM<15:0> |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGSDLIM  | 0ACC  | PTGSDLIM<15:0> |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGC0LIM  | 0ACE  | PTGC0LIM<15:0> |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGC1LIM  | 0AD0  | PTGC1LIM<15:0> |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGADJ    | 0AD2  | PTGADJ<15:0>   |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGL0     | 0AD4  | PTGL0<15:0>    |        |         |             |        |        |         |         |             |        |       |              |        |             |             |        | 0000       |
| PTGQPTR   | 0AD6  | —              | —      | —       | —           | —      | —      | —       | —       | —           | —      | —     | PTGQPTR<4:0> |        |             |             | 0000   |            |
| PTGQUE0   | 0AD8  | STEP1<7:0>     |        |         |             |        |        |         |         | STEP0<7:0>  |        |       |              |        |             |             |        | 0000       |
| PTGQUE1   | 0ADA  | STEP3<7:0>     |        |         |             |        |        |         |         | STEP2<7:0>  |        |       |              |        |             |             |        | 0000       |
| PTGQUE2   | 0ADC  | STEP5<7:0>     |        |         |             |        |        |         |         | STEP4<7:0>  |        |       |              |        |             |             |        | 0000       |
| PTGQUE3   | 0ADE  | STEP7<7:0>     |        |         |             |        |        |         |         | STEP6<7:0>  |        |       |              |        |             |             |        | 0000       |
| PTGQUE4   | 0AE0  | STEP9<7:0>     |        |         |             |        |        |         |         | STEP8<7:0>  |        |       |              |        |             |             |        | 0000       |
| PTGQUE5   | 0AE2  | STEP11<7:0>    |        |         |             |        |        |         |         | STEP10<7:0> |        |       |              |        |             |             |        | 0000       |
| PTGQUE6   | 0AE4  | STEP13<7:0>    |        |         |             |        |        |         |         | STEP12<7:0> |        |       |              |        |             |             |        | 0000       |
| PTGQUE7   | 0AE6  | STEP15<7:0>    |        |         |             |        |        |         |         | STEP14<7:0> |        |       |              |        |             |             |        | 0000       |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-14: PWM GENERATOR 2 REGISTER MAP FOR dsPIC33EPXXXMC20X/50X AND PIC24EPXXXMC20X DEVICES ONLY**

| File Name | Addr. | Bit 15       | Bit 14     | Bit 13        | Bit 12 | Bit 11        | Bit 10  | Bit 9  | Bit 8  | Bit 7       | Bit 6 | Bit 5        | Bit 4 | Bit 3      | Bit 2  | Bit 1       | Bit 0  | All Resets |      |
|-----------|-------|--------------|------------|---------------|--------|---------------|---------|--------|--------|-------------|-------|--------------|-------|------------|--------|-------------|--------|------------|------|
| PWMCON2   | 0C40  | FLTSTAT      | CLSTAT     | TRGSTAT       | FLTIE  | CLIE          | TRGIE   | ITB    | MDCS   | DTC<1:0>    |       | DTCP         | —     | MTBS       | CAM    | XPRES       | IUE    | 0000       |      |
| IOCON2    | 0C42  | PENH         | PENL       | POLH          | POLL   | PMOD<1:0>     |         | OVRENH | OVRENL | OVRDAT<1:0> |       | FLTDAT<1:0>  |       | CLDAT<1:0> |        | SWAP        | OSYNC  | C000       |      |
| FCLCON2   | 0C44  | —            | CLSRC<4:0> |               |        |               |         | CLPOL  | CLMOD  | FLTSRC<4:0> |       |              |       |            | FLTPOL | FLTMOD<1:0> |        | 00F8       |      |
| PDC2      | 0C46  | PDC2<15:0>   |            |               |        |               |         |        |        |             |       |              |       |            |        |             |        |            | 0000 |
| PHASE2    | 0C48  | PHASE2<15:0> |            |               |        |               |         |        |        |             |       |              |       |            |        |             |        |            | 0000 |
| DTR2      | 0C4A  | —            | —          | DTR2<13:0>    |        |               |         |        |        |             |       |              |       |            |        |             |        | 0000       |      |
| ALTDTR2   | 0C4C  | —            | —          | ALTDTR2<13:0> |        |               |         |        |        |             |       |              |       |            |        |             |        | 0000       |      |
| TRIG2     | 0C52  | TRGCMP<15:0> |            |               |        |               |         |        |        |             |       |              |       |            |        |             |        |            | 0000 |
| TRGCON2   | 0C54  | TRGDIV<3:0>  |            |               |        | —             | —       | —      | —      | —           | —     | TRGSTRT<5:0> |       |            |        |             |        |            | 0000 |
| LEBCON2   | 0C5A  | PHR          | PHF        | PLR           | PLF    | FLTLEBEN      | CLLEBEN | —      | —      | —           | —     | BCH          | BCL   | BPHH       | BPHL   | BPLH        | BPLL   | 0000       |      |
| LEBDLY2   | 0C5C  | —            | —          | —             | —      | LEB<11:0>     |         |        |        |             |       |              |       |            |        |             |        | 0000       |      |
| AUXCON2   | 0C5E  | —            | —          | —             | —      | BLANKSEL<3:0> |         |        |        | —           | —     | CHOPSEL<3:0> |       |            |        | CHOPHEN     | CHOPLN | 0000       |      |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**TABLE 4-15: PWM GENERATOR 3 REGISTER MAP FOR dsPIC33EPXXXMC20X/50X AND PIC24EPXXXMC20X DEVICES ONLY**

| File Name | Addr. | Bit 15       | Bit 14     | Bit 13        | Bit 12 | Bit 11        | Bit 10  | Bit 9  | Bit 8  | Bit 7       | Bit 6 | Bit 5        | Bit 4 | Bit 3      | Bit 2  | Bit 1       | Bit 0   | All Resets |      |
|-----------|-------|--------------|------------|---------------|--------|---------------|---------|--------|--------|-------------|-------|--------------|-------|------------|--------|-------------|---------|------------|------|
| PWMCON3   | 0C60  | FLTSTAT      | CLSTAT     | TRGSTAT       | FLTIE  | CLIE          | TRGIE   | ITB    | MDCS   | DTC<1:0>    |       | DTCP         | —     | MTBS       | CAM    | XPRES       | IUE     | 0000       |      |
| IOCON3    | 0C62  | PENH         | PENL       | POLH          | POLL   | PMOD<1:0>     |         | OVRENH | OVRENL | OVRDAT<1:0> |       | FLTDAT<1:0>  |       | CLDAT<1:0> |        | SWAP        | OSYNC   | C000       |      |
| FCLCON3   | 0C64  | —            | CLSRC<4:0> |               |        |               |         | CLPOL  | CLMOD  | FLTSRC<4:0> |       |              |       |            | FLTPOL | FLTMOD<1:0> |         | 00F8       |      |
| PDC3      | 0C66  | PDC3<15:0>   |            |               |        |               |         |        |        |             |       |              |       |            |        |             |         |            | 0000 |
| PHASE3    | 0C68  | PHASE3<15:0> |            |               |        |               |         |        |        |             |       |              |       |            |        |             |         |            | 0000 |
| DTR3      | 0C6A  | —            | —          | DTR3<13:0>    |        |               |         |        |        |             |       |              |       |            |        |             |         | 0000       |      |
| ALTDTR3   | 0C6C  | —            | —          | ALTDTR3<13:0> |        |               |         |        |        |             |       |              |       |            |        |             |         | 0000       |      |
| TRIG3     | 0C72  | TRGCMP<15:0> |            |               |        |               |         |        |        |             |       |              |       |            |        |             |         |            | 0000 |
| TRGCON3   | 0C74  | TRGDIV<3:0>  |            |               |        | —             | —       | —      | —      | —           | —     | TRGSTRT<5:0> |       |            |        |             |         |            | 0000 |
| LEBCON3   | 0C7A  | PHR          | PHF        | PLR           | PLF    | FLTLEBEN      | CLLEBEN | —      | —      | —           | —     | BCH          | BCL   | BPHH       | BPHL   | BPLH        | BPLL    | 0000       |      |
| LEBDLY3   | 0C7C  | —            | —          | —             | —      | LEB<11:0>     |         |        |        |             |       |              |       |            |        |             |         | 0000       |      |
| AUXCON3   | 0C7E  | —            | —          | —             | —      | BLANKSEL<3:0> |         |        |        | —           | —     | CHOPSEL<3:0> |       |            |        | CHOPHEN     | CHOPLEN | 0000       |      |

**Legend:** — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

#### 4.6.3 MODULO ADDRESSING APPLICABILITY

Modulo Addressing can be applied to the Effective Address (EA) calculation associated with any W register. Address boundaries check for addresses equal to:

- The upper boundary addresses for incrementing buffers
- The lower boundary addresses for decrementing buffers

It is important to realize that the address boundaries check for addresses less than, or greater than, the upper (for incrementing buffers) and lower (for decrementing buffers) boundary addresses (not just equal to). Address changes can, therefore, jump beyond boundaries and still be adjusted correctly.

**Note:** The modulo corrected Effective Address is written back to the register only when Pre-Modify or Post-Modify Addressing mode is used to compute the Effective Address. When an address offset (such as  $[W7 + W2]$ ) is used, Modulo Addressing correction is performed but the contents of the register remain unchanged.

#### 4.7 Bit-Reversed Addressing (dsPIC33EPXXXMC20X/50X and dsPIC33EPXXXGP50X Devices Only)

Bit-Reversed Addressing mode is intended to simplify data reordering for radix-2 FFT algorithms. It is supported by the X AGU for data writes only.

The modifier, which can be a constant value or register contents, is regarded as having its bit order reversed. The address source and destination are kept in normal order. Thus, the only operand requiring reversal is the modifier.

#### 4.7.1 BIT-REVERSED ADDRESSING IMPLEMENTATION

Bit-Reversed Addressing mode is enabled when all these conditions are met:

- BWMx bits (W register selection) in the MODCON register are any value other than '1111' (the stack cannot be accessed using Bit-Reversed Addressing)
- The BREN bit is set in the XBREV register
- The addressing mode used is Register Indirect with Pre-Increment or Post-Increment

If the length of a bit-reversed buffer is  $M = 2^N$  bytes, the last 'N' bits of the data buffer start address must be zeros.

XBREV<14:0> is the Bit-Reversed Addressing modifier, or 'pivot point', which is typically a constant. In the case of an FFT computation, its value is equal to half of the FFT data buffer size.

**Note:** All bit-reversed EA calculations assume word-sized data (LSb of every EA is always clear). The XBREVx value is scaled accordingly to generate compatible (byte) addresses.

When enabled, Bit-Reversed Addressing is executed only for Register Indirect with Pre-Increment or Post-Increment Addressing and word-sized data writes. It does not function for any other addressing mode or for byte-sized data and normal addresses are generated instead. When Bit-Reversed Addressing is active, the W Address Pointer is always added to the address modifier (XBREVx) and the offset associated with the Register Indirect Addressing mode is ignored. In addition, as word-sized data is a requirement, the LSb of the EA is ignored (and always clear).

**Note:** Modulo Addressing and Bit-Reversed Addressing can be enabled simultaneously using the same W register, but Bit-Reversed Addressing operation will always take precedence for data writes when enabled.

If Bit-Reversed Addressing has already been enabled by setting the BREN (XBREV<15>) bit, a write to the XBREV register should not be immediately followed by an indirect read operation using the W register that has been designated as the Bit-Reversed Pointer.

**REGISTER 7-1: SR: CPU STATUS REGISTER<sup>(1)</sup>**

|        |       |       |       |       |       |     |       |
|--------|-------|-------|-------|-------|-------|-----|-------|
| R/W-0  | R/W-0 | R/W-0 | R/W-0 | R/C-0 | R/C-0 | R-0 | R/W-0 |
| OA     | OB    | SA    | SB    | OAB   | SAB   | DA  | DC    |
| bit 15 |       |       |       |       |       |     | bit 8 |

|                         |                      |                      |     |       |       |       |       |
|-------------------------|----------------------|----------------------|-----|-------|-------|-------|-------|
| R/W-0 <sup>(3)</sup>    | R/W-0 <sup>(3)</sup> | R/W-0 <sup>(3)</sup> | R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| IPL<2:0> <sup>(2)</sup> |                      |                      | RA  | N     | OV    | Z     | C     |
| bit 7                   |                      |                      |     |       |       |       | bit 0 |

|                   |                      |
|-------------------|----------------------|
| <b>Legend:</b>    | C = Clearable bit    |
| R = Readable bit  | W = Writable bit     |
| -n = Value at POR | '1' = Bit is set     |
|                   | '0' = Bit is cleared |
|                   | x = Bit is unknown   |

bit 7-5 **IPL<2:0>: CPU Interrupt Priority Level Status bits<sup>(2,3)</sup>**

111 = CPU Interrupt Priority Level is 7 (15); user interrupts are disabled  
 110 = CPU Interrupt Priority Level is 6 (14)  
 101 = CPU Interrupt Priority Level is 5 (13)  
 100 = CPU Interrupt Priority Level is 4 (12)  
 011 = CPU Interrupt Priority Level is 3 (11)  
 010 = CPU Interrupt Priority Level is 2 (10)  
 001 = CPU Interrupt Priority Level is 1 (9)  
 000 = CPU Interrupt Priority Level is 0 (8)

**Note 1:** For complete register details, see Register 3-1.

- 2:** The IPL<2:0> bits are concatenated with the IPL<3> bit (CORCON<3>) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL, if IPL<3> = 1. User interrupts are disabled when IPL<3> = 1.
- 3:** The IPL<2:0> Status bits are read-only when the NSTDIS bit (INTCON1<15>) = 1.

**REGISTER 16-15: FCLCONx: PWMx FAULT CURRENT-LIMIT CONTROL REGISTER<sup>(1)</sup>**

- bit 7-3      **FLTSRC<4:0>**: Fault Control Signal Source Select for PWM Generator # bits
- 11111 = Fault 32 (**default**)
  - 11110 = Reserved
  - .
  - .
  - .
  - 01100 = Reserved
  - 01011 = Comparator 4
  - 01010 = Op Amp/Comparator 3
  - 01001 = Op Amp/Comparator 2
  - 01000 = Op Amp/Comparator 1
  - 00111 = Reserved
  - 00110 = Reserved
  - 00101 = Reserved
  - 00100 = Reserved
  - 00011 = Fault 4
  - 00010 = Fault 3
  - 00001 = Fault 2
  - 00000 = Fault 1
- bit 2      **FLTPOL**: Fault Polarity for PWM Generator # bit<sup>(2)</sup>
- 1 = The selected Fault source is active-low
  - 0 = The selected Fault source is active-high
- bit 1-0      **FLTMOD<1:0>**: Fault Mode for PWM Generator # bits
- 11 = Fault input is disabled
  - 10 = Reserved
  - 01 = The selected Fault source forces PWMxH, PWMxL pins to FLTDAT values (cycle)
  - 00 = The selected Fault source forces PWMxH, PWMxL pins to FLTDAT values (latched condition)

- Note 1:** If the PWMLOCK Configuration bit (FOSCSEL<6>) is a '1', the IOCONx register can only be written after the unlock sequence has been executed.
- 2:** These bits should be changed only when PTEN = 0. Changing the clock selection during operation will yield unpredictable results.

**REGISTER 17-4: POS1CNTH: POSITION COUNTER 1 HIGH WORD REGISTER**

|               |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0         | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| POSCNT<31:24> |       |       |       |       |       |       |       |
| bit 15        |       |       |       | bit 8 |       |       |       |

|               |       |       |       |       |       |       |       |
|---------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0         | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| POSCNT<23:16> |       |       |       |       |       |       |       |
| bit 7         |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **POSCNT<31:16>**: High Word Used to Form 32-Bit Position Counter Register (POS1CNT) bits

**REGISTER 17-5: POS1CNTL: POSITION COUNTER 1 LOW WORD REGISTER**

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| POSCNT<15:8> |       |       |       |       |       |       |       |
| bit 15       |       |       |       | bit 8 |       |       |       |

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| POSCNT<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **POSCNT<15:0>**: Low Word Used to Form 32-Bit Position Counter Register (POS1CNT) bits

**REGISTER 17-6: POS1HLD: POSITION COUNTER 1 HOLD REGISTER**

|              |       |       |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0        | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| POSHLD<15:8> |       |       |       |       |       |       |       |
| bit 15       |       |       |       | bit 8 |       |       |       |

|             |       |       |       |       |       |       |       |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| R/W-0       | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| POSHLD<7:0> |       |       |       |       |       |       |       |
| bit 7       |       |       |       | bit 0 |       |       |       |

**Legend:**

R = Readable bit      W = Writable bit      U = Unimplemented bit, read as '0'  
 -n = Value at POR      '1' = Bit is set      '0' = Bit is cleared      x = Bit is unknown

bit 15-0      **POSHLD<15:0>**: Hold Register for Reading and Writing POS1CNTH bits

**REGISTER 21-2: CxCTRL2: ECANx CONTROL REGISTER 2**

|        |     |     |     |     |     |     |       |
|--------|-----|-----|-----|-----|-----|-----|-------|
| U-0    | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0   |
| —      | —   | —   | —   | —   | —   | —   | —     |
| bit 15 |     |     |     |     |     |     | bit 8 |

|       |     |     |        |        |        |        |        |
|-------|-----|-----|--------|--------|--------|--------|--------|
| U-0   | U-0 | U-0 | R-0    | R-0    | R-0    | R-0    | R-0    |
| —     | —   | —   | DNCNT4 | DNCNT3 | DNCNT2 | DNCNT1 | DNCNT0 |
| bit 7 |     |     |        |        |        |        | bit 0  |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 15-5      **Unimplemented:** Read as '0'bit 4-0      **DNCNT<4:0>:** DeviceNet™ Filter Bit Number bits

10010 - 11111 = Invalid selection

10001 = Compares up to Data Byte 3, bit 6 with EID&lt;17&gt;

•

•

•

00001 = Compares up to Data Byte 1, bit 7 with EID&lt;0&gt;

00000 = Does not compare data bytes

**REGISTER 21-20: CxRXMnSID: ECANx ACCEPTANCE FILTER MASK n STANDARD IDENTIFIER REGISTER (n = 0-2)**

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| SID10  | SID9  | SID8  | SID7  | SID6  | SID5  | SID4  | SID3  |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |     |       |     |       |       |
|-------|-------|-------|-----|-------|-----|-------|-------|
| R/W-x | R/W-x | R/W-x | U-0 | R/W-x | U-0 | R/W-x | R/W-x |
| SID2  | SID1  | SID0  | —   | MIDE  | —   | EID17 | EID16 |
| bit 7 |       |       |     |       |     | bit 0 |       |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 15-5      **SID<10:0>**: Standard Identifier bits  
1 = Includes bit, SIDx, in filter comparison  
0 = SIDx bit is a don't care in filter comparison
- bit 4      **Unimplemented**: Read as '0'
- bit 3      **MIDE**: Identifier Receive Mode bit  
1 = Matches only message types (standard or extended address) that correspond to EXIDE bit in the filter  
0 = Matches either standard or extended address message if filters match (i.e., if (Filter SID) = (Message SID) or if (Filter SID/EID) = (Message SID/EID))
- bit 2      **Unimplemented**: Read as '0'
- bit 1-0      **EID<17:16>**: Extended Identifier bits  
1 = Includes bit, EIDx, in filter comparison  
0 = EIDx bit is a don't care in filter comparison

**REGISTER 21-21: CxRXMnEID: ECANx ACCEPTANCE FILTER MASK n EXTENDED IDENTIFIER REGISTER (n = 0-2)**

|        |       |       |       |       |       |       |       |
|--------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x  | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID15  | EID14 | EID13 | EID12 | EID11 | EID10 | EID9  | EID8  |
| bit 15 |       |       |       |       |       | bit 8 |       |

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
| EID7  | EID6  | EID5  | EID4  | EID3  | EID2  | EID1  | EID0  |
| bit 7 |       |       |       |       |       | bit 0 |       |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
-n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 15-0      **EID<15:0>**: Extended Identifier bits  
1 = Includes bit, EIDx, in filter comparison  
0 = EIDx bit is a don't care in filter comparison

**REGISTER 22-2: CTMUCON2: CTMU CONTROL REGISTER 2**

|         |         |          |          |          |          |          |          |
|---------|---------|----------|----------|----------|----------|----------|----------|
| R/W-0   | R/W-0   | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    |
| EDG1MOD | EDG1POL | EDG1SEL3 | EDG1SEL2 | EDG1SEL1 | EDG1SEL0 | EDG2STAT | EDG1STAT |
| bit 15  |         |          |          |          |          |          | bit 8    |

|         |         |          |          |          |          |     |       |
|---------|---------|----------|----------|----------|----------|-----|-------|
| R/W-0   | R/W-0   | R/W-0    | R/W-0    | R/W-0    | R/W-0    | U-0 | U-0   |
| EDG2MOD | EDG2POL | EDG2SEL3 | EDG2SEL2 | EDG2SEL1 | EDG2SEL0 | —   | —     |
| bit 7   |         |          |          |          |          |     | bit 0 |

**Legend:**

R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 -n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

- bit 15            **EDG1MOD:** Edge 1 Edge Sampling Mode Selection bit  
                   1 = Edge 1 is edge-sensitive  
                   0 = Edge 1 is level-sensitive
- bit 14            **EDG1POL:** Edge 1 Polarity Select bit  
                   1 = Edge 1 is programmed for a positive edge response  
                   0 = Edge 1 is programmed for a negative edge response
- bit 13-10        **EDG1SEL<3:0>:** Edge 1 Source Select bits  
                   1xxx = Reserved  
                   01xx = Reserved  
                   0011 = CTED1 pin  
                   0010 = CTED2 pin  
                   0001 = OC1 module  
                   0000 = Timer1 module
- bit 9            **EDG2STAT:** Edge 2 Status bit  
                   Indicates the status of Edge 2 and can be written to control the edge source.  
                   1 = Edge 2 has occurred  
                   0 = Edge 2 has not occurred
- bit 8            **EDG1STAT:** Edge 1 Status bit  
                   Indicates the status of Edge 1 and can be written to control the edge source.  
                   1 = Edge 1 has occurred  
                   0 = Edge 1 has not occurred
- bit 7            **EDG2MOD:** Edge 2 Edge Sampling Mode Selection bit  
                   1 = Edge 2 is edge-sensitive  
                   0 = Edge 2 is level-sensitive
- bit 6            **EDG2POL:** Edge 2 Polarity Select bit  
                   1 = Edge 2 is programmed for a positive edge response  
                   0 = Edge 2 is programmed for a negative edge response
- bit 5-2        **EDG2SEL<3:0>:** Edge 2 Source Select bits  
                   1111 = Reserved  
                   01xx = Reserved  
                   0100 = CMP1 module  
                   0011 = CTED2 pin  
                   0010 = CTED1 pin  
                   0001 = OC1 module  
                   0000 = IC1 module
- bit 1-0        **Unimplemented:** Read as '0'

TABLE 30-7: DC CHARACTERISTICS: IDLE CURRENT (I<sub>IDLE</sub>)

| DC CHARACTERISTICS                 |      |      | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature    -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |            |      |         |
|------------------------------------|------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------|---------|
| Parameter No.                      | Typ. | Max. | Units                                                                                                                                                                      | Conditions |      |         |
| Idle Current (IDLE) <sup>(1)</sup> |      |      |                                                                                                                                                                            |            |      |         |
| DC40d                              | 3    | 8    | mA                                                                                                                                                                         | -40°C      | 3.3V | 10 MIPS |
| DC40a                              | 3    | 8    | mA                                                                                                                                                                         | +25°C      |      |         |
| DC40b                              | 3    | 8    | mA                                                                                                                                                                         | +85°C      |      |         |
| DC40c                              | 3    | 8    | mA                                                                                                                                                                         | +125°C     |      |         |
| DC42d                              | 6    | 12   | mA                                                                                                                                                                         | -40°C      | 3.3V | 20 MIPS |
| DC42a                              | 6    | 12   | mA                                                                                                                                                                         | +25°C      |      |         |
| DC42b                              | 6    | 12   | mA                                                                                                                                                                         | +85°C      |      |         |
| DC42c                              | 6    | 12   | mA                                                                                                                                                                         | +125°C     |      |         |
| DC44d                              | 11   | 18   | mA                                                                                                                                                                         | -40°C      | 3.3V | 40 MIPS |
| DC44a                              | 11   | 18   | mA                                                                                                                                                                         | +25°C      |      |         |
| DC44b                              | 11   | 18   | mA                                                                                                                                                                         | +85°C      |      |         |
| DC44c                              | 11   | 18   | mA                                                                                                                                                                         | +125°C     |      |         |
| DC45d                              | 17   | 27   | mA                                                                                                                                                                         | -40°C      | 3.3V | 60 MIPS |
| DC45a                              | 17   | 27   | mA                                                                                                                                                                         | +25°C      |      |         |
| DC45b                              | 17   | 27   | mA                                                                                                                                                                         | +85°C      |      |         |
| DC45c                              | 17   | 27   | mA                                                                                                                                                                         | +125°C     |      |         |
| DC46d                              | 20   | 35   | mA                                                                                                                                                                         | -40°C      | 3.3V | 70 MIPS |
| DC46a                              | 20   | 35   | mA                                                                                                                                                                         | +25°C      |      |         |
| DC46b                              | 20   | 35   | mA                                                                                                                                                                         | +85°C      |      |         |

**Note 1:** Base Idle current (I<sub>IDLE</sub>) is measured as follows:

- CPU core is off, oscillator is configured in EC mode and external clock is active; OSC1 is driven with external square wave from rail-to-rail (EC clock overshoot/undershoot < 250 mV required)
- CLKO is configured as an I/O input pin in the Configuration Word
- All I/O pins are configured as inputs and pulled to V<sub>SS</sub>
- $\overline{\text{MCLR}} = \text{V}_{\text{DD}}$ , WDT and FSCM are disabled
- No peripheral modules are operating; however, every peripheral is being clocked (all PMD<sub>x</sub> bits are zeroed)
- The NVMSIDL bit (NVMCON<12>) = 1 (i.e., Flash regulator is set to standby while the device is in Idle mode)
- The VREGSF bit (RCON<11>) = 0 (i.e., Flash regulator is set to standby while the device is in Sleep mode)
- JTAG is disabled

FIGURE 30-3: I/O TIMING CHARACTERISTICS

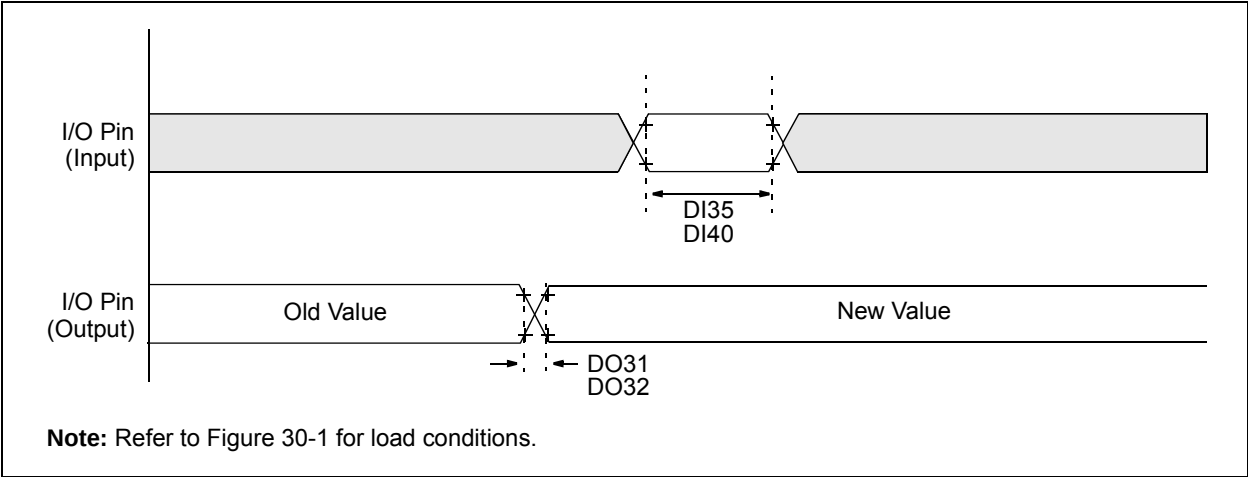


TABLE 30-21: I/O TIMING REQUIREMENTS

| AC CHARACTERISTICS |        |                                   |      | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for Industrial<br>$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for Extended |      |       |            |
|--------------------|--------|-----------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|------------|
| Param No.          | Symbol | Characteristic                    | Min. | Typ. <sup>(1)</sup>                                                                                                                                                                                                                               | Max. | Units | Conditions |
| DO31               | TioR   | Port Output Rise Time             | —    | 5                                                                                                                                                                                                                                                 | 10   | ns    |            |
| DO32               | TioF   | Port Output Fall Time             | —    | 5                                                                                                                                                                                                                                                 | 10   | ns    |            |
| DI35               | TINP   | INTx Pin High or Low Time (input) | 20   | —                                                                                                                                                                                                                                                 | —    | ns    |            |
| DI40               | TRBP   | CNx High or Low Time (input)      | 2    | —                                                                                                                                                                                                                                                 | —    | Tcy   |            |

Note 1: Data in “Typical” column is at 3.3V, +25°C unless otherwise stated.

FIGURE 30-4: BOR AND MASTER CLEAR RESET TIMING CHARACTERISTICS

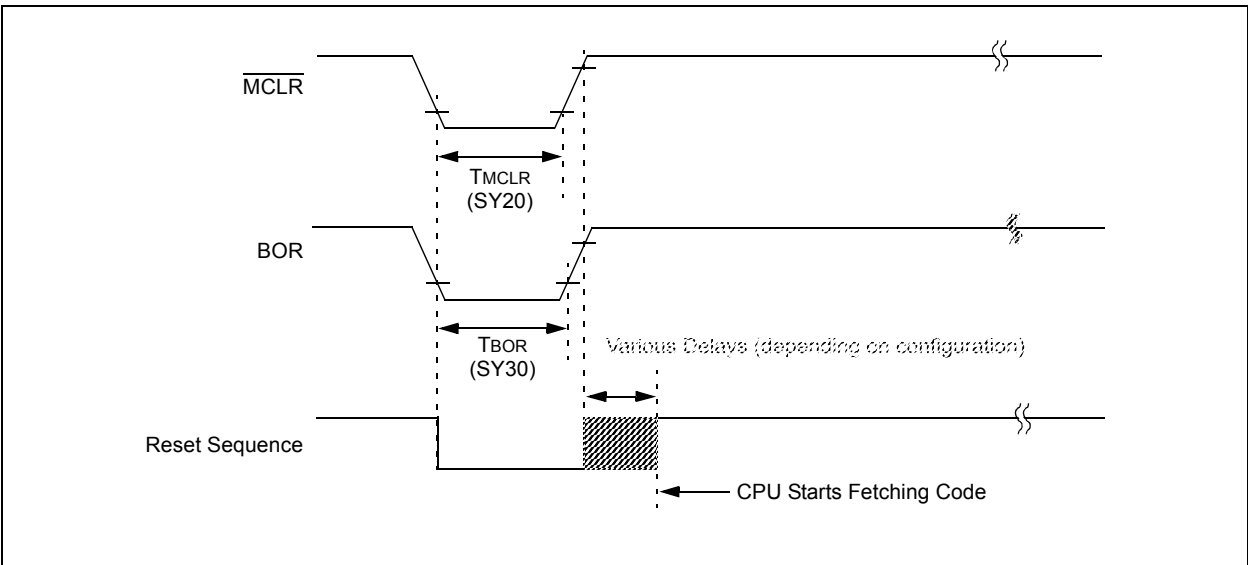


TABLE 30-50: I2Cx BUS DATA TIMING REQUIREMENTS (SLAVE MODE)

| AC CHARACTERISTICS |         |                                                 |                           | Standard Operating Conditions: 3.0V to 3.6V<br>(unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended |      |       |                                                               |
|--------------------|---------|-------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|---------------------------------------------------------------|
| Param. No.         | Symbol  | Characteristic <sup>(3)</sup>                   |                           | Min.                                                                                                                                                                    | Max. | Units | Conditions                                                    |
| IS10               | TLO:SCL | Clock Low Time                                  | 100 kHz mode              | 4.7                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 400 kHz mode              | 1.3                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.5                                                                                                                                                                     | —    | μs    |                                                               |
| IS11               | THI:SCL | Clock High Time                                 | 100 kHz mode              | 4.0                                                                                                                                                                     | —    | μs    | Device must operate at a minimum of 1.5 MHz                   |
|                    |         |                                                 | 400 kHz mode              | 0.6                                                                                                                                                                     | —    | μs    | Device must operate at a minimum of 10 MHz                    |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.5                                                                                                                                                                     | —    | μs    |                                                               |
| IS20               | TF:SCL  | SDA <sub>x</sub> and SCL <sub>x</sub> Fall Time | 100 kHz mode              | —                                                                                                                                                                       | 300  | ns    | Cb is specified to be from 10 to 400 pF                       |
|                    |         |                                                 | 400 kHz mode              | 20 + 0.1 Cb                                                                                                                                                             | 300  | ns    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | —                                                                                                                                                                       | 100  | ns    |                                                               |
| IS21               | TR:SCL  | SDA <sub>x</sub> and SCL <sub>x</sub> Rise Time | 100 kHz mode              | —                                                                                                                                                                       | 1000 | ns    | Cb is specified to be from 10 to 400 pF                       |
|                    |         |                                                 | 400 kHz mode              | 20 + 0.1 Cb                                                                                                                                                             | 300  | ns    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | —                                                                                                                                                                       | 300  | ns    |                                                               |
| IS25               | TSU:DAT | Data Input Setup Time                           | 100 kHz mode              | 250                                                                                                                                                                     | —    | ns    |                                                               |
|                    |         |                                                 | 400 kHz mode              | 100                                                                                                                                                                     | —    | ns    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 100                                                                                                                                                                     | —    | ns    |                                                               |
| IS26               | THD:DAT | Data Input Hold Time                            | 100 kHz mode              | 0                                                                                                                                                                       | —    | μs    |                                                               |
|                    |         |                                                 | 400 kHz mode              | 0                                                                                                                                                                       | 0.9  | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0                                                                                                                                                                       | 0.3  | μs    |                                                               |
| IS30               | TSU:STA | Start Condition Setup Time                      | 100 kHz mode              | 4.7                                                                                                                                                                     | —    | μs    | Only relevant for Repeated Start condition                    |
|                    |         |                                                 | 400 kHz mode              | 0.6                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.25                                                                                                                                                                    | —    | μs    |                                                               |
| IS31               | THD:STA | Start Condition Hold Time                       | 100 kHz mode              | 4.0                                                                                                                                                                     | —    | μs    | After this period, the first clock pulse is generated         |
|                    |         |                                                 | 400 kHz mode              | 0.6                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.25                                                                                                                                                                    | —    | μs    |                                                               |
| IS33               | TSU:STO | Stop Condition Setup Time                       | 100 kHz mode              | 4.7                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 400 kHz mode              | 0.6                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.6                                                                                                                                                                     | —    | μs    |                                                               |
| IS34               | THD:STO | Stop Condition Hold Time                        | 100 kHz mode              | 4                                                                                                                                                                       | —    | μs    |                                                               |
|                    |         |                                                 | 400 kHz mode              | 0.6                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.25                                                                                                                                                                    | —    | μs    |                                                               |
| IS40               | TAA:SCL | Output Valid From Clock                         | 100 kHz mode              | 0                                                                                                                                                                       | 3500 | ns    |                                                               |
|                    |         |                                                 | 400 kHz mode              | 0                                                                                                                                                                       | 1000 | ns    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0                                                                                                                                                                       | 350  | ns    |                                                               |
| IS45               | TBF:SDA | Bus Free Time                                   | 100 kHz mode              | 4.7                                                                                                                                                                     | —    | μs    | Time the bus must be free before a new transmission can start |
|                    |         |                                                 | 400 kHz mode              | 1.3                                                                                                                                                                     | —    | μs    |                                                               |
|                    |         |                                                 | 1 MHz mode <sup>(1)</sup> | 0.5                                                                                                                                                                     | —    | μs    |                                                               |
| IS50               | Cb      | Bus Capacitive Loading                          |                           | —                                                                                                                                                                       | 400  | pF    |                                                               |
| IS51               | TPGD    | Pulse Gobbler Delay                             |                           | 65                                                                                                                                                                      | 390  | ns    | (Note 2)                                                      |


**Note 1:** Maximum pin capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

**2:** Typical value for this parameter is 130 ns.

**3:** These parameters are characterized, but not tested in manufacturing.

44-Lead Plastic Quad Flat, No Lead Package (ML) - 8x8 mm Body [QFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

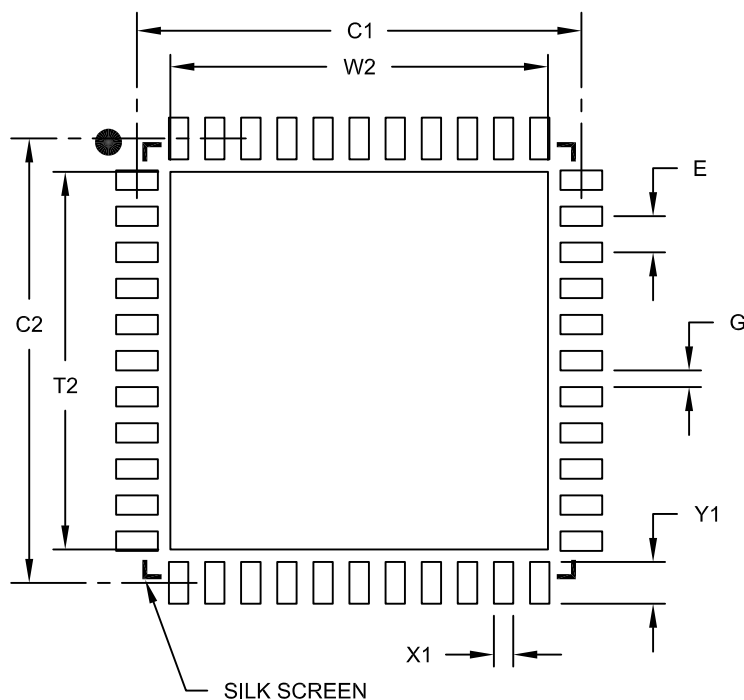

RECOMMENDED LAND PATTERN

| Units                      |    | MILLIMETERS |      |      |
|----------------------------|----|-------------|------|------|
| Dimension Limits           |    | MIN         | NOM  | MAX  |
| Contact Pitch              | E  | 0.65 BSC    |      |      |
| Optional Center Pad Width  | W2 |             |      | 6.60 |
| Optional Center Pad Length | T2 |             |      | 6.60 |
| Contact Pad Spacing        | C1 |             | 8.00 |      |
| Contact Pad Spacing        | C2 |             | 8.00 |      |
| Contact Pad Width (X44)    | X1 |             |      | 0.35 |
| Contact Pad Length (X44)   | Y1 |             |      | 0.85 |
| Distance Between Pads      | G  | 0.25        |      |      |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2103B

|                                                                                       |          |                                                               |          |
|---------------------------------------------------------------------------------------|----------|---------------------------------------------------------------|----------|
| Remappable Input for U1RX .....                                                       | 176      | Memory Map for PIC24EP256GP/MC20X/50X<br>Devices .....        | 60       |
| Reset System .....                                                                    | 123      | Memory Map for PIC24EP32GP/MC20X/50X<br>Devices .....         | 57       |
| Shared Port Structure .....                                                           | 173      | Memory Map for PIC24EP512GP/MC20X/50X<br>Devices .....        | 61       |
| Single-Phase Synchronous Buck Converter .....                                         | 33       | Memory Map for PIC24EP64GP/MC20X/50X<br>Devices .....         | 58       |
| SPIx Module .....                                                                     | 266      | Near Data Space .....                                         | 51       |
| Suggested Oscillator Circuit Placement .....                                          | 31       | Organization, Alignment .....                                 | 51       |
| Type B Timer (Timer2 and Timer4) .....                                                | 208      | SFR Space .....                                               | 51       |
| Type B/Type C Timer Pair (32-Bit Timer) .....                                         | 209      | Width .....                                                   | 51       |
| Type C Timer (Timer3 and Timer5) .....                                                | 208      | Data Memory<br>Arbitration and Bus Master Priority .....      | 110      |
| UARTx Module .....                                                                    | 281      | Data Space<br>Extended X .....                                | 109      |
| User-Programmable Blanking Function .....                                             | 357      | Paged Memory Scheme .....                                     | 105      |
| Watchdog Timer (WDT) .....                                                            | 385      | DC and AC Characteristics<br>Graphs .....                     | 475      |
| Brown-out Reset (BOR) .....                                                           | 384      | DC Characteristics<br>BOR .....                               | 411      |
| <b>C</b>                                                                              |          | CTMU Current Source Requirements .....                        | 458      |
| C Compilers<br>MPLAB XC Compilers .....                                               | 398      | Doze Current (IDOE) .....                                     | 407, 469 |
| Charge Time Measurement Unit. See CTMU.                                               |          | High Temperature .....                                        | 468      |
| Code Examples<br>IC1 Connection to QE11 Input on<br>Pin 43 of dsPIC33EPXXXMC206 ..... | 176      | I/O Pin Input Specifications .....                            | 408      |
| Port Write/Read .....                                                                 | 174      | I/O Pin Output Specifications .....                           | 411, 470 |
| PWMx Write-Protected Register<br>Unlock Sequence .....                                | 226      | Idle Current (IDLE) .....                                     | 405, 469 |
| PWRSV Instruction Syntax .....                                                        | 163      | Op Amp/Comparator Requirements .....                          | 455      |
| Code Protection .....                                                                 | 379, 386 | Op Amp/Comparator Voltage Reference<br>Requirements .....     | 457      |
| CodeGuard Security .....                                                              | 379, 386 | Operating Current (IDD) .....                                 | 404, 469 |
| Configuration Bits .....                                                              | 379      | Operating MIPS vs. Voltage .....                              | 402, 468 |
| Description .....                                                                     | 381      | Power-Down Current (IPD) .....                                | 406, 469 |
| Configuration Byte Register Map .....                                                 | 380      | Program Memory .....                                          | 412      |
| Configuring Analog and Digital Port Pins .....                                        | 174      | Temperature and Voltage .....                                 | 468      |
| CPU<br>Addressing Modes .....                                                         | 35       | Temperature and Voltage Specifications .....                  | 403      |
| Clocking System Options .....                                                         | 154      | Thermal Operating Conditions .....                            | 468      |
| Fast RC (FRC) Oscillator .....                                                        | 154      | Watchdog Timer Delta Current .....                            | 407      |
| FRC Oscillator with PLL .....                                                         | 154      | Demo/Development Boards, Evaluation and<br>Starter Kits ..... | 400      |
| FRC Oscillator with Postscaler .....                                                  | 154      | Development Support .....                                     | 397      |
| Low-Power RC (LPRC) Oscillator .....                                                  | 154      | Third-Party Tools .....                                       | 400      |
| Primary (XT, HS, EC) Oscillator .....                                                 | 154      | DMA Controller<br>Channel to Peripheral Associations .....    | 140      |
| Primary Oscillator with PLL .....                                                     | 154      | Control Registers .....                                       | 141      |
| Control Registers .....                                                               | 40       | DMAxCNT .....                                                 | 141      |
| Data Space Addressing .....                                                           | 35       | DMAxCON .....                                                 | 141      |
| Instruction Set .....                                                                 | 35       | DMAxPAD .....                                                 | 141      |
| Resources .....                                                                       | 39       | DMAxREQ .....                                                 | 141      |
| CTMU<br>Control Registers .....                                                       | 317      | DMAxSTA .....                                                 | 141      |
| Resources .....                                                                       | 316      | DMAxSTB .....                                                 | 141      |
| Customer Change Notification Service .....                                            | 524      | Resources .....                                               | 141      |
| Customer Notification Service .....                                                   | 524      | Supported Peripherals .....                                   | 139      |
| Customer Support .....                                                                | 524      | Doze Mode .....                                               | 165      |
| <b>D</b>                                                                              |          | DSP Engine .....                                              | 44       |
| Data Address Space .....                                                              | 51       | <b>E</b>                                                      |          |
| Memory Map for dsPIC33EP128MC20X/50X,<br>dsPIC33EP128GP50X Devices .....              | 54       | ECAN Message Buffers<br>Word 0 .....                          | 310      |
| Memory Map for dsPIC33EP256MC20X/50X,<br>dsPIC33EP256GP50X Devices .....              | 55       | Word 1 .....                                                  | 310      |
| Memory Map for dsPIC33EP32MC20X/50X,<br>dsPIC33EP32GP50X Devices .....                | 52       | Word 2 .....                                                  | 311      |
| Memory Map for dsPIC33EP512MC20X/50X,<br>dsPIC33EP512GP50X Devices .....              | 56       | Word 3 .....                                                  | 311      |
| Memory Map for dsPIC33EP64MC20X/50X,<br>dsPIC33EP64GP50X Devices .....                | 53       | Word 4 .....                                                  | 312      |
| Memory Map for PIC24EP128GP/MC20X/50X<br>Devices .....                                | 59       | Word 5 .....                                                  | 312      |
|                                                                                       |          | Word 6 .....                                                  | 313      |
|                                                                                       |          | Word 7 .....                                                  | 313      |