



Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                      |
| Core Processor             | ARM® Cortex®-M4                                                                                                                                             |
| Core Size                  | 32-Bit Single-Core                                                                                                                                          |
| Speed                      | 100MHz                                                                                                                                                      |
| Connectivity               | CANbus, EBI/EMI, I <sup>2</sup> C, IrDA, SD, SPI, UART/USART, USB, USB OTG                                                                                  |
| Peripherals                | DMA, I <sup>2</sup> S, LVD, POR, PWM, WDT                                                                                                                   |
| Number of I/O              | 52                                                                                                                                                          |
| Program Memory Size        | 256KB (256K x 8)                                                                                                                                            |
| Program Memory Type        | FLASH                                                                                                                                                       |
| EEPROM Size                | 4K x 8                                                                                                                                                      |
| RAM Size                   | 64K x 8                                                                                                                                                     |
| Voltage - Supply (Vcc/Vdd) | 1.71V ~ 3.6V                                                                                                                                                |
| Data Converters            | A/D 27x16b; D/A 1x12b                                                                                                                                       |
| Oscillator Type            | Internal                                                                                                                                                    |
| Operating Temperature      | -40°C ~ 105°C (TA)                                                                                                                                          |
| Mounting Type              | Surface Mount                                                                                                                                               |
| Package / Case             | 80-LQFP                                                                                                                                                     |
| Supplier Device Package    | 80-FQFP (12x12)                                                                                                                                             |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/nxp-semiconductors/mk20dx256vlk10">https://www.e-xfl.com/product-detail/nxp-semiconductors/mk20dx256vlk10</a> |


### 3.8.1 Example 1

This is an example of an operating behavior that includes a typical value:

| Symbol   | Description                              | Min. | Typ. | Max. | Unit    |
|----------|------------------------------------------|------|------|------|---------|
| $I_{WP}$ | Digital I/O weak pullup/pulldown current | 10   | 70   | 130  | $\mu A$ |

### 3.8.2 Example 2

This is an example of a chart that shows typical values for various voltage and temperature conditions:

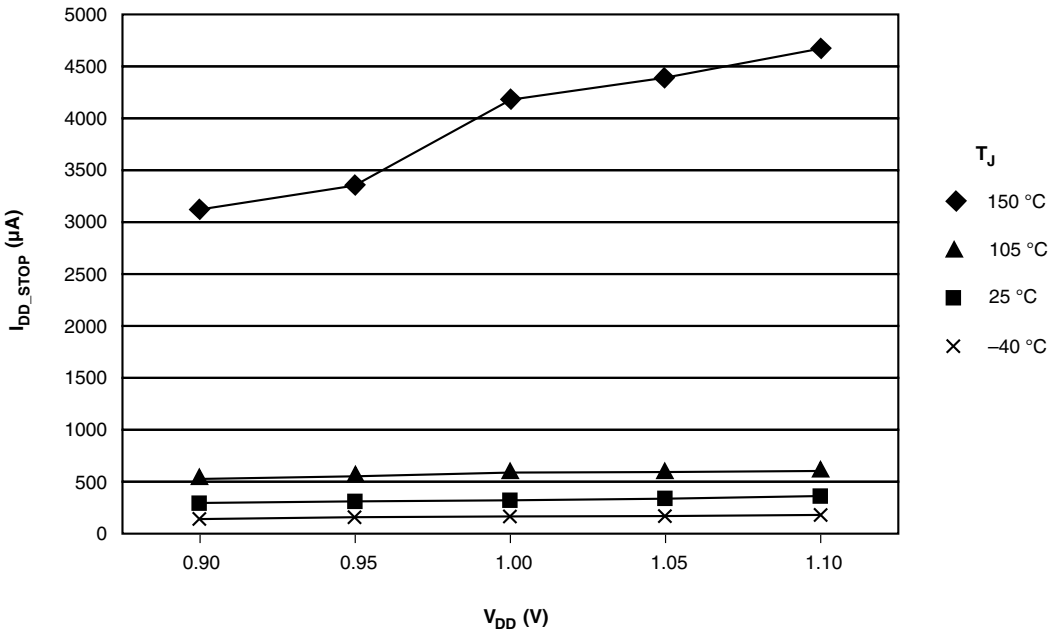

## 3.9 Typical value conditions

Typical values assume you meet the following conditions (or other conditions as specified):

| Symbol   | Description          | Value | Unit        |
|----------|----------------------|-------|-------------|
| $T_A$    | Ambient temperature  | 25    | $^{\circ}C$ |
| $V_{DD}$ | 3.3 V supply voltage | 3.3   | V           |

## 5.2 Nonswitching electrical specifications

### 5.2.1 Voltage and current operating requirements

Table 1. Voltage and current operating requirements

| Symbol             | Description                                                                                                                                                                                                                                                                              | Min.                                        | Max.                                        | Unit   | Notes |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------|--------|-------|
| $V_{DD}$           | Supply voltage                                                                                                                                                                                                                                                                           | 1.71                                        | 3.6                                         | V      |       |
| $V_{DDA}$          | Analog supply voltage                                                                                                                                                                                                                                                                    | 1.71                                        | 3.6                                         | V      |       |
| $V_{DD} - V_{DDA}$ | $V_{DD}$ -to- $V_{DDA}$ differential voltage                                                                                                                                                                                                                                             | -0.1                                        | 0.1                                         | V      |       |
| $V_{SS} - V_{SSA}$ | $V_{SS}$ -to- $V_{SSA}$ differential voltage                                                                                                                                                                                                                                             | -0.1                                        | 0.1                                         | V      |       |
| $V_{BAT}$          | RTC battery supply voltage                                                                                                                                                                                                                                                               | 1.71                                        | 3.6                                         | V      |       |
| $V_{IH}$           | Input high voltage <ul style="list-style-type: none"> <li><math>2.7\text{ V} \leq V_{DD} \leq 3.6\text{ V}</math></li> <li><math>1.7\text{ V} \leq V_{DD} \leq 2.7\text{ V}</math></li> </ul>                                                                                            | $0.7 \times V_{DD}$<br>$0.75 \times V_{DD}$ | —                                           | V<br>V |       |
| $V_{IL}$           | Input low voltage <ul style="list-style-type: none"> <li><math>2.7\text{ V} \leq V_{DD} \leq 3.6\text{ V}</math></li> <li><math>1.7\text{ V} \leq V_{DD} \leq 2.7\text{ V}</math></li> </ul>                                                                                             | —<br>—                                      | $0.35 \times V_{DD}$<br>$0.3 \times V_{DD}$ | V<br>V |       |
| $V_{HYS}$          | Input hysteresis                                                                                                                                                                                                                                                                         | $0.06 \times V_{DD}$                        | —                                           | V      |       |
| $I_{ICDIO}$        | Digital pin negative DC injection current — single pin <ul style="list-style-type: none"> <li><math>V_{IN} &lt; V_{SS}-0.3\text{V}</math></li> </ul>                                                                                                                                     | -5                                          | —                                           | mA     | 1     |
| $I_{ICAIO}$        | Analog <sup>2</sup> , EXTAL, and XTAL pin DC injection current — single pin <ul style="list-style-type: none"> <li><math>V_{IN} &lt; V_{SS}-0.3\text{V}</math> (Negative current injection)</li> <li><math>V_{IN} &gt; V_{DD}+0.3\text{V}</math> (Positive current injection)</li> </ul> | -5<br>—                                     | —<br>+5                                     | mA     | 3     |
| $I_{ICcont}$       | Contiguous pin DC injection current —regional limit, includes sum of negative injection currents or sum of positive injection currents of 16 contiguous pins <ul style="list-style-type: none"> <li>Negative current injection</li> <li>Positive current injection</li> </ul>            | -25<br>—                                    | —<br>+25                                    | mA     |       |
| $V_{ODPU}$         | Open drain pullup voltage level                                                                                                                                                                                                                                                          | $V_{DD}$                                    | $V_{DD}$                                    | V      | 4     |
| $V_{RAM}$          | $V_{DD}$ voltage required to retain RAM                                                                                                                                                                                                                                                  | 1.2                                         | —                                           | V      |       |
| $V_{RFVBAT}$       | $V_{BAT}$ voltage required to retain the VBAT register file                                                                                                                                                                                                                              | $V_{POR\_VBAT}$                             | —                                           | V      |       |

1. All 5 V tolerant digital I/O pins are internally clamped to  $V_{SS}$  through an ESD protection diode. There is no diode connection to  $V_{DD}$ . If  $V_{IN}$  is less than  $V_{DIO\_MIN}$ , a current limiting resistor is required. The negative DC injection current limiting resistor is calculated as  $R=(V_{DIO\_MIN}-V_{IN})/I_{ICDIO}$ .
2. Analog pins are defined as pins that do not have an associated general purpose I/O port function. Additionally, EXTAL and XTAL are analog pins.
3. All analog pins are internally clamped to  $V_{SS}$  and  $V_{DD}$  through ESD protection diodes. If  $V_{IN}$  is less than  $V_{AIO\_MIN}$  or greater than  $V_{AIO\_MAX}$ , a current limiting resistor is required. The negative DC injection current limiting resistor is calculated as  $R=(V_{AIO\_MIN}-V_{IN})/I_{ICAIO}$ . The positive injection current limiting resistor is calculated as  $R=(V_{IN}-V_{AIO\_MAX})/I_{ICAIO}$ . Select the larger of these two calculated resistances if the pin is exposed to positive and negative injection currents.
4. Open drain outputs must be pulled to  $V_{DD}$ .

**Table 6. Power consumption operating behaviors (continued)**

| Symbol                | Description                                                                                                                                                 | Min.        | Typ.                 | Max.                | Unit           | Notes |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------|---------------------|----------------|-------|
| I <sub>DD_VLPR</sub>  | Very-low-power run mode current at 3.0 V — all peripheral clocks enabled                                                                                    | —           | 1.71                 | —                   | mA             | 7     |
| I <sub>DD_VLPW</sub>  | Very-low-power wait mode current at 3.0 V — all peripheral clocks disabled                                                                                  | —           | 0.77                 | —                   | mA             | 8     |
| I <sub>DD_STOP</sub>  | Stop mode current at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul>                           | —<br>—<br>— | 0.74<br>2.45<br>6.61 | 1.41<br>11.5<br>30  | mA<br>mA<br>mA |       |
| I <sub>DD_VLPS</sub>  | Very-low-power stop mode current at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul>            | —<br>—<br>— | 83<br>425<br>1280    | 435<br>2000<br>4000 | μA<br>μA<br>μA |       |
| I <sub>DD_LLS</sub>   | Low leakage stop mode current at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul>               | —<br>—<br>— | 4.58<br>30.6<br>137  | 19.9<br>105<br>500  | μA<br>μA<br>μA | 9     |
| I <sub>DD_VLLS3</sub> | Very low-leakage stop mode 3 current at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul>        | —<br>—<br>— | 3.0<br>18.6<br>84.9  | 23<br>43<br>230     | μA<br>μA<br>μA | 9     |
| I <sub>DD_VLLS2</sub> | Very low-leakage stop mode 2 current at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul>        | —<br>—<br>— | 2.2<br>9.3<br>41.4   | 5.4<br>35<br>128    | μA<br>μA<br>μA |       |
| I <sub>DD_VLLS1</sub> | Very low-leakage stop mode 1 current at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul>        | —<br>—<br>— | 2.1<br>7.6<br>33.5   | 9<br>28<br>95.5     | μA<br>μA<br>μA |       |
| I <sub>DD_VBAT</sub>  | Average current with RTC and 32kHz disabled at 3.0 V <ul style="list-style-type: none"> <li>• @ –40 to 25°C</li> <li>• @ 70°C</li> <li>• @ 105°C</li> </ul> | —<br>—<br>— | 0.19<br>0.49<br>2.2  | 0.22<br>0.64<br>3.2 | μA<br>μA<br>μA |       |

Table continues on the next page...

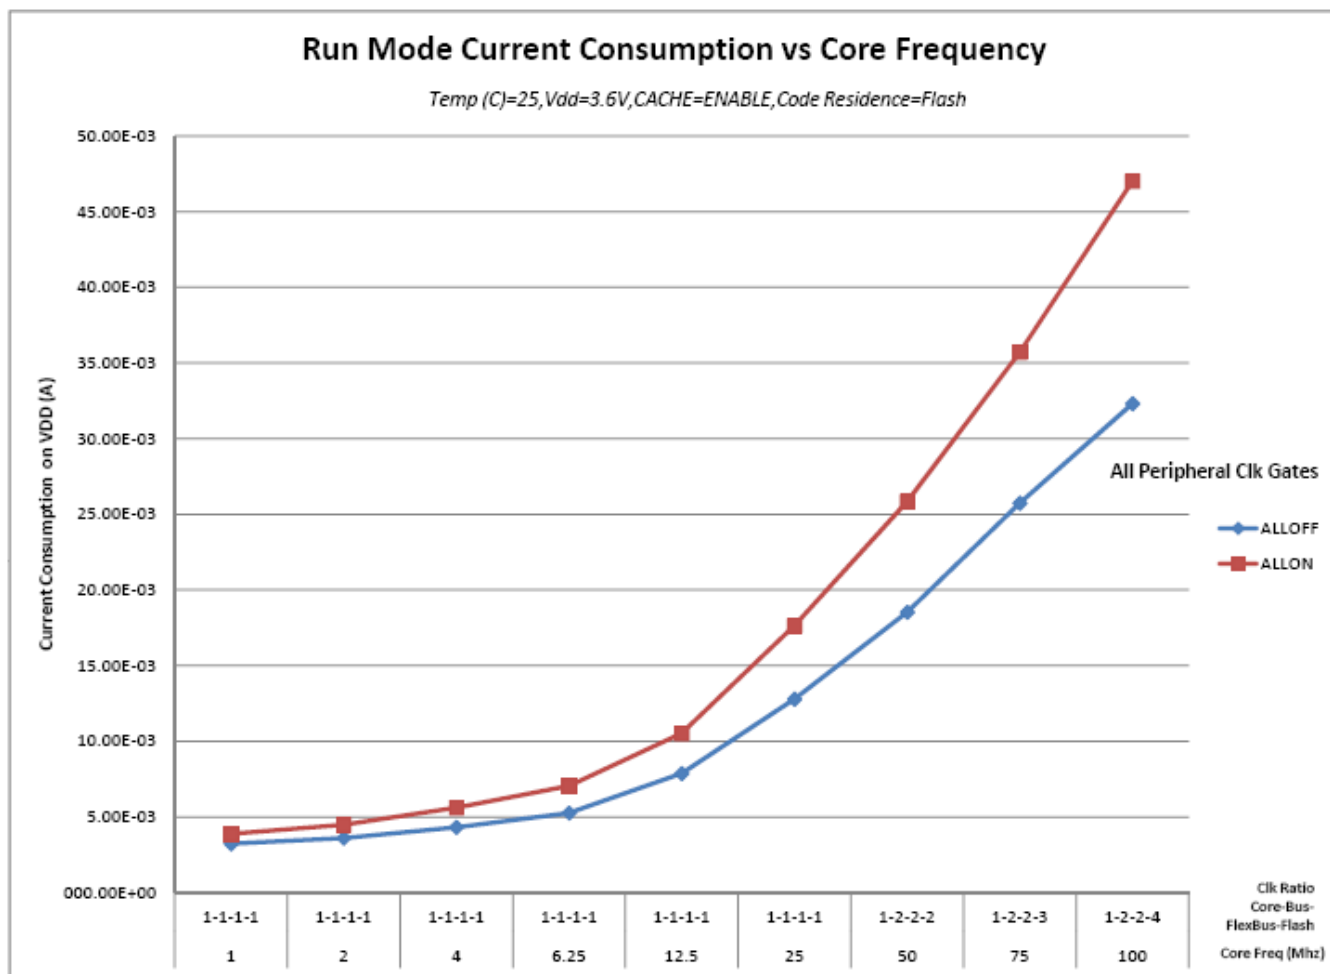


Figure 2. Run mode supply current vs. core frequency

## 5.2.6 EMC radiated emissions operating behaviors

Table 7. EMC radiated emissions operating behaviors for 144LQFP and 144MAPBGA

| Symbol              | Description                        | Frequency band (MHz) | 144LQFP | 144MAPBGA | Unit | Notes |
|---------------------|------------------------------------|----------------------|---------|-----------|------|-------|
| V <sub>RE1</sub>    | Radiated emissions voltage, band 1 | 0.15–50              | 23      | 12        | dBμV | 1, 2  |
| V <sub>RE2</sub>    | Radiated emissions voltage, band 2 | 50–150               | 27      | 24        | dBμV |       |
| V <sub>RE3</sub>    | Radiated emissions voltage, band 3 | 150–500              | 28      | 27        | dBμV |       |
| V <sub>RE4</sub>    | Radiated emissions voltage, band 4 | 500–1000             | 14      | 11        | dBμV |       |
| V <sub>RE_IEC</sub> | IEC level                          | 0.15–1000            | K       | K         | —    | 2, 3  |

1. Determined according to IEC Standard 61967-1, *Integrated Circuits - Measurement of Electromagnetic Emissions, 150 kHz to 1 GHz Part 1: General Conditions and Definitions* and IEC Standard 61967-2, *Integrated Circuits - Measurement of Electromagnetic Emissions, 150 kHz to 1 GHz Part 2: Measurement of Radiated Emissions—TEM Cell and Wideband TEM Cell Method*. Measurements were made while the microcontroller was running basic application code. The reported emission level is the value of the maximum measured emission, rounded up to the next whole number, from among the measured orientations in each frequency range.

## General

2.  $V_{DD} = 3.3\text{ V}$ ,  $T_A = 25\text{ }^{\circ}\text{C}$ ,  $f_{OSC} = 12\text{ MHz}$  (crystal),  $f_{SYS} = 96\text{ MHz}$ ,  $f_{BUS} = 48\text{ MHz}$
3. Specified according to Annex D of IEC Standard 61967-2, *Measurement of Radiated Emissions—TEM Cell and Wideband TEM Cell Method*

## 5.2.7 Designing with radiated emissions in mind

To find application notes that provide guidance on designing your system to minimize interference from radiated emissions:

1. Go to [www.freescale.com](http://www.freescale.com).
2. Perform a keyword search for “EMC design.”

## 5.2.8 Capacitance attributes

**Table 8. Capacitance attributes**

| Symbol      | Description                     | Min. | Max. | Unit |
|-------------|---------------------------------|------|------|------|
| $C_{IN\_A}$ | Input capacitance: analog pins  | —    | 7    | pF   |
| $C_{IN\_D}$ | Input capacitance: digital pins | —    | 7    | pF   |

## 5.3 Switching specifications

### 5.3.1 Device clock specifications

**Table 9. Device clock specifications**

| Symbol                 | Description                                            | Min. | Max. | Unit | Notes |
|------------------------|--------------------------------------------------------|------|------|------|-------|
| Normal run mode        |                                                        |      |      |      |       |
| $f_{SYS}$              | System and core clock                                  | —    | 100  | MHz  |       |
| $f_{SYS\_USB}$         | System and core clock when Full Speed USB in operation | 20   | —    | MHz  |       |
| $f_{BUS}$              | Bus clock                                              | —    | 50   | MHz  |       |
| FB_CLK                 | FlexBus clock                                          | —    | 50   | MHz  |       |
| $f_{FLASH}$            | Flash clock                                            | —    | 25   | MHz  |       |
| $f_{LPTMR}$            | LPTMR clock                                            | —    | 25   | MHz  |       |
| VLPR mode <sup>1</sup> |                                                        |      |      |      |       |
| $f_{SYS}$              | System and core clock                                  | —    | 4    | MHz  |       |
| $f_{BUS}$              | Bus clock                                              | —    | 4    | MHz  |       |
| FB_CLK                 | FlexBus clock                                          | —    | 4    | MHz  |       |
| $f_{FLASH}$            | Flash clock                                            | —    | 1    | MHz  |       |

Table continues on the next page...

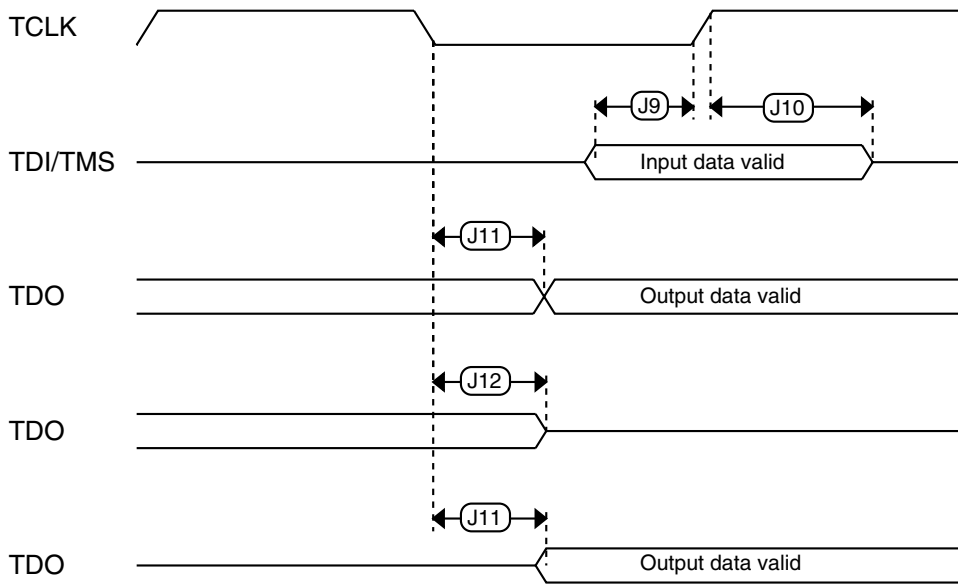


Figure 7. Test Access Port timing

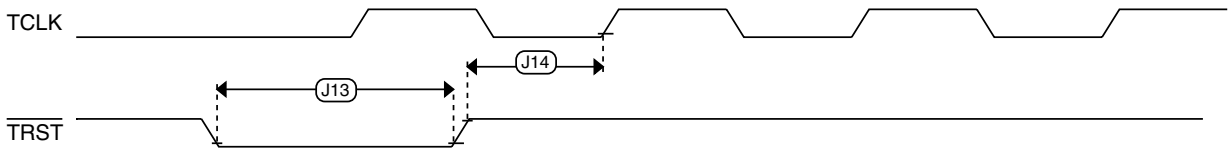


Figure 8.  $\overline{\text{TRST}}$  timing

## 6.2 System modules

There are no specifications necessary for the device's system modules.

## 6.3 Clock modules

## 6.6.1 ADC electrical specifications

The 16-bit accuracy specifications listed in [Table 27](#) and [Table 28](#) are achievable on the differential pins ADCx\_DP0, ADCx\_DM0, ADCx\_DP1, ADCx\_DM1, ADCx\_DP3, and ADCx\_DM3.

The ADCx\_DP2 and ADCx\_DM2 ADC inputs are connected to the PGA outputs and are not direct device pins. Accuracy specifications for these pins are defined in [Table 29](#) and [Table 30](#).

All other ADC channels meet the 13-bit differential/12-bit single-ended accuracy specifications.

### 6.6.1.1 16-bit ADC operating conditions

**Table 27. 16-bit ADC operating conditions**


| Symbol            | Description                    | Conditions                                                                                                | Min.                                   | Typ. <sup>1</sup> | Max.                                           | Unit | Notes             |
|-------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------|------------------------------------------------|------|-------------------|
| V <sub>DDA</sub>  | Supply voltage                 | Absolute                                                                                                  | 1.71                                   | —                 | 3.6                                            | V    |                   |
| ΔV <sub>DDA</sub> | Supply voltage                 | Delta to V <sub>DD</sub> (V <sub>DD</sub> – V <sub>DDA</sub> )                                            | -100                                   | 0                 | +100                                           | mV   | <a href="#">2</a> |
| ΔV <sub>SSA</sub> | Ground voltage                 | Delta to V <sub>SS</sub> (V <sub>SS</sub> – V <sub>SSA</sub> )                                            | -100                                   | 0                 | +100                                           | mV   | <a href="#">2</a> |
| V <sub>REFH</sub> | ADC reference voltage high     |                                                                                                           | 1.13                                   | V <sub>DDA</sub>  | V <sub>DDA</sub>                               | V    |                   |
| V <sub>REFL</sub> | ADC reference voltage low      |                                                                                                           | V <sub>SSA</sub>                       | V <sub>SSA</sub>  | V <sub>SSA</sub>                               | V    |                   |
| V <sub>ADIN</sub> | Input voltage                  | <ul style="list-style-type: none"> <li>16-bit differential mode</li> <li>All other modes</li> </ul>       | V <sub>REFL</sub><br>V <sub>REFL</sub> | —<br>—            | 31/32 * V <sub>REFH</sub><br>V <sub>REFH</sub> | V    |                   |
| C <sub>ADIN</sub> | Input capacitance              | <ul style="list-style-type: none"> <li>16-bit mode</li> <li>8-bit / 10-bit / 12-bit modes</li> </ul>      | —<br>—                                 | 8<br>4            | 10<br>5                                        | pF   |                   |
| R <sub>ADIN</sub> | Input resistance               |                                                                                                           | —                                      | 2                 | 5                                              | kΩ   |                   |
| R <sub>AS</sub>   | Analog source resistance       | 13-bit / 12-bit modes<br>f <sub>ADCK</sub> < 4 MHz                                                        | —                                      | —                 | 5                                              | kΩ   | <a href="#">3</a> |
| f <sub>ADCK</sub> | ADC conversion clock frequency | ≤ 13-bit mode                                                                                             | 1.0                                    | —                 | 18.0                                           | MHz  | <a href="#">4</a> |
| f <sub>ADCK</sub> | ADC conversion clock frequency | 16-bit mode                                                                                               | 2.0                                    | —                 | 12.0                                           | MHz  | <a href="#">4</a> |
| C <sub>rate</sub> | ADC conversion rate            | ≤ 13-bit modes<br>No ADC hardware averaging<br>Continuous conversions enabled, subsequent conversion time | 20.000                                 | —                 | 818.330                                        | Ksps | <a href="#">5</a> |

Table continues on the next page...

**Table 27. 16-bit ADC operating conditions (continued)**

| Symbol            | Description         | Conditions                                                                                             | Min.   | Typ. <sup>1</sup> | Max.    | Unit | Notes |
|-------------------|---------------------|--------------------------------------------------------------------------------------------------------|--------|-------------------|---------|------|-------|
| C <sub>rate</sub> | ADC conversion rate | 16-bit mode<br>No ADC hardware averaging<br>Continuous conversions enabled, subsequent conversion time | 37.037 | —                 | 461.467 | Ksps | 5     |

1. Typical values assume  $V_{DDA} = 3.0\text{ V}$ ,  $\text{Temp} = 25\text{ }^{\circ}\text{C}$ ,  $f_{\text{ADCK}} = 1.0\text{ MHz}$ , unless otherwise stated. Typical values are for reference only, and are not tested in production.
2. DC potential difference.
3. This resistance is external to MCU. To achieve the best results, the analog source resistance must be kept as low as possible. The results in this data sheet were derived from a system that had  $< 8\text{ }\Omega$  analog source resistance. The  $R_{\text{AS}}/C_{\text{AS}}$  time constant should be kept to  $< 1\text{ ns}$ .
4. To use the maximum ADC conversion clock frequency,  $\text{CFG2}[\text{ADHSC}]$  must be set and  $\text{CFG1}[\text{ADLPC}]$  must be clear.
5. For guidelines and examples of conversion rate calculation, download the [ADC calculator tool](#).

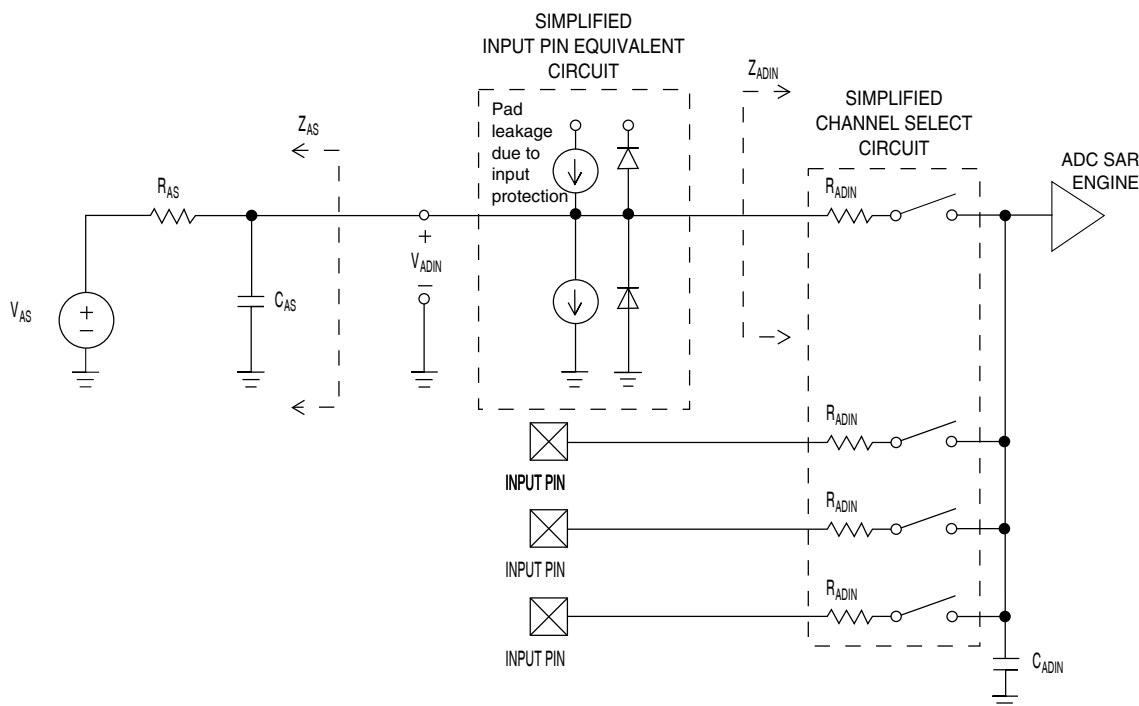

### Figure 12. ADC input impedance equivalency diagram

### 6.6.1.2 16-bit ADC electrical characteristics

**Table 28. 16-bit ADC characteristics ( $V_{\text{REFH}} = V_{\text{DDA}}$ ,  $V_{\text{REFL}} = V_{\text{SSA}}$ )**

| Symbol               | Description    | Conditions <sup>1</sup> . | Min.  | Typ. <sup>2</sup> | Max. | Unit | Notes |
|----------------------|----------------|---------------------------|-------|-------------------|------|------|-------|
| I <sub>DDA_ADC</sub> | Supply current |                           | 0.215 | —                 | 1.7  | mA   | 3     |

*Table continues on the next page...*

**Table 28. 16-bit ADC characteristics ( $V_{REFH} = V_{DDA}$ ,  $V_{REFL} = V_{SSA}$ ) (continued)**

| Symbol      | Description                     | Conditions <sup>1</sup>                                                                                                                                                                                   | Min.                             | Typ. <sup>2</sup>            | Max.                         | Unit                         | Notes                     |
|-------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------------------|------------------------------|------------------------------|---------------------------|
| $f_{ADACK}$ | ADC asynchronous clock source   | <ul style="list-style-type: none"> <li>ADLPC = 1, ADHSC = 0</li> <li>ADLPC = 1, ADHSC = 1</li> <li>ADLPC = 0, ADHSC = 0</li> <li>ADLPC = 0, ADHSC = 1</li> </ul>                                          | 1.2<br>2.4<br>3.0<br>4.4         | 2.4<br>4.0<br>5.2<br>6.2     | 3.9<br>6.1<br>7.3<br>9.5     | MHz<br>MHz<br>MHz<br>MHz     | $t_{ADACK} = 1/f_{ADACK}$ |
|             | Sample Time                     | See Reference Manual chapter for sample times                                                                                                                                                             |                                  |                              |                              |                              |                           |
| TUE         | Total unadjusted error          | <ul style="list-style-type: none"> <li>12-bit modes</li> <li>&lt;12-bit modes</li> </ul>                                                                                                                  | —<br>—                           | ±4<br>±1.4                   | ±6.8<br>±2.1                 | LSB <sup>4</sup>             | 5                         |
| DNL         | Differential non-linearity      | <ul style="list-style-type: none"> <li>12-bit modes</li> <li>&lt;12-bit modes</li> </ul>                                                                                                                  | —<br>—                           | ±0.7<br>±0.2                 | -1.1 to +1.9<br>-0.3 to 0.5  | LSB <sup>4</sup>             | 5                         |
| INL         | Integral non-linearity          | <ul style="list-style-type: none"> <li>12-bit modes</li> <li>&lt;12-bit modes</li> </ul>                                                                                                                  | —<br>—                           | ±1.0<br>±0.5                 | -2.7 to +1.9<br>-0.7 to +0.5 | LSB <sup>4</sup>             | 5                         |
| $E_{FS}$    | Full-scale error                | <ul style="list-style-type: none"> <li>12-bit modes</li> <li>&lt;12-bit modes</li> </ul>                                                                                                                  | —<br>—                           | -4<br>-1.4                   | -5.4<br>-1.8                 | LSB <sup>4</sup>             | $V_{ADIN} = V_{DDA}$<br>5 |
| $E_Q$       | Quantization error              | <ul style="list-style-type: none"> <li>16-bit modes</li> <li>≤13-bit modes</li> </ul>                                                                                                                     | —<br>—                           | -1 to 0<br>—                 | —<br>±0.5                    | LSB <sup>4</sup>             |                           |
| ENOB        | Effective number of bits        | 16-bit differential mode <ul style="list-style-type: none"> <li>Avg = 32</li> <li>Avg = 4</li> </ul> 16-bit single-ended mode <ul style="list-style-type: none"> <li>Avg = 32</li> <li>Avg = 4</li> </ul> | 12.8<br>11.9<br>12.2<br>11.4     | 14.5<br>13.8<br>13.9<br>13.1 | —<br>—<br>—<br>—             | bits<br>bits<br>bits<br>bits | 6                         |
| SINAD       | Signal-to-noise plus distortion | See ENOB                                                                                                                                                                                                  | $6.02 \times \text{ENOB} + 1.76$ |                              |                              | dB                           |                           |
| THD         | Total harmonic distortion       | 16-bit differential mode <ul style="list-style-type: none"> <li>Avg = 32</li> </ul> 16-bit single-ended mode <ul style="list-style-type: none"> <li>Avg = 32</li> </ul>                                   | —<br>—                           | -94<br>-85                   | —<br>—                       | dB<br>dB                     | 7                         |
| SFDR        | Spurious free dynamic range     | 16-bit differential mode <ul style="list-style-type: none"> <li>Avg = 32</li> </ul> 16-bit single-ended mode <ul style="list-style-type: none"> <li>Avg = 32</li> </ul>                                   | 82<br>78                         | 95<br>90                     | —<br>—                       | dB<br>dB                     | 7                         |

Table continues on the next page...

**Table 29. 16-bit ADC with PGA operating conditions (continued)**

| Symbol            | Description         | Conditions                                                                                                 | Min.   | Typ. <sup>1</sup> | Max. | Unit | Notes |
|-------------------|---------------------|------------------------------------------------------------------------------------------------------------|--------|-------------------|------|------|-------|
| C <sub>rate</sub> | ADC conversion rate | ≤ 13 bit modes<br>No ADC hardware averaging<br>Continuous conversions enabled<br>Peripheral clock = 50 MHz | 18.484 | —                 | 450  | Ksps | 7     |
|                   |                     | 16 bit modes<br>No ADC hardware averaging<br>Continuous conversions enabled<br>Peripheral clock = 50 MHz   | 37.037 | —                 | 250  | Ksps | 8     |

1. Typical values assume V<sub>DDA</sub> = 3.0 V, Temp = 25°C, f<sub>ADCK</sub> = 6 MHz unless otherwise stated. Typical values are for reference only and are not tested in production.
2. ADC must be configured to use the internal voltage reference (VREF\_OUT)
3. PGA reference is internally connected to the VREF\_OUT pin. If the user wishes to drive VREF\_OUT with a voltage other than the output of the VREF module, the VREF module must be disabled.
4. For single ended configurations the input impedance of the driven input is R<sub>PGAD</sub>/2
5. The analog source resistance (R<sub>AS</sub>), external to MCU, should be kept as minimum as possible. Increased R<sub>AS</sub> causes drop in PGA gain without affecting other performances. This is not dependent on ADC clock frequency.
6. The minimum sampling time is dependent on input signal frequency and ADC mode of operation. A minimum of 1.25μs time should be allowed for F<sub>in</sub>=4 kHz at 16-bit differential mode. Recommended ADC setting is: ADLSMP=1, ADLSTS=2 at 8 MHz ADC clock.
7. ADC clock = 18 MHz, ADLSMP = 1, ADLST = 00, ADHSC = 1
8. ADC clock = 12 MHz, ADLSMP = 1, ADLST = 01, ADHSC = 1

#### 6.6.1.4 16-bit ADC with PGA characteristics with Chop enabled (ADC\_PGA[PGACHPb] =0)

**Table 30. 16-bit ADC with PGA characteristics**

| Symbol               | Description      | Conditions                                                 | Min.                                                                                    | Typ. <sup>1</sup> | Max. | Unit | Notes |
|----------------------|------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------|------|------|-------|
| I <sub>DDA_PGA</sub> | Supply current   | Low power (ADC_PGA[PGALPb]=0)                              | —                                                                                       | 420               | 644  | μA   | 2     |
| I <sub>DC_PGA</sub>  | Input DC current |                                                            | $\frac{2}{R_{PGAD}} \left( \frac{(V_{REFPGA} \times 0.583) - V_{CM}}{(Gain+1)} \right)$ |                   |      | A    | 3     |
|                      |                  | Gain =1, V <sub>REFPGA</sub> =1.2V, V <sub>CM</sub> =0.5V  | —                                                                                       | 1.54              | —    | μA   |       |
|                      |                  | Gain =64, V <sub>REFPGA</sub> =1.2V, V <sub>CM</sub> =0.1V | —                                                                                       | 0.57              | —    | μA   |       |

Table continues on the next page...

**Table 30. 16-bit ADC with PGA characteristics (continued)**

| Symbol               | Description                             | Conditions                                                                                                                                               | Min.                                                                                                                              | Typ. <sup>1</sup>                      | Max.                                              | Unit             | Notes                                                                                                              |
|----------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------------------------------------------|------------------|--------------------------------------------------------------------------------------------------------------------|
| G                    | Gain <sup>4</sup>                       | <ul style="list-style-type: none"> <li>PGAG=0</li> <li>PGAG=1</li> <li>PGAG=2</li> <li>PGAG=3</li> <li>PGAG=4</li> <li>PGAG=5</li> <li>PGAG=6</li> </ul> | 0.95<br>1.9<br>3.8<br>7.6<br>15.2<br>30.0<br>58.8                                                                                 | 1<br>2<br>4<br>8<br>16<br>31.6<br>63.3 | 1.05<br>2.1<br>4.2<br>8.4<br>16.6<br>33.2<br>67.8 |                  | R <sub>AS</sub> < 100Ω                                                                                             |
| BW                   | Input signal bandwidth                  | <ul style="list-style-type: none"> <li>16-bit modes</li> <li>&lt; 16-bit modes</li> </ul>                                                                | —<br>—                                                                                                                            | —<br>—                                 | 4<br>40                                           | kHz<br>kHz       |                                                                                                                    |
| PSRR                 | Power supply rejection ratio            | Gain=1                                                                                                                                                   | —                                                                                                                                 | -84                                    | —                                                 | dB               | V <sub>DDA</sub> = 3V<br>±100mV,<br>f <sub>VDDA</sub> = 50Hz,<br>60Hz                                              |
| CMRR                 | Common mode rejection ratio             | <ul style="list-style-type: none"> <li>Gain=1</li> <li>Gain=64</li> </ul>                                                                                | —<br>—                                                                                                                            | -84<br>-85                             | —<br>—                                            | dB<br>dB         | V <sub>CM</sub> =<br>500mVpp,<br>f <sub>VCM</sub> = 50Hz,<br>100Hz                                                 |
| V <sub>OFS</sub>     | Input offset voltage                    |                                                                                                                                                          | —                                                                                                                                 | 0.2                                    | —                                                 | mV               | Output offset =<br>V <sub>OFS</sub> *(Gain+1)                                                                      |
| T <sub>GSW</sub>     | Gain switching settling time            |                                                                                                                                                          | —                                                                                                                                 | —                                      | 10                                                | μs               | 5                                                                                                                  |
| dG/dT                | Gain drift over full temperature range  | <ul style="list-style-type: none"> <li>Gain=1</li> <li>Gain=64</li> </ul>                                                                                | —<br>—                                                                                                                            | 6<br>31                                | 10<br>42                                          | ppm/°C<br>ppm/°C |                                                                                                                    |
| dG/dV <sub>DDA</sub> | Gain drift over supply voltage          | <ul style="list-style-type: none"> <li>Gain=1</li> <li>Gain=64</li> </ul>                                                                                | —<br>—                                                                                                                            | 0.07<br>0.14                           | 0.21<br>0.31                                      | %/V<br>%/V       | V <sub>DDA</sub> from 1.71<br>to 3.6V                                                                              |
| E <sub>IL</sub>      | Input leakage error                     | All modes                                                                                                                                                | I <sub>in</sub> × R <sub>AS</sub>                                                                                                 |                                        |                                                   | mV               | I <sub>in</sub> = leakage<br>current<br><br>(refer to the<br>MCU's voltage<br>and current<br>operating<br>ratings) |
| V <sub>PP,DIFF</sub> | Maximum differential input signal swing |                                                                                                                                                          | $\left( \frac{(\min(V_X, V_{DDA} - V_X) - 0.2) \times 4}{\text{Gain}} \right)$ where V <sub>X</sub> = V <sub>REFPGA</sub> × 0.583 |                                        |                                                   | V                | 6                                                                                                                  |
| SNR                  | Signal-to-noise ratio                   | <ul style="list-style-type: none"> <li>Gain=1</li> <li>Gain=64</li> </ul>                                                                                | 80<br>52                                                                                                                          | 90<br>66                               | —<br>—                                            | dB<br>dB         | 16-bit<br>differential<br>mode,<br>Average=32                                                                      |
| THD                  | Total harmonic distortion               | <ul style="list-style-type: none"> <li>Gain=1</li> <li>Gain=64</li> </ul>                                                                                | 85<br>49                                                                                                                          | 100<br>95                              | —<br>—                                            | dB<br>dB         | 16-bit<br>differential<br>mode,<br>Average=32,<br>f <sub>in</sub> =100Hz                                           |

Table continues on the next page...

**Table 30. 16-bit ADC with PGA characteristics (continued)**

| Symbol | Description                           | Conditions                                                                                                                                                                                                                                                                                                                                                    | Min.                                                                         | Typ. <sup>1</sup>                                                                  | Max.                                                | Unit                                                                                 | Notes                                                       |
|--------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------|
| SFDR   | Spurious free dynamic range           | <ul style="list-style-type: none"> <li>Gain=1</li> <li>Gain=64</li> </ul>                                                                                                                                                                                                                                                                                     | 85<br>53                                                                     | 105<br>88                                                                          | —<br>—                                              | dB<br>dB                                                                             | 16-bit differential mode, Average=32, $f_{in}=100\text{Hz}$ |
| ENOB   | Effective number of bits              | <ul style="list-style-type: none"> <li>Gain=1, Average=4</li> <li>Gain=1, Average=8</li> <li>Gain=64, Average=4</li> <li>Gain=64, Average=8</li> <li>Gain=1, Average=32</li> <li>Gain=2, Average=32</li> <li>Gain=4, Average=32</li> <li>Gain=8, Average=32</li> <li>Gain=16, Average=32</li> <li>Gain=32, Average=32</li> <li>Gain=64, Average=32</li> </ul> | 11.6<br>8.0<br>7.2<br>6.3<br>12.8<br>11.0<br>7.9<br>7.3<br>6.8<br>6.8<br>7.5 | 13.4<br>13.6<br>9.6<br>9.6<br>14.5<br>14.3<br>13.8<br>13.1<br>12.5<br>11.5<br>10.6 | —<br>—<br>—<br>—<br>—<br>—<br>—<br>—<br>—<br>—<br>— | bits<br>bits<br>bits<br>bits<br>bits<br>bits<br>bits<br>bits<br>bits<br>bits<br>bits | 16-bit differential mode, $f_{in}=100\text{Hz}$             |
| SINAD  | Signal-to-noise plus distortion ratio | See ENOB                                                                                                                                                                                                                                                                                                                                                      | $6.02 \times \text{ENOB} + 1.76$                                             |                                                                                    |                                                     | dB                                                                                   |                                                             |

1. Typical values assume  $V_{DDA}=3.0\text{V}$ ,  $\text{Temp}=25^{\circ}\text{C}$ ,  $f_{ADCK}=6\text{MHz}$  unless otherwise stated.
2. This current is a PGA module adder, in addition to ADC conversion currents.
3. Between IN+ and IN-. The PGA draws a DC current from the input terminals. The magnitude of the DC current is a strong function of input common mode voltage ( $V_{CM}$ ) and the PGA gain.
4.  $\text{Gain} = 2^{\text{PGAG}}$
5. After changing the PGA gain setting, a minimum of 2 ADC+PGA conversions should be ignored.
6. Limit the input signal swing so that the PGA does not saturate during operation. Input signal swing is dependent on the PGA reference voltage and gain setting.

## 6.6.2 CMP and 6-bit DAC electrical specifications

**Table 31. Comparator and 6-bit DAC electrical specifications**

| Symbol      | Description                                     | Min.           | Typ. | Max.     | Unit          |
|-------------|-------------------------------------------------|----------------|------|----------|---------------|
| $V_{DD}$    | Supply voltage                                  | 1.71           | —    | 3.6      | V             |
| $I_{DDHS}$  | Supply current, High-speed mode (EN=1, PMODE=1) | —              | —    | 200      | $\mu\text{A}$ |
| $I_{DDL S}$ | Supply current, low-speed mode (EN=1, PMODE=0)  | —              | —    | 20       | $\mu\text{A}$ |
| $V_{AIN}$   | Analog input voltage                            | $V_{SS} - 0.3$ | —    | $V_{DD}$ | V             |
| $V_{AIO}$   | Analog input offset voltage                     | —              | —    | 20       | mV            |

Table continues on the next page...

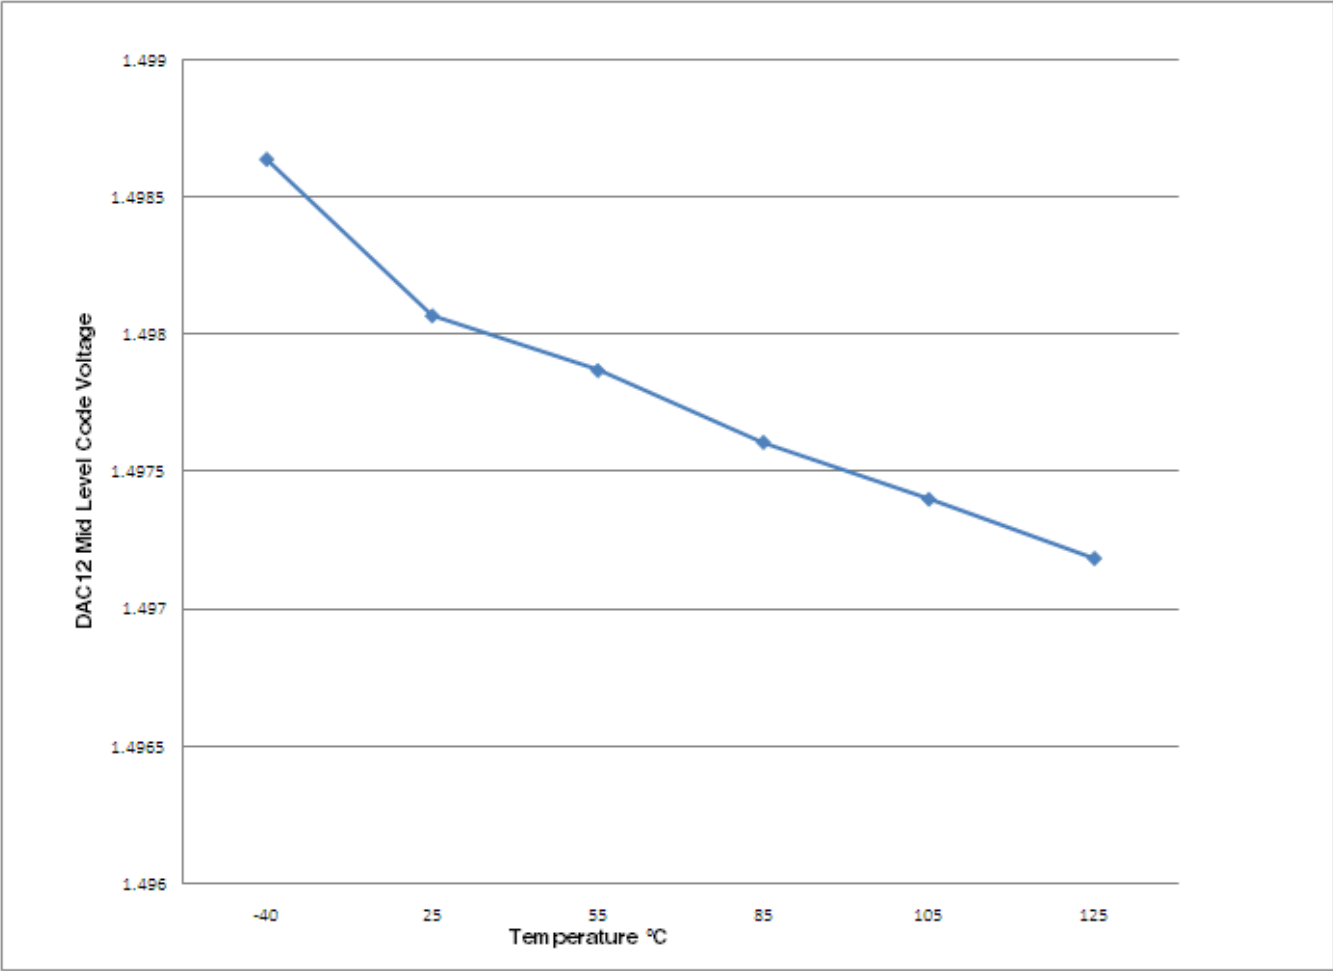


Figure 18. Offset at half scale vs. temperature

### 6.6.4 Voltage reference electrical specifications

Table 34. VREF full-range operating requirements

| Symbol           | Description             | Min.                                      | Max. | Unit | Notes |
|------------------|-------------------------|-------------------------------------------|------|------|-------|
| V <sub>DDA</sub> | Supply voltage          | 1.71                                      | 3.6  | V    |       |
| T <sub>A</sub>   | Temperature             | Operating temperature range of the device |      | °C   |       |
| C <sub>L</sub>   | Output load capacitance | 100                                       |      | nF   | 1, 2  |

1. C<sub>L</sub> must be connected to VREF\_OUT if the VREF\_OUT functionality is being used for either an internal or external reference.
2. The load capacitance should not exceed +/-25% of the nominal specified C<sub>L</sub> value over the operating temperature range of the device.

**Table 35. VREF full-range operating behaviors**

| Symbol            | Description                                                                         | Min.   | Typ.  | Max.   | Unit    | Notes |
|-------------------|-------------------------------------------------------------------------------------|--------|-------|--------|---------|-------|
| $V_{out}$         | Voltage reference output with factory trim at nominal $V_{DDA}$ and temperature=25C | 1.1915 | 1.195 | 1.1977 | V       |       |
| $V_{out}$         | Voltage reference output — factory trim                                             | 1.1584 | —     | 1.2376 | V       |       |
| $V_{out}$         | Voltage reference output — user trim                                                | 1.193  | —     | 1.197  | V       |       |
| $V_{step}$        | Voltage reference trim step                                                         | —      | 0.5   | —      | mV      |       |
| $V_{tdrift}$      | Temperature drift ( $V_{max} - V_{min}$ across the full temperature range)          | —      | —     | 80     | mV      |       |
| $I_{bg}$          | Bandgap only current                                                                | —      | —     | 80     | $\mu A$ | 1     |
| $I_{lp}$          | Low-power buffer current                                                            | —      | —     | 360    | $\mu A$ | 1     |
| $I_{hp}$          | High-power buffer current                                                           | —      | —     | 1      | mA      | 1     |
| $\Delta V_{LOAD}$ | Load regulation<br>• current = $\pm 1.0$ mA                                         | —      | 200   | —      | $\mu V$ | 1, 2  |
| $T_{stup}$        | Buffer startup time                                                                 | —      | —     | 100    | $\mu s$ |       |
| $V_{vdift}$       | Voltage drift ( $V_{max} - V_{min}$ across the full voltage range)                  | —      | 2     | —      | mV      | 1     |

1. See the chip's Reference Manual for the appropriate settings of the VREF Status and Control register.
2. Load regulation voltage is the difference between the VREF\_OUT voltage with no load vs. voltage with defined load

**Table 36. VREF limited-range operating requirements**

| Symbol | Description | Min. | Max. | Unit        | Notes |
|--------|-------------|------|------|-------------|-------|
| $T_A$  | Temperature | 0    | 50   | $^{\circ}C$ |       |

**Table 37. VREF limited-range operating behaviors**

| Symbol    | Description                                | Min.  | Max.  | Unit | Notes |
|-----------|--------------------------------------------|-------|-------|------|-------|
| $V_{out}$ | Voltage reference output with factory trim | 1.173 | 1.225 | V    |       |

## 6.7 Timers

See [General switching specifications](#).

## 6.8 Communication interfaces

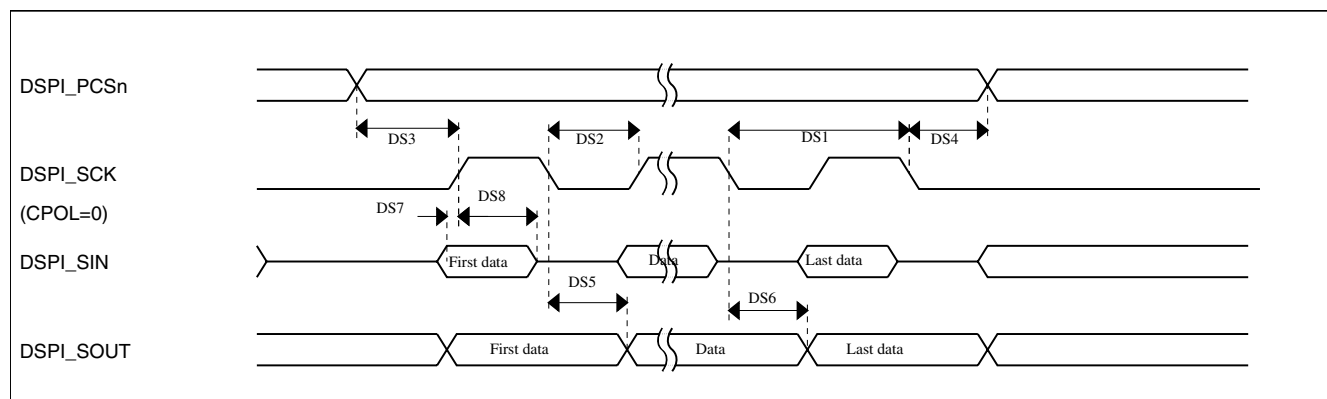


Figure 19. DSPI classic SPI timing — master mode

Table 41. Slave mode DSPI timing (limited voltage range)

| Num  | Description                              | Min.               | Max.              | Unit    |
|------|------------------------------------------|--------------------|-------------------|---------|
|      | Operating voltage                        | 2.7                | 3.6               | V       |
|      | Frequency of operation                   |                    | 12.5              | MHz     |
| DS9  | DSPI_SCK input cycle time                | $4 \times t_{BUS}$ | —                 | ns      |
| DS10 | DSPI_SCK input high/low time             | $(t_{SCK}/2) - 2$  | $(t_{SCK}/2) + 2$ | ns      |
| DS11 | DSPI_SCK to DSPI_SOUT valid              | —                  | 20                | ns      |
| DS12 | DSPI_SCK to DSPI_SOUT invalid            | 0                  | —                 | ns      |
| DS13 | DSPI_SIN to DSPI_SCK input setup         | 2                  | —                 | ns      |
| DS14 | DSPI_SCK to DSPI_SIN input hold          | 7                  | —                 | ns      |
| DS15 | DSPI_SS active to DSPI_SOUT driven       | —                  | 14                | ns </td |
| DS16 | DSPI_SS inactive to DSPI_SOUT not driven | —                  | 14                | ns      |

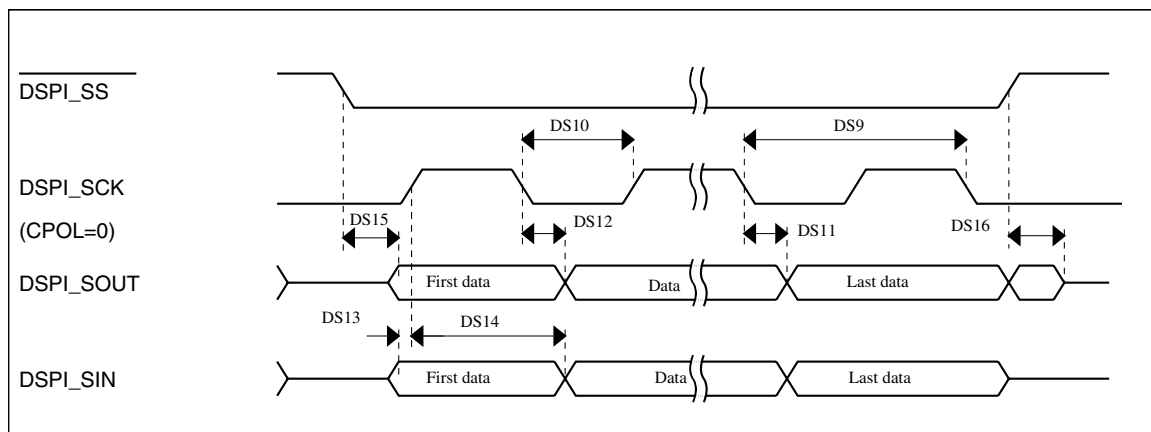
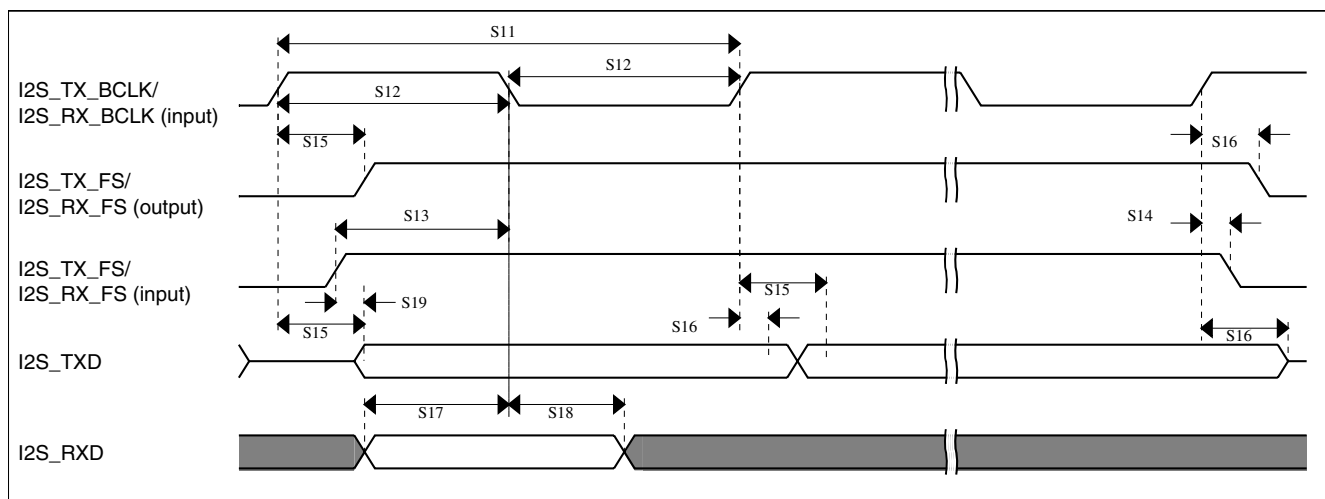


Figure 20. DSPI classic SPI timing — slave mode



**Figure 26. I2S/SAI timing — slave modes**

### 6.8.10.2 Normal Run, Wait and Stop mode performance over the full operating voltage range

This section provides the operating performance over the full operating voltage for the device in Normal Run, Wait and Stop modes.

**Table 48. I2S/SAI master mode timing in Normal Run, Wait and Stop modes (full voltage range)**

| Num. | Characteristic                                                    | Min. | Max. | Unit        |
|------|-------------------------------------------------------------------|------|------|-------------|
|      | Operating voltage                                                 | 1.71 | 3.6  | V           |
| S1   | I2S_MCLK cycle time                                               | 40   | —    | ns          |
| S2   | I2S_MCLK pulse width high/low                                     | 45%  | 55%  | MCLK period |
| S3   | I2S_TX_BCLK/I2S_RX_BCLK cycle time (output)                       | 80   | —    | ns          |
| S4   | I2S_TX_BCLK/I2S_RX_BCLK pulse width high/low                      | 45%  | 55%  | BCLK period |
| S5   | I2S_TX_BCLK/I2S_RX_BCLK to I2S_TX_FS/<br>I2S_RX_FS output valid   | —    | 15   | ns          |
| S6   | I2S_TX_BCLK/I2S_RX_BCLK to I2S_TX_FS/<br>I2S_RX_FS output invalid | -1.0 | —    | ns          |
| S7   | I2S_TX_BCLK to I2S_TXD valid                                      | —    | 15   | ns          |
| S8   | I2S_TX_BCLK to I2S_TXD invalid                                    | 0    | —    | ns          |
| S9   | I2S_RXD/I2S_RX_FS input setup before<br>I2S_RX_BCLK               | 20.5 | —    | ns          |
| S10  | I2S_RXD/I2S_RX_FS input hold after I2S_RX_BCLK                    | 0    | —    | ns          |

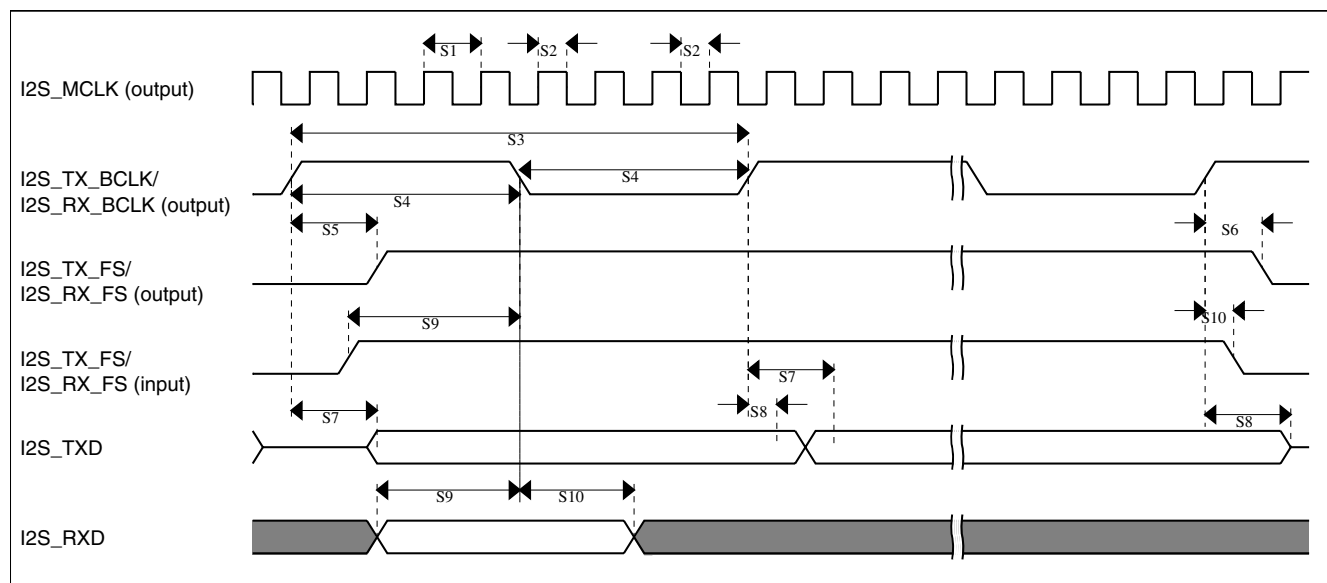


Figure 29. I2S/SAI timing — master modes

Table 51. I2S/SAI slave mode timing in VLPR, VLPW, and VLPS modes (full voltage range)

| Num. | Characteristic                                                 | Min. | Max. | Unit        |
|------|----------------------------------------------------------------|------|------|-------------|
|      | Operating voltage                                              | 1.71 | 3.6  | V           |
| S11  | I2S_TX_BCLK/I2S_RX_BCLK cycle time (input)                     | 250  | —    | ns          |
| S12  | I2S_TX_BCLK/I2S_RX_BCLK pulse width high/low (input)           | 45%  | 55%  | MCLK period |
| S13  | I2S_TX_FS/I2S_RX_FS input setup before I2S_TX_BCLK/I2S_RX_BCLK | 30   | —    | ns          |
| S14  | I2S_TX_FS/I2S_RX_FS input hold after I2S_TX_BCLK/I2S_RX_BCLK   | 3    | —    | ns          |
| S15  | I2S_TX_BCLK to I2S_TXD/I2S_TX_FS output valid                  | —    | 63   | ns          |
| S16  | I2S_TX_BCLK to I2S_TXD/I2S_TX_FS output invalid                | 0    | —    | ns          |
| S17  | I2S_RXD setup before I2S_RX_BCLK                               | 30   | —    | ns          |
| S18  | I2S_RXD hold after I2S_RX_BCLK                                 | 2    | —    | ns          |
| S19  | I2S_TX_FS input assertion to I2S_TXD output valid <sup>1</sup> | —    | 72   | ns          |

1. Applies to first bit in each frame and only if the TCR4[FSE] bit is clear

# Pinout

| 80 LQFP | Pin Name          | Default                            | ALT0                               | ALT1              | ALT2                            | ALT3                            | ALT4       | ALT5     | ALT6            | ALT7                   | EzPort   |
|---------|-------------------|------------------------------------|------------------------------------|-------------------|---------------------------------|---------------------------------|------------|----------|-----------------|------------------------|----------|
| 25      | VBAT              | VBAT                               | VBAT                               |                   |                                 |                                 |            |          |                 |                        |          |
| 26      | PTA0              | JTAG_TCLK/<br>SWD_CLK/<br>EZP_CLK  | TSI0_CH1                           | PTA0              | UART0_CTS_<br>b/<br>UART0_COL_b | FTM0_CH5                        |            |          |                 | JTAG_TCLK/<br>SWD_CLK  | EZP_CLK  |
| 27      | PTA1              | JTAG_TDI/<br>EZP_DI                | TSI0_CH2                           | PTA1              | UART0_RX                        | FTM0_CH6                        |            |          |                 | JTAG_TDI               | EZP_DI   |
| 28      | PTA2              | JTAG_TDO/<br>TRACE_SWO/<br>EZP_DO  | TSI0_CH3                           | PTA2              | UART0_TX                        | FTM0_CH7                        |            |          |                 | JTAG_TDO/<br>TRACE_SWO | EZP_DO   |
| 29      | PTA3              | JTAG_TMS/<br>SWD_DIO               | TSI0_CH4                           | PTA3              | UART0_RTS_b                     | FTM0_CH0                        |            |          |                 | JTAG_TMS/<br>SWD_DIO   |          |
| 30      | PTA4/<br>LLWU_P3  | NMI_b/<br>EZP_CS_b                 | TSI0_CH5                           | PTA4/<br>LLWU_P3  |                                 | FTM0_CH1                        |            |          |                 | NMI_b                  | EZP_CS_b |
| 31      | PTA5              | DISABLED                           |                                    | PTA5              | USB_CLKIN                       | FTM0_CH2                        |            | CMP2_OUT | I2S0_TX_BCLK    | JTAG_TRST_b            |          |
| 32      | PTA12             | CMP2_IN0                           | CMP2_IN0                           | PTA12             | CAN0_TX                         | FTM1_CH0                        |            |          | I2S0_TXD0       | FTM1_QD_<br>PHA        |          |
| 33      | PTA13/<br>LLWU_P4 | CMP2_IN1                           | CMP2_IN1                           | PTA13/<br>LLWU_P4 | CAN0_RX                         | FTM1_CH1                        |            |          | I2S0_TX_FS      | FTM1_QD_<br>PHB        |          |
| 34      | PTA14             | DISABLED                           |                                    | PTA14             | SPI0_PCS0                       | UART0_TX                        |            |          | I2S0_RX_BCLK    | I2S0_TXD1              |          |
| 35      | PTA15             | DISABLED                           |                                    | PTA15             | SPI0_SCK                        | UART0_RX                        |            |          | I2S0_RXD0       |                        |          |
| 36      | PTA16             | DISABLED                           |                                    | PTA16             | SPI0_SOUT                       | UART0_CTS_<br>b/<br>UART0_COL_b |            |          | I2S0_RX_FS      | I2S0_RXD1              |          |
| 37      | PTA17             | ADC1_SE17                          | ADC1_SE17                          | PTA17             | SPI0_SIN                        | UART0_RTS_b                     |            |          | I2S0_MCLK       |                        |          |
| 38      | VDD               | VDD                                | VDD                                |                   |                                 |                                 |            |          |                 |                        |          |
| 39      | VSS               | VSS                                | VSS                                |                   |                                 |                                 |            |          |                 |                        |          |
| 40      | PTA18             | EXTAL0                             | EXTAL0                             | PTA18             |                                 | FTM0_FLT2                       | FTM_CLKIN0 |          |                 |                        |          |
| 41      | PTA19             | XTAL0                              | XTAL0                              | PTA19             |                                 | FTM1_FLT0                       | FTM_CLKIN1 |          | LPTMR0_ALT1     |                        |          |
| 42      | RESET_b           | RESET_b                            | RESET_b                            |                   |                                 |                                 |            |          |                 |                        |          |
| 43      | PTB0/<br>LLWU_P5  | ADC0_SE8/<br>ADC1_SE8/<br>TSI0_CH0 | ADC0_SE8/<br>ADC1_SE8/<br>TSI0_CH0 | PTB0/<br>LLWU_P5  | I2C0_SCL                        | FTM1_CH0                        |            |          | FTM1_QD_<br>PHA |                        |          |
| 44      | PTB1              | ADC0_SE9/<br>ADC1_SE9/<br>TSI0_CH6 | ADC0_SE9/<br>ADC1_SE9/<br>TSI0_CH6 | PTB1              | I2C0_SDA                        | FTM1_CH1                        |            |          | FTM1_QD_<br>PHB |                        |          |
| 45      | PTB2              | ADC0_SE12/<br>TSI0_CH7             | ADC0_SE12/<br>TSI0_CH7             | PTB2              | I2C0_SCL                        | UART0_RTS_b                     |            |          | FTM0_FLT3       |                        |          |
| 46      | PTB3              | ADC0_SE13/<br>TSI0_CH8             | ADC0_SE13/<br>TSI0_CH8             | PTB3              | I2C0_SDA                        | UART0_CTS_<br>b/<br>UART0_COL_b |            |          | FTM0_FLT0       |                        |          |
| 47      | PTB10             | ADC1_SE14                          | ADC1_SE14                          | PTB10             | SPI1_PCS0                       | UART3_RX                        |            | FB_AD19  | FTM0_FLT1       |                        |          |
| 48      | PTB11             | ADC1_SE15                          | ADC1_SE15                          | PTB11             | SPI1_SCK                        | UART3_TX                        |            | FB_AD18  | FTM0_FLT2       |                        |          |
| 49      | VSS               | VSS                                | VSS                                |                   |                                 |                                 |            |          |                 |                        |          |
| 50      | VDD               | VDD                                | VDD                                |                   |                                 |                                 |            |          |                 |                        |          |
| 51      | PTB16             | TSI0_CH9                           | TSI0_CH9                           | PTB16             | SPI1_SOUT                       | UART0_RX                        |            | FB_AD17  | EWM_IN          |                        |          |
| 52      | PTB17             | TSI0_CH10                          | TSI0_CH10                          | PTB17             | SPI1_SIN                        | UART0_TX                        |            | FB_AD16  | EWM_OUT_b       |                        |          |

| 80 LQFP | Pin Name           | Default                              | ALT0                                 | ALT1               | ALT2      | ALT3        | ALT4         | ALT5                                   | ALT6         | ALT7 | EzPort |
|---------|--------------------|--------------------------------------|--------------------------------------|--------------------|-----------|-------------|--------------|----------------------------------------|--------------|------|--------|
| 53      | PTB18              | TSIO_CH11                            | TSIO_CH11                            | PTB18              | CAN0_TX   | FTM2_CH0    | I2S0_TX_BCLK | FB_AD15                                | FTM2_QD_PHA  |      |        |
| 54      | PTB19              | TSIO_CH12                            | TSIO_CH12                            | PTB19              | CAN0_RX   | FTM2_CH1    | I2S0_TX_FS   | FB_OE_b                                | FTM2_QD_PHB  |      |        |
| 55      | PTC0               | ADC0_SE14/<br>TSIO_CH13              | ADC0_SE14/<br>TSIO_CH13              | PTC0               | SPI0_PCS4 | PDB0_EXTRG  |              | FB_AD14                                | I2S0_TXD1    |      |        |
| 56      | PTC1/<br>LLWU_P6   | ADC0_SE15/<br>TSIO_CH14              | ADC0_SE15/<br>TSIO_CH14              | PTC1/<br>LLWU_P6   | SPI0_PCS3 | UART1_RTS_b | FTM0_CH0     | FB_AD13                                | I2S0_TXD0    |      |        |
| 57      | PTC2               | ADC0_SE4b/<br>CMP1_IN0/<br>TSIO_CH15 | ADC0_SE4b/<br>CMP1_IN0/<br>TSIO_CH15 | PTC2               | SPI0_PCS2 | UART1_CTS_b | FTM0_CH1     | FB_AD12                                | I2S0_TX_FS   |      |        |
| 58      | PTC3/<br>LLWU_P7   | CMP1_IN1                             | CMP1_IN1                             | PTC3/<br>LLWU_P7   | SPI0_PCS1 | UART1_RX    | FTM0_CH2     | CLKOUT                                 | I2S0_TX_BCLK |      |        |
| 59      | VSS                | VSS                                  | VSS                                  |                    |           |             |              |                                        |              |      |        |
| 60      | VDD                | VDD                                  | VDD                                  |                    |           |             |              |                                        |              |      |        |
| 61      | PTC4/<br>LLWU_P8   | DISABLED                             |                                      | PTC4/<br>LLWU_P8   | SPI0_PCS0 | UART1_TX    | FTM0_CH3     | FB_AD11                                | CMP1_OUT     |      |        |
| 62      | PTC5/<br>LLWU_P9   | DISABLED                             |                                      | PTC5/<br>LLWU_P9   | SPI0_SCK  | LPTMR0_ALT2 | I2S0_RXD0    | FB_AD10                                | CMP0_OUT     |      |        |
| 63      | PTC6/<br>LLWU_P10  | CMP0_IN0                             | CMP0_IN0                             | PTC6/<br>LLWU_P10  | SPI0_SOUT | PDB0_EXTRG  | I2S0_RX_BCLK | FB_AD9                                 | I2S0_MCLK    |      |        |
| 64      | PTC7               | CMP0_IN1                             | CMP0_IN1                             | PTC7               | SPI0_SIN  | USB_SOF_OUT | I2S0_RX_FS   | FB_AD8                                 |              |      |        |
| 65      | PTC8               | ADC1_SE4b/<br>CMP0_IN2               | ADC1_SE4b/<br>CMP0_IN2               | PTC8               |           |             | I2S0_MCLK    | FB_AD7                                 |              |      |        |
| 66      | PTC9               | ADC1_SE5b/<br>CMP0_IN3               | ADC1_SE5b/<br>CMP0_IN3               | PTC9               |           |             | I2S0_RX_BCLK | FB_AD6                                 | FTM2_FLT0    |      |        |
| 67      | PTC10              | ADC1_SE6b                            | ADC1_SE6b                            | PTC10              | I2C1_SCL  |             | I2S0_RX_FS   | FB_AD5                                 |              |      |        |
| 68      | PTC11/<br>LLWU_P11 | ADC1_SE7b                            | ADC1_SE7b                            | PTC11/<br>LLWU_P11 | I2C1_SDA  |             | I2S0_RXD1    | FB_RW_b                                |              |      |        |
| 69      | VSS                | VSS                                  | VSS                                  |                    |           |             |              |                                        |              |      |        |
| 70      | VDD                | VDD                                  | VDD                                  |                    |           |             |              |                                        |              |      |        |
| 71      | PTC16              | DISABLED                             |                                      | PTC16              | CAN1_RX   | UART3_RX    |              | FB_CS5_b/<br>FB_TSI21/<br>FB_BE23_16_b |              |      |        |
| 72      | PTC17              | DISABLED                             |                                      | PTC17              | CAN1_TX   | UART3_TX    |              | FB_CS4_b/<br>FB_TSI20/<br>FB_BE31_24_b |              |      |        |
| 73      | PTD0/<br>LLWU_P12  | DISABLED                             |                                      | PTD0/<br>LLWU_P12  | SPI0_PCS0 | UART2_RTS_b |              | FB_ALE/<br>FB_CS1_b/<br>FB_TS_b        |              |      |        |
| 74      | PTD1               | ADC0_SE5b                            | ADC0_SE5b                            | PTD1               | SPI0_SCK  | UART2_CTS_b |              | FB_CS0_b                               |              |      |        |
| 75      | PTD2/<br>LLWU_P13  | DISABLED                             |                                      | PTD2/<br>LLWU_P13  | SPI0_SOUT | UART2_RX    |              | FB_AD4                                 |              |      |        |
| 76      | PTD3               | DISABLED                             |                                      | PTD3               | SPI0_SIN  | UART2_TX    |              | FB_AD3                                 |              |      |        |
| 77      | PTD4/<br>LLWU_P14  | DISABLED                             |                                      | PTD4/<br>LLWU_P14  | SPI0_PCS1 | UART0_RTS_b | FTM0_CH4     | FB_AD2                                 | EWM_IN       |      |        |

**Table 53. Revision history**

| Rev. No. | Date    | Substantial Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | 6/2012  | Initial public revision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 2        | 12/2012 | Replaced TBDs throughout.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3        | 6/2013  | <ul style="list-style-type: none"> <li>• In <a href="#">ESD handling ratings</a>, added a note for ILAT.</li> <li>• Updated "Voltage and current operating requirements" <a href="#">Table 1</a>.</li> <li>• Updated I<sub>OL</sub> data for V<sub>OL</sub> row in "Voltage and current operating behaviors" <a href="#">Table 4</a>.</li> <li>• Updated wakeup times and t<sub>POR</sub> value in "Power mode transition operating behaviors" <a href="#">Table 5</a>.</li> <li>• In "EMC radiated emissions operating behaviors . . ." <a href="#">Table 7</a>, added a column for 144MAPBGA.</li> <li>• In "16-bit ADC operating conditions" <a href="#">Table 27</a>, updated the max spec of VADIN.</li> <li>• In "16-bit ADC electrical characteristics" <a href="#">Table 28</a>, updated the temp sensor slope and voltage specs.</li> <li>• Updated <a href="#">Inter-Integrated Circuit Interface (I<sup>2</sup>C) timing</a>.</li> <li>• In <a href="#">SDHC specifications</a>, added operating voltage row.</li> </ul> |