



Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - CPLDs \(Complex Programmable Logic Devices\)](#)

Embedded - CPLDs, or Complex Programmable Logic Devices, are highly versatile digital logic devices used in electronic systems. These programmable components are designed to perform complex logical operations and can be customized for specific applications. Unlike fixed-function ICs, CPLDs offer the flexibility to reprogram their configuration, making them an ideal choice for various embedded systems. They consist of a set of logic gates and programmable interconnects, allowing designers to implement complex logic circuits without needing custom hardware.

## Applications of Embedded - CPLDs

### Details

|                                 |                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                  | Obsolete                                                                                                                                                            |
| Programmable Type               | In System Programmable                                                                                                                                              |
| Delay Time tpd(1) Max           | 2.5 ns                                                                                                                                                              |
| Voltage Supply - Internal       | 1.65V ~ 1.95V                                                                                                                                                       |
| Number of Logic Elements/Blocks | 4                                                                                                                                                                   |
| Number of Macrocells            | 64                                                                                                                                                                  |
| Number of Gates                 | -                                                                                                                                                                   |
| Number of I/O                   | 30                                                                                                                                                                  |
| Operating Temperature           | 0°C ~ 90°C (TJ)                                                                                                                                                     |
| Mounting Type                   | Surface Mount                                                                                                                                                       |
| Package / Case                  | 44-TQFP                                                                                                                                                             |
| Supplier Device Package         | 44-TQFP (10x10)                                                                                                                                                     |
| Purchase URL                    | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lc4064c-25tn44c">https://www.e-xfl.com/product-detail/lattice-semiconductor/lc4064c-25tn44c</a> |

- Block CLK2
- Block CLK3
- PT Clock
- PT Clock Inverted
- Shared PT Clock
- Ground

### Clock Enable Multiplexer

Each macrocell has a 4:1 clock enable multiplexer. This allows the clock enable signal to be selected from the following four sources:

- PT Initialization/CE
- PT Initialization/CE Inverted
- Shared PT Clock
- Logic High

### Initialization Control


The ispMACH 4000 family architecture accommodates both block-level and macrocell-level set and reset capability. There is one block-level initialization term that is distributed to all macrocell registers in a GLB. At the macrocell level, two product terms can be “stolen” from the cluster associated with a macrocell to be used for set/reset functionality. A reset/preset swapping feature in each macrocell allows for reset and preset to be exchanged, providing flexibility.

Note that the reset/preset swapping selection feature affects power-up reset as well. All flip-flops power up to a known state for predictable system initialization. If a macrocell is configured to SET on a signal from the block-level initialization, then that macrocell will be SET during device power-up. If a macrocell is configured to RESET on a signal from the block-level initialization or is not configured for set/reset, then that macrocell will RESET on power-up. To guarantee initialization values, the  $V_{CC}$  rise must be monotonic, and the clock must be inactive until the reset delay time has elapsed.

### GLB Clock Generator

Each ispMACH 4000 device has up to four clock pins that are also routed to the GRP to be used as inputs. These pins drive a clock generator in each GLB, as shown in Figure 6. The clock generator provides four clock signals that can be used anywhere in the GLB. These four GLB clock signals can consist of a number of combinations of the true and complement edges of the global clock signals.

**Figure 6. GLB Clock Generator**

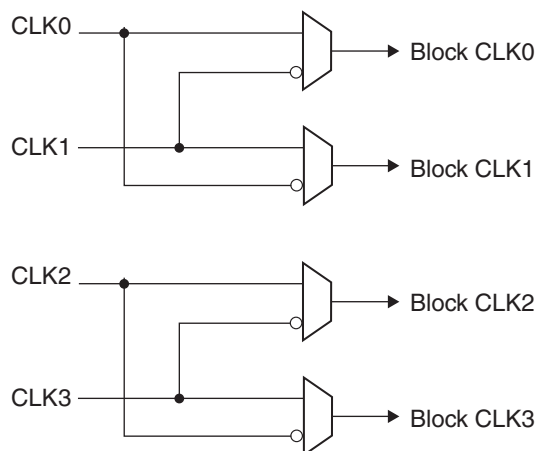

- LVTTTL
- LVCMOS 3.3
- LVCMOS 2.5
- LVCMOS 1.8
- 3.3V PCI Compatible

All of the I/Os and dedicated inputs have the capability to provide a bus-keeper latch, Pull-up Resistor or Pull-down Resistor. A fourth option is to provide none of these. The selection is done on a global basis. The default in both hardware and software is such that when the device is erased or if the user does not specify, the input structure is configured to be a Pull-up Resistor.


Each ispMACH 4000 device I/O has an individually programmable output slew rate control bit. Each output can be individually configured for fast slew or slow slew. The typical edge rate difference between fast and slow slew setting is 20%. For high-speed designs with long, unterminated traces, the slow-slew rate will introduce fewer reflections, less noise and keep ground bounce to a minimum. For designs with short traces or well terminated lines, the fast slew rate can be used to achieve the highest speed.

## Global OE Generation

Most ispMACH 4000 family devices have a 4-bit wide Global OE Bus, except the ispMACH 4032 device that has a 2-bit wide Global OE Bus. This bus is derived from a 4-bit internal global OE PT bus and two dual purpose I/O or GOE pins. Each signal that drives the bus can optionally be inverted.

Each GLB has a block-level OE PT that connects to all bits of the Global OE PT bus with four fuses. Hence, for a 256-macrocell device (with 16 blocks), each line of the bus is driven from 16 OE product terms. Figures 9 and 10 show a graphical representation of the global OE generation.

**Figure 9. Global OE Generation for All Devices Except ispMACH 4032**

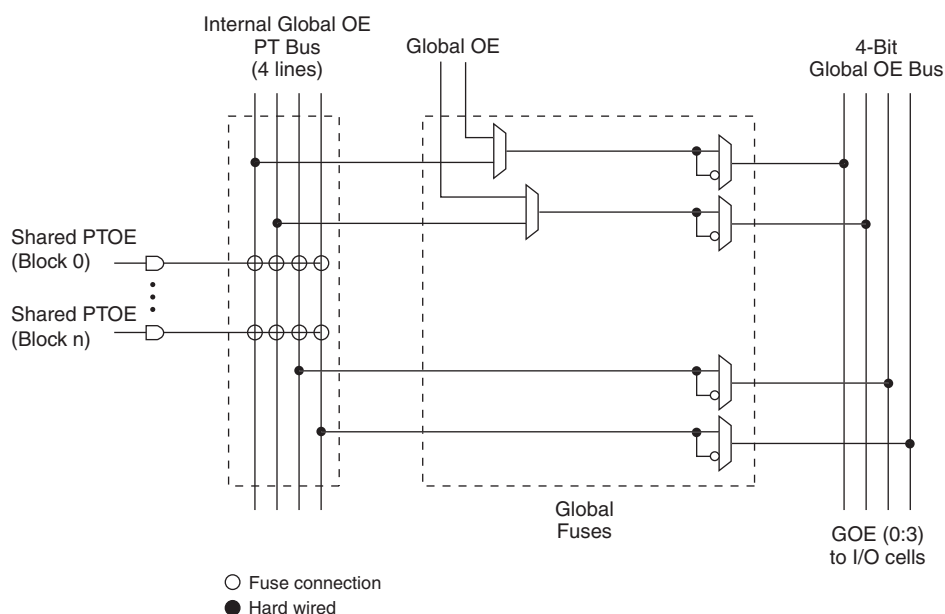

## IEEE 1532-Compliant In-System Programming

Programming devices in-system provides a number of significant benefits including: rapid prototyping, lower inventory levels, higher quality and the ability to make in-field modifications. All ispMACH 4000 devices provide In-System Programming (ISP™) capability through the Boundary Scan Test Access Port. This capability has been implemented in a manner that ensures that the port remains compliant to the IEEE 1149.1 standard. By using IEEE 1149.1 as the communication interface through which ISP is achieved, users get the benefit of a standard, well-defined interface. All ispMACH 4000 devices are also compliant with the IEEE 1532 standard.

The ispMACH 4000 devices can be programmed across the commercial temperature and voltage range. The PC-based Lattice software facilitates in-system programming of ispMACH 4000 devices. The software takes the JEDEC file output produced by the design implementation software, along with information about the scan chain, and creates a set of vectors used to drive the scan chain. The software can use these vectors to drive a scan chain via the parallel port of a PC. Alternatively, the software can output files in formats understood by common automated test equipment. This equipment can then be used to program ispMACH 4000 devices during the testing of a circuit board.

## User Electronic Signature

The User Electronic Signature (UES) allows the designer to include identification bits or serial numbers inside the device, stored in E<sup>2</sup>CMOS memory. The ispMACH 4000 device contains 32 UES bits that can be configured by the user to store unique data such as ID codes, revision numbers or inventory control codes.

## Security Bit

A programmable security bit is provided on the ispMACH 4000 devices as a deterrent to unauthorized copying of the array configuration patterns. Once programmed, this bit defeats readback of the programmed pattern by a device programmer, securing proprietary designs from competitors. Programming and verification are also defeated by the security bit. The bit can only be reset by erasing the entire device.

## Hot Socketing

The ispMACH 4000 devices are well-suited for applications that require hot socketing capability. Hot socketing a device requires that the device, during power-up and down, can tolerate active signals on the I/Os and inputs without being damaged. Additionally, it requires that the effects of I/O pin loading be minimal on active signals. The ispMACH 4000 devices provide this capability for input voltages in the range 0V to 3.0V.

## Density Migration

The ispMACH 4000 family has been designed to ensure that different density devices in the same package have the same pin-out. Furthermore, the architecture ensures a high success rate when performing design migration from lower density parts to higher density parts. In many cases, it is possible to shift a lower utilization design targeted for a high density device to a lower density device. However, the exact details of the final resource utilization will impact the likely success in each case.

**ispMACH 4000Z External Switching Characteristics (Cont.)****Over Recommended Operating Conditions**

| Parameter                     | Description <sup>1, 2, 3</sup>                                                    | -45  |      | -5   |      | -75  |      | Units |
|-------------------------------|-----------------------------------------------------------------------------------|------|------|------|------|------|------|-------|
|                               |                                                                                   | Min. | Max. | Min. | Max. | Min. | Max. |       |
| t <sub>PD</sub>               | 5-PT bypass combinatorial propagation delay                                       | —    | 4.5  | —    | 5.0  | —    | 7.5  | ns    |
| t <sub>PD_MC</sub>            | 20-PT combinatorial propagation delay through macrocell                           | —    | 5.8  | —    | 6.0  | —    | 8.0  | ns    |
| t <sub>S</sub>                | GLB register setup time before clock                                              | 2.9  | —    | 3.0  | —    | 4.5  | —    | ns    |
| t <sub>ST</sub>               | GLB register setup time before clock with T-type register                         | 3.1  | —    | 3.2  | —    | 4.7  | —    | ns    |
| t <sub>SIR</sub>              | GLB register setup time before clock, input register path                         | 1.3  | —    | 1.3  | —    | 1.4  | —    | ns    |
| t <sub>SIRZ</sub>             | GLB register setup time before clock with zero hold                               | 2.6  | —    | 2.6  | —    | 2.7  | —    | ns    |
| t <sub>H</sub>                | GLB register hold time after clock                                                | 0.0  | —    | 0.0  | —    | 0.0  | —    | ns    |
| t <sub>HT</sub>               | GLB register hold time after clock with T-type register                           | 0.0  | —    | 0.0  | —    | 0.0  | —    | ns    |
| t <sub>HIR</sub>              | GLB register hold time after clock, input register path                           | 1.3  | —    | 1.3  | —    | 1.3  | —    | ns    |
| t <sub>HIRZ</sub>             | GLB register hold time after clock, input register path with zero hold            | 0.0  | —    | 0.0  | —    | 0.0  | —    | ns    |
| t <sub>CO</sub>               | GLB register clock-to-output delay                                                | —    | 3.8  | —    | 4.2  | —    | 4.5  | ns    |
| t <sub>R</sub>                | External reset pin to output delay                                                | —    | 7.5  | —    | 7.5  | —    | 9.0  | ns    |
| t <sub>RW</sub>               | External reset pulse duration                                                     | 2.0  | —    | 2.0  | —    | 4.0  | —    | ns    |
| t <sub>PTOE/DIS</sub>         | Input to output local product term output enable/disable                          | —    | 8.2  | —    | 8.5  | —    | 9.0  | ns    |
| t <sub>GPTOE/DIS</sub>        | Input to output global product term output enable/disable                         | —    | 10.0 | —    | 10.0 | —    | 10.5 | ns    |
| t <sub>GOE/DIS</sub>          | Global OE input to output enable/disable                                          | —    | 5.5  | —    | 6.0  | —    | 7.0  | ns    |
| t <sub>CW</sub>               | Global clock width, high or low                                                   | 1.8  | —    | 2.0  | —    | 2.8  | —    | ns    |
| t <sub>GW</sub>               | Global gate width low (for low transparent) or high (for high transparent)        | 1.8  | —    | 2.0  | —    | 2.8  | —    | ns    |
| t <sub>WIR</sub>              | Input register clock width, high or low                                           | 1.8  | —    | 2.0  | —    | 2.8  | —    | ns    |
| f <sub>MAX</sub> <sup>4</sup> | Clock frequency with internal feedback                                            | —    | 200  | —    | 200  | —    | 168  | MHz   |
| f <sub>MAX</sub> (Ext.)       | clock frequency with external feedback, [1 / (t <sub>S</sub> + t <sub>CO</sub> )] | —    | 150  | —    | 139  | —    | 111  | MHz   |

1. Timing numbers are based on default LVCMOS 1.8 I/O buffers. Use timing adjusters provided to calculate other standards.

Timing v.2.2

2. Measured using standard switching GRP loading of 1 and 1 output switching.


3. Pulse widths and clock widths less than minimum will cause unknown behavior.

4. Standard 16-bit counter using GRP feedback.

## Timing Model

The task of determining the timing through the ispMACH 4000 family, like any CPLD, is relatively simple. The timing model provided in Figure 11 shows the specific delay paths. Once the implementation of a given function is determined either conceptually or from the software report file, the delay path of the function can easily be determined from the timing model. The Lattice design tools report the timing delays based on the same timing model for a particular design. Note that the internal timing parameters are given for reference only, and are not tested. The external timing parameters are tested and guaranteed for every device. For more information on the timing model and usage, refer to TN1004, [ispMACH 4000 Timing Model Design and Usage Guidelines](#).

**Figure 11. ispMACH 4000 Timing Model**

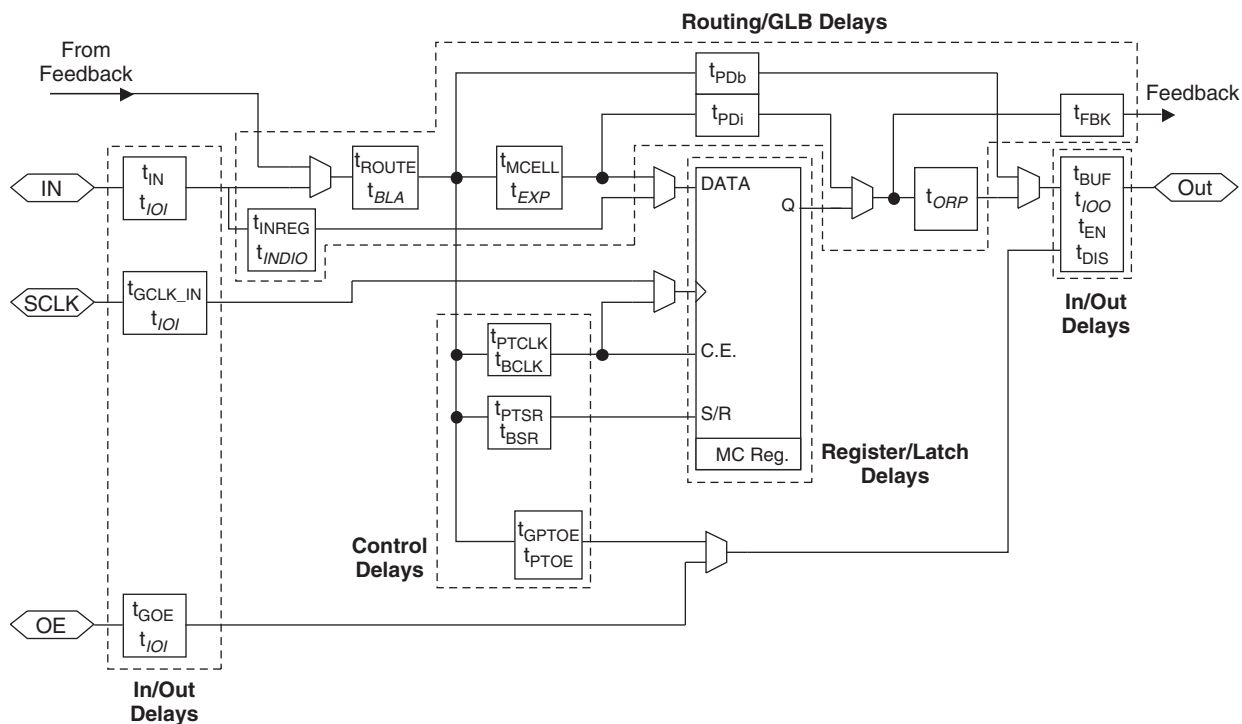

Note: Italicized items are optional delay adders.

**ispMACH 4000V/B/C Internal Timing Parameters (Cont.)****Over Recommended Operating Conditions**

| Parameter             | Description                                                         | -2.5 |      | -2.7 |      | -3   |      | -3.5 |      | Units |
|-----------------------|---------------------------------------------------------------------|------|------|------|------|------|------|------|------|-------|
| $t_{PDLi}$            | Propagation Delay through Transparent Latch to Output/ Feedback MUX | —    | 0.25 | —    | 0.25 | —    | 0.25 | —    | 0.25 | ns    |
| $t_{SRi}$             | Asynchronous Reset or Set to Output/Feedback MUX Delay              | 0.28 | —    | 0.28 | —    | 0.28 | —    | 0.28 | —    | ns    |
| $t_{SRR}$             | Asynchronous Reset or Set Recovery Time                             | 1.67 | —    | 1.67 | —    | 1.67 | —    | 1.67 | —    | ns    |
| <b>Control Delays</b> |                                                                     |      |      |      |      |      |      |      |      |       |
| $t_{BCLK}$            | GLB PT Clock Delay                                                  | —    | 1.12 | —    | 1.12 | —    | 1.12 | —    | 1.12 | ns    |
| $t_{PTCLK}$           | Macrocell PT Clock Delay                                            | —    | 0.87 | —    | 0.87 | —    | 0.87 | —    | 0.87 | ns    |
| $t_{BSR}$             | Block PT Set/Reset Delay                                            | —    | 1.83 | —    | 1.83 | —    | 1.83 | —    | 1.83 | ns    |
| $t_{PTSR}$            | Macrocell PT Set/Reset Delay                                        | —    | 1.11 | —    | 1.41 | —    | 1.51 | —    | 1.61 | ns    |
| $t_{GPTOE}$           | Global PT OE Delay                                                  | —    | 2.83 | —    | 4.13 | —    | 5.33 | —    | 5.33 | ns    |
| $t_{PTOE}$            | Macrocell PT OE Delay                                               | —    | 1.83 | —    | 2.13 | —    | 2.33 | —    | 2.83 | ns    |

Timing v.3.2

Note: Internal Timing Parameters are not tested and are for reference only. Refer to the Timing Model in this data sheet for further details.

## ispMACH 4000V/B/C Internal Timing Parameters

Over Recommended Operating Conditions

| Parameter             | Description                                                        | -5   |      | -75  |      | -10  |      | Units |
|-----------------------|--------------------------------------------------------------------|------|------|------|------|------|------|-------|
|                       |                                                                    | Min. | Max. | Min. | Max. | Min. | Max. |       |
| In/Out Delays         |                                                                    |      |      |      |      |      |      |       |
| t <sub>IN</sub>       | Input Buffer Delay                                                 | —    | 0.95 | —    | 1.50 | —    | 2.00 | ns    |
| t <sub>GOE</sub>      | Global OE Pin Delay                                                | —    | 4.04 | —    | 6.04 | —    | 7.04 | ns    |
| t <sub>GCLK_IN</sub>  | Global Clock Input Buffer Delay                                    | —    | 1.83 | —    | 2.28 | —    | 3.28 | ns    |
| t <sub>BUF</sub>      | Delay through Output Buffer                                        | —    | 1.00 | —    | 1.50 | —    | 1.50 | ns    |
| t <sub>EN</sub>       | Output Enable Time                                                 | —    | 0.96 | —    | 0.96 | —    | 0.96 | ns    |
| t <sub>DIS</sub>      | Output Disable Time                                                | —    | 0.96 | —    | 0.96 | —    | 0.96 | ns    |
| Routing/GLB Delays    |                                                                    |      |      |      |      |      |      |       |
| t <sub>ROUTE</sub>    | Delay through GRP                                                  | —    | 1.51 | —    | 2.26 | —    | 3.26 | ns    |
| t <sub>MCELL</sub>    | Macrocell Delay                                                    | —    | 1.05 | —    | 1.45 | —    | 1.95 | ns    |
| t <sub>INREG</sub>    | Input Buffer to Macrocell Register Delay                           | —    | 0.56 | —    | 0.96 | —    | 1.46 | ns    |
| t <sub>FBK</sub>      | Internal Feedback Delay                                            | —    | 0.00 | —    | 0.00 | —    | 0.00 | ns    |
| t <sub>PDb</sub>      | 5-PT Bypass Propagation Delay                                      | —    | 1.54 | —    | 2.24 | —    | 3.24 | ns    |
| t <sub>PDi</sub>      | Macrocell Propagation Delay                                        | —    | 0.94 | —    | 1.24 | —    | 1.74 | ns    |
| Register/Latch Delays |                                                                    |      |      |      |      |      |      |       |
| t <sub>S</sub>        | D-Register Setup Time (Global Clock)                               | 1.32 | —    | 1.57 | —    | 1.57 | —    | ns    |
| t <sub>S_PT</sub>     | D-Register Setup Time (Product Term Clock)                         | 1.32 | —    | 1.32 | —    | 1.32 | —    | ns    |
| t <sub>ST</sub>       | T-Register Setup Time (Global Clock)                               | 1.52 | —    | 1.77 | —    | 1.77 | —    | ns    |
| t <sub>ST_PT</sub>    | T-Register Setup Time (Product Term Clock)                         | 1.32 | —    | 1.32 | —    | 1.32 | —    | ns    |
| t <sub>H</sub>        | D-Register Hold Time                                               | 1.68 | —    | 2.93 | —    | 3.93 | —    | ns    |
| t <sub>HT</sub>       | T-Register Hold Time                                               | 1.68 | —    | 2.93 | —    | 3.93 | —    | ns    |
| t <sub>SIR</sub>      | D-Input Register Setup Time (Global Clock)                         | 1.52 | —    | 1.57 | —    | 1.57 | —    | ns    |
| t <sub>SIR_PT</sub>   | D-Input Register Setup Time (Product Term Clock)                   | 1.45 | —    | 1.45 | —    | 1.45 | —    | ns    |
| t <sub>HIR</sub>      | D-Input Register Hold Time (Global Clock)                          | 0.68 | —    | 1.18 | —    | 1.18 | —    | ns    |
| t <sub>HIR_PT</sub>   | D-Input Register Hold Time (Product Term Clock)                    | 0.68 | —    | 1.18 | —    | 1.18 | —    | ns    |
| t <sub>COi</sub>      | Register Clock to Output/Feedback MUX Time                         | —    | 0.52 | —    | 0.67 | —    | 1.17 | ns    |
| t <sub>CES</sub>      | Clock Enable Setup Time                                            | 2.25 | —    | 2.25 | —    | 2.25 | —    | ns    |
| t <sub>CEH</sub>      | Clock Enable Hold Time                                             | 1.88 | —    | 1.88 | —    | 1.88 | —    | ns    |
| t <sub>SL</sub>       | Latch Setup Time (Global Clock)                                    | 1.32 | —    | 1.57 | —    | 1.57 | —    | ns    |
| t <sub>SL_PT</sub>    | Latch Setup Time (Product Term Clock)                              | 1.32 | —    | 1.32 | —    | 1.32 | —    | ns    |
| t <sub>HL</sub>       | Latch Hold Time                                                    | 1.17 | —    | 1.17 | —    | 1.17 | —    | ns    |
| t <sub>GOi</sub>      | Latch Gate to Output/Feedback MUX Time                             | —    | 0.33 | —    | 0.33 | —    | 0.33 | ns    |
| t <sub>PDLi</sub>     | Propagation Delay through Transparent Latch to Output/Feedback MUX | —    | 0.25 | —    | 0.25 | —    | 0.25 | ns    |
| t <sub>SRI</sub>      | Asynchronous Reset or Set to Output/Feedback MUX Delay             | 0.28 | —    | 0.28 | —    | 0.28 | —    | ns    |
| t <sub>SRR</sub>      | Asynchronous Reset or Set Recovery Time                            | 1.67 | —    | 1.67 | —    | 1.67 | —    | ns    |
| Control Delays        |                                                                    |      |      |      |      |      |      |       |
| t <sub>BCLK</sub>     | GLB PT Clock Delay                                                 | —    | 1.12 | —    | 1.12 | —    | 0.62 | ns    |
| t <sub>PTCLK</sub>    | Macrocell PT Clock Delay                                           | —    | 0.87 | —    | 0.87 | —    | 0.87 | ns    |
| t <sub>BSR</sub>      | GLB PT Set/Reset Delay                                             | —    | 1.83 | —    | 1.83 | —    | 1.83 | ns    |
| t <sub>PTSR</sub>     | Macrocell PT Set/Reset Delay                                       | —    | 2.51 | —    | 3.41 | —    | 3.41 | ns    |

## ispMACH 4000Z Internal Timing Parameters


Over Recommended Operating Conditions

| Parameter             | Description                                                        | -35  |      | -37  |      | -42  |      | Units |
|-----------------------|--------------------------------------------------------------------|------|------|------|------|------|------|-------|
|                       |                                                                    | Min. | Max. | Min. | Max. | Min. | Max. |       |
| In/Out Delays         |                                                                    |      |      |      |      |      |      |       |
| t <sub>IN</sub>       | Input Buffer Delay                                                 | —    | 0.75 | —    | 0.80 | —    | 0.75 | ns    |
| t <sub>GOE</sub>      | Global OE Pin Delay                                                | —    | 2.25 | —    | 2.25 | —    | 2.30 | ns    |
| t <sub>GCLK_IN</sub>  | Global Clock Input Buffer Delay                                    | —    | 1.60 | —    | 1.60 | —    | 1.95 | ns    |
| t <sub>BUF</sub>      | Delay through Output Buffer                                        | —    | 0.75 | —    | 0.90 | —    | 0.90 | ns    |
| t <sub>EN</sub>       | Output Enable Time                                                 | —    | 2.25 | —    | 2.25 | —    | 2.50 | ns    |
| t <sub>DIS</sub>      | Output Disable Time                                                | —    | 1.35 | —    | 1.35 | —    | 2.50 | ns    |
| Routing/GLB Delays    |                                                                    |      |      |      |      |      |      |       |
| t <sub>ROUTE</sub>    | Delay through GRP                                                  | —    | 1.60 | —    | 1.60 | —    | 2.15 | ns    |
| t <sub>MCELL</sub>    | Macrocell Delay                                                    | —    | 0.65 | —    | 0.75 | —    | 0.85 | ns    |
| t <sub>INREG</sub>    | Input Buffer to Macrocell Register Delay                           | —    | 0.91 | —    | 1.00 | —    | 1.00 | ns    |
| t <sub>FBK</sub>      | Internal Feedback Delay                                            | —    | 0.05 | —    | 0.00 | —    | 0.00 | ns    |
| t <sub>PDb</sub>      | 5-PT Bypass Propagation Delay                                      | —    | 0.40 | —    | 0.40 | —    | 0.40 | ns    |
| t <sub>PDi</sub>      | Macrocell Propagation Delay                                        | —    | 0.25 | —    | 0.25 | —    | 0.65 | ns    |
| Register/Latch Delays |                                                                    |      |      |      |      |      |      |       |
| t <sub>S</sub>        | D-Register Setup Time (Global Clock)                               | 0.80 | —    | 0.95 | —    | 0.90 | —    | ns    |
| t <sub>S_PT</sub>     | D-Register Setup Time (Product Term Clock)                         | 1.35 | —    | 1.95 | —    | 1.90 | —    | ns    |
| t <sub>ST</sub>       | T-Register Setup Time (Global Clock)                               | 1.00 | —    | 1.15 | —    | 1.10 | —    | ns    |
| t <sub>ST_PT</sub>    | T-register Setup Time (Product Term Clock)                         | 1.55 | —    | 1.75 | —    | 2.10 | —    | ns    |
| t <sub>H</sub>        | D-Register Hold Time                                               | 1.40 | —    | 1.55 | —    | 1.80 | —    | ns    |
| t <sub>HT</sub>       | T-Resister Hold Time                                               | 1.40 | —    | 1.55 | —    | 1.80 | —    | ns    |
| t <sub>SIR</sub>      | D-Input Register Setup Time (Global Clock)                         | 0.94 | —    | 0.90 | —    | 1.50 | —    | ns    |
| t <sub>SIR_PT</sub>   | D-Input Register Setup Time (Product Term Clock)                   | 1.45 | —    | 1.45 | —    | 1.45 | —    | ns    |
| t <sub>HIR</sub>      | D-Input Register Hold Time (Global Clock)                          | 1.06 | —    | 1.20 | —    | 1.10 | —    | ns    |
| t <sub>HIR_PT</sub>   | D-Input Register Hold Time (Product Term Clock)                    | 0.88 | —    | 1.00 | —    | 1.00 | —    | ns    |
| t <sub>COi</sub>      | Register Clock to Output/Feedback MUX Time                         | —    | 0.65 | —    | 0.70 | —    | 0.65 | ns    |
| t <sub>CES</sub>      | Clock Enable Setup Time                                            | 1.00 | —    | 2.00 | —    | 2.00 | —    | ns    |
| t <sub>CEH</sub>      | Clock Enable Hold Time                                             | 0.00 | —    | 0.00 | —    | 0.00 | —    | ns    |
| t <sub>SL</sub>       | Latch Setup Time (Global Clock)                                    | 0.80 | —    | 0.95 | —    | 0.90 | —    | ns    |
| t <sub>SL_PT</sub>    | Latch Setup Time (Product Term Clock)                              | 1.55 | —    | 1.95 | —    | 1.90 | —    | ns    |
| t <sub>HL</sub>       | Latch Hold Time                                                    | 1.40 | —    | 1.80 | —    | 1.80 | —    | ns    |
| t <sub>GOi</sub>      | Latch Gate to Output/Feedback MUX Time                             | —    | 0.40 | —    | 0.33 | —    | 0.33 | ns    |
| t <sub>PDLi</sub>     | Propagation Delay through Transparent Latch to Output/Feedback MUX | —    | 0.30 | —    | 0.25 | —    | 0.25 | ns    |
| t <sub>SRI</sub>      | Asynchronous Reset or Set to Output/Feedback MUX Delay             | —    | 0.28 | —    | 0.28 | —    | 1.27 | ns    |
| t <sub>SRR</sub>      | Asynchronous Reset or Set Recovery Delay                           | —    | 2.00 | —    | 1.67 | —    | 1.80 | ns    |
| Control Delays        |                                                                    |      |      |      |      |      |      |       |
| t <sub>BCLK</sub>     | GLB PT Clock Delay                                                 | —    | 1.30 | —    | 1.50 | —    | 1.55 | ns    |
| t <sub>PTCLK</sub>    | Macrocell PT Clock Delay                                           | —    | 1.50 | —    | 1.70 | —    | 1.55 | ns    |
| t <sub>BSR</sub>      | GLB PT Set/Reset Delay                                             | —    | 1.10 | —    | 1.83 | —    | 1.83 | ns    |
| t <sub>PTSR</sub>     | Macrocell PT Set/Reset Delay                                       | —    | 1.22 | —    | 2.02 | —    | 1.83 | ns    |

Switching Test Conditions

Figure 12 shows the output test load that is used for AC testing. The specific values for resistance, capacitance, voltage, and other test conditions are shown in Table 11.

Figure 12. Output Test Load, LVTTTL and LVCMOS Standards

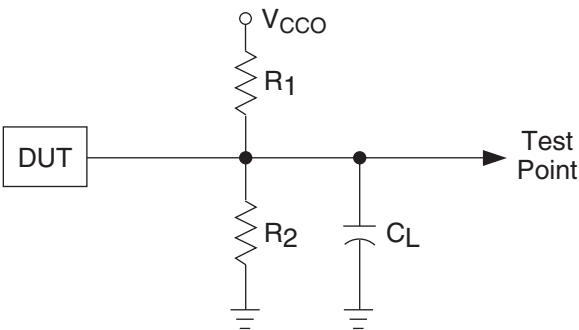

0213A/ispm4k

Table 11. Test Fixture Required Components

| Test Condition               | $R_1$        | $R_2$        | $C_L^1$ | Timing Ref.              | $V_{CCO}$          |
|------------------------------|--------------|--------------|---------|--------------------------|--------------------|
| LVCMOS I/O, (L -> H, H -> L) | 106 $\Omega$ | 106 $\Omega$ | 35pF    | LVCMOS 3.3 = 1.5V        | LVCMOS 3.3 = 3.0V  |
|                              |              |              |         | LVCMOS 2.5 = $V_{CCO}/2$ | LVCMOS 2.5 = 2.3V  |
|                              |              |              |         | LVCMOS 1.8 = $V_{CCO}/2$ | LVCMOS 1.8 = 1.65V |
| LVCMOS I/O (Z -> H)          | $\infty$     | 106 $\Omega$ | 35pF    | 1.5V                     | 3.0V               |
| LVCMOS I/O (Z -> L)          | 106 $\Omega$ | $\infty$     | 35pF    | 1.5V                     | 3.0V               |
| LVCMOS I/O (H -> Z)          | $\infty$     | 106 $\Omega$ | 5pF     | $V_{OH} - 0.3$           | 3.0V               |
| LVCMOS I/O (L -> Z)          | 106 $\Omega$ | $\infty$     | 5pF     | $V_{OL} + 0.3$           | 3.0V               |

1.  $C_L$  includes test fixtures and probe capacitance.

**ispMACH 4000V/B/C/Z Power Supply and NC Connections<sup>1</sup> (Cont.)**

| Signal                 | 132-ball csBGA <sup>7</sup>                                                                                                                                                       | 144-pin TQFP <sup>4</sup>                                                           | 176-pin TQFP <sup>4</sup>             | 256-ball ftBGA/fpBGA <sup>2,3,7,9</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VCC                    | P1, A14, B7, N8                                                                                                                                                                   | 36, 57, 108, 129                                                                    | 42, 69, 88, 130, 157, 176             | B2, B15, G8, G9, K8, K9, R2, R15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| VCCO0<br>VCCO (Bank 0) | G3, P5, C1 <sup>8</sup> , M2 <sup>8</sup> , C5                                                                                                                                    | 3, 19, 34, 47, 136                                                                  | 4, 22, 40, 56, 166                    | D6, F4, H7, J7, L4, N6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| VCCO1<br>VCCO (Bank 1) | M10, M14 <sup>8</sup> , H12, A10, C13 <sup>8</sup>                                                                                                                                | 64, 75, 91, 106, 119                                                                | 78, 92, 110, 128, 144                 | D11, F13, H10, J10, L13, N11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| GND                    | B1, P2, N14, A13                                                                                                                                                                  | 1, 37, 73, 109                                                                      | 2, 46 <sup>5</sup> , 65, 90, 134, 153 | A1, A16, C6, C11, F3, F14, G7, G10, H8, H9, J8, J9, K7, K10, L3, L14, P6, P11, T1, T16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| GND (Bank 0)           | E2, K2, N4, B4                                                                                                                                                                    | 10, 18 <sup>6</sup> , 27, 46, 127, 137                                              | 13, 31, 55, 155, 167                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| GND (Bank 1)           | N11, K13, E13, B11                                                                                                                                                                | 55, 65, 82, 90 <sup>6</sup> , 99, 118                                               | 67, 79, 101, 119, 143                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| NC                     | <b>4064Z:</b> C1, C3, E1, E3, H2, J3, K1, M2, M4, N5, P7, P8, M8, P10, P11, P14, M12, K14, K12, G13, G14, E14, C13, B13, B10, C10, A7, B5, A5, A4, A1<br><br><b>4128Z:</b> P8, A7 | <b>4128V:</b> 17, 20, 38, 45, 72, 89, 92, 110, 117, 144<br><br><b>4256V:</b> 18, 90 | 1, 43, 44, 45, 89, 131, 132, 133      | <b>4256V/B/C, 128 I/O:</b> A4, A5, A6, A11, A12, A13, A15, B5, B6, B11, B12, B14, C7, D1, D4, D5, D10, D12, D16, E1, E2, E4, E5, E7, E10, E13, E14, E15, E16, F1, F2, F15, F16, G1, G4, G5, G6, G12, G13, G14, J11, K3, K4, K15, L1, L2, L12, L15, L16, M1, M2, M3, M4, M5, M12, M13, M15, M16, N1, N2, N7, N10, N12, N14, P5, P12, R4, R5, R6, R11, R12, R16, T2, T4, T5, T6, T11, T12, T13, T15<br><br><b>4256V/B/C, 160 I/O:</b> A5, A12, A15, B5, B6, B11, B12, B14, D4, D5, D12, E1, E4, E5, E13, E15, E16, F1, F2, F15, G1, G5, G12, G14, L1, L2, L12, L15, L16, M1, M2, M3, M12, M16, N1, N12, N14, P5, R4, R5, R6, R11, R12, R16, T4, T5, T12, T15<br><br><b>4384V/B/C:</b> B5, B12, D5, D12, E1, E15, E16, F2, L12, M1, M2, M16, N12, R5, R12, T4<br><br><b>4512V/B/C:</b> None |

1. All grounds must be electrically connected at the board level. However, for the purposes of I/O current loading, grounds are associated with the bank shown.
2. Internal GNDs and I/O GNDs (Bank 0/1) are connected inside package.
3. VCCO balls connect to two power planes within the package, one for VCCO0 and one for VCCO1.
4. Pin orientation follows the conventional order from pin 1 marking of the top side view and counter-clockwise.
5. ispMACH 4384V/B/C pin 46 is tied to GND (Bank 0).
6. ispMACH 4128V only.
7. Pin orientation A1 starts from the upper left corner of the top side view with alphabetical order ascending vertically and numerical order ascending horizontally.
8. ispMACH 4128Z and 4256Z only. NC for ispMACH 4064Z.
9. Use 256 ftBGA package for all new designs. Refer to PCN#14A-07 for 256 fpBGA package discontinuance.

**ispMACH 4032V/B/C and 4064V/B/C Logic Signal Connections:  
44-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4032V/B/C |                | ispMACH 4064V/B/C |                |
|------------|-------------|-------------------|----------------|-------------------|----------------|
|            |             | GLB/MC/Pad        | ORP            | GLB/MC/Pad        | ORP            |
| 42         | 0           | A2                | A <sup>2</sup> | A4                | A <sup>2</sup> |
| 43         | 0           | A3                | A <sup>3</sup> | A6                | A <sup>3</sup> |
| 44         | 0           | A4                | A <sup>4</sup> | A8                | A <sup>4</sup> |

**ispMACH 4032V/B/C/Z and 4064V/B/C/Z Logic Signal Connections:  
48-Pin TQFP**

| Pin Number | Bank Number | ispMACH 4032V/B/C/Z |                 | ispMACH 4064V/B/C |                | ispMACH 4064Z |                |
|------------|-------------|---------------------|-----------------|-------------------|----------------|---------------|----------------|
|            |             | GLB/MC/Pad          | ORP             | GLB/MC/Pad        | ORP            | GLB/MC/Pad    | ORP            |
| 1          | -           | TDI                 | -               | TDI               | -              | TDI           | -              |
| 2          | 0           | A5                  | A <sup>5</sup>  | A10               | A <sup>5</sup> | A8            | A <sup>5</sup> |
| 3          | 0           | A6                  | A <sup>6</sup>  | A12               | A <sup>6</sup> | A10           | A <sup>6</sup> |
| 4          | 0           | A7                  | A <sup>7</sup>  | A14               | A <sup>7</sup> | A11           | A <sup>7</sup> |
| 5          | 0           | GND (Bank 0)        | -               | GND (Bank 0)      | -              | GND (Bank 0)  | -              |
| 6          | 0           | VCCO (Bank 0)       | -               | VCCO (Bank 0)     | -              | VCCO (Bank 0) | -              |
| 7          | 0           | A8                  | A <sup>8</sup>  | B0                | B <sup>0</sup> | B15           | B <sup>7</sup> |
| 8          | 0           | A9                  | A <sup>9</sup>  | B2                | B <sup>1</sup> | B12           | B <sup>6</sup> |
| 9          | 0           | A10                 | A <sup>10</sup> | B4                | B <sup>2</sup> | B10           | B <sup>5</sup> |
| 10         | 0           | A11                 | A <sup>11</sup> | B6                | B <sup>3</sup> | B8            | B <sup>4</sup> |
| 11         | -           | TCK                 | -               | TCK               | -              | TCK           | -              |
| 12         | -           | VCC                 | -               | VCC               | -              | VCC           | -              |
| 13         | -           | GND                 | -               | GND               | -              | GND           | -              |
| 14         | 0           | A12                 | A <sup>12</sup> | B8                | B <sup>4</sup> | B6            | B <sup>3</sup> |
| 15         | 0           | A13                 | A <sup>13</sup> | B10               | B <sup>5</sup> | B4            | B <sup>2</sup> |
| 16         | 0           | A14                 | A <sup>14</sup> | B12               | B <sup>6</sup> | B2            | B <sup>1</sup> |
| 17         | 0           | A15                 | A <sup>15</sup> | B14               | B <sup>7</sup> | B0            | B <sup>0</sup> |
| 18         | 0           | CLK1/I              | -               | CLK1/I            | -              | CLK1/I        | -              |
| 19         | 1           | CLK2/I              | -               | CLK2/I            | -              | CLK2/I        | -              |
| 20         | 1           | B0                  | B <sup>0</sup>  | C0                | C <sup>0</sup> | C0            | C <sup>0</sup> |
| 21         | 1           | B1                  | B <sup>1</sup>  | C2                | C <sup>1</sup> | C1            | C <sup>1</sup> |
| 22         | 1           | B2                  | B <sup>2</sup>  | C4                | C <sup>2</sup> | C2            | C <sup>2</sup> |
| 23         | 1           | B3                  | B <sup>3</sup>  | C6                | C <sup>3</sup> | C4            | C <sup>3</sup> |
| 24         | 1           | B4                  | B <sup>4</sup>  | C8                | C <sup>4</sup> | C6            | C <sup>4</sup> |
| 25         | -           | TMS                 | -               | TMS               | -              | TMS           | -              |
| 26         | 1           | B5                  | B <sup>5</sup>  | C10               | C <sup>5</sup> | C8            | C <sup>5</sup> |
| 27         | 1           | B6                  | B <sup>6</sup>  | C12               | C <sup>6</sup> | C10           | C <sup>6</sup> |
| 28         | 1           | B7                  | B <sup>7</sup>  | C14               | C <sup>7</sup> | C11           | C <sup>7</sup> |
| 29         | 1           | GND (Bank 1)        | -               | GND (Bank 1)      | -              | GND (Bank 1)  | -              |
| 30         | 1           | VCCO (Bank 1)       | -               | VCCO (Bank 1)     | -              | VCCO (Bank 1) | -              |
| 31         | 1           | B8                  | B <sup>8</sup>  | D0                | D <sup>0</sup> | D15           | D <sup>7</sup> |
| 32         | 1           | B9                  | B <sup>9</sup>  | D2                | D <sup>1</sup> | D12           | D <sup>6</sup> |

**ispMACH 4064V/B/C/Z, 4128V/B/C/Z, 4256V/B/C/Z Logic Signal Connections:  
100-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4064V/B/C/Z |                 | ispMACH 4128V/B/C/Z |                | ispMACH 4256V/B/C/Z |                |
|------------|-------------|---------------------|-----------------|---------------------|----------------|---------------------|----------------|
|            |             | GLB/MC/Pad          | ORP             | GLB/MC/Pad          | ORP            | GLB/MC/Pad          | ORP            |
| 42         | 1           | C1                  | C <sup>1</sup>  | E2                  | E <sup>1</sup> | I6                  | I <sup>1</sup> |
| 43         | 1           | C2                  | C <sup>2</sup>  | E4                  | E <sup>2</sup> | I10                 | I <sup>2</sup> |
| 44         | 1           | C3                  | C <sup>3</sup>  | E6                  | E <sup>3</sup> | I12                 | I <sup>3</sup> |
| 45         | 1           | VCCO (Bank 1)       | -               | VCCO (Bank 1)       | -              | VCCO (Bank 1)       | -              |
| 46         | 1           | GND (Bank 1)        | -               | GND (Bank 1)        | -              | GND (Bank 1)        | -              |
| 47         | 1           | C4                  | C <sup>4</sup>  | E8                  | E <sup>4</sup> | J2                  | J <sup>0</sup> |
| 48         | 1           | C5                  | C <sup>5</sup>  | E10                 | E <sup>5</sup> | J6                  | J <sup>1</sup> |
| 49         | 1           | C6                  | C <sup>6</sup>  | E12                 | E <sup>6</sup> | J10                 | J <sup>2</sup> |
| 50         | 1           | C7                  | C <sup>7</sup>  | E14                 | E <sup>7</sup> | J12                 | J <sup>3</sup> |
| 51         | -           | GND                 | -               | GND                 | -              | GND                 | -              |
| 52         | -           | TMS                 | -               | TMS                 | -              | TMS                 | -              |
| 53         | 1           | C8                  | C <sup>8</sup>  | F0                  | F <sup>0</sup> | K12                 | K <sup>3</sup> |
| 54         | 1           | C9                  | C <sup>9</sup>  | F2                  | F <sup>1</sup> | K10                 | K <sup>2</sup> |
| 55         | 1           | C10                 | C <sup>10</sup> | F4                  | F <sup>2</sup> | K6                  | K <sup>1</sup> |
| 56         | 1           | C11                 | C <sup>11</sup> | F6                  | F <sup>3</sup> | K2                  | K <sup>0</sup> |
| 57         | 1           | GND (Bank 1)        | -               | GND (Bank 1)        | -              | GND (Bank 1)        | -              |
| 58         | 1           | C12                 | C <sup>12</sup> | F8                  | F <sup>4</sup> | L12                 | L <sup>3</sup> |
| 59         | 1           | C13                 | C <sup>13</sup> | F10                 | F <sup>5</sup> | L10                 | L <sup>2</sup> |
| 60         | 1           | C14                 | C <sup>14</sup> | F12                 | F <sup>6</sup> | L6                  | L <sup>1</sup> |
| 61         | 1           | C15                 | C <sup>15</sup> | F13                 | F <sup>7</sup> | L4                  | L <sup>0</sup> |
| 62*        | 1           | I                   | -               | I                   | -              | I                   | -              |
| 63         | 1           | VCCO (Bank 1)       | -               | VCCO (Bank 1)       | -              | VCCO (Bank 1)       | -              |
| 64         | 1           | D15                 | D <sup>15</sup> | G14                 | G <sup>7</sup> | M4                  | M <sup>0</sup> |
| 65         | 1           | D14                 | D <sup>14</sup> | G12                 | G <sup>6</sup> | M6                  | M <sup>1</sup> |
| 66         | 1           | D13                 | D <sup>13</sup> | G10                 | G <sup>5</sup> | M10                 | M <sup>2</sup> |
| 67         | 1           | D12                 | D <sup>12</sup> | G8                  | G <sup>4</sup> | M12                 | M <sup>3</sup> |
| 68         | 1           | GND (Bank 1)        | -               | GND (Bank 1)        | -              | GND (Bank 1)        | -              |
| 69         | 1           | D11                 | D <sup>11</sup> | G6                  | G <sup>3</sup> | N2                  | N <sup>0</sup> |
| 70         | 1           | D10                 | D <sup>10</sup> | G5                  | G <sup>2</sup> | N6                  | N <sup>1</sup> |
| 71         | 1           | D9                  | D <sup>9</sup>  | G4                  | G <sup>1</sup> | N10                 | N <sup>2</sup> |
| 72         | 1           | D8                  | D <sup>8</sup>  | G2                  | G <sup>0</sup> | N12                 | N <sup>3</sup> |
| 73*        | 1           | I                   | -               | I                   | -              | I                   | -              |
| 74         | -           | TDO                 | -               | TDO                 | -              | TDO                 | -              |
| 75         | -           | VCC                 | -               | VCC                 | -              | VCC                 | -              |
| 76         | -           | GND                 | -               | GND                 | -              | GND                 | -              |
| 77*        | 1           | I                   | -               | I                   | -              | I                   | -              |
| 78         | 1           | D7                  | D <sup>7</sup>  | H13                 | H <sup>7</sup> | O12                 | O <sup>3</sup> |
| 79         | 1           | D6                  | D <sup>6</sup>  | H12                 | H <sup>6</sup> | O10                 | O <sup>2</sup> |
| 80         | 1           | D5                  | D <sup>5</sup>  | H10                 | H <sup>5</sup> | O6                  | O <sup>1</sup> |
| 81         | 1           | D4                  | D <sup>4</sup>  | H8                  | H <sup>4</sup> | O2                  | O <sup>0</sup> |
| 82         | 1           | GND (Bank 1)        | -               | GND (Bank 1)        | -              | GND (Bank 1)        | -              |

**ispMACH 4064V/B/C/Z, 4128V/B/C/Z, 4256V/B/C/Z Logic Signal Connections:  
100-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4064V/B/C/Z |                | ispMACH 4128V/B/C/Z |                | ispMACH 4256V/B/C/Z |                |
|------------|-------------|---------------------|----------------|---------------------|----------------|---------------------|----------------|
|            |             | GLB/MC/Pad          | ORP            | GLB/MC/Pad          | ORP            | GLB/MC/Pad          | ORP            |
| 83         | 1           | VCCO (Bank 1)       | -              | VCCO (Bank 1)       | -              | VCCO (Bank 1)       | -              |
| 84         | 1           | D3                  | D <sup>3</sup> | H6                  | H <sup>3</sup> | P12                 | P <sup>3</sup> |
| 85         | 1           | D2                  | D <sup>2</sup> | H4                  | H <sup>2</sup> | P10                 | P <sup>2</sup> |
| 86         | 1           | D1                  | D <sup>1</sup> | H2                  | H <sup>1</sup> | P6                  | P <sup>1</sup> |
| 87         | 1           | D0/GOE1             | D <sup>0</sup> | H0/GOE1             | H <sup>0</sup> | P2/OE1              | P <sup>0</sup> |
| 88         | 1           | CLK3/I              | -              | CLK3/I              | -              | CLK3/I              | -              |
| 89         | 0           | CLK0/I              | -              | CLK0/I              | -              | CLK0/I              | -              |
| 90         | -           | VCC                 | -              | VCC                 | -              | VCC                 | -              |
| 91         | 0           | A0/GOE0             | A <sup>0</sup> | A0/GOE0             | A <sup>0</sup> | A2/GOE0             | A <sup>0</sup> |
| 92         | 0           | A1                  | A <sup>1</sup> | A2                  | A <sup>1</sup> | A6                  | A <sup>1</sup> |
| 93         | 0           | A2                  | A <sup>2</sup> | A4                  | A <sup>2</sup> | A10                 | A <sup>2</sup> |
| 94         | 0           | A3                  | A <sup>3</sup> | A6                  | A <sup>3</sup> | A12                 | A <sup>3</sup> |
| 95         | 0           | VCCO (Bank 0)       | -              | VCCO (Bank 0)       | -              | VCCO (Bank 0)       | -              |
| 96         | 0           | GND (Bank 0)        | -              | GND (Bank 0)        | -              | GND (Bank 0)        | -              |
| 97         | 0           | A4                  | A <sup>4</sup> | A8                  | A <sup>4</sup> | B2                  | B <sup>0</sup> |
| 98         | 0           | A5                  | A <sup>5</sup> | A10                 | A <sup>5</sup> | B6                  | B <sup>1</sup> |
| 99         | 0           | A6                  | A <sup>6</sup> | A12                 | A <sup>6</sup> | B10                 | B <sup>2</sup> |
| 100        | 0           | A7                  | A <sup>7</sup> | A14                 | A <sup>7</sup> | B12                 | B <sup>3</sup> |

\*This pin is input only.

**ispMACH 4128V/B/C Logic Signal Connections: 128-Pin TQFP**

| Pin Number | Bank Number | ispMACH 4128V/B/C |                 |
|------------|-------------|-------------------|-----------------|
|            |             | GLB/MC/Pad        | ORP             |
| 1          | 0           | GND               | -               |
| 2          | 0           | TDI               | -               |
| 3          | 0           | VCCO (Bank 0)     | -               |
| 4          | 0           | B0                | B <sup>0</sup>  |
| 5          | 0           | B1                | B <sup>1</sup>  |
| 6          | 0           | B2                | B <sup>2</sup>  |
| 7          | 0           | B4                | B <sup>3</sup>  |
| 8          | 0           | B5                | B <sup>4</sup>  |
| 9          | 0           | B6                | B <sup>5</sup>  |
| 10         | 0           | GND (Bank 0)      | -               |
| 11         | 0           | B8                | B <sup>6</sup>  |
| 12         | 0           | B9                | B <sup>7</sup>  |
| 13         | 0           | B10               | B <sup>8</sup>  |
| 14         | 0           | B12               | B <sup>9</sup>  |
| 15         | 0           | B13               | B <sup>10</sup> |
| 16         | 0           | B14               | B <sup>11</sup> |
| 17         | 0           | VCCO (Bank 0)     | -               |
| 18         | 0           | C14               | C <sup>11</sup> |

**ispMACH 4128V/B/C Logic Signal Connections: 128-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4128V/B/C |                   |
|------------|-------------|-------------------|-------------------|
|            |             | GLB/MC/Pad        | ORP               |
| 62         | 1           | E10               | E <sup>^</sup> 8  |
| 63         | 1           | E12               | E <sup>^</sup> 9  |
| 64         | 1           | E14               | E <sup>^</sup> 11 |
| 65         | 1           | GND               | -                 |
| 66         | 1           | TMS               | -                 |
| 67         | 1           | VCCO (Bank 1)     | -                 |
| 68         | 1           | F0                | F <sup>^</sup> 0  |
| 69         | 1           | F1                | F <sup>^</sup> 1  |
| 70         | 1           | F2                | F <sup>^</sup> 2  |
| 71         | 1           | F4                | F <sup>^</sup> 3  |
| 72         | 1           | F5                | F <sup>^</sup> 4  |
| 73         | 1           | F6                | F <sup>^</sup> 5  |
| 74         | 1           | GND (Bank 1)      | -                 |
| 75         | 1           | F8                | F <sup>^</sup> 6  |
| 76         | 1           | F9                | F <sup>^</sup> 7  |
| 77         | 1           | F10               | F <sup>^</sup> 8  |
| 78         | 1           | F12               | F <sup>^</sup> 9  |
| 79         | 1           | F13               | F <sup>^</sup> 10 |
| 80         | 1           | F14               | F <sup>^</sup> 11 |
| 81         | 1           | VCCO (Bank 1)     | -                 |
| 82         | 1           | G14               | G <sup>^</sup> 11 |
| 83         | 1           | G13               | G <sup>^</sup> 10 |
| 84         | 1           | G12               | G <sup>^</sup> 9  |
| 85         | 1           | G10               | G <sup>^</sup> 8  |
| 86         | 1           | G9                | G <sup>^</sup> 7  |
| 87         | 1           | G8                | G <sup>^</sup> 6  |
| 88         | 1           | GND (Bank 1)      | -                 |
| 89         | 1           | G6                | G <sup>^</sup> 5  |
| 90         | 1           | G5                | G <sup>^</sup> 4  |
| 91         | 1           | G4                | G <sup>^</sup> 3  |
| 92         | 1           | G2                | G <sup>^</sup> 2  |
| 93         | 1           | G0                | G <sup>^</sup> 0  |
| 94         | 1           | VCCO (Bank 1)     | -                 |
| 95         | 1           | TDO               | -                 |
| 96         | 1           | VCC               | -                 |
| 97         | 1           | GND               | -                 |
| 98         | 1           | H14               | H <sup>^</sup> 11 |
| 99         | 1           | H13               | H <sup>^</sup> 10 |
| 100        | 1           | H12               | H <sup>^</sup> 9  |
| 101        | 1           | H10               | H <sup>^</sup> 8  |
| 102        | 1           | H9                | H <sup>^</sup> 7  |
| 103        | 1           | H8                | H <sup>^</sup> 6  |
| 104        | 1           | GND (Bank 1)      | -                 |

**ispMACH 4256V/B/C/Z, 4384V/B/C, 4512V/B/C, Logic Signal Connections:  
176-Pin TQFP (Cont.)**

| Pin Number | Bank Number | ispMACH 4256V/B/C/Z |                  | ispMACH 4384V/B/C |                  | ispMACH 4512V/B/C |                  |
|------------|-------------|---------------------|------------------|-------------------|------------------|-------------------|------------------|
|            |             | GLB/MC/Pad          | ORP              | GLB/MC/Pad        | ORP              | GLB/MC/Pad        | ORP              |
| 19         | 0           | D4                  | D <sup>^</sup> 2 | E4                | E <sup>^</sup> 2 | G4                | G <sup>^</sup> 2 |
| 20         | 0           | D2                  | D <sup>^</sup> 1 | E2                | E <sup>^</sup> 1 | G2                | G <sup>^</sup> 1 |
| 21         | 0           | D0                  | D <sup>^</sup> 0 | E0                | E <sup>^</sup> 0 | G0                | G <sup>^</sup> 0 |
| 22         | 0           | VCCO (Bank 0)       | -                | VCCO (Bank 0)     | -                | VCCO (Bank 0)     | -                |
| 23         | 0           | E0                  | E <sup>^</sup> 0 | H0                | H <sup>^</sup> 0 | J0                | J <sup>^</sup> 0 |
| 24         | 0           | E2                  | E <sup>^</sup> 1 | H2                | H <sup>^</sup> 1 | J2                | J <sup>^</sup> 1 |
| 25         | 0           | E4                  | E <sup>^</sup> 2 | H4                | H <sup>^</sup> 2 | J4                | J <sup>^</sup> 2 |
| 26         | 0           | E6                  | E <sup>^</sup> 3 | H6                | H <sup>^</sup> 3 | J6                | J <sup>^</sup> 3 |
| 27         | 0           | E8                  | E <sup>^</sup> 4 | H8                | H <sup>^</sup> 4 | J8                | J <sup>^</sup> 4 |
| 28         | 0           | E10                 | E <sup>^</sup> 5 | H10               | H <sup>^</sup> 5 | J10               | J <sup>^</sup> 5 |
| 29         | 0           | E12                 | E <sup>^</sup> 6 | H12               | H <sup>^</sup> 6 | J12               | J <sup>^</sup> 6 |
| 30         | 0           | E14                 | E <sup>^</sup> 7 | H14               | H <sup>^</sup> 7 | J14               | J <sup>^</sup> 7 |
| 31         | 0           | GND (Bank 0)        | -                | GND (Bank 0)      | -                | GND (Bank 0)      | -                |
| 32         | 0           | F0                  | F <sup>^</sup> 0 | J0                | J <sup>^</sup> 0 | N0                | N <sup>^</sup> 0 |
| 33         | 0           | F2                  | F <sup>^</sup> 1 | J2                | J <sup>^</sup> 1 | N2                | N <sup>^</sup> 1 |
| 34         | 0           | F4                  | F <sup>^</sup> 2 | J4                | J <sup>^</sup> 2 | N4                | N <sup>^</sup> 2 |
| 35         | 0           | F6                  | F <sup>^</sup> 3 | J6                | J <sup>^</sup> 3 | N6                | N <sup>^</sup> 3 |
| 36         | 0           | F8                  | F <sup>^</sup> 4 | J8                | J <sup>^</sup> 4 | N8                | N <sup>^</sup> 4 |
| 37         | 0           | F10                 | F <sup>^</sup> 5 | J10               | J <sup>^</sup> 5 | N10               | N <sup>^</sup> 5 |
| 38         | 0           | F12                 | F <sup>^</sup> 6 | J12               | J <sup>^</sup> 6 | N12               | N <sup>^</sup> 6 |
| 39         | 0           | F14                 | F <sup>^</sup> 7 | J14               | J <sup>^</sup> 7 | N14               | N <sup>^</sup> 7 |
| 40         | 0           | VCCO (Bank 0)       | -                | VCCO (Bank 0)     | -                | VCCO (Bank 0)     | -                |
| 41         | -           | TCK                 | -                | TCK               | -                | TCK               | -                |
| 42         | -           | VCC                 | -                | VCC               | -                | VCC               | -                |
| 43         | -           | NC                  | -                | NC                | -                | NC                | -                |
| 44         | -           | NC                  | -                | NC                | -                | NC                | -                |
| 45         | -           | NC                  | -                | NC                | -                | NC                | -                |
| 46         | -           | GND                 | -                | GND (Bank 0)      | -                | GND               | -                |
| 47         | 0           | G14                 | G <sup>^</sup> 7 | K14               | K <sup>^</sup> 7 | O14               | O <sup>^</sup> 7 |
| 48         | 0           | G12                 | G <sup>^</sup> 6 | K12               | K <sup>^</sup> 6 | O12               | O <sup>^</sup> 6 |
| 49         | 0           | G10                 | G <sup>^</sup> 5 | K10               | K <sup>^</sup> 5 | O10               | O <sup>^</sup> 5 |
| 50         | 0           | G8                  | G <sup>^</sup> 4 | K8                | K <sup>^</sup> 4 | O8                | O <sup>^</sup> 4 |
| 51         | 0           | G6                  | G <sup>^</sup> 3 | K6                | K <sup>^</sup> 3 | O6                | O <sup>^</sup> 3 |
| 52         | 0           | G4                  | G <sup>^</sup> 2 | K4                | K <sup>^</sup> 2 | O4                | O <sup>^</sup> 2 |
| 53         | 0           | G2                  | G <sup>^</sup> 1 | K2                | K <sup>^</sup> 1 | O2                | O <sup>^</sup> 1 |
| 54         | 0           | G0                  | G <sup>^</sup> 0 | K0                | K <sup>^</sup> 0 | O0                | O <sup>^</sup> 0 |
| 55         | 0           | GND (Bank 0)        | -                | GND (Bank 0)      | -                | GND (Bank 0)      | -                |
| 56         | 0           | VCCO (Bank 0)       | -                | VCCO (Bank 0)     | -                | VCCO (Bank 0)     | -                |
| 57         | 0           | H14                 | H <sup>^</sup> 7 | L14               | L <sup>^</sup> 7 | P14               | P <sup>^</sup> 7 |
| 58         | 0           | H12                 | H <sup>^</sup> 6 | L12               | L <sup>^</sup> 6 | P12               | P <sup>^</sup> 6 |
| 59         | 0           | H10                 | H <sup>^</sup> 5 | L10               | L <sup>^</sup> 5 | P10               | P <sup>^</sup> 5 |

**ispMACH 4256V/B/C, 4384V/B/C, 4512V/B/C Logic Signal Connections:  
256-Ball ftBGA/fpBGA (Cont.)**

| Ball Number | I/O Bank | ispMACH 4256V/B/C<br>128-I/O |                | ispMACH 4256V/B/C<br>160-I/O |                | ispMACH 4384V/B/C |                | ispMACH 4512V/B/C |                |
|-------------|----------|------------------------------|----------------|------------------------------|----------------|-------------------|----------------|-------------------|----------------|
|             |          | GLB/MC/Pad                   | ORP            | GLB/MC/Pad                   | ORP            | GLB/MC/Pad        | ORP            | GLB/MC/Pad        | ORP            |
| E7          | 0        | NC                           | -              | B1                           | B <sup>1</sup> | F8                | F <sup>4</sup> | D12               | D <sup>3</sup> |
| A3          | 0        | B0                           | B <sup>0</sup> | B2                           | B <sup>2</sup> | B0                | B <sup>0</sup> | B0                | B <sup>0</sup> |
| F7          | 0        | B2                           | B <sup>1</sup> | B4                           | B <sup>3</sup> | B2                | B <sup>1</sup> | B2                | B <sup>1</sup> |
| B4          | 0        | B4                           | B <sup>2</sup> | B6                           | B <sup>4</sup> | B4                | B <sup>2</sup> | B4                | B <sup>2</sup> |
| C5          | 0        | B6                           | B <sup>3</sup> | B8                           | B <sup>5</sup> | B6                | B <sup>3</sup> | B6                | B <sup>3</sup> |
| A2          | 0        | B8                           | B <sup>4</sup> | B9                           | B <sup>6</sup> | B8                | B <sup>4</sup> | B8                | B <sup>4</sup> |
| E6          | 0        | B10                          | B <sup>5</sup> | B10                          | B <sup>7</sup> | B10               | B <sup>5</sup> | B10               | B <sup>5</sup> |
| B3          | 0        | B12                          | B <sup>6</sup> | B12                          | B <sup>8</sup> | B12               | B <sup>6</sup> | B12               | B <sup>6</sup> |
| C4          | 0        | B14                          | B <sup>7</sup> | B14                          | B <sup>9</sup> | B14               | B <sup>7</sup> | B14               | B <sup>7</sup> |
| D4          | 0        | NC                           | -              | NC                           | -              | D10               | D <sup>5</sup> | F0                | F <sup>0</sup> |
| E5          | 0        | NC                           | -              | NC                           | -              | D8                | D <sup>4</sup> | F2                | F <sup>1</sup> |
| -           | -        | VCC                          | -              | VCC                          | -              | VCC               | -              | VCC               | -              |
| -           | -        | -                            | -              | -                            | -              | GND               | -              | GND               | -              |
| -           | 0        | -                            | -              | -                            | -              | GND (Bank 0)      | -              | GND (Bank 0)      | -              |

Note: VCC, VCCO and GND are tied together to their respective common signal on the package substrate. See Power Supply and NC Connections table for VCC/ VCCO/GND pin definitions.

## ispMACH 4000B (2.5V) Industrial Devices

| Family  | Part Number                   | Macrocells | Voltage | t <sub>PD</sub> | Package | Pin/Ball Count | I/O | Grade |
|---------|-------------------------------|------------|---------|-----------------|---------|----------------|-----|-------|
| LC4032B | LC4032B-5T48I                 | 32         | 2.5     | 5               | TQFP    | 48             | 32  | I     |
|         | LC4032B-75T48I                | 32         | 2.5     | 7.5             | TQFP    | 48             | 32  | I     |
|         | LC4032B-10T48I                | 32         | 2.5     | 10              | TQFP    | 48             | 32  | I     |
|         | LC4032B-5T44I                 | 32         | 2.5     | 5               | TQFP    | 44             | 30  | I     |
|         | LC4032B-75T44I                | 32         | 2.5     | 7.5             | TQFP    | 44             | 30  | I     |
|         | LC4032B-10T44I                | 32         | 2.5     | 10              | TQFP    | 44             | 30  | I     |
| LC4064B | LC4064B-5T100I                | 64         | 2.5     | 5               | TQFP    | 100            | 64  | I     |
|         | LC4064B-75T100I               | 64         | 2.5     | 7.5             | TQFP    | 100            | 64  | I     |
|         | LC4064B-10T100I               | 64         | 2.5     | 10              | TQFP    | 100            | 64  | I     |
|         | LC4064B-5T48I                 | 64         | 2.5     | 5               | TQFP    | 48             | 32  | I     |
|         | LC4064B-75T48I                | 64         | 2.5     | 7.5             | TQFP    | 48             | 32  | I     |
|         | LC4064B-10T48I                | 64         | 2.5     | 10              | TQFP    | 48             | 32  | I     |
|         | LC4064B-5T44I                 | 64         | 2.5     | 5               | TQFP    | 44             | 30  | I     |
|         | LC4064B-75T44I                | 64         | 2.5     | 7.5             | TQFP    | 44             | 30  | I     |
|         | LC4064B-10T44I                | 64         | 2.5     | 10              | TQFP    | 44             | 30  | I     |
| LC4128B | LC4128B-5T128I                | 128        | 2.5     | 5               | TQFP    | 128            | 92  | I     |
|         | LC4128B-75T128I               | 128        | 2.5     | 7.5             | TQFP    | 128            | 92  | I     |
|         | LC4128B-10T128I               | 128        | 2.5     | 10              | TQFP    | 128            | 92  | I     |
|         | LC4128B-5T100I                | 128        | 2.5     | 5               | TQFP    | 100            | 64  | I     |
|         | LC4128B-75T100I               | 128        | 2.5     | 7.5             | TQFP    | 100            | 64  | I     |
|         | LC4128B-10T100I               | 128        | 2.5     | 10              | TQFP    | 100            | 64  | I     |
| LC4256B | LC4256B-5FT256AI              | 256        | 2.5     | 5               | ftBGA   | 256            | 128 | I     |
|         | LC4256B-75FT256AI             | 256        | 2.5     | 7.5             | ftBGA   | 256            | 128 | I     |
|         | LC4256B-10FT256AI             | 256        | 2.5     | 10              | ftBGA   | 256            | 128 | I     |
|         | LC4256B-5FT256BI              | 256        | 2.5     | 5               | ftBGA   | 256            | 160 | I     |
|         | LC4256B-75FT256BI             | 256        | 2.5     | 7.5             | ftBGA   | 256            | 160 | I     |
|         | LC4256B-10FT256BI             | 256        | 2.5     | 10              | ftBGA   | 256            | 160 | I     |
|         | LC4256B-5F256AI <sup>1</sup>  | 256        | 2.5     | 5               | fpBGA   | 256            | 128 | I     |
|         | LC4256B-75F256AI <sup>1</sup> | 256        | 2.5     | 7.5             | fpBGA   | 256            | 128 | I     |
|         | LC4256B-10F256AI <sup>1</sup> | 256        | 2.5     | 10              | fpBGA   | 256            | 128 | I     |
|         | LC4256B-5F256BI <sup>1</sup>  | 256        | 2.5     | 5               | fpBGA   | 256            | 160 | I     |
|         | LC4256B-75F256BI <sup>1</sup> | 256        | 2.5     | 7.5             | fpBGA   | 256            | 160 | I     |
|         | LC4256B-10F256BI <sup>1</sup> | 256        | 2.5     | 10              | fpBGA   | 256            | 160 | I     |
|         | LC4256B-5T176I                | 256        | 2.5     | 5               | TQFP    | 176            | 128 | I     |
|         | LC4256B-75T176I               | 256        | 2.5     | 7.5             | TQFP    | 176            | 128 | I     |
|         | LC4256B-10T176I               | 256        | 2.5     | 10              | TQFP    | 176            | 128 | I     |
|         | LC4256B-5T100I                | 256        | 2.5     | 5               | TQFP    | 100            | 64  | I     |
|         | LC4256B-75T100I               | 256        | 2.5     | 7.5             | TQFP    | 100            | 64  | I     |
|         | LC4256B-10T100I               | 256        | 2.5     | 10              | TQFP    | 100            | 64  | I     |

## ispMACH 4000V (3.3V) Commercial Devices (Cont.)

| Device  | Part Number                   | Macrocells | Voltage | t <sub>PD</sub> | Package | Pin/Ball Count | I/O | Grade |
|---------|-------------------------------|------------|---------|-----------------|---------|----------------|-----|-------|
| LC4128V | LC4128V-27T144C               | 128        | 3.3     | 2.7             | TQFP    | 144            | 96  | C     |
|         | LC4128V-5T144C                | 128        | 3.3     | 5               | TQFP    | 144            | 96  | C     |
|         | LC4128V-75T144C               | 128        | 3.3     | 7.5             | TQFP    | 144            | 96  | C     |
|         | LC4128V-27T128C               | 128        | 3.3     | 2.7             | TQFP    | 128            | 92  | C     |
|         | LC4128V-5T128C                | 128        | 3.3     | 5               | TQFP    | 128            | 92  | C     |
|         | LC4128V-75T128C               | 128        | 3.3     | 7.5             | TQFP    | 128            | 92  | C     |
|         | LC4128V-27T100C               | 128        | 3.3     | 2.7             | TQFP    | 100            | 64  | C     |
|         | LC4128V-5T100C                | 128        | 3.3     | 5               | TQFP    | 100            | 64  | C     |
|         | LC4128V-75T100C               | 128        | 3.3     | 7.5             | TQFP    | 100            | 64  | C     |
| LC4256V | LC4256V-3FT256AC              | 256        | 3.3     | 3               | ftBGA   | 256            | 128 | C     |
|         | LC4256V-5FT256AC              | 256        | 3.3     | 5               | ftBGA   | 256            | 128 | C     |
|         | LC4256V-75FT256AC             | 256        | 3.3     | 7.5             | ftBGA   | 256            | 128 | C     |
|         | LC4256V-3FT256BC              | 256        | 3.3     | 3               | ftBGA   | 256            | 160 | C     |
|         | LC4256V-5FT256BC              | 256        | 3.3     | 5               | ftBGA   | 256            | 160 | C     |
|         | LC4256V-75FT256BC             | 256        | 3.3     | 7.5             | ftBGA   | 256            | 160 | C     |
|         | LC4256V-3F256AC <sup>1</sup>  | 256        | 3.3     | 3               | fpBGA   | 256            | 128 | C     |
|         | LC4256V-5F256AC <sup>1</sup>  | 256        | 3.3     | 5               | fpBGA   | 256            | 128 | C     |
|         | LC4256V-75F256AC <sup>1</sup> | 256        | 3.3     | 7.5             | fpBGA   | 256            | 128 | C     |
|         | LC4256V-3F256BC <sup>1</sup>  | 256        | 3.3     | 3               | fpBGA   | 256            | 160 | C     |
|         | LC4256V-5F256BC <sup>1</sup>  | 256        | 3.3     | 5               | fpBGA   | 256            | 160 | C     |
|         | LC4256V-75F256BC <sup>1</sup> | 256        | 3.3     | 7.5             | fpBGA   | 256            | 160 | C     |
|         | LC4256V-3T176C                | 256        | 3.3     | 3               | TQFP    | 176            | 128 | C     |
|         | LC4256V-5T176C                | 256        | 3.3     | 5               | TQFP    | 176            | 128 | C     |
|         | LC4256V-75T176C               | 256        | 3.3     | 7.5             | TQFP    | 176            | 128 | C     |
|         | LC4256V-3T144C                | 256        | 3.3     | 3               | TQFP    | 144            | 96  | C     |
|         | LC4256V-5T144C                | 256        | 3.3     | 5               | TQFP    | 144            | 96  | C     |
|         | LC4256V-75T144C               | 256        | 3.3     | 7.5             | TQFP    | 144            | 96  | C     |
|         | LC4256V-3T100C                | 256        | 3.3     | 3               | TQFP    | 100            | 64  | C     |
|         | LC4256V-5T100C                | 256        | 3.3     | 5               | TQFP    | 100            | 64  | C     |
|         | LC4256V-75T100C               | 256        | 3.3     | 7.5             | TQFP    | 100            | 64  | C     |
| LC4384V | LC4384V-35FT256C              | 384        | 3.3     | 3.5             | ftBGA   | 256            | 192 | C     |
|         | LC4384V-5FT256C               | 384        | 3.3     | 5               | ftBGA   | 256            | 192 | C     |
|         | LC4384V-75FT256C              | 384        | 3.3     | 7.5             | ftBGA   | 256            | 192 | C     |
|         | LC4384V-35F256C <sup>1</sup>  | 384        | 3.3     | 3.5             | fpBGA   | 256            | 192 | C     |
|         | LC4384V-5F256C <sup>1</sup>   | 384        | 3.3     | 5               | fpBGA   | 256            | 192 | C     |
|         | LC4384V-75F256C <sup>1</sup>  | 384        | 3.3     | 7.5             | fpBGA   | 256            | 192 | C     |
|         | LC4384V-35T176C               | 384        | 3.3     | 3.5             | TQFP    | 176            | 128 | C     |
|         | LC4384V-5T176C                | 384        | 3.3     | 5               | TQFP    | 176            | 128 | C     |
|         | LC4384V-75T176C               | 384        | 3.3     | 7.5             | TQFP    | 176            | 128 | C     |

## ispMACH 4000B (2.5V) Lead-Free Commercial Devices

| Device  | Part Number                    | Macrocells | Voltage | t <sub>PD</sub> | Package         | Pin/Ball Count | I/O | Grade |
|---------|--------------------------------|------------|---------|-----------------|-----------------|----------------|-----|-------|
| LC4032B | LC4032B-25TN48C                | 32         | 2.5     | 2.5             | Lead-Free TQFP  | 48             | 32  | C     |
|         | LC4032B-5TN48C                 | 32         | 2.5     | 5               | Lead-Free TQFP  | 48             | 32  | C     |
|         | LC4032B-75TN48C                | 32         | 2.5     | 7.5             | Lead-Free TQFP  | 48             | 32  | C     |
|         | LC4032B-25TN44C                | 32         | 2.5     | 2.5             | Lead-Free TQFP  | 44             | 30  | C     |
|         | LC4032B-5TN44C                 | 32         | 2.5     | 5               | Lead-Free TQFP  | 44             | 30  | C     |
|         | LC4032B-75TN44C                | 32         | 2.5     | 7.5             | Lead-Free TQFP  | 44             | 30  | C     |
| LC4064B | LC4064B-25TN100C               | 64         | 2.5     | 2.5             | Lead-Free TQFP  | 100            | 64  | C     |
|         | LC4064B-5TN100C                | 64         | 2.5     | 5               | Lead-Free TQFP  | 100            | 64  | C     |
|         | LC4064B-75TN100C               | 64         | 2.5     | 7.5             | Lead-Free TQFP  | 100            | 64  | C     |
|         | LC4064B-25TN48C                | 64         | 2.5     | 2.5             | Lead-Free TQFP  | 48             | 32  | C     |
|         | LC4064B-5TN48C                 | 64         | 2.5     | 5               | Lead-Free TQFP  | 48             | 32  | C     |
|         | LC4064B-75TN48C                | 64         | 2.5     | 7.5             | Lead-Free TQFP  | 48             | 32  | C     |
|         | LC4064B-25TN44C                | 64         | 2.5     | 2.5             | Lead-Free TQFP  | 44             | 30  | C     |
|         | LC4064B-5TN44C                 | 64         | 2.5     | 5               | Lead-Free TQFP  | 44             | 30  | C     |
|         | LC4064B-75TN44C                | 64         | 2.5     | 7.5             | Lead-Free TQFP  | 44             | 30  | C     |
| LC4128B | LC4128B-27TN128C               | 128        | 2.5     | 2.7             | Lead-Free TQFP  | 128            | 92  | C     |
|         | LC4128B-5TN128C                | 128        | 2.5     | 5               | Lead-Free TQFP  | 128            | 92  | C     |
|         | LC4128B-75TN128C               | 128        | 2.5     | 7.5             | Lead-Free TQFP  | 128            | 92  | C     |
|         | LC4128B-27TN100C               | 128        | 2.5     | 2.7             | Lead-Free TQFP  | 100            | 92  | C     |
|         | LC4128B-5TN100C                | 128        | 2.5     | 5               | Lead-Free TQFP  | 100            | 92  | C     |
|         | LC4128B-75TN100C               | 128        | 2.5     | 7.5             | Lead-Free TQFP  | 100            | 92  | C     |
| LC4256B | LC4256B-3FTN256AC              | 256        | 2.5     | 3               | Lead-Free ftBGA | 256            | 128 | C     |
|         | LC4256B-5FTN256AC              | 256        | 2.5     | 5               | Lead-Free ftBGA | 256            | 128 | C     |
|         | LC4256B-75FTN256AC             | 256        | 2.5     | 7.5             | Lead-Free ftBGA | 256            | 128 | C     |
|         | LC4256B-3FTN256BC              | 256        | 2.5     | 3               | Lead-Free ftBGA | 256            | 160 | C     |
|         | LC4256B-5FTN256BC              | 256        | 2.5     | 5               | Lead-Free ftBGA | 256            | 160 | C     |
|         | LC4256B-75FTN256BC             | 256        | 2.5     | 7.5             | Lead-Free ftBGA | 256            | 160 | C     |
|         | LC4256B-3FN256AC <sup>1</sup>  | 256        | 2.5     | 3               | Lead-Free fpBGA | 256            | 128 | C     |
|         | LC4256B-5FN256AC <sup>1</sup>  | 256        | 2.5     | 5               | Lead-Free fpBGA | 256            | 128 | C     |
|         | LC4256B-75FN256AC <sup>1</sup> | 256        | 2.5     | 7.5             | Lead-Free fpBGA | 256            | 128 | C     |
|         | LC4256B-3FN256BC <sup>1</sup>  | 256        | 2.5     | 3               | Lead-Free fpBGA | 256            | 160 | C     |
|         | LC4256B-5FN256BC <sup>1</sup>  | 256        | 2.5     | 5               | Lead-Free fpBGA | 256            | 160 | C     |
|         | LC4256B-75FN256BC <sup>1</sup> | 256        | 2.5     | 7.5             | Lead-Free fpBGA | 256            | 160 | C     |
|         | LC4256B-3TN176C                | 256        | 2.5     | 3               | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4256B-5TN176C                | 256        | 2.5     | 5               | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4256B-75TN176C               | 256        | 2.5     | 7.5             | Lead-Free TQFP  | 176            | 128 | C     |
|         | LC4256B-3TN100C                | 256        | 2.5     | 3               | Lead-Free TQFP  | 100            | 64  | C     |
|         | LC4256B-5TN100C                | 256        | 2.5     | 5               | Lead-Free TQFP  | 100            | 64  | C     |
|         | LC4256B-75TN100C               | 256        | 2.5     | 7.5             | Lead-Free TQFP  | 100            | 64  | C     |

## ispMACH 4000V (3.3V) Lead-Free Industrial Devices

| Device  | Part Number      | Macrocells | Voltage | t <sub>PD</sub> | Package        | Pin/Ball Count | I/O | Grade |
|---------|------------------|------------|---------|-----------------|----------------|----------------|-----|-------|
| LC4032V | LC4032V-5TN48I   | 32         | 3.3     | 5               | Lead-free TQFP | 48             | 32  | I     |
|         | LC4032V-75TN48I  | 32         | 3.3     | 7.5             | Lead-free TQFP | 48             | 32  | I     |
|         | LC4032V-10TN48I  | 32         | 3.3     | 10              | Lead-free TQFP | 48             | 32  | I     |
|         | LC4032V-5TN44I   | 32         | 3.3     | 5               | Lead-free TQFP | 44             | 30  | I     |
|         | LC4032V-75TN44I  | 32         | 3.3     | 7.5             | Lead-free TQFP | 44             | 30  | I     |
|         | LC4032V-10TN44I  | 32         | 3.3     | 10              | Lead-free TQFP | 44             | 30  | I     |
| LC4064V | LC4064V-5TN100I  | 64         | 3.3     | 5               | Lead-free TQFP | 100            | 64  | I     |
|         | LC4064V-75TN100I | 64         | 3.3     | 7.5             | Lead-free TQFP | 100            | 64  | I     |
|         | LC4064V-10TN100I | 64         | 3.3     | 10              | Lead-free TQFP | 100            | 64  | I     |
|         | LC4064V-5TN48I   | 64         | 3.3     | 5               | Lead-free TQFP | 48             | 32  | I     |
|         | LC4064V-75TN48I  | 64         | 3.3     | 7.5             | Lead-free TQFP | 48             | 32  | I     |
|         | LC4064V-10TN48I  | 64         | 3.3     | 10              | Lead-free TQFP | 48             | 32  | I     |
|         | LC4064V-5TN44I   | 64         | 3.3     | 5               | Lead-free TQFP | 44             | 30  | I     |
|         | LC4064V-75TN44I  | 64         | 3.3     | 7.5             | Lead-free TQFP | 44             | 30  | I     |
|         | LC4064V-10TN44I  | 64         | 3.3     | 10              | Lead-free TQFP | 44             | 30  | I     |
| LC4128V | LC4128V-5TN144I  | 128        | 3.3     | 5               | Lead-free TQFP | 144            | 96  | I     |
|         | LC4128V-75TN144I | 128        | 3.3     | 7.5             | Lead-free TQFP | 144            | 96  | I     |
|         | LC4128V-10TN144I | 128        | 3.3     | 10              | Lead-free TQFP | 144            | 96  | I     |
|         | LC4128V-5TN128I  | 128        | 3.3     | 5               | Lead-free TQFP | 128            | 92  | I     |
|         | LC4128V-75TN128I | 128        | 3.3     | 7.5             | Lead-free TQFP | 128            | 92  | I     |
|         | LC4128V-10TN128I | 128        | 3.3     | 10              | Lead-free TQFP | 128            | 92  | I     |
|         | LC4128V-5TN100I  | 128        | 3.3     | 5               | Lead-free TQFP | 100            | 64  | I     |
|         | LC4128V-75TN100I | 128        | 3.3     | 7.5             | Lead-free TQFP | 100            | 64  | I     |
|         | LC4128V-10TN100I | 128        | 3.3     | 10              | Lead-free TQFP | 100            | 64  | I     |