



Welcome to [E-XFL.COM](https://www.e-xfl.com)


Understanding [Embedded - DSP \(Digital Signal Processors\)](#)

[Embedded - DSP \(Digital Signal Processors\)](#) are specialized microprocessors designed to perform complex mathematical computations on digital signals in real-time. Unlike general-purpose processors, DSPs are optimized for high-speed numeric processing tasks, making them ideal for applications that require efficient and precise manipulation of digital data. These processors are fundamental in converting and processing signals in various forms, including audio, video, and communication signals, ensuring that data is accurately interpreted and utilized in embedded systems.

Applications of [Embedded - DSP \(Digital Signal Processors\)](#)

Details

Product Status	Obsolete
Type	Fixed Point
Interface	I ² C, SPI
Clock Rate	150MHz
Non-Volatile Memory	-
On-Chip RAM	128kB
Voltage - I/O	3.30V
Voltage - Core	1.80V
Operating Temperature	-40°C ~ 85°C (TA)
Mounting Type	Surface Mount
Package / Case	100-LQFP Exposed Pad
Supplier Device Package	100-LQFP (16x16)
Purchase URL	https://www.e-xfl.com/product-detail/cirrus-logic/cs47024b-dqzr

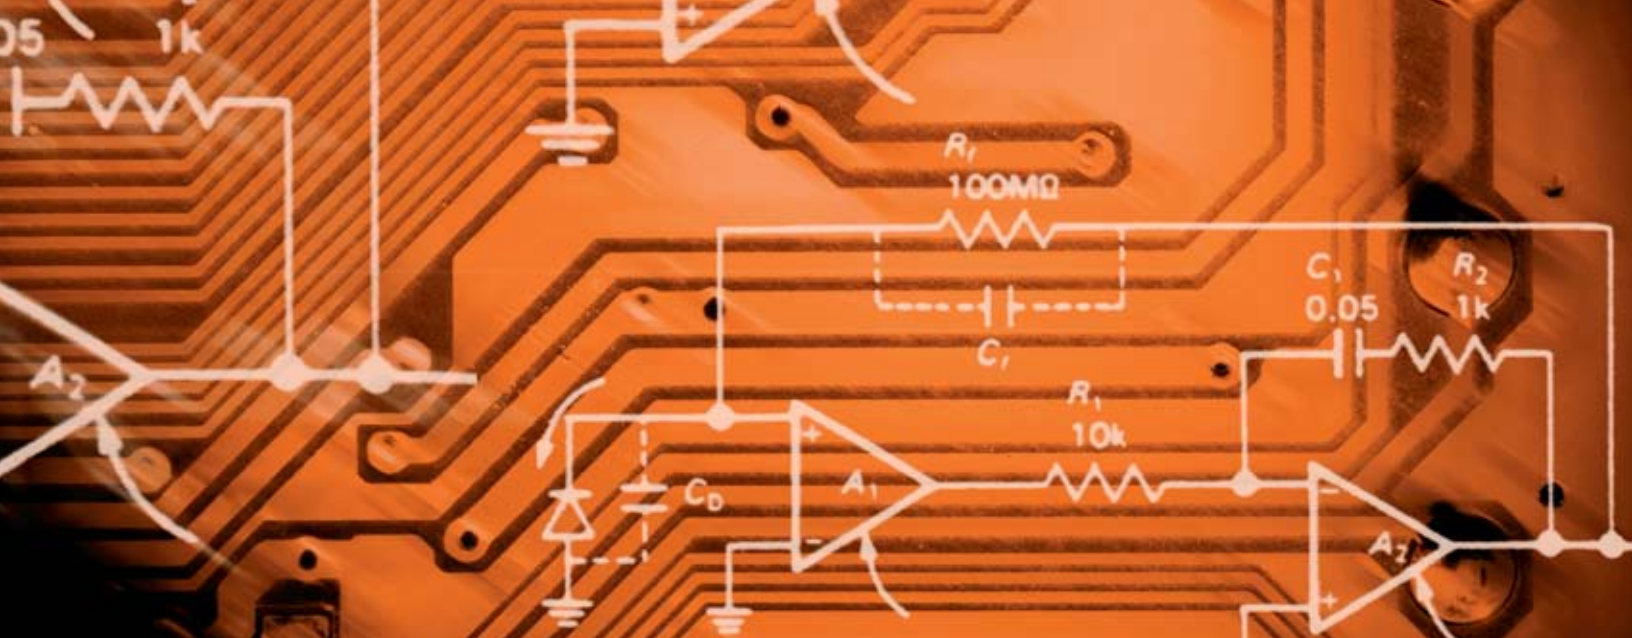

Copyright © 2009 Cirrus Logic, Inc.

All rights reserved

Printed in the USA

Cirrus Logic, Inc. and its subsidiaries ("Cirrus") believe that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided 'as is' without warranty of any kind (express or implied). Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied upon is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. No responsibility is assumed by Cirrus for the use of this information, or for infringement of patents or other rights of third parties. This document is the property of Cirrus and, by furnishing this information, Cirrus grants no license, express or implied, under any patents, mask work rights, copyrights, trademarks, trade secrets, or other intellectual property rights. No part of this publication may be copied, reproduced, stored in a retrieval system, or transmitted, in any form or by any means (electronic, mechanical, photographic, or otherwise) unless distributed in its entirety with all copyright notices attached. No part of this publication may be used as a basis for manufacture or sale of any items without the prior written consent of Cirrus.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("critical applications"). Cirrus products are not designed, authorized, or warranted to be suitable for use in products surgically implanted into the body, automotive safety or security devices, life-support products or other critical applications. Inclusion of Cirrus products in such applications is understood to be fully at the customer's risk and Cirrus disclaims and makes no warranty of merchantability and fitness for particular purpose, with regard to any Cirrus product that is used in such a manner. If the customer uses or permits the use of Cirrus products in critical applications, customer agrees, by such use, to fully indemnify Cirrus, its officers, directors, employees, distributors and other agents from any and all liability, including attorneys' fees and costs, that may result from or arise in connection with these uses.

Cirrus Logic, Cirrus, Apex Precision Power, Apex, Entertainment Processors, CobraNet, CobraCAD, CobraCom, Crystal LAN, MaverickKey, MaverickCrunch, Popguard, Intelligent Room Calibration, Optimal Integration, DSP Conductor, Total-S, Single-S, Extreme-S, Multipath, PacketPage, Cirrus Logic framework, Cirrus Extended Surround, and the Cirrus Logic logo designs are the trademarks of Cirrus Logic, Inc. All other brand and product names in this document may be trademarks or service marks of their respective owners.

Clock Generation and Jitter Reduction

SPECIFICATIONS

Part Number	One-Time Programmable	Frequency Synth/Clock Generator	Clock Multiplier/Jitter Remover	Power Supply (V)	Input Frequency Range	Reference Frequency Range	Output Frequency Range	Package
CS2000	CS2000-OTP	✓	✓	3.3	50 Hz to 30 MHz	8 to 75 MHz	6 to 75 MHz	10 MSOP
CS2100	CS2100-OTP	—	✓	3.3	50 Hz to 30 MHz	8 to 75 MHz	6 to 75 MHz	10 MSOP
CS2200	CS2200-OTP	✓	—	3.3	—	8 to 75 MHz	6 to 75 MHz	10 MSOP
CS2300	CS2300-OTP	—	✓	3.3	50 Hz to 30 MHz	Internally generated	6 to 75 MHz	10 MSOP

Audio A/D Converters

SPECIFICATIONS

Part Number	Resolution (bits)	Dynamic Range (dB)	THD+N (dB)	Sample Rate (kHz)	Analog Inputs	Power Supply (V)	Comments	Package
CS5340	24	101	−94	192	Single-ended	VA = 3.3 or 5, VD = 3.3 or 5, VL = 1.8 to 5	Pin compatible with CS5341	16 TSSOP
CS5341	24	105	−98	192	Single-ended	VA = 3.3 or 5, VD = 3.3 or 5, VL = 1.8 to 5	Pin compatible with CS5340	16 TSSOP
CS5342	24	105	−98	192	Single-ended	VA = 3.3 or 5, VD = 3.3 or 5, VL = 2.5 to 5	384*Fs MCLK	16 TSSOP
CS5343/44	24	98	−92	96	Single-ended	VA = 3.3 or 5	CS5343—I ² S CS5344—LJ	10 TSSOP
CS5345	24	104	−95	192	Single-ended	VA = 3.3 or 5, VD = 3.3 or 5, VLS/VLC = 1.8 to 5	6:1 Input MUX, PGA, MIC preamp	48 LQFP
NEW CS5346	24	103	−95	192	Single-ended	VA = 5, VD = 3.3, VL = 3.3 to 5	6:1 input MUX, PGA, MIC pre-amp, high input impedance	48 LQFP
CS5351	24	108	−98	192	Single-ended	VA = 5, VD = 3.3 or 5, VL = 2.5 to 5	Functionally compatible with CS5361	24 SOIC 24 TSSOP
CS5361	24	114	−105	192	Differential	VA = 5, VD = 3.3 or 5, VL = 2.5 to 5	Pin compatible with CS5381	24 SOIC 24 TSSOP
CS5364/66/68	24	114	−105	192	Differential	VA = 5, VD = 3.3 or 5, VLS/VLC = 1.8 to 5	4-/6-/8-channel ADC, TDM, on-chip oscillator	48 LQFP
CS5381	24	120	−110	192	Differential	VA = 5, VD = 3.3 or 5, VL = 2.5 to 5	Flagship performance	24 SOIC 24 TSSOP

Audio D/A Converters

SPECIFICATIONS

Part Number	Channels	Resolution (bits)	Dynamic Range (dB)	THD+N (dB)	Sample Rate (kHz)	Analog Outputs	Power Supply (V)	Comments	Package
CS4334/35/38/39	2	24	96	−88	96	Single-ended	VA = 5	Entry-level stereo DAC	8 SOIC
CS4344/45/46/48	2	24	105	−90	192	Single-ended	VA = 3.3 or 5	Upgrade for CS4340 and CS4340A	10 TSSOP
CS4349	2	24	101	−91	192	Single-ended	VA = 3.3 or 5	1 V _{RMS} @ 3.3 V, Volume Control	24 TSSOP
CS4350	2	24	109	−91	192	Single-ended or Differential	VA = 3.3 or 5 VLC = 3.3 to 5 VLS = 1.5 to 5	Integrated PLL, TDM	24 TSSOP
CS4351	2	24	112	−100	192	Single-ended	VA = 9 or 12 VD = 3.3 VL = 1.8 to 3	Line driver, 2 V _{RMS} output	20 TSSOP
CS4352	2	24	106	−93	192	Single-ended	VA = 9 or 12 VD = 3.3 VL = 1.5 to 5	Line driver, 2 V _{RMS} output	20 TSSOP
NEW CS4353	2	24	106	−93	192	Single-ended	VA = 3.3 VCP = 3.3 VL = 0.9 to 3.3	Ground-centered 2 V _{RMS} line-level outputs	24 QFN
CS4361	6	24	105	−95	192	Single-ended	VA = 5 VL = 1.8 to 5	Entry-level 6-channel DAC	20 TSSOP
CS4362A/82A	6/8	24	114	−100	192	Differential	VA = 5 VD = 2.5 VL = 1.8 to 5	6-/8-channel DAC, DSD	48 LQFP
CS4364/84	6/8	24	103	−88	192	Single-ended	VA = 5 VD = 2.5 VL = 1.8 to 5	6-/8-channel DAC, DSD, footprint compatible with CS4365/85	48 LQFP
CS4365/85	6/8	24	114	−100	192	Differential	VA = 5 VD = 2.5 VL = 1.8 to 5	6-/8-channel DAC, DSD, TDM	48 LQFP
CS4391A	2	24	108	−94	192	Differential	VA = 5 VL = 1.8 to 5	DSD, pin compatible with CS4392	20 TSSOP
CS4392	2	24	114	−100	192	Differential	VA = 5 VL = 1.8 to 5	DSD, selectable digital filters, pin compatible with CS4391A	20 TSSOP
CS4398	2	24	120	−107	192	Differential	VA = 5 VD = 3.3 or 5 VL = 1.8 to 5	Flagship DAC, DSD processor, selectable D-filter	28 TSSOP

Audio DSPs

SPECIFICATIONS

Part	Processor	DSP Tools	Key Firmwares & Features	Temp Range	Package
CS493xxx	Supported exclusively with existing firmwares, many functions available for license, ideal for reduced requirements and low-cost opportunities				
CS493253	Dual 24-bit	None	DD + PLII, IEC61937 via I ² S	86 MHz~70 °C	44 PLCC
CS493254	Dual 24-bit	None	DD + PLII, IEC61937 via I ² S + DDEX	86 MHz~70 °C	44 PLCC
CS493263	Dual 24-bit	None	DD + PLII, IEC61937 via I ² S + DTS	86 MHz~70 °C	44 PLCC
CS493264	Dual 24-bit	None	DD + PLII, IEC61937 via I ² S + DDEX	86 MHz~70 °C	44 PLCC
CS493295	Dual 24-bit	None	also includes support for AAC	86 MHz~70 °C	44 PLCC
CS493302	Dual 24-bit	None	MP3 & PCM Processor for THX® & automotive applications	86 MHz~70 °C & 72 MHz~85 °C	44 PLCC
CS493105	Dual 24-bit	None	Broadcast audio decoder, DD, MPEG, AAC ES/PES streams	86 MHz~70 °C	44 PLCC
CS493115	Dual 24-bit	None	Broadcast audio decoder, DD, MPEG, AAC ES/PES streams	86 MHz~70 °C	44 PLCC
CS493122	Dual 24-bit	None	Broadcast audio decoder, DD, MPEG, AAC ES/PES streams	86 MHz~70 °C	44 PLCC
CS485xx	Tiny, cost effective, mega-performance PCM processors targeted for: mini-systems, DVD receivers, speaker bars, car audio, DTVs				
CS48520	Single 32-bit	DSP Composer, ASM, C	4 channel audio PP1	150 MHz~70 °C (300 M MAC/Sec)	48 QFP
CS48540	Single 32-bit	DSP Composer, ASM, C	8 channel audio PP1	150 MHz~70 °C (300 M MAC/Sec)	48 QFP
CS48560	Single 32-bit	DSP Composer, ASM, C	> 8 channel audio PP1	150 MHz~70 °C & 130 MHz~85 °C	48 QFP
CS48AU2x	Audyssey® EQ/Dynamic Volume/Dynamic EQ/BassXT-enabled device ideally targeted for DTVs, portable audio docking stations, automotive entertainment, I²S I/O				
CS48AU2B	Single 32-bit	DSP Composer	2.0 channel Audyssey® EQ/Dynamic Volume/Dynamic EQ/BassXT controller (selected additional functions available through DSP Composer)	150 MHz~70 °C (300 M MAC/Sec)	48 LQFP
CS48DV2x	Dolby® Volume-enabled device ideally targeted for DTVs, portable audio docking stations, automotive entertainment, I²S I/O				
CS48DV2A	Single 32-bit	Demo GUI	2 channel Dolby® Volume controller (fixed function)	150 MHz~70 °C (300 M MAC/Sec)	48 LQFP
NEW CS48DV2B	Single 32-bit	DSP Composer	2.1 channel Dolby® Volume controller (selected additional functions available through DSP Composer)	150 MHz~70 °C (300 M MAC/Sec)	48 LQFP
CS48DV6x	Dolby® Volume-enabled device ideally targeted for 5.1 channel audio/video receivers, DVD receivers, soundbars, I²S I/O				
NEW CS48DV6B	Single 32-bit	DSP Composer	5.1 channel Dolby® Volume controller (fixed function)	150 MHz~70 °C (300 M MAC/Sec)	48 LQFP
CS4953xx	Single-chip multistandard surround sound decoder targeted for playback from analog & S/PDIF sources				
CS495303	Dual 32-bit	DSP Composer, ASM, C	(DD, DDEX, AAC, MPEG) + PP2	150 MHz~70 °C (600 M MAC/Sec)	128 LQFP
CS495313	Dual 32-bit	DSP Composer, ASM, C	(DD, DDEX, DTS, DTSes, DTS96, AAC, MPEG) + PP2	150 MHz~70 °C (600 M MAC/Sec)	128 LQFP 144 LQFP

Audio DSPs

SPECIFICATIONS

Part	Processor	DSP Tools	Key Firmwares & Features	Temp Range	Package
CS4970xx	Single-chip multistandard surround sound decoder targeted for playback from HD DVD™, Blu-ray Disc® players, & all analog, S/PDIF & HDMI® sources				
CS497004	Dual 32-bit	DSP Composer, ASM, C	(DD+, DTHD, DTSHRA, DTSMA, DTSLBR, DTSES, DTS96, DD, DDEX, DTS, AAC, MPEG) + PP2	150 MHz~70 °C (600 M MAC/Sec)	144 LQFP
CS497024	Dual 32-bit	DSP Composer, ASM, C	(DD+, DTHD, DTSHRA, DTSMA, DTSLBR, DTSES, DTS96, DD, DDEX, DTS, AAC, MPEG) + PP2	150 MHz~70 °C (600 M MAC/Sec)	128 LQFP
CS49DV8x	Dolby® Volume-enabled device ideally targeted for audio/video receivers and DVD receivers, I²S I/O				
NEW CS49DV8C	Dual 32-bit	DSP Composer	8 channel Dolby® Volume control (fixed function)	150 MHz~70 °C (600 M MAC/Sec)	128 LQFP

Audio SOCs (DSP with Integrated Mixed-Signal)

SPECIFICATIONS

Part	Processor	Speed (MIPS)	Car Audio DSPs	General Audio DSPs	Resolution (bits)	Dynamic Range (dB)	A/D Channels	D/A Channels	Comments	Package
CS470xx	Tiny, cost effective, mega-performance PCM processors with integrated CODEC targeted for mini-systems, DVD receivers, speakerbars, car audio, DTVs									
NEW CS47024	Single 32-bit	150	CS47024B-DQZ	CS47024B-CQZ	24	108 DAC 105 ADC	2	4	2 ADC w/ 5:1 MUX, 4 DAC, S/PDIF Rx/Tx, SRC	100 LQFP
NEW CS47028	Single 32-bit	150	CS47028B-DQZ	CS47028B-CQZ	24	108 DAC 105 ADC	2	8	2 ADC w/ 5:1 MUX on 1 ADC, 8 DAC, S/PDIF Rx/Tx, SRC	100 LQFP
NEW CS47048	Single 32-bit	150	CS47048B-DQZ	CS47048B-CQZ	24	108 DAC 105 ADC	4	8	4 ADC w/ 5:1 MUX, 8 DAC, S/PDIF Rx/Tx, SRC	100 LQFP

Recommended Replacements for New Design

Not Recommended for New Design	Recommended Replacement
CS494xxx (CS494003)	CS4953xx
CS4950xx (CS495002)	CS4953xx
CS4951xx (CS495102)	CS4953xx
CS4952xx (CS495202)	CS4953xx

Algorithm & Nomenclature Abbreviations

Decoding Algorithm & Nomenclature Abbreviation Table	
DTSES = DTS-ES™ Matrix/Discrete	DD = Dolby Digital®
DTS = DTS Digital Surround™	DDEX = Dolby Digital® Surround EX®
DTS96 = 96 kHz/24-bit	DD+ = Dolby Digital® Plus
DTHD = Dolby® TrueHD	DTSHRA = DTS® High Resolution Audio
AAC = MPEG-2 AAC Multichannel	DTSMa = DTS® Master Audio
PP = Post-Processing	DTSLBR = DTS® Express
ES = Elementary Stream	MPEG = MPEG 2, Layer II Stereo & Multichannel
PES = Packetized Elementary Stream	MP3 = MPEG 1, Layer II & III CBR & VBR
CBR = Constant Bit Rate	VBR = Variable Bit Rate

Algorithm & Nomenclature Abbreviations (continued)

Post-Processing (PP1) Inclusion & Algorithm Abbreviation Table	
PL = Dolby® Pro Logic®	PLII = Dolby® Pro Logic® II
PLIIx = Dolby® Pro Logic® IIx	NEO = DTS:Neo6™
TSXT = SRS® TruSurround XT®	TSHD = SRS® TruSurround® HD/HD4
WOW™ = SRS® WOW™	WOWHD™ = SRS® WOW HD™
TB = SRS® TruBass®	TV = SRS® TruVolume®
CBM = Cross-Bar Mixer	TC = Tone Control
LIM = Compressor/Limiter	DVL = Cirrus® Dynamic Volume Leveler
L7 = Logic7™	DVS = Dolby® Virtual Speaker® 2
NER = Neural-THX® Surround	DH = Dolby Headphone® 2
THX = THX® Cinema	REEQ = THX® Cinema Re-EQ™
TEX = THX® Surround EX™	TUX = THX® Select2/Ultra2™ Surround EX
Post-Processing (PP2 includes all of the above +) Inclusion & Algorithm Abbreviation Table	
AUDY = Audyssey® MultEQ XT™	TUX+ = THX® Select2/Ultra2™ Surround EX™ with Loudness Plus
AUD = Audistry®	DYNVOL = Audyssey® Dynamic Volume® / Dynamic EQ®

CobraNet® Transport and Audio Network Processor ICs

SPECIFICATIONS

Family	Description	CobraNet® Part Numbers	Audio Channels over Ethernet	Serial Input/Serial Output Ports	Ethernet Interface	IC Package
CS1810xx CS4961xx*	The CS1810xx Family contains CobraNet® networked digital audio interface ICs. The CS4961xx Family provides digital audio signal processing along with the network interface function.	CS181002 CS496102*	2	One synchronous, capable of supplying up to 2 full-duplex channels at 48 and/or up to 96 kHz sample rates.	Supports 100BASE-Tx, 100 Mbps, full duplex Ethernet, fully compliant with IEEE 802.3u.	144 LQFP
		CS181012 CS496112*	8	Quad synchronous, capable of supplying up to 8 full-duplex channels at 48 and/or up to 96 kHz sample rates.		
		CS181022 CS496122*	16	Quad synchronous, capable of supplying up to 16 full-duplex channels at 48 kHz, or up to 8 channels at 96 kHz sample rates.		

*The CS4961xx series includes a 32-bit, 120 MIPS digital signal processor for audio processing of any or all channels.

CobraNet® System Modules

SPECIFICATIONS

Product	Description	CobraNet® Part Numbers	Audio Channels over Ethernet (full-duplex)	Serial Input/Output Ports	Ethernet Interface	Integrated DSP (MIPS)	Board Dimensions
CM-1 Transport Module	Digital audio network interface module with dual Ethernet ports	See your Cirrus Logic sales representative for available models.	32	Quad synchronous, up to 32 channels at 48 and/or up to 96 kHz sample rates	100BASE-Tx, 100 Mbps, full duplex Ethernet, fully compliant with IEEE 802.3u	—	3.5" X 3.5"
CM-2 Transport and DSP Module	Digital audio network interface module with dual Ethernet ports and audio DSP	CPB496122-CM2-FB and CPB496122-CM2-MT	16	Quad synchronous, capable of supplying up to 16 full-duplex channels at 48 kHz sample rate or up to 8 full-duplex channels at 96 kHz sample rate	100BASE-Tx, 100 Mbps, full duplex Ethernet, fully compliant with IEEE 802.3u	32-bit DSP, 120 MIPS	3.5" X 3.5"
EV-2 Development Board	CobraNet® development platform for use with the CM-1 and CM-2 modules	CDB-496122-EV2	16	One digital AES3 input stream (two channels) or one digital AES3 output stream (two channels). Two analog audio input channels, two analog audio output channels	100BASE-Tx, 100 Mbps, full duplex Ethernet, fully compliant with IEEE 802.3u	32-bit DSP, 120 MIPS	8" X 7"
CobraCom™ Reference Design	CobraNet® microphone and network-powered loudspeaker reference design	CRD-CobraCom	16	Using the CS4961xx series provides up to 16 audio channels with audio DSP capability	100BASE-Tx, 100 Mbps, full duplex Ethernet, fully compliant with IEEE 802.3u and 802.3af Power-over-Ethernet	32-bit DSP, 120 MIPS	5.4" X 4"
NEW CobraNet® LE Reference Design	Low-cost, 2 channel I/O end-node reference design	See your Cirrus Logic sales representative	2	Stereo 1/8" input and output, stereo RCA input and output, I²S digital audio outputs	100Base-Tx, 10 Mbps, full duplex Ethernet, fully compliant with IEEE 802.3u and 802.3af Power-over-Ethernet	—	5" x 3"

CobraNet® Software Tools

FEATURES

DSP Conductor™	DSP Conductor™ software is a powerful, graphical tool for rapid, drag-and-drop audio signal processing firmware development on CS4961xx-based platforms, such as the CM-2 module or an OEM's custom hardware. Drawing upon a comprehensive library of DSP functions, an OEM can design the audio processing of a product, then lock the DSP firmware down into the CS4961xx-based CobraNet® product. These audio functions can be controlled either by the product's user interface or through remote SNMP commands over the CobraNet® Ethernet LAN. Further, any CS4961xx node can be re-programmed in real-time from a PC on the network, enabling multi-purpose products to serve different audio processing functions for different applications at the push of a button.
CobraCAD™	CobraCAD™ software is a graphical, drag-and-drop design and verification tool for modeling a network of CobraNet-enabled gear and standard Ethernet switches. A library of commercially available, CobraNet®-enabled products is the place to start for designing a virtual CobraNet® network, then making sure it will perform as required. CobraCAD™ software is ideal for consultants and integrators preparing a bid for a client and for installers and expert end users who need to visualize the network before or after deployment.
CobraNet® Discovery	CobraNet® Discovery is a CobraNet® network maintenance utility that automatically discovers CobraNet® devices on the network, configures them and queries and reports the working state of a CobraNet® network and its devices. Discovery also provides a CobraNet® firmware update function.

Amplifiers

SPECIFICATIONS

Part Number	Device	Supply Voltage (V)	Supply Current (mA)	V_{os} (μV) Max	V_{os} Drift (μV/°C)	e_{noise} (nV/√Hz)	$A_{ol, min}$ (dB)	Package
CS3001	Single	2.7 to 6.7	2.1	10	0.05	6	200	8 SOIC
CS3002	Dual	2.7 to 6.7	3.6	10	0.05	6	200	8 SOIC
CS3003	Single	2.7 to 5.25	1.0	10	0.05	17	150	8 SOIC
CS3004	Dual	2.7 to 5.25	2.0	10	0.05	17	150	8 SOIC
CS3011	Single	2.7 to 6.7	0.9	10	0.05	12	200	8 SOIC
CS3012	Dual	2.7 to 6.7	1.7	10	0.05	12	200	8 SOIC
CS3013	Single	2.7 to 5.25	0.5	10	0.05	22	135	8 SOIC
CS3014	Dual	2.7 to 5.25	1.0	10	0.05	22	135	8 SOIC

Delta-Sigma A/D Converters

SPECIFICATIONS

Part Number	Resolution (bits)	Throughput (Sps)	Integral Linearity (%FS)	Differential Linearity (±LSB)	Number of Channels	Power Consumption (mW)	Package
CS5505	16	20 – 100	0.0015%	0.25	4	3.2	24 SOIC
CS5506	20	20 – 100	7.0E-4%	NMC	4	3.2	24 SOIC
CS5507	16	20 – 100	0.0015%	0.25	1	3.2	20 SOIC
CS5508	20	20 – 100	7.0E-4%	NMC	1	3.2	20 SOIC
CS5509	16	20 – 200	0.0015%	0.25	1	1.7	16 SOIC
CS5510	16	53 – 212	0.0015%	NMC	1	1.4	8 SOIC
CS5511	16	100 (typical)	0.0015%	NMC	1	1.5	8 SOIC
CS5512	20	53 – 326	7.0E-4%	NMC	1	1.8	8 SOIC
CS5513	20	100 (typical)	7.0E-4%	NMC	1	1.9	8 SOIC
CS5529	16	1 – 303	0.0015%	NMC	1	2.6	20 SOIC

High-Throughput Delta-Sigma A/D Converters

SPECIFICATIONS

Part	Resolution (bits)	Throughput (kSPS)	Integral Linearity (%FS)	Differential Linearity ($\pm$ LSB)	Number of Channels	Power Consumption (mW)	Package
CS5560	24	50	± 5 ppm	0.1	1, Differential	90	24 SSOP
CS5566	24	5	± 5 ppm	0.1	1, Differential	20	24 SSOP
CS5571	16	100	± 8 ppm	0.1	1, Single-ended	85	24 SSOP
CS5581	16	200	± 8 ppm	0.1	1, Single-ended	85	24 SSOP

Geophysical Products Single-S™

SPECIFICATIONS

Part	Description	Resolution (bits)	Dynamic Range (dB)	THD (dB)	Power Consumption Per Channel (mW)	Signal Range (V)	Package
CS3301A	Geophone amplifier	—	—	–121	27.5	5 V _{p-p} diff	24 SSOP
CS3302A	Hydrophone amplifier	—	—	–118	25	5 V _{p-p} diff	24 SSOP
CS5373A	A/D converter	24	124	–118	25	5 V _{p-p} diff	28 SSOP
	D/A converter	24	114	–116	40	5 V _{p-p} diff	
CS5378	Filter with PLL	—	—	—	20	—	28 SSOP

Energy Measurement

SPECIFICATIONS

Part	Channels	Energy Data Linearity – 1000:1 Range	Energy Pulse Outputs	Instantaneous I and V	Real (Active) Power	I_{RMS} , V_{RMS}	Apparent Power (S)	Reactive Power (Q)	Temp Sensor	Package
CS5451A	6	—	—	✓	—	—	—	—	—	28 SSOP
CS5460A	2	0.1% of reading	✓	✓	✓	✓	—	—	—	24 SSOP
CS5461A	2	0.1% of reading	✓	✓	✓	✓	✓	—	✓	24 SSOP
CS5462	2	0.1% of reading	✓	—	✓	—	—	—	—	24 SSOP
CS5463	2	0.1% of reading	✓	✓	✓	✓	✓	✓	✓	24 SSOP
CS5464	3	0.1% of reading	✓	✓	✓	✓	✓	✓	✓	28 SSOP
CS5466	2	0.1% of reading	✓	—	✓	—	—	—	—	24 SSOP
CS5467	4	0.1% of reading	✓	✓	✓	✓	✓	✓	✓	28 SSOP

Energy Measurement System-on-Chip

SPECIFICATIONS

Part	ADCs	W, VA, VAR, PF, RMS	MCU	Flash	RAM	RTC	LCD Driver	Temp Sensor	SSI/UART	Package
CS740111	3	✓	ARM7TDMI	32 KB	8 KB	✓	✓	✓	1/2	64 LQFP
CS740121	3	✓	ARM7TDMI	64 KB	8 KB	✓	✓	✓	1/2	64 LQFP
CS740131	3	✓	ARM7TDMI	128 KB	8 KB	✓	✓	✓	1/2	64 LQFP

Apex Precision Power™ Products

POWER ANALOG ICs, MODULES AND HYBRIDS

Apex Precision Power™ is the brand name for Cirrus Logic's high performance precision power analog family of products. Apex Precision Power™ products drive innovation in the design and manufacturing of power operational amplifiers (linear) and pulse width modulation amplifiers (PWM/switching). A mix of IC, board-level module and hybrid product designs is used to deliver up to 50 A of output current while operating on voltage supplies ranging from 8.5 V up to 1200 V. Target applications focus on the high power precision control of current, voltage and speed applications in the industrial, test and measurement, aerospace and medical markets.

APEX PRECISION POWER™ HIGH-CURRENT LINEAR AMPLIFIERS

- PA50
- PA52
- MP230FC
- PA03
- PA05
- MP240FC
- PA04
- MP111FD
- PA12A
- PA13A
- MP108FDA
- MP39CLA
- MP108FD
- MP39CL
- PA12
- PA13
- PA51
- PA61
- MP38CLA
- PA93
- MP38CL
- PA01
- PA02
- PA07
- PA10
- PA16
- PA73
- PA162
- PA119
- PA92
- PA09M
- PA74A
- PA76A
- PA74
- PA76
- PA09
- PB50
- PA60EU
- PA75CC
- PA96
- PB51
- PB58
- PA12H

APEX PRECISION POWER™ HIGH-CURRENT PWM AMPLIFIERS

- SA03
- SA08
- SA01
- MSA260KC
- MSA240KC
- SA12
- SA306
- SA60
- SA50
- SA57

APEX PRECISION POWER™ HIGH-VOLTAGE LINEAR AMPLIFIERS

- PA89
- PA94
- PA95
- PA97
- PA15
- PA85
- PA88
- PA91
- PA98
- PA90
- PA92
- PA93
- PA240CC
- PA241CE
- PA243DF
- PA78DK
- PA79DK
- PA08
- PA82J
- PA83
- PA84
- PA96
- PB51
- PB58
- MP108FD
- MP240FC
- MP38CL
- PA04
- PA52
- PA69EU
- PA86EU
- PB50
- PA03
- PA81J
- MP111FD
- MP230FC
- MP39CL
- PA05
- PA07
- PA50

APEX PRECISION POWER™ HIGH-VOLTAGE PWM AMPLIFIERS

- MSA260KC
- SA08
- SA12
- MSA240KC
- SA01
- SA03
- SA50
- SA60

APEX PRECISION POWER™ HIGH-SPEED LINEAR AMPLIFIERS

- PA98
- PA85
- PA119
- PA94
- PA79DK
- PA78DK
- PA86EU
- MP400
- PA91
- PA90
- PB58
- PA96
- PA69EU
- PA09
- PA84
- MP108FDA
- MP108FD
- MP111FD
- PB51
- PB50
- PA05

Apex Precision Power™ High-Current Linear Amplifiers

SPECIFICATIONS

Model	Output Current MAX (A)	Supply Voltage MAX (V)	Slew Rate TYP (V/us)	Standby Current MAX (mA)	Power Dissipation MAX (W)
PA50	40	100	50	36	400
PA52	40	200	50	36	400
MP230FC	30	100	15	35	210
PA03	30	150	8	300	500
PA05	30	100	100	120	250
MP240FC	20	200	14	25	170
PA04	20	200	50	90	200
MP111FD	15	100	130	157	170
PA12A	15	100	4	50	125
PA13A	15	90	4	50	135
MP108FDA	11	200	170	65	100
MP39CLA	11	100	10	24	125
MP108FD	10	200	170	65	100
MP39CL	10	100	10	24	125
PA12	10	90	4	50	125
PA13	10	90	4	50	135
PA51	10	72	2.6	10	97
PA61	10	90	2.8	10	97
MP38CLA	8	200	63	24	125
PA93	8	400	50	14	125
MP38CL	7	200	63	24	125
PA01	5	56	2.6	50	67
PA02	5	38	20	40	48
PA07	5	100	4	30	67
PA10	5	90	3	30	67
PA16	5	38	20	40	62.5
PA73	5	60	2.6	5	67
PA162	4 x 1	40	1.4	20	45
PA119	4	80	900	120	78
PA92	4	400	50	14	80
PA09M	3	80	200	85	78
PA74A	2 x 3	40	1.4	40	36/60
PA76A	2 x 3	40	1.4	40	36/60
PA74	2 x 2.5	40	1.4	40	36/60
PA76	2 x 2.5	40	1.4	40	36/60
PA09	2	80	200	85	78
PB50	2	200	100	25	35
PA60EU	2 x 1.5	40	1.4	10	16/31
PA75CC	2 x 1.5	40	1.4	10	19/28
PA96	1.5	300	250	18	83
PB51	1.5	300	100	18	83
PB58	1.5	300	250	35	70
PA12H	1	90	4	100	6

Apex Precision Power™ High-Voltage Linear Amplifiers

SPECIFICATIONS

Model	Supply Voltage MAX (V)	Output Current MAX (A)	Slew Rate TYP (V/us)	Standby Current MAX (mA)	Power Dissipation MAX (W)
PA89	1200	0.075	30	6	40
PA94	900	0.1	700	24	30
PA95	900	0.1	30	2.2	30
PA97	900	0.01	8	1	5
PA15	450	0.2	20	3	30
PA85	450	0.2	1000	25	30
PA88	450	0.1	30	2	15
PA91	450	0.2	300	14	30
PA98	450	0.2	1000	25	30
PA90	400	0.2	300	14	30
PA92	400	4	50	14	80
PA93	400	8	50	14	125
PA240CC	350	0.06	40	2.5	14
PA241CE	350	0.06	40	2.5	12
PA243DF	350	0.06	40	5	11/20
PA78DK	350	0.15	350	2.5	23
PA79DK	350	0.15	350	2.5	26
PA08	300	0.15	30	8.5	17.5
PA82J	300	0.015	20	8.5	11.5
PA83	300	0.075	30	8.5	17.5
PA84	300	0.04	180	7.5	17.5
PA96	300	1.5	250	18	83
PB51	300	1.5	100	18	83
PB58	300	1.5	250	35	70
MP108FD	200	10	170	65	100
MP240FC	200	20	14	25	170
MP38CL	200	7	63	24	125
PA04	200	20	50	90	200
PA52	200	40	50	36	400
PA69EU	200	0.05	200	2.5	23
PA86EU	200	0.15	350	2.5	23
PB50	200	2	100	25	35
PA03	150	30	8	300	500
PA81J	150	0.03	20	8.5	11.5
MP111FD	100	15	130	157	170
MP230FC	100	30	15	35	210
MP39CL	100	10	10	24	125
PA05	100	30	100	120	250
PA07	100	5	4	30	67
PA50	100	40	50	36	400

Apex Precision Power™ High-Voltage PWM Amplifiers

SPECIFICATIONS

Model	Supply Voltage MAX (V)	Output Current MAX (A)	Switching Frequency (kHz)	Power Delivery MAX (W)	Int. Power MAX (W)
MSA260KC	450	20	50	250	300
SA08	450	20	22.5	250	250
SA12	200	15	200	250	185
MSA240KC	100	20	50	250	250
SA01	100	20	42	185	250
SA03	100	30	22.5	300	250
SA50	80	5	45	120	140
SA60	80	10	250	140	80

Apex Precision Power™ High-Speed Linear Amplifiers

SPECIFICATIONS

Model	Slew Rate TYP (V/us)	Supply Voltage MAX (V)	Output Current MAX (A)	Standby Current MAX (mA)	Power Dissipation MAX (W)
PA98	1000	450	0.2	25	30
PA85	1000	450	0.2	25	30
PA119	900	80	4	120	78
PA94	700	900	0.1	24	30
PA79DK	350	350	0.15	2.5	26
PA78DK	350	350	0.15	2.5	23
PA86EU	350	200	0.15	2.5	23
MP400	350	50	0.2	2.5	14.2
PA91	300	450	0.2	14	30
PA90	300	400	0.2	14	30
PB58	250	300	1.5	35	70
PA96	250	300	1.5	18	83
PA69EU	200	200	0.05	2.5	23
PA09	200	80	2	85	78
PA84	180	300	0.04	7.5	17.5
MP108FDA	170	200	11	65	100
MP108FD	170	200	10	65	100
MP111FD	130	100	15	157	170
PB51	100	300	1.5	18	83
PB50	100	200	2	25	35
PA05	100	100	30	120	250

NEW

Short-Haul Single-Port Line Interface Units

SPECIFICATIONS

Part	Power Supply (V)	Control Modes	Line Coders	Number of Channels	TBR-12 Compliant	Impedance Matching Line Driver	Package
CS61535A	5	Host, H/W & Extended H/W	AMI, B8ZS & HDB3	1	✓	✓	28 PLCC
CS61574A	5	Host, H/W & Extended H/W	AMI, B8ZS & HDB3	1	✓	✓	28 PLCC
CS61575	5	Host, H/W & Extended H/W	AMI, B8ZS & HDB3	1	✓	✓	28 PLCC
CS61577	5	Host, H/W & Extended H/W	AMI, B8ZS & HDB3	1	✓	—	28 PLCC

Short-Haul Multi-Port Line Interface Units

SPECIFICATIONS

Part	Power Supply (V)	Control Modes	Line Coders	Number of Channels	TBR-12 Compliant	Impedance Matching Line Driver	Arbitrary Waveform Option	Package
CS61584A	3.3 or 5	Host & H/W	AMI, B8ZS & HDB3	2	✓	✓	✓	64 TQFP
CS61880	3.3	Host & H/W	AMI & HDB3	8	✓	✓	✓	144 LQFP 160 BGA
CS61884	3.3	Host & H/W	AMI, HDB3 & B8ZS	8	✓	✓	✓	144 LQFP

Processors

POWERFUL GENERAL PURPOSE PROCESSORS

A wide variety of 32-bit ARM 7- and ARM 9-based system-on-a-chip processors that offer a wide range of performance and features at cost-effective price points.

EMBEDDED PROCESSORS

ARM 7 Embedded Processors

- EP7309
- EP7311
- EP7312

ARM 9 Embedded Processors

- EP9301
- EP9302
- EP9307
- EP9312
- EP9315

Networked Attached Storage (NAS) Reference Design

- NAS ARM 9

Internet Protocol Radio Demonstration Platform

- Internet Protocol Radio (IPR)

ARM 7 Embedded Processors

SPECIFICATIONS

Part	Processor	Processor Speed (MHz)	Cache	MMU	DRAM Controller	On-chip SRAM (KB)	LCD Controller	DAI	Package
EP7309	ARM 720T	74	8 KB unified	✓	—	48	✓	✓	208 LQFP 256 PBGA
EP7311	ARM 720T	90 & 74	8 KB unified	✓	SDRAM	48	✓	—	208 LQFP 256 PBGA
EP7312	ARM 720T	90 & 74	8 KB unified	✓	SDRAM	48	✓	✓	208 LQFP 256 PBGA

ARM 9 Embedded Processors

SPECIFICATIONS

Part	Processor Speed (MHz)	Cache Data/Code (K)	Ethernet MAC	PCMCIA Device	IDE/IF	USB Hosts	Display I/F	Graphics Engine	Math Crunch Engine	Touch/ADC	Package
EP9301	166	16/16	✓	—	—	2	—	—	—	5 ADC	208 TQFP
EP9302	200	16/16	✓	—	—	2	—	—	✓	5 ADC	208 LQFP
EP9307	200	16/16	✓	—	—	3	✓	✓	✓	8-wire	272 TFBGA
EP9312	200	16/16	✓	—	2	3	✓	—	✓	8-wire	352 PBGA
EP9315	200	16/16	✓	✓	2	3	✓	✓	✓	8-wire	352 PBGA

Product Number Index

CM-1 Transport Module	12	CS4350	3	CS495202	10
CM-2 Transport and DSP Module	12	CS4351	3	CS4953xx Family	8, 10
CobraCAD™	12	CS4352	3	CS495303	8
CobraCom™ Reference Design	12	CS4353	3	CS495313	8
CobraNet® Discovery	12	CS4361	3	CS4961xx Family	11, 12
CobraNet® LE Reference Design	12	CS4362A/82A	3	CS496102	11
CS1810xx Family	11	CS4364/84	3	CS496112	11
CS181002	11	CS4365/85	3	CS496122	11
CS181012	11	CS4373A	17	CS4970xx Family	9
CS181022	11	CS4391A	3	CS497004	9
CS2000	2	CS4392	3	CS497024	9
CS2100	2	CS4398	3	CS49DV8x Family	9
CS2200	2	CS43L21	5	CS49DV8C	9
CS2300	2	CS43L22	5	CS5201	17
CS3001	14	CS4412A	6	CS5203A	17
CS3002	14	CS44600	6	CS5204	17
CS3003	14	CS44800	6	CS5205	17
CS3004	14	CS4461	6	CS5207	17
CS3011	14	CS44L11	5	CS5340	2
CS3012	14	CS4525	6	CS5341	2
CS3013	14	CS470xx Family	9	CS5342	2
CS3014	14	CS47024	9	CS5343/44	2
CS3301A	16, 17	CS47028	9	CS5345	2
CS3302A	16, 17	CS47048	9	CS5346	2
CS3308	6	CS485xx Family	8	CS5351	2
CS3310	6	CS48520	8	CS5361	2
CS3318	6	CS48540	8	CS5364/66/68	2
CS3511	6	CS48560	8	CS5371A	17
CS4202	7	CS48AU2x Family	8	CS5372A	17
CS4205	7	CS48AU2B	8	CS5373A	16
CS42324/25	4	CS48DV2x Family	8	CS5376A	17
CS42416/26	4	CS48DV2A	8	CS5378	16
CS42418/28	4	CS48DV2B	8	CS5381	2
CS42432	4	CS48DV6x Family	8	CS53L21	5
CS42435	4	CS48DV6B	8	CS5451A	18
CS42436/38	4	CS493xxx Family	8	CS5460A	18
CS42448	4	CS493105	8	CS5461A	18
CS4245	5	CS493115	8	CS5462	18
CS42516/26	4	CS493122	8	CS5463	18
CS42518/28	4	CS493253	8	CS5464	18
CS4265	5	CS493254	8	CS5466	18
CS4270	5	CS493263	8	CS5467	18
CS4271	5	CS493264	8	CS5505	14
CS4272	5	CS493295	8	CS5506	14
CS42888	4	CS493302	8	CS5507	14
CS4299	7	CS494xxx Family	10	CS5508	14
CS42L51	5	CS494003	10	CS5509	14
CS42L52	5	CS4950xx Family	10	CS5510	14
CS42L55	5	CS495002	10	CS5511	14
CS4334/35/38/39	3	CS4951xx Family	10	CS5512	14
CS4344/45/46/48	3	CS495102	10	CS5513	14
CS4349	3	CS4952xx Family	10	CS5521	15

Notes