



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	54150
Number of Logic Elements/Cells	693120
Total RAM Bits	54190080
Number of I/O	350
Number of Gates	-
Voltage - Supply	0.97V ~ 1.03V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 100°C (TJ)
Package / Case	1156-BBGA, FCBGA
Supplier Device Package	1158-FCBGA (35x35)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7vx690t-l2ffg1158e

Table 5: V_{IN} Maximum Allowed AC Voltage Overshoot and Undershoot for 1.8V HP I/O Banks⁽¹⁾⁽²⁾

AC Voltage Overshoot	% of UI @-40°C to 100°C	AC Voltage Undershoot	% of UI @-40°C to 100°C
$V_{CCO} + 0.55$	100	-0.55	100
$V_{CCO} + 0.60$	50.0	-0.60	50.0
$V_{CCO} + 0.65$	50.0	-0.65	50.0
$V_{CCO} + 0.70$	47.0	-0.70	50.0
$V_{CCO} + 0.75$	21.2	-0.75	50.0
$V_{CCO} + 0.80$	9.71	-0.80	50.0
$V_{CCO} + 0.85$	4.51	-0.85	28.4
$V_{CCO} + 0.90$	2.12	-0.90	12.7
$V_{CCO} + 0.95$	1.01	-0.95	5.79

Notes:

1. A total of 200 mA per bank should not be exceeded.
2. For UI smaller than 20 μ s.

Table 6: Typical Quiescent Supply Current

Symbol	Description	Device	Speed Grade			Units
			-3	-2/-2L/-2G	-1	
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC7V585T	1483	1483	1483	mA
		XC7V2000T	N/A	3756	3756	mA
		XC7VX330T	1012	1012	1012	mA
		XC7VX415T	1324	1324	1324	mA
		XC7VX485T	1578	1578	1578	mA
		XC7VX550T	2214	2214	2214	mA
		XC7VX690T	2214	2214	2214	mA
		XC7VX980T	N/A	2580	2580	mA
		XC7VX1140T	N/A	3448	3448	mA
I_{CCOQ}	Quiescent V_{CCO} supply current	XC7V585T	1	1	1	mA
		XC7V2000T	N/A	1	1	mA
		XC7VX330T	1	1	1	mA
		XC7VX415T	1	1	1	mA
		XC7VX485T	1	1	1	mA
		XC7VX550T	1	1	1	mA
		XC7VX690T	1	1	1	mA
		XC7VX980T	N/A	1	1	mA
		XC7VX1140T	N/A	1	1	mA

Table 7 shows the minimum current, in addition to I_{CCQ} , that is required by Virtex-7 T and XT devices for proper power-on and configuration. If the current minimums shown in Table 6 and Table 7 are met, the device powers on after all five supplies have passed through their power-on reset threshold voltages. The FPGA must not be configured until after V_{CCINT} is applied.

Once initialized and configured, use the XPower tools to estimate current drain on these supplies.

Table 7: Power-On Current for Virtex-7 T and XT Devices

Device	$I_{CCINTMIN}$ Typ ⁽¹⁾	$I_{CCAUXMIN}$ Typ ⁽¹⁾	I_{CCOMIN} Typ ⁽¹⁾	I_{CCAUX_IO} Typ ⁽¹⁾	I_{CCBRAM} Typ ⁽¹⁾	Units
XC7V585T	$I_{CCINTQ} + 2700$	$I_{CCAUXQ} + 40$	$I_{CCOQ} + 60$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 108$	mA
XC7V2000T	$I_{CCINTQ} + 4000$	$I_{CCAUXQ} + 80$	$I_{CCOQ} + 60$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 176$	mA
XC7VX330T	$I_{CCINTQ} + 1000$	$I_{CCAUXQ} + 65$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 95$	mA
XC7VX415T	$I_{CCINTQ} + 1200$	$I_{CCAUXQ} + 75$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 115$	mA
XC7VX485T	$I_{CCINTQ} + 1200$	$I_{CCAUXQ} + 80$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 140$	mA
XC7VX550T	$I_{CCINTQ} + 3300$	$I_{CCAUXQ} + 143$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 57$ mA per bank	$I_{CCBRAMQ} + 200$	mA
XC7VX690T	$I_{CCINTQ} + 3300$	$I_{CCAUXQ} + 143$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 57$ mA per bank	$I_{CCBRAMQ} + 200$	mA
XC7VX980T	$I_{CCINTQ} + 6500$	$I_{CCAUXQ} + 202$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 60$ mA per bank	$I_{CCBRAMQ} + 204$	mA
XC7VX1140T	$I_{CCINTQ} + 8000$	$I_{CCAUXQ} + 235$	$I_{CCOQ} + 40$ mA per bank	$I_{CCOAXIOQ} + 63$ mA per bank	$I_{CCBRAMQ} + 256$	mA

Notes:

- Typical values are specified at nominal voltage, 25°C.
- Use the Xilinx Power Estimator (XPE) spreadsheet tool (download at <http://www.xilinx.com/power>) to calculate maximum power-on currents.

Table 8: Power Supply Ramp Time

Symbol	Description	Conditions	Min	Max	Units
T_{VCCINT}	Ramp time from GND to 90% of V_{CCINT}		0.2	50	ms
T_{VCCO}	Ramp time from GND to 90% of V_{CCO}		0.2	50	ms
T_{VCCAUX}	Ramp time from GND to 90% of V_{CCAUX}		0.2	50	ms
T_{VCCAUX_IO}	Ramp time from GND to 90% of V_{CCAUX_IO}		0.2	50	ms
$T_{VCCBRAM}$	Ramp time from GND to 90% of V_{CCBRAM}		0.2	50	ms
$T_{VCCO2VCCAUX}$	Allowed time per power cycle for $V_{CCO} - V_{CCAUX} > 2.625V$	$T_J = 100^{\circ}C^{(1)}$	–	500	ms
		$T_J = 85^{\circ}C^{(1)}$	–	800	
$T_{MGTAVCC}$	Ramp time from GND to 90% of $V_{MGTAVCC}$		0.2	50	ms
$T_{MGTAVTT}$	Ramp time from GND to 90% of $V_{MGTAVTT}$		0.2	50	ms
$T_{MGTVCCAUX}$	Ramp time from GND to 90% of $V_{MGTVCCAUX}$		0.2	50	ms

Notes:

- Based on 240,000 power cycles with nominal V_{CCO} of 3.3V or 36,500 power cycles with a worst case V_{CCO} of 3.465V.

AC Switching Characteristics

All values represented in this data sheet are based on the speed specifications in the ISE® Design Suite 14.5 and Vivado® Design Suite 2013.1 as outlined in [Table 14](#).

Table 14: Virtex-7 T and XT FPGA Speed Specification Version By Device/Speed Grade

Version In:		Typical V _{CCINT}	Device
ISE 14.5	Vivado 2013.1	(Table 2)	
1.09	1.09	1.0V	XC7V585T, XC7VX485T
N/A	1.08	1.0V	XC7V2000T
1.08	1.08	1.0V	XC7VX330T, XC7VX415T, XC7VX550T, XC7VX690T, XC7VX980T
N/A	1.08	1.0V	XC7VX1140T

Switching characteristics are specified on a per-speed-grade basis and can be designated as Advance, Preliminary, or Production. Each designation is defined as follows:

Advance Product Specification

These specifications are based on simulations only and are typically available soon after device design specifications are frozen. Although speed grades with this designation are considered relatively stable and conservative, some under-reporting might still occur.

Preliminary Product Specification

These specifications are based on complete ES (engineering sample) silicon characterization. Devices and speed grades with this designation are intended to give a better indication of the expected performance of production silicon. The probability of under-reporting delays is greatly reduced as compared to Advance data.

Production Product Specification

These specifications are released once enough production silicon of a particular device family member has been characterized to provide full correlation between specifications and devices over numerous production lots. There is no under-reporting of delays, and customers receive formal notification of any subsequent changes. Typically, the slowest speed grades transition to Production before faster speed grades.

Testing of AC Switching Characteristics

Internal timing parameters are derived from measuring internal test patterns. All AC switching characteristics are representative of worst-case supply voltage and junction temperature conditions.

For more specific, more precise, and worst-case guaranteed data, use the values reported by the static timing analyzer and back-annotate to the simulation net list. Unless otherwise noted, values apply to all Virtex-7 T and XT FPGAs.

Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Virtex-7 T and XT devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 12](#). In each table, the I/O bank type is either High Performance (HP) or High Range (HR).

Table 17: Networking Applications Interface Performances

Description	I/O Bank Type	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)	HR	710	710	625	Mb/s
	HP	710	710	625	Mb/s
DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14)	HR	1250	1250	950	Mb/s
	HP	1600	1400	1250	Mb/s
SDR LVDS receiver (SFI-4.1) ⁽¹⁾	HR	710	710	625	Mb/s
	HP	710	710	625	Mb/s
DDR LVDS receiver (SPI-4.2) ⁽¹⁾	HR	1250	1250	950	Mb/s
	HP	1600	1400	1250	Mb/s

Notes:

1. LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics

I/O Standard	T _{IOPI}			T _{IOOP}			T _{IOTP}			Units
	Speed Grade			Speed Grade			Speed Grade			
	-3	-2/-2L/-2G	-1	-3	-2/-2L/-2G	-1	-3	-2/-2L/-2G	-1	
LVDS	0.75	0.79	0.92	1.05	1.17	1.24	1.68	1.92	2.06	ns
HSUL_12	0.69	0.72	0.82	1.65	1.84	2.05	2.29	2.59	2.87	ns
DIFF_HSUL_12	0.69	0.72	0.82	1.65	1.84	2.05	2.29	2.59	2.87	ns
HSTL_I_S	0.68	0.72	0.82	1.15	1.28	1.38	1.79	2.03	2.20	ns
HSTL_II_S	0.68	0.72	0.82	1.05	1.17	1.26	1.69	1.93	2.08	ns
HSTL_I_18_S	0.70	0.72	0.82	1.12	1.24	1.34	1.75	2.00	2.16	ns
HSTL_II_18_S	0.70	0.72	0.82	1.06	1.18	1.26	1.70	1.94	2.08	ns
HSTL_I_12_S	0.68	0.72	0.82	1.14	1.27	1.37	1.78	2.02	2.20	ns
HSTL_I_DCI_S	0.68	0.72	0.82	1.11	1.23	1.33	1.74	1.99	2.15	ns
HSTL_II_DCI_S	0.68	0.72	0.82	1.05	1.17	1.26	1.69	1.93	2.08	ns
HSTL_II_T_DCI_S	0.70	0.72	0.82	1.15	1.28	1.38	1.78	2.03	2.20	ns
HSTL_I_DCI_18_S	0.70	0.72	0.82	1.11	1.23	1.33	1.74	1.99	2.15	ns
HSTL_II_DCI_18_S	0.70	0.72	0.82	1.05	1.16	1.24	1.69	1.92	2.06	ns
HSTL_II_T_DCI_18_S	0.70	0.72	0.82	1.11	1.23	1.33	1.74	1.99	2.15	ns
DIFF_HSTL_I_S	0.75	0.79	0.92	1.15	1.28	1.38	1.79	2.03	2.20	ns
DIFF_HSTL_II_S	0.75	0.79	0.92	1.05	1.17	1.26	1.69	1.93	2.08	ns
DIFF_HSTL_I_DCI_S	0.75	0.79	0.92	1.15	1.28	1.38	1.78	2.03	2.20	ns
DIFF_HSTL_II_DCI_S	0.75	0.79	0.92	1.05	1.17	1.26	1.69	1.93	2.08	ns
DIFF_HSTL_I_18_S	0.75	0.79	0.92	1.12	1.24	1.34	1.75	2.00	2.16	ns
DIFF_HSTL_II_18_S	0.75	0.79	0.92	1.06	1.18	1.26	1.70	1.94	2.08	ns
DIFF_HSTL_I_DCI_18_S	0.75	0.79	0.92	1.11	1.23	1.33	1.74	1.99	2.15	ns
DIFF_HSTL_II_DCI_18_S	0.75	0.79	0.92	1.05	1.16	1.24	1.69	1.92	2.06	ns
DIFF_HSTL_II_T_DCI_18_S	0.75	0.79	0.92	1.11	1.23	1.33	1.74	1.99	2.15	ns
HSTL_I_F	0.68	0.72	0.82	1.02	1.14	1.22	1.66	1.90	2.04	ns
HSTL_II_F	0.68	0.72	0.82	0.97	1.08	1.15	1.61	1.84	1.97	ns
HSTL_I_18_F	0.70	0.72	0.82	1.04	1.16	1.24	1.68	1.91	2.06	ns
HSTL_II_18_F	0.70	0.72	0.82	0.98	1.09	1.16	1.62	1.85	1.98	ns
HSTL_I_12_F	0.68	0.72	0.82	1.02	1.13	1.21	1.65	1.88	2.03	ns
HSTL_I_DCI_F	0.68	0.72	0.82	1.04	1.16	1.24	1.67	1.91	2.06	ns
HSTL_II_DCI_F	0.68	0.72	0.82	0.97	1.08	1.15	1.61	1.84	1.97	ns
HSTL_II_T_DCI_F	0.70	0.72	0.82	1.02	1.14	1.22	1.66	1.90	2.04	ns
HSTL_I_DCI_18_F	0.70	0.72	0.82	1.04	1.16	1.24	1.67	1.91	2.06	ns
HSTL_II_DCI_18_F	0.70	0.72	0.82	0.98	1.09	1.16	1.61	1.85	1.98	ns
HSTL_II_T_DCI_18_F	0.70	0.72	0.82	1.04	1.16	1.24	1.67	1.91	2.06	ns
DIFF_HSTL_I_F	0.75	0.79	0.92	1.02	1.14	1.22	1.66	1.90	2.04	ns
DIFF_HSTL_II_F	0.75	0.79	0.92	0.97	1.08	1.15	1.61	1.84	1.97	ns
DIFF_HSTL_I_DCI_F	0.75	0.79	0.92	1.02	1.14	1.22	1.66	1.90	2.04	ns
DIFF_HSTL_II_DCI_F	0.75	0.79	0.92	0.97	1.08	1.15	1.61	1.84	1.97	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}			T _{IOOP}			T _{IOTP}			Units
	Speed Grade			Speed Grade			Speed Grade			
	-3	-2/-2L/-2G	-1	-3	-2/-2L/-2G	-1	-3	-2/-2L/-2G	-1	
DIFF_HSTL_I_18_F	0.75	0.79	0.92	1.04	1.16	1.24	1.68	1.91	2.06	ns
DIFF_HSTL_II_18_F	0.75	0.79	0.92	0.98	1.09	1.16	1.62	1.85	1.98	ns
DIFF_HSTL_I_DCI_18_F	0.75	0.79	0.92	1.04	1.16	1.24	1.67	1.91	2.06	ns
DIFF_HSTL_II_DCI_18_F	0.75	0.79	0.92	0.98	1.09	1.16	1.61	1.85	1.98	ns
DIFF_HSTL_II_T_DCI_18_F	0.75	0.79	0.92	1.04	1.16	1.24	1.67	1.91	2.06	ns
LVC MOS18_S2	0.47	0.50	0.60	3.95	4.28	4.85	4.59	5.04	5.67	ns
LVC MOS18_S4	0.47	0.50	0.60	2.67	2.98	3.43	3.31	3.73	4.26	ns
LVC MOS18_S6	0.47	0.50	0.60	2.14	2.38	2.72	2.77	3.14	3.54	ns
LVC MOS18_S8	0.47	0.50	0.60	1.98	2.21	2.52	2.61	2.97	3.35	ns
LVC MOS18_S12	0.47	0.50	0.60	1.70	1.91	2.17	2.34	2.67	2.99	ns
LVC MOS18_S16	0.47	0.50	0.60	1.57	1.75	1.97	2.20	2.51	2.79	ns
LVC MOS18_F2	0.47	0.50	0.60	3.50	3.87	4.48	4.14	4.63	5.30	ns
LVC MOS18_F4	0.47	0.50	0.60	2.23	2.50	2.87	2.87	3.25	3.69	ns
LVC MOS18_F6	0.47	0.50	0.60	1.80	2.00	2.26	2.43	2.76	3.08	ns
LVC MOS18_F8	0.47	0.50	0.60	1.46	1.72	2.04	2.10	2.47	2.86	ns
LVC MOS18_F12	0.47	0.50	0.60	1.26	1.40	1.53	1.89	2.16	2.35	ns
LVC MOS18_F16	0.47	0.50	0.60	1.19	1.33	1.44	1.83	2.08	2.26	ns
LVC MOS15_S2	0.59	0.62	0.73	3.55	3.89	4.45	4.19	4.65	5.27	ns
LVC MOS15_S4	0.59	0.62	0.73	2.45	2.70	3.06	3.08	3.45	3.89	ns
LVC MOS15_S6	0.59	0.62	0.73	2.24	2.51	2.88	2.88	3.26	3.71	ns
LVC MOS15_S8	0.59	0.62	0.73	1.91	2.16	2.49	2.55	2.91	3.31	ns
LVC MOS15_S12	0.59	0.62	0.73	1.77	1.98	2.23	2.41	2.73	3.05	ns
LVC MOS15_S16	0.59	0.62	0.73	1.62	1.81	2.02	2.26	2.56	2.84	ns
LVC MOS15_F2	0.59	0.62	0.73	3.38	3.69	4.18	4.02	4.44	5.00	ns
LVC MOS15_F4	0.59	0.62	0.73	2.04	2.21	2.44	2.68	2.97	3.26	ns
LVC MOS15_F6	0.59	0.62	0.73	1.47	1.74	2.09	2.10	2.50	2.91	ns
LVC MOS15_F8	0.59	0.62	0.73	1.31	1.46	1.61	1.95	2.22	2.43	ns
LVC MOS15_F12	0.59	0.62	0.73	1.21	1.34	1.45	1.84	2.10	2.27	ns
LVC MOS15_F16	0.59	0.62	0.73	1.18	1.31	1.41	1.82	2.07	2.23	ns
LVC MOS12_S2	0.64	0.67	0.78	3.38	3.80	4.48	4.02	4.55	5.30	ns
LVC MOS12_S4	0.64	0.67	0.78	2.62	2.94	3.43	3.26	3.70	4.25	ns
LVC MOS12_S6	0.64	0.67	0.78	2.05	2.33	2.72	2.69	3.08	3.54	ns
LVC MOS12_S8	0.64	0.67	0.78	1.94	2.18	2.51	2.58	2.94	3.33	ns
LVC MOS12_F2	0.64	0.67	0.78	2.84	3.15	3.62	3.48	3.90	4.44	ns
LVC MOS12_F4	0.64	0.67	0.78	1.97	2.18	2.44	2.61	2.93	3.26	ns
LVC MOS12_F6	0.64	0.67	0.78	1.33	1.51	1.70	1.96	2.26	2.52	ns
LVC MOS12_F8	0.64	0.67	0.78	1.27	1.42	1.55	1.91	2.18	2.37	ns
LVDCI_18	0.47	0.50	0.60	1.99	2.15	2.35	2.62	2.91	3.17	ns

Table 20: 1.8V IOB High Performance (HP) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}			T _{IOOP}			T _{IOTP}			Units
	Speed Grade			Speed Grade			Speed Grade			
	-3	-2/-2L/-2G	-1	-3	-2/-2L/-2G	-1	-3	-2/-2L/-2G	-1	
SSTL15_F	0.68	0.72	0.82	0.89	1.01	1.09	1.53	1.77	1.91	ns
SSTL15_DCI_F	0.68	0.72	0.82	0.89	1.01	1.09	1.53	1.77	1.91	ns
SSTL15_T_DCI_F	0.68	0.72	0.82	0.89	1.01	1.09	1.53	1.77	1.91	ns
SSTL135_F	0.69	0.72	0.82	0.88	1.00	1.08	1.52	1.76	1.90	ns
SSTL135_DCI_F	0.69	0.72	0.82	0.89	1.00	1.08	1.52	1.76	1.90	ns
SSTL135_T_DCI_F	0.69	0.72	0.82	0.89	1.00	1.08	1.52	1.76	1.90	ns
SSTL12_F	0.69	0.72	0.82	0.88	1.00	1.08	1.52	1.76	1.90	ns
SSTL12_DCI_F	0.69	0.72	0.82	0.91	1.03	1.11	1.54	1.79	1.93	ns
SSTL12_T_DCI_F	0.69	0.72	0.82	0.91	1.03	1.11	1.54	1.79	1.93	ns
DIFF_SSTL18_I_F	0.75	0.79	0.92	0.94	1.06	1.15	1.58	1.82	1.97	ns
DIFF_SSTL18_II_F	0.75	0.79	0.92	0.97	1.09	1.16	1.61	1.84	1.99	ns
DIFF_SSTL18_I_DCI_F	0.75	0.79	0.92	0.89	1.02	1.10	1.53	1.77	1.92	ns
DIFF_SSTL18_II_DCI_F	0.75	0.79	0.92	0.89	1.02	1.10	1.53	1.77	1.92	ns
DIFF_SSTL18_II_T_DCI_F	0.75	0.79	0.92	0.89	1.02	1.10	1.53	1.77	1.92	ns
DIFF_SSTL15_F	0.68	0.72	0.82	0.89	1.01	1.09	1.53	1.77	1.91	ns
DIFF_SSTL15_DCI_F	0.68	0.72	0.82	0.89	1.01	1.09	1.53	1.77	1.91	ns
DIFF_SSTL15_T_DCI_F	0.68	0.72	0.82	0.89	1.01	1.09	1.53	1.77	1.91	ns
DIFF_SSTL135_F	0.69	0.72	0.82	0.88	1.00	1.08	1.52	1.76	1.90	ns
DIFF_SSTL135_DCI_F	0.69	0.72	0.82	0.89	1.00	1.08	1.52	1.76	1.90	ns
DIFF_SSTL135_T_DCI_F	0.69	0.72	0.82	0.89	1.00	1.08	1.52	1.76	1.90	ns
DIFF_SSTL12_F	0.69	0.72	0.82	0.88	1.00	1.08	1.52	1.76	1.90	ns
DIFF_SSTL12_DCI_F	0.69	0.72	0.82	0.91	1.03	1.11	1.54	1.79	1.93	ns
DIFF_SSTL12_T_DCI_F	0.69	0.72	0.82	0.91	1.03	1.11	1.54	1.79	1.93	ns

Notes:

1. This I/O standard is only available in the 1.8V high-performance (HP) banks.

Table 21 specifies the values of T_{IOTPHZ} and T_{IOIBUFDISABLE}. T_{IOTPHZ} is described as the delay from the T pin to the IOB pad through the output buffer of an IOB pad, when 3-state is enabled (i.e., a high impedance state). T_{IOIBUFDISABLE} is described as the IOB delay from IBUFDISABLE to O output. In HP I/O banks, the internal DCI termination turn-off time is always faster than T_{IOTPHZ} when the DCITERMDISABLE pin is used. In HR I/O banks, the internal IN_TERM termination turn-off time is always faster than T_{IOTPHZ} when the INTERMDISABLE pin is used.

Table 21: IOB 3-state Output Switching Characteristics

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
T _{IOTPHZ}	T input to pad high-impedance	0.76	0.86	0.99	ns
T _{IOIBUFDISABLE_HR}	IBUF turn-on time from IBUFDISABLE to O output for HR I/O banks	1.72	1.89	2.14	ns
T _{IOIBUFDISABLE_HP}	IBUF turn-on time from IBUFDISABLE to O output for HP I/O banks	1.31	1.46	1.76	ns

Table 27: IO_FIFO Switching Characteristics

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
IO_FIFO Clock to Out Delays					
T _{OFFCKO_DO}	RDCLK to Q outputs	0.51	0.56	0.63	ns
T _{CKO_FLAGS}	Clock to IO_FIFO flags	0.59	0.62	0.81	ns
Setup/Hold					
T _{CCK_D} /T _{CKC_D}	D inputs to WRCLK	0.43/−0.01	0.47/−0.01	0.53/−0.01	ns
T _{IFFCK_WREN} /T _{IFFCKC_WREN}	WREN to WRCLK	0.39/−0.01	0.43/−0.01	0.50/−0.01	ns
T _{OFFCK_RDEN} /T _{OFFCKC_RDEN}	RDEN to RDCLK	0.49/0.01	0.53/0.02	0.61/0.02	ns
Minimum Pulse Width					
T _{PWH_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	ns
T _{PWL_IO_FIFO}	RESET, RDCLK, WRCLK	0.81	0.92	1.08	ns
Maximum Frequency					
F _{MAX}	RDCLK and WRCLK	533.05	470.37	400.00	MHz

CLB Distributed RAM Switching Characteristics (SLICEM Only)*Table 29: CLB Distributed RAM Switching Characteristics*

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
Sequential Delays					
T _{SHCKO} ⁽¹⁾	Clock to A – B outputs	0.68	0.70	0.85	ns, Max
T _{SHCKO_1}	Clock to AMUX – BMUX outputs	0.91	0.95	1.15	ns, Max
Setup and Hold Times Before/After Clock CLK					
T _{DS_LRAM} /T _{DH_LRAM}	A – D inputs to CLK	0.45/0.23	0.45/0.24	0.54/0.27	ns, Min
T _{AS_LRAM} /T _{AH_LRAM}	Address An inputs to clock	0.13/0.50	0.14/0.50	0.17/0.58	ns, Min
	Address An inputs through MUXs and/or carry logic to clock	0.40/0.16	0.42/0.17	0.52/0.23	ns, Min
T _{WS_LRAM} /T _{WH_LRAM}	WE input to clock	0.29/0.09	0.30/0.09	0.36/0.09	ns, Min
T _{CECK_LRAM} /T _{CKCE_LRAM}	CE input to CLK	0.29/0.09	0.30/0.09	0.37/0.09	ns, Min
Clock CLK					
T _{MPW}	Minimum pulse width	0.68	0.77	0.91	ns, Min
T _{MCP}	Minimum clock period	1.35	1.54	1.82	ns, Min

Notes:

1. T_{SHCKO} also represents the CLK to XMUX output. Refer to the timing report for the CLK to XMUX path.

CLB Shift Register Switching Characteristics (SLICEM Only)*Table 30: CLB Shift Register Switching Characteristics*

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
Sequential Delays					
T _{REG}	Clock to A – D outputs	0.96	0.98	1.20	ns, Max
T _{REG_MUX}	Clock to AMUX – DMUX output	1.19	1.23	1.50	ns, Max
T _{REG_M31}	Clock to DMUX output via M31 output	0.89	0.91	1.10	ns, Max
Setup and Hold Times Before/After Clock CLK					
T _{WS_SHFREG} /T _{WH_SHFREG}	WE input	0.26/0.09	0.27/0.09	0.33/0.09	ns, Min
T _{CECK_SHFREG} /T _{CKCE_SHFREG}	CE input to CLK	0.27/0.09	0.28/0.09	0.33/0.09	ns, Min
T _{DS_SHFREG} /T _{DH_SHFREG}	A – D inputs to CLK	0.28/0.26	0.28/0.26	0.33/0.30	ns, Min
Clock CLK					
T _{MPW_SHFREG}	Minimum pulse width	0.55	0.65	0.78	ns, Min

DSP48E1 Switching Characteristics

Table 32: DSP48E1 Switching Characteristics

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
Setup and Hold Times of Data/Control Pins to the Input Register Clock					
T _{DSPDCK_A_AREG} / T _{DSPCKD_A_AREG}	A input to A register CLK	0.24/0.12	0.27/0.14	0.31/0.16	ns
T _{DSPDCK_B_BREG} /T _{DSPCKD_B_BREG}	B input to B register CLK	0.28/0.13	0.32/0.14	0.39/0.15	ns
T _{DSPDCK_C_CREG} /T _{DSPCKD_C_CREG}	C input to C register CLK	0.15/0.15	0.17/0.17	0.20/0.20	ns
T _{DSPDCK_D_DREG} /T _{DSPCKD_D_DREG}	D input to D register CLK	0.21/0.19	0.27/0.22	0.35/0.26	ns
T _{DSPDCK_ACIN_AREG} /T _{DSPCKD_ACIN_AREG}	ACIN input to A register CLK	0.21/0.12	0.24/0.14	0.27/0.16	ns
T _{DSPDCK_BCIN_BREG} /T _{DSPCKD_BCIN_BREG}	BCIN input to B register CLK	0.22/0.13	0.25/0.14	0.30/0.15	ns
Setup and Hold Times of Data Pins to the Pipeline Register Clock					
T _{DSPDCK_{A,B}_MREG_MULT} /T _{DSPCKD_B_MREG_MULT}	{A, B,} input to M register CLK using multiplier	2.04/–0.01	2.34/–0.01	2.79/–0.01	ns
T _{DSPDCK_{A,B}_ADREG} / T _{DSPCKD_D_ADREG}	{A, D} input to AD register CLK	1.09/–0.02	1.25/–0.02	1.49/–0.02	ns
Setup and Hold Times of Data/Control Pins to the Output Register Clock					
T _{DSPDCK_{A,B}_PREG_MULT} /T _{DSPCKD_{A,B}_PREG_MULT}	{A, B,} input to P register CLK using multiplier	3.41/–0.24	3.90/–0.24	4.64/–0.24	ns
T _{DSPDCK_D_PREG_MULT} /T _{DSPCKD_D_PREG_MULT}	D input to P register CLK using multiplier	3.33/–0.62	3.81/–0.62	4.53/–0.62	ns
T _{DSPDCK_{A,B}_PREG} /T _{DSPCKD_{A,B}_PREG}	A or B input to P register CLK not using multiplier	1.47/–0.24	1.68/–0.24	2.00/–0.24	ns
T _{DSPDCK_C_PREG} /T _{DSPCKD_C_PREG}	C input to P register CLK not using multiplier	1.30/–0.22	1.49/–0.22	1.78/–0.22	ns
T _{DSPDCK_PCIN_PREG} /T _{DSPCKD_PCIN_PREG}	PCIN input to P register CLK	1.12/–0.13	1.28/–0.13	1.52/–0.13	ns
Setup and Hold Times of the CE Pins					
T _{DSPDCK_{CEA;CEB}_{AREG;BREG}} /T _{DSPCKD_{CEA;CEB}_{AREG;BREG}}	{CEA; CEB} input to {A; B} register CLK	0.30/0.05	0.36/0.06	0.44/0.09	ns
T _{DSPDCK_CEC_CREG} /T _{DSPCKD_CEC_CREG}	CEC input to C register CLK	0.24/0.08	0.29/0.09	0.36/0.11	ns
T _{DSPDCK_CED_DREG} /T _{DSPCKD_CED_DREG}	CED input to D register CLK	0.31/–0.02	0.36/–0.02	0.44/–0.02	ns
T _{DSPDCK_CEM_MREG} /T _{DSPCKD_CEM_MREG}	CEM input to M register CLK	0.26/0.15	0.29/0.17	0.33/0.20	ns
T _{DSPDCK_CEP_PREG} / T _{DSPCKD_CEP_PREG}	CEP input to P register CLK	0.31/0.01	0.36/0.01	0.45/0.01	ns
Setup and Hold Times of the RST Pins					
T _{DSPDCK_{RSTA;RSTB}_{AREG;BREG}} /T _{DSPCKD_{RSTA;RSTB}_{AREG;BREG}}	{RSTA, RSTB} input to {A, B} register CLK	0.34/0.10	0.39/0.11	0.47/0.13	ns
T _{DSPDCK_RSTC_CREG} /T _{DSPCKD_RSTC_CREG}	RSTC input to C register CLK	0.06/0.22	0.07/0.24	0.08/0.26	ns
T _{DSPDCK_RSTD_DREG} /T _{DSPCKD_RSTD_DREG}	RSTD input to D register CLK	0.37/0.06	0.42/0.06	0.50/0.07	ns
T _{DSPDCK_RSTM_MREG} /T _{DSPCKD_RSTM_MREG}	RSTM input to M register CLK	0.18/0.18	0.20/0.21	0.23/0.24	ns
T _{DSPDCK_RSTP_PREG} /T _{DSPCKD_RSTP_PREG}	RSTP input to P register CLK	0.24/0.01	0.26/0.01	0.30/0.01	ns
Combinatorial Delays from Input Pins to Output Pins					
T _{DSPDO_A_CARRYOUT_MULT}	A input to CARRYOUT output using multiplier	3.21	3.69	4.39	ns
T _{DSPDO_D_P_MULT}	D input to P output using multiplier	3.15	3.61	4.30	ns

Table 38: MMCM Specification (Cont'd)

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
MMCM_T _{LOCKMAX}	MMCM maximum Lock Time	100	100	100	μs
MMCM_F _{OUTMAX}	MMCM maximum output frequency	1066.00	933.00	800.00	MHz
MMCM_F _{OUTMIN}	MMCM minimum output frequency ⁽⁵⁾⁽⁶⁾	4.69	4.69	4.69	MHz
MMCM_T _{EXTFDVAR}	External clock feedback variation	< 20% of clock input period or 1 ns Max			
MMCM_RST _{MINPULSE}	Minimum reset pulse width	5.00	5.00	5.00	ns
MMCM_F _{PFDMAX}	Maximum frequency at the phase frequency detector	550.00	500.00	450.00	MHz
MMCM_F _{PFDMIN}	Minimum frequency at the phase frequency detector	10.00	10.00	10.00	MHz
MMCM_T _{FBDELAY}	Maximum delay in the feedback path	3 ns Max or one CLKIN cycle			
MMCM Switching Characteristics Setup and Hold					
T _{MMCMDCK_PSEN} / T _{MMCMCKD_PSEN}	Setup and hold of phase-shift enable	1.04/0.00	1.04/0.00	1.04/0.00	ns
T _{MMCMDCK_PSINCDEC} / T _{MMCMCKD_PSINCDEC}	Setup and hold of phase-shift increment/decrement	1.04/0.00	1.04/0.00	1.04/0.00	ns
T _{MMCMCKO_PSDONE}	Phase shift clock-to-out of PSDONE	0.59	0.68	0.81	ns
Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK					
T _{MMCMDCK_DADDR} / T _{MMCMCKD_DADDR}	DADDR setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	ns, Min
T _{MMCMDCK_DI} /T _{MMCMCKD_DI}	DI setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	ns, Min
T _{MMCMDCK_DEN} /T _{MMCMCKD_DEN}	DEN setup/hold	1.76/0.00	1.97/0.00	2.29/0.00	ns, Min
T _{MMCMDCK_DWE} /T _{MMCMCKD_DWE}	DWE setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	ns, Min
T _{MMCMCKO_DRDY}	CLK to out of DRDY	0.65	0.72	0.99	ns, Max
F _{DCK}	DCLK frequency	200.00	200.00	200.00	MHz, Max

Notes:

1. The MMCM does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
2. The static offset is measured between any MMCM outputs with identical phase.
3. Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
4. Includes global clock buffer.
5. Calculated as F_{VCO}/128 assuming output duty cycle is 50%.
6. When CLKOUT4_CASCADE = TRUE, MMCM_F_{OUTMIN} is 0.036 MHz.

PLL Switching Characteristics

Table 39: PLL Specification

Symbol	Description	Speed Grade			Units
		-3	-2/-2L/-2G	-1	
PLL_F _{INMAX}	Maximum input clock frequency	1066.00	933.00	800.00	MHz
PLL_F _{INMIN}	Minimum input clock frequency	19.00	19.00	19.00	MHz
PLL_F _{INJITTER}	Maximum input clock period jitter	< 20% of clock input period or 1 ns Max			
PLL_F _{INDUTY}	Allowable input duty cycle: 19—49 MHz	25	25	25	%
	Allowable input duty cycle: 50—199 MHz	30	30	30	%
	Allowable input duty cycle: 200—399 MHz	35	35	35	%
	Allowable input duty cycle: 400—499 MHz	40	40	40	%
	Allowable input duty cycle: >500 MHz	45	45	45	%
PLL_F _{VCOMIN}	Minimum PLL VCO frequency	800.00	800.00	800.00	MHz
PLL_F _{VCOMAX}	Maximum PLL VCO frequency	2133.00	1866.00	1600.00	MHz
PLL_F _{BANDWIDTH}	Low PLL bandwidth at typical ⁽¹⁾	1.00	1.00	1.00	MHz
	High PLL bandwidth at typical ⁽¹⁾	4.00	4.00	4.00	MHz
PLL_T _{STATPHAOFFSET}	Static phase offset of the PLL outputs ⁽²⁾	0.12	0.12	0.12	ns
PLL_T _{OUTJITTER}	PLL output jitter	Note 3			
PLL_T _{OUTDUTY}	PLL output clock duty cycle precision ⁽⁴⁾	0.20	0.20	0.20	ns
PLL_T _{LOCKMAX}	PLL maximum lock time	100	100	100	μs
PLL_F _{OUTMAX}	PLL maximum output frequency	1066.00	933.00	800.00	MHz
PLL_F _{OUTMIN}	PLL minimum output frequency ⁽⁵⁾	6.25	6.25	6.25	MHz
PLL_T _{EXTFDVAR}	External clock feedback variation	< 20% of clock input period or 1 ns Max			
PLL_RST _{MINPULSE}	Minimum reset pulse width	5.00	5.00	5.00	ns
PLL_F _{PFDMAX}	Maximum frequency at the phase frequency detector	550.00	500.00	450.00	MHz
PLL_F _{PFDMIN}	Minimum frequency at the phase frequency detector	19.00	19.00	19.00	MHz
PLL_T _{FBDELAY}	Maximum delay in the feedback path	3 ns Max or one CLKIN cycle			
Dynamic Reconfiguration Port (DRP) for PLL Before and After DCLK					
T _{PLLDCK_DADDR} /T _{PLLCKD_DADDR}	DADDR setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	ns, Min
T _{PLLDCK_DI} /T _{PLLCKD_DI}	DI setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	ns, Min
T _{PLLDCK_DEN} /T _{PLLCKD_DEN}	DEN setup/hold	1.76/0.00	1.97/0.00	2.29/0.00	ns, Min
T _{PLLDCK_DWE} /T _{PLLCKD_DWE}	DWE setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	ns, Min
T _{PLLCKO_DRDY}	CLK to out of DRDY	0.65	0.72	0.99	ns, Max
F _{DCK}	DCLK frequency	200.00	200.00	200.00	MHz, Max

Notes:

- The PLL does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
- The static offset is measured between any PLL outputs with identical phase.
- Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
- Includes global clock buffer.
- Calculated as F_{VCO}/128 assuming output duty cycle is 50%.

Device Pin-to-Pin Input Parameter Guidelines

All devices are 100% functionally tested. Values are expressed in nanoseconds unless otherwise noted.

Table 45: Global Clock Input Setup and Hold Without MMCM/PLL with ZHOLD_DELAY on HR I/O Banks (only)

Symbol	Description	Device	Speed Grade			Units
			-3	-2/-2L/-2G	-1	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾						
T _{PSFD} / T _{PHFD}	Full delay (legacy delay or default delay) Global clock Input and IFF ⁽²⁾ without MMCM/PLL with ZHOLD_DELAY on HR I/O banks	XC7V585T	3.12/−0.37	3.19/−0.37	3.42/−0.37	ns
		XC7V2000T	N/A	N/A	N/A	ns
		XC7VX330T	2.90/−0.31	2.96/−0.31	3.16/−0.31	ns
		XC7VX415T	N/A	N/A	N/A	ns
		XC7VX485T	N/A	N/A	N/A	ns
		XC7VX550T	N/A	N/A	N/A	ns
		XC7VX690T	N/A	N/A	N/A	ns
		XC7VX980T	N/A	N/A	N/A	ns
		XC7VX1140T	N/A	N/A	N/A	ns

Notes:

- Setup and hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the global clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the global clock input signal using the fastest process, lowest temperature, and highest voltage.
- IFF = Input Flip-Flop or Latch

Table 46: Clock-Capable Clock Input Setup and Hold With MMCM

Symbol	Description	Device	Speed Grade			Units
			-3	-2/-2L/-2G	-1	
Input Setup and Hold Time Relative to Global Clock Input Signal for SSTL15 Standard. ⁽¹⁾⁽²⁾						
T _{PSMMCMCC} / T _{PHMMCMCC}	No delay clock-capable clock input and IFF ⁽³⁾ with MMCM	XC7V585T	2.71/−0.10	3.00/−0.10	3.33/−0.10	ns
		XC7V2000T	N/A	2.60/−0.24	2.87/−0.24	ns
		XC7VX330T	2.58/−0.15	2.87/−0.15	3.18/−0.15	ns
		XC7VX415T	2.73/0.01	3.03/0.01	3.36/0.01	ns
		XC7VX485T	2.58/−0.15	2.87/−0.15	3.18/−0.15	ns
		XC7VX550T	2.72/−0.09	3.01/−0.09	3.34/−0.09	ns
		XC7VX690T	2.72/0.01	3.01/0.01	3.34/0.01	ns
		XC7VX980T	N/A	3.01/−0.10	3.36/−0.10	ns
		XC7VX1140T	N/A	2.61/−0.24	2.88/−0.24	ns

Notes:

- Setup and hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the global clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the global clock input signal using the fastest process, lowest temperature, and highest voltage.
- Listed below are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net in a single SLR.
- IFF = Input Flip-Flop or Latch
- Use IBIS to determine any duty-cycle distortion incurred using various standards.

GTX Transceiver Specifications

GTX Transceiver DC Input and Output Levels

Table 51 summarizes the DC specifications of the GTX transceivers in Virtex-7 T and XT FPGAs. Consult the *7 Series FPGAs GTX/GTH Transceiver User Guide* (UG476) for further details.

Table 51: GTX Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV _{PPOUT}	Differential peak-to-peak output voltage ⁽¹⁾	Transmitter output swing is set to maximum setting	–	–	1000	mV
V _{CMOUTDC}	DC common mode output voltage.	Equation based	$V_{MGTAVTT} - DV_{PPOUT}/4$			mV
R _{OUT}	Differential output resistance		–	100	–	Ω
T _{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew		–	2	12	ps
DV _{PPIN}	Differential peak-to-peak input voltage (external AC coupled)	>10.3125 Gb/s	150	–	1250	mV
		6.6 Gb/s to 10.3125 Gb/s	150	–	1250	mV
		≤ 6.6 Gb/s	150	–	2000	mV
V _{IN}	Absolute input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–200	–	$V_{MGTAVTT}$	mV
V _{CMIN}	Common mode input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	–	$2/3 V_{MGTAVTT}$	–	mV
R _{IN}	Differential input resistance		–	100	–	Ω
C _{EXT}	Recommended external AC coupling capacitor ⁽²⁾		–	100	–	nF

Notes:

- The output swing and preemphasis levels are programmable using the attributes discussed in the *7 Series FPGAs GTX/GTH Transceiver User Guide* (UG476), and can result in values lower than reported in this table.
- Other values can be used as appropriate to conform to specific protocols and standards.

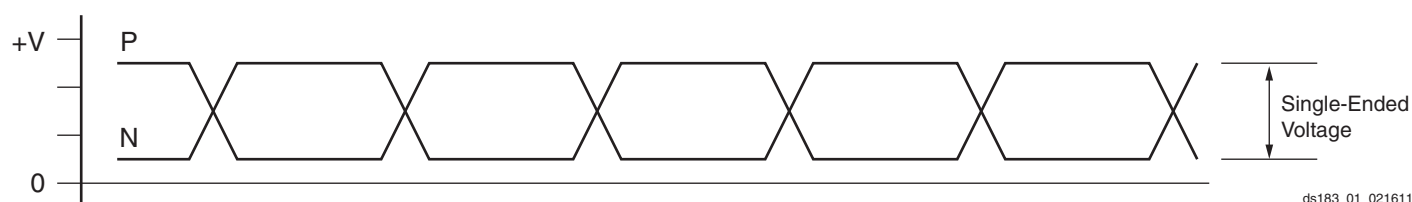


Figure 1: Single-Ended Peak-to-Peak Voltage

ds183_01_021611

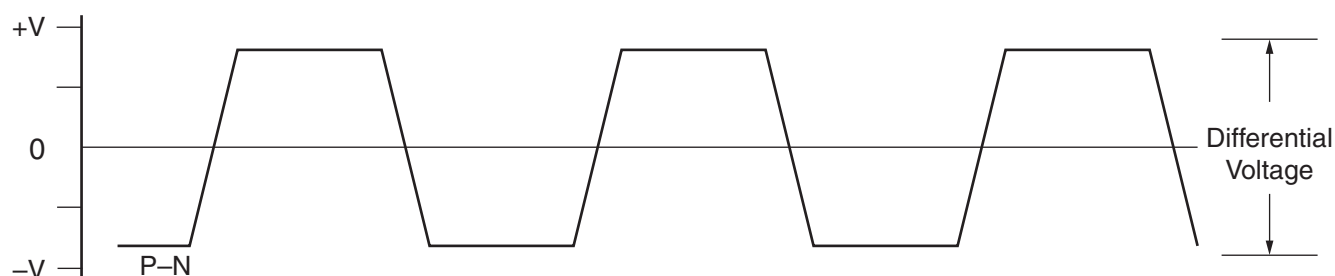


Figure 2: Differential Peak-to-Peak Voltage

ds183_02_021611

GTH Transceiver Specifications

GTH Transceiver DC Input and Output Levels

Table 66 summarizes the DC specifications of the GTH transceivers in Virtex-7 T and XT FPGAs. Consult the *7 Series FPGAs GTX/GTH Transceiver User Guide* (UG476) for further details.

Table 66: GTH Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV _{PPIN}	Differential peak-to-peak input voltage (external AC coupled)	>10.3125 Gb/s	150	–	1250	mV
		6.6 Gb/s to 10.3125 Gb/s	150	–	1250	mV
		≤ 6.6 Gb/s	150	–	2000	mV
V _{IN}	Absolute input voltage	DC coupled V _{MGTAVTT} = 1.2V	–400	–	V _{MGTAVTT}	mV
V _{CMIN}	Common mode input voltage	DC coupled V _{MGTAVTT} = 1.2V	–	2/3 V _{MGTAVTT}	–	mV
DV _{PPOUT}	Differential peak-to-peak output voltage ⁽¹⁾	Transmitter output swing is set to 1010	–	–	800	mV
V _{CMOUTDC}	Common mode output voltage: DC coupled	Equation based	V _{MGTAVTT} – DV _{PPOUT} /4			mV
V _{CMOUTAC}	Common mode output voltage: AC coupled	Equation based	V _{MGTAVTT} – DV _{PPOUT} /2			mV
R _{IN}	Differential input resistance		–	100	–	Ω
R _{OUT}	Differential output resistance		–	100	–	Ω
T _{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew		–	–	10	ps
C _{EXT}	Recommended external AC coupling capacitor ⁽²⁾		–	100	–	nF

Notes:

- The output swing and preemphasis levels are programmable using the attributes discussed in the *7 Series FPGAs GTX/GTH Transceiver User Guide* (UG476), and can result in values lower than reported in this table.
- Other values can be used as appropriate to conform to specific protocols and standards.

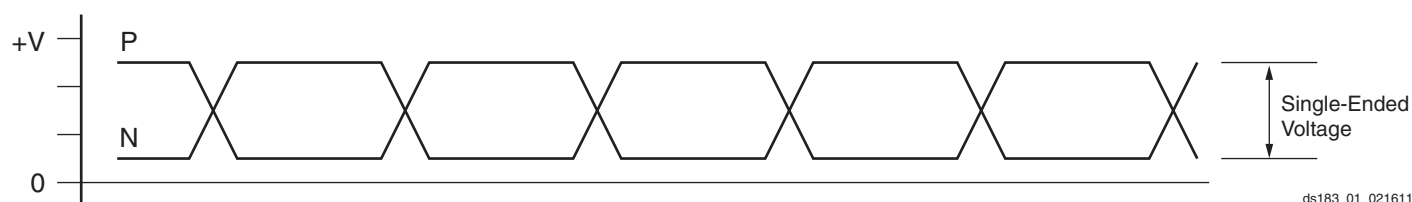


Figure 4: Single-Ended Peak-to-Peak Voltage

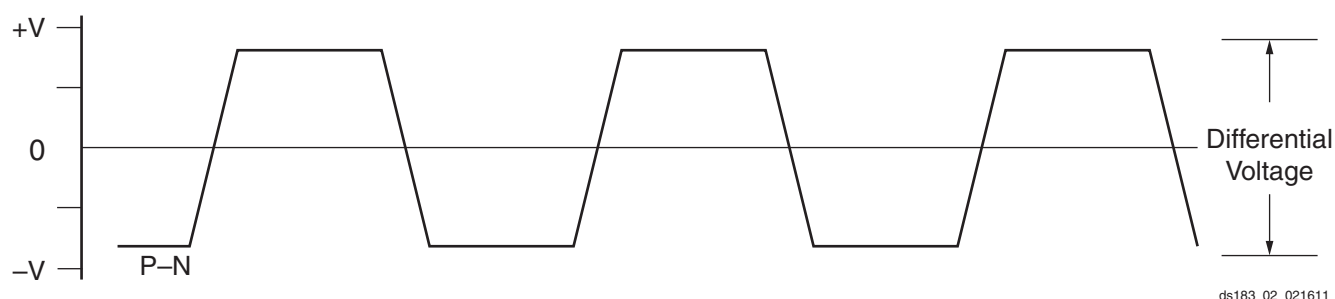


Figure 5: Differential Peak-to-Peak Voltage

Table 67 summarizes the DC specifications of the clock input of the GTH transceiver. Consult the *7 Series FPGAs GTX/GTH Transceiver User Guide* ([UG476](#)) for further details.

Table 67: GTH Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V _{IDIFF}	Differential peak-to-peak input voltage	350	–	2000	mV
R _{IN}	Differential input resistance	–	100	–	Ω
C _{EXT}	Required external AC coupling capacitor	–	100	–	nF

GTH Transceiver Switching Characteristics

Consult the *7 Series FPGAs GTX/GTH Transceiver User Guide* ([UG476](#)) for further information.

Table 68: GTH Transceiver Performance

Symbol	Description	Output Divider	Speed Grade			Units
			-3E/-2GE	-2(C&I)/-2LE	-1(C&I) ⁽¹⁾	
F _{GTHMAX}	Maximum GTH transceiver data rate		13.1	11.3	8.5	Gb/s
F _{GTHMIN}	Minimum GTH transceiver data rate		0.500	0.500	0.500	Gb/s
F _{GTHCRANGE}	CPLL line rate range	1	3.2–10.3125		3.2–8.0	Gb/s
		2	1.6–5.16		1.6–4.0	Gb/s
		4	0.8–2.58		0.8–2.0	Gb/s
		8	0.5–1.29		0.5–1.0	Gb/s
		16	N/A			Gb/s
F _{GTHQRANGE1}	QPLL line rate range 1	1	8.0–11.85	8.0–11.3	8.0–8.5	Gb/s
		2	4.0–5.925	4.0–5.65	4.0–4.25	Gb/s
		4	2.0–2.9625	2.0–2.825	2.0–2.125	Gb/s
		8	1.0–1.48125	1.0–1.4125	1.0–1.0625	Gb/s
		16	N/A			Gb/s
F _{GTHQRANGE2}	QPLL line rate range 2	1	11.85–13.1	N/A		Gb/s
		2	5.925–6.55	N/A		Gb/s
		4	2.96–3.275	N/A		Gb/s
		8	1.48–1.63	N/A		Gb/s
		16	0.74–0.81	N/A		Gb/s
F _{GCPLLRANGE}	GTH transceiver CPLL frequency range		1.6–5.16		1.6–4.0	GHz
F _{GQPLLRange1}	GTH transceiver QPLL frequency range 1		8.0–11.85	8.0–11.3	8.0–8.5	GHz
F _{GQPLLRange2}	GTH transceiver QPLL frequency range 2		11.85–13.1	N/A		GHz

Notes:

- The -1 speed grade requires a 4-byte internal data width for operation above 5.0 Gb/s. A -1 speed grade with V_{CCINT} = 0.9V, as described in the *Lowering Power using the Voltage Identification Bit* application note ([XAPP555](#)), requires a 4-byte internal data width for operation above 3.8 Gb/s.

Table 69: GTH Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics

Symbol	Description	Speed Grade				Units
		-3/-2G	-2L	-2	-1	
F _{GTHDRPCLK}	GTHDRPCLK maximum frequency	175	175	175	156	MHz

Table 74: GTH Transceiver Receiver Switching Characteristics

Symbol	Description		Min	Typ	Max	Units
F _{GTHRX}	Serial data rate	RX oversampler not enabled	0.500	–	F _{GTHMAX}	Gb/s
T _{RXELECIDLE}	Time for RXELECIDLE to respond to loss or restoration of data		–	10	–	ns
RX _{OOBVDPP}	OOB detect threshold peak-to-peak		60	–	150	mV
RX _{SST}	Receiver spread-spectrum tracking ⁽¹⁾	Modulated @ 33 KHz	–5000	–	0	ppm
RX _{RL}	Run length (CID)		–	–	512	UI
RX _{PPMTOL}	Data/REFCLK PPM offset tolerance	Bit rates ≤ 6.6 Gb/s	–1250	–	1250	ppm
		Bit rates > 6.6 Gb/s and ≤ 8.0 Gb/s	–700	–	700	ppm
		Bit rates > 8.0 Gb/s	–200	–	200	ppm
SJ Jitter Tolerance ⁽²⁾						
JT_SJ _{13.1}	Sinusoidal jitter (QPLL) ⁽³⁾	13.1 Gb/s	0.3	–	–	UI
JT_SJ _{12.5}	Sinusoidal jitter (QPLL) ⁽³⁾	12.5 Gb/s	0.3	–	–	UI
JT_SJ _{11.3}	Sinusoidal jitter (QPLL) ⁽³⁾	11.3 Gb/s	0.3	–	–	UI
JT_SJ _{10.32_QPLL}	Sinusoidal jitter (QPLL) ⁽³⁾	10.32 Gb/s	0.3	–	–	UI
JT_SJ _{10.32_CPLL}	Sinusoidal jitter (CPLL) ⁽³⁾	10.32 Gb/s	0.3	–	–	UI
JT_SJ _{9.8}	Sinusoidal jitter (QPLL) ⁽³⁾	9.8 Gb/s	0.3	–	–	UI
JT_SJ _{8.0_QPLL}	Sinusoidal jitter (QPLL) ⁽³⁾	8.0 Gb/s	0.44	–	–	UI
JT_SJ _{8.0_CPLL}	Sinusoidal jitter (CPLL) ⁽³⁾	8.0 Gb/s	0.42	–	–	UI
JT_SJ _{6.6_QPLL}	Sinusoidal jitter (QPLL) ⁽³⁾	6.6 Gb/s	0.48	–	–	UI
JT_SJ _{6.6_CPLL}	Sinusoidal jitter (CPLL) ⁽³⁾	6.6 Gb/s	0.44	–	–	UI
JT_SJ _{5.0}	Sinusoidal jitter (CPLL) ⁽³⁾	5.0 Gb/s	0.44	–	–	UI
JT_SJ _{4.25}	Sinusoidal jitter (CPLL) ⁽³⁾	4.25 Gb/s	0.44	–	–	UI
JT_SJ _{3.75}	Sinusoidal jitter (CPLL) ⁽³⁾	3.75 Gb/s	0.44	–	–	UI
JT_SJ _{3.2}	Sinusoidal jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁴⁾	0.45	–	–	UI
JT_SJ _{3.2L}	Sinusoidal jitter (CPLL) ⁽³⁾	3.2 Gb/s ⁽⁵⁾	0.45	–	–	UI
JT_SJ _{2.5}	Sinusoidal jitter (CPLL) ⁽³⁾	2.5 Gb/s ⁽⁶⁾	0.5	–	–	UI
JT_SJ _{1.25}	Sinusoidal jitter (CPLL) ⁽³⁾	1.25 Gb/s ⁽⁷⁾	0.5	–	–	UI
JT_SJ ₅₀₀	Sinusoidal jitter (CPLL) ⁽³⁾	500 Mb/s	0.4	–	–	UI
SJ Jitter Tolerance with Stressed Eye ⁽²⁾						
JT_TJSE _{3.2}	Total jitter with stressed eye ⁽⁸⁾	3.2 Gb/s	0.70	–	–	UI
JT_TJSE _{6.6}		6.6 Gb/s	0.70	–	–	UI
JT_SJSE _{3.2}	Sinusoidal jitter with stressed eye ⁽⁸⁾	3.2 Gb/s	0.1	–	–	UI
JT_SJSE _{6.6}		6.6 Gb/s	0.1	–	–	UI

Notes:

- Using RXOUT_DIV = 1, 2, and 4.
- All jitter values are based on a bit error ratio of $1e^{-12}$.
- The frequency of the injected sinusoidal jitter is 80 MHz.
- CPLL frequency at 3.2 GHz and RXOUT_DIV = 2.
- CPLL frequency at 1.6 GHz and RXOUT_DIV = 1.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 2.
- CPLL frequency at 2.5 GHz and RXOUT_DIV = 4.
- Composite jitter with RX equalizer enabled. DFE disabled.

GTH Transceiver Protocol Jitter Characteristics

For [Table 75](#) through [Table 80](#), the *7 Series FPGAs GTX/GTH Transceiver User Guide* ([UG476](#)) contains recommended settings for optimal usage of protocol specific characteristics.

Table 75: Gigabit Ethernet Protocol Characteristics (GTH Transceivers)

Description	Line Rate (Mb/s)	Min	Max	Units
Gigabit Ethernet Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	1250	–	0.24	UI
Gigabit Ethernet Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	1250	0.749	–	UI

Table 76: XAUI Protocol Characteristics (GTH Transceivers)

Description	Line Rate (Mb/s)	Min	Max	Units
XAUI Transmitter Jitter Generation				
Total transmitter jitter (T _{TJ})	3125	–	0.35	UI
XAUI Receiver High Frequency Jitter Tolerance				
Total receiver jitter tolerance	3125	0.65	–	UI

Table 77: PCI Express Protocol Characteristics (GTH Transceivers)⁽¹⁾

Standard	Description		Line Rate (Mb/s)	Min	Max	Units
PCI Express Transmitter Jitter Generation						
PCI Express Gen 1	Total transmitter jitter		2500	–	0.25	UI
PCI Express Gen 2	Total transmitter jitter		5000	–	0.25	UI
PCI Express Gen 3 ⁽²⁾	Total transmitter jitter uncorrelated		8000	–	31.25	ps
	Deterministic transmitter jitter uncorrelated			–	12	ps
PCI Express Receiver High Frequency Jitter Tolerance						
PCI Express Gen 1	Total receiver jitter tolerance		2500	0.65	–	UI
PCI Express Gen 2 ⁽³⁾	Receiver inherent timing error		5000	0.40	–	UI
	Receiver inherent deterministic timing error			0.30	–	UI
PCI Express Gen 3 ⁽²⁾	Receiver sinusoidal jitter tolerance	0.03 MHz–1.0 MHz	8000	1.00	–	UI
		1.0 MHz–10 MHz		Note 4	–	UI
		10 MHz–100 MHz		0.10	–	UI

Notes:

1. Tested per card electromechanical (CEM) methodology.
2. PCI-SIG 3.0 certification and compliance test boards are currently not available.
3. Using common REFCLK.
4. Between 1 MHz and 10 MHz the minimum sinusoidal jitter roll-off with a slope of 20dB/decade.

Date	Version	Description
08/03/2012	1.5	Updated the descriptions, changed V_{IN} and Note 2 and added Note 4 in Table 1. In Table 2, changed descriptions and notes, removed Note 7, changed GTX transceiver parameters and values and added Note 12 and Note 13. Updated parameters in Table 3. Added Table 4 and Table 5. Updated the values for in Table 7. Updated LVCMOS12 and the SSTLs in Table 9. Updated many of the specifications in Table 10 and Table 11. Updated the AC Switching Characteristics section, based upon Table 14, for the ISE 14.2 speed specifications throughout the document with appropriate changes to Table 15 and Table 16 including production release of the XC7VX485T in the -2 and -1 speed designations. Added notes and specifications to Table 18. Updated the IOB Pad Input/Output/3-State discussion and changed Table 21 by adding $T_{IOIBUFDISABLE}$. Removed many of the combinatorial delay specifications and T_{CINCK}/T_{CKCIN} from Table 28. Rearranged Table 51 including moving some parameters to Table 1. Added Table 56. Updated Table 57. In Table 59, updated SJ Jitter Tolerance with Stressed Eye section, page 48 and Note 8. Added Note 1, Note 2, and Note 3 to Table 62. Added Note 1 and Note 2 to Table 63, and line rate ranges. Updated Table 64 including adding Note 1. Updated Table 65 including adding Note 1. In Table 82 updated Note 1 and added Note 4. In Table 83, updated T_{POR} and F_{EMCK}.
09/20/2012	1.6	Removed the XC7V1500T device from data sheet. In Table 2, revised V_{CCINT} and V_{CCBRAM} and added Note 3. Updated some of the values in Table 7. Revised Table 15 and Table 16 to include production release of the XC7V585T in the -2 and -1 speed designations. Added values for the XC7V585T in Table 50. Updated Note 2 in Table 58.
09/26/2012	1.7	Revised Table 15 and Table 16 to include production release of the XC7VX485T in the -3 speed designation.
10/19/2012	1.8	Revised Table 15 and Table 16 to include production release of the XC7VX485T in the -2L (1.0V) speed designation. Removed -2L (0.9V) speed specifications from data sheet, this change includes edits to V_{CCINT} and V_{CCBRAM} in Table 2, editing Note 1 and removing Note 2 in Table 53. Also in Table 53, updated the F_{GTXMAX}, $F_{GTXQRANGE1}$, and $F_{GQPLLRange1}$ specification for -1 speed grade from 6.6 Gb/s to 8.0 Gb/s. Edited Note 4 in Table 57 and Note 3 in Table 72.
12/12/2012	1.9	Updated the AC Switching Characteristics section, based upon Table 14, for the ISE 14.3 speed specifications throughout the document. Revised Table 15 and Table 16 to include production release of the XC7V585T in the -3 and -2L(1.0V) speed designations. Updated the notes in Table 50. Updated GTH Transceiver Specifications including removal of GTH Transceiver DC Characteristics section (use the XPE (download at http://www.xilinx.com/power). Updated Table 68 and added Table 71, Table 73, and Table 74. Removed Note 4 from Table 82.
12/24/2012	1.10	Updated the AC Switching Characteristics section, based upon Table 14, for the ISE 14.4 and Vivado 2012.4 speed specifications throughout the document. Revised the XC7V2000T in the -1 and -2 speed designations Table 15 to preliminary. Added the GTH Transceiver Protocol Jitter Characteristics section. Updated T_{TCKTDO} and added Internal Configuration Access Port section to Table 83.
01/31/2013	1.11	Added Note 2 to Table 2. Revised Table 15 and Table 16 to include production release of the XC7V2000T in the -1 and -2 speed specifications. Updated Note 1 in Table 35. Updated the notes in Table 37, Table 40 through Table 43, Table 46, and Table 47. In Table 66, updated D_{VPPIN}. In Table 67, updated V_{IDIFF}. Removed T_{LOCK} and T_{PHASE} from Table 70. Updated T_{DLOCK} in Table 71.
03/07/2013	1.12	Updated the AC Switching Characteristics section, based upon Table 14, for the ISE 14.5 and Vivado 2013.1 speed specifications throughout the document. Revised Table 15 and Table 16 to include production release of the XC7VX690T. Revised D_{VPPOUT} in Table 66. Updated values in Table 67 and Table 74. Removed Note 1 from Table 68. Updated $MMCM_F_{PFDMAX}$ in Table 38 and PLL_F_{PFDMAX} in Table 39. Added skew values to Table 50.

Date	Version	Description
03/27/2013	1.13	In Table 7 , added values for the XC7VX330T and XC7VX415T devices. Revised Table 15 and Table 16 to include production release of the XC7VX330T and XC7VX415T. In Table 18 , updated the table title, LPDDR2 values, and removed Note 3. Removed Note 2: <i>For QPLL line rate, the maximum line rate with the divider N set to 66 is 10.3125 Gb/s</i> from Table 68 .
04/17/2013	1.14	Updated the AC Switching Characteristics section with production release changes to Table 15 and Table 16 for XC7VX550T for all speed specifications. In Table 1 , revised V_{IN} (I/O input voltage) to match values in Table 4 and Table 5 , and combined Note 4 with old Note 5 and then added new Note 5 . Revised V_{IN} description and added Note 8 in Table 2 . Updated first 3 rows in Table 4 and Table 5 . Updated values and added new values to Table 7 . Also revised PCI33_3 voltage minimum in Table 10 to match values in Table 1 , Table 4 , and Table 5 . Added Note 1 to Table 12 and Table 13 . Throughout the data sheet (Table 29 , Table 30 , and Table 45) removed the obvious note "A Zero "0" Hold Time listing indicates no hold time or a negative hold time." Updated and clarified USRCLK data in Table 57 and Table 72 .

Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials, or to advise you of any corrections or update. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

AUTOMOTIVE APPLICATIONS DISCLAIMER

XILINX PRODUCTS ARE NOT DESIGNED OR INTENDED TO BE FAIL-SAFE, OR FOR USE IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE, SUCH AS APPLICATIONS RELATED TO: (I) THE DEPLOYMENT OF AIRBAGS, (II) CONTROL OF A VEHICLE, UNLESS THERE IS A FAIL-SAFE OR REDUNDANCY FEATURE (WHICH DOES NOT INCLUDE USE OF SOFTWARE IN THE XILINX DEVICE TO IMPLEMENT THE REDUNDANCY) AND A WARNING SIGNAL UPON FAILURE TO THE OPERATOR, OR (III) USES THAT COULD LEAD TO DEATH OR PERSONAL INJURY. CUSTOMER ASSUMES THE SOLE RISK AND LIABILITY OF ANY USE OF XILINX PRODUCTS IN SUCH APPLICATIONS.