



Welcome to [E-XFL.COM](#)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.


## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

### Details

|                                |   |
|--------------------------------|---|
| Product Status                 | Obsolete  |
| Number of LABs/CLBs            | 150   |
| Number of Logic Elements/Cells | 1200  |
| Total RAM Bits                 | 9421  |
| Number of I/O                  | 73  |
| Number of Gates                | -   |
| Voltage - Supply               | 1.14V ~ 1.26V   |
| Mounting Type                  | Surface Mount   |
| Operating Temperature          | 0°C ~ 85°C (TJ)   |
| Package / Case                 | 100-LQFP  |
| Supplier Device Package        | 100-TQFP (14x14)  |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lcmxo1200e-3t100c">https://www.e-xfl.com/product-detail/lattice-semiconductor/lcmxo1200e-3t100c</a> |

**Figure 2-6. Distributed Memory Primitives**

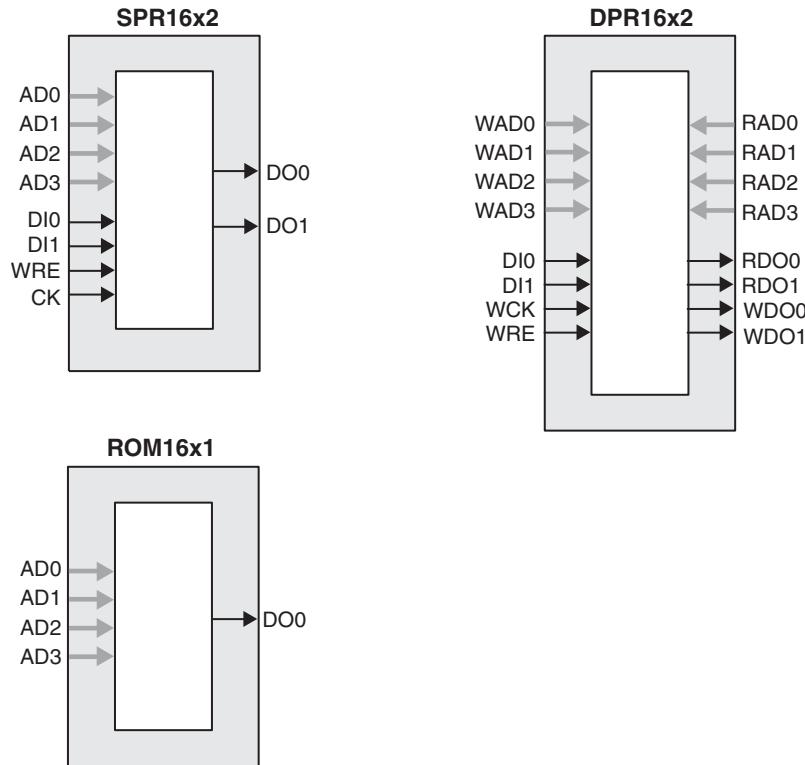

**ROM Mode:** The ROM mode uses the same principal as the RAM modes, but without the Write port. Pre-loading is accomplished through the programming interface during configuration.

#### PFU Modes of Operation

Slices can be combined within a PFU to form larger functions. Table 2-4 tabulates these modes and documents the functionality possible at the PFU level.

**Table 2-4. PFU Modes of Operation**

| Logic                   | Ripple            | RAM                        | ROM         |
|-------------------------|-------------------|----------------------------|-------------|
| LUT 4x8 or MUX 2x1 x 8  | 2-bit Add x 4     | SPR16x2 x 4<br>DPR16x2 x 2 | ROM16x1 x 8 |
| LUT 5x4 or MUX 4x1 x 4  | 2-bit Sub x 4     | SPR16x4 x 2<br>DPR16x4 x 1 | ROM16x2 x 4 |
| LUT 6x2 or MUX 8x1 x 2  | 2-bit Counter x 4 | SPR16x8 x 1                | ROM16x4 x 2 |
| LUT 7x1 or MUX 16x1 x 1 | 2-bit Comp x 4    |                            | ROM16x8 x 1 |

#### Routing

There are many resources provided in the MachXO devices to route signals individually or as buses with related control signals. The routing resources consist of switching circuitry, buffers and metal interconnect (routing) segments.

The inter-PFU connections are made with three different types of routing resources: x1 (spans two PFUs), x2 (spans three PFUs) and x6 (spans seven PFUs). The x1, x2, and x6 connections provide fast and efficient connections in the horizontal and vertical directions.

**Table 2-5. PLL Signal Descriptions**

| Signal       | I/O | Description   |
|--------------|-----|---|
| CLKI         | I   | Clock input from external pin or routing  |
| CLKFB        | I   | PLL feedback input from PLL output, clock net, routing/external pin or internal feedback from CLKINTFB port |
| RST          | I   | "1" to reset the input clock divider  |
| CLKOS        | O   | PLL output clock to clock tree (phase shifted/duty cycle changed)   |
| CLKOP        | O   | PLL output clock to clock tree (No phase shift)   |
| CLKOK        | O   | PLL output to clock tree through secondary clock divider  |
| LOCK         | O   | "1" indicates PLL LOCK to CLKI  |
| CLKINTFB     | O   | Internal feedback source, CLKOP divider output before CLOCKTREE   |
| DDAMODE      | I   | Dynamic Delay Enable. "1": Pin control (dynamic), "0": Fuse Control (static)                                |
| DDAIZR       | I   | Dynamic Delay Zero. "1": delay = 0, "0": delay = on   |
| DDAILAG      | I   | Dynamic Delay Lag/Lead. "1": Lag, "0": Lead   |
| DDAIDEL[2:0] | I   | Dynamic Delay Input   |

For more information on the PLL, please see details of additional technical documentation at the end of this data sheet.

## sysMEM Memory

The MachXO1200 and MachXO2280 devices contain sysMEM Embedded Block RAMs (EBRs). The EBR consists of a 9-Kbit RAM, with dedicated input and output registers.

### sysMEM Memory Block

The sysMEM block can implement single port, dual port, pseudo dual port, or FIFO memories. Each block can be used in a variety of depths and widths as shown in Table 2-6.

**Table 2-6. sysMEM Block Configurations**

| Memory Mode      | Configurations   |
|------------------|--|
| Single Port      | 8,192 x 1<br>4,096 x 2<br>2,048 x 4<br>1,024 x 9<br>512 x 18<br>256 x 36 |
| True Dual Port   | 8,192 x 1<br>4,096 x 2<br>2,048 x 4<br>1,024 x 9<br>512 x 18             |
| Pseudo Dual Port | 8,192 x 1<br>4,096 x 2<br>2,048 x 4<br>1,024 x 9<br>512 x 18<br>256 x 36 |
| FIFO             | 8,192 x 1<br>4,096 x 2<br>2,048 x 4<br>1,024 x 9<br>512 x 18<br>256 x 36 |

**Table 2-8. I/O Support Device by Device**

|  | MachXO256   | MachXO640   | MachXO1200  | MachXO2280  |
|--|---|---|---|---|
| Number of I/O Banks                      | 2   | 4   | 8   | 8   |
| Type of Input Buffers                    | Single-ended (all I/O Banks)                                    | Single-ended (all I/O Banks)                                    | Single-ended (all I/O Banks)<br>Differential Receivers (all I/O Banks)  | Single-ended (all I/O Banks)<br>Differential Receivers (all I/O Banks)  |
| Types of Output Buffers                  | Single-ended buffers with complementary outputs (all I/O Banks) | Single-ended buffers with complementary outputs (all I/O Banks) | Single-ended buffers with complementary outputs (all I/O Banks)<br>Differential buffers with true LVDS outputs (50% on left and right side) | Single-ended buffers with complementary outputs (all I/O Banks)<br>Differential buffers with true LVDS outputs (50% on left and right side) |
| Differential Output Emulation Capability | All I/O Banks   | All I/O Banks   | All I/O Banks   | All I/O Banks   |
| PCI Support                              | No  | No  | Top side only   | Top side only   |

**Table 2-9. Supported Input Standards**

| Input Standard   | VCCIO (Typ.) |      |      |      |      |
|--|--------------|------|------|------|------|
|  | 3.3V         | 2.5V | 1.8V | 1.5V | 1.2V |
| <b>Single Ended Interfaces</b>   |              |      |      |      |      |
| LVTTL  | Yes          | Yes  | Yes  | Yes  | Yes  |
| LVCMOS33   | Yes          | Yes  | Yes  | Yes  | Yes  |
| LVCMOS25   | Yes          | Yes  | Yes  | Yes  | Yes  |
| LVCMOS18   |              |      | Yes  |      |      |
| LVCMOS15   |              |      |      | Yes  |      |
| LVCMOS12   | Yes          | Yes  | Yes  | Yes  | Yes  |
| PCI <sup>1</sup>   | Yes          |      |      |      |      |
| <b>Differential Interfaces</b>   |              |      |      |      |      |
| BLVDS <sup>2</sup> , LVDS <sup>2</sup> , LVPECL <sup>2</sup> , RSDS <sup>2</sup> | Yes          | Yes  | Yes  | Yes  | Yes  |

1. Top Banks of MachXO1200 and MachXO2280 devices only.

2. MachXO1200 and MachXO2280 devices only.

**Table 2-10. Supported Output Standards**

| Output Standard                | Drive                | $V_{CCIO}$ (Typ.) |
|--------------------------------|----------------------|-------------------|
| <b>Single-ended Interfaces</b> |                      |                   |
| LV TTL                         | 4mA, 8mA, 12mA, 16mA | 3.3               |
| LVC MOS33                      | 4mA, 8mA, 12mA, 14mA | 3.3               |
| LVC MOS25                      | 4mA, 8mA, 12mA, 14mA | 2.5               |
| LVC MOS18                      | 4mA, 8mA, 12mA, 14mA | 1.8               |
| LVC MOS15                      | 4mA, 8mA             | 1.5               |
| LVC MOS12                      | 2mA, 6mA             | 1.2               |
| LVC MOS33, Open Drain          | 4mA, 8mA, 12mA, 14mA | —                 |
| LVC MOS25, Open Drain          | 4mA, 8mA, 12mA, 14mA | —                 |
| LVC MOS18, Open Drain          | 4mA, 8mA, 12mA, 14mA | —                 |
| LVC MOS15, Open Drain          | 4mA, 8mA             | —                 |
| LVC MOS12, Open Drain          | 2mA, 6mA             | —                 |
| PCI33 <sup>3</sup>             | N/A                  | 3.3               |
| <b>Differential Interfaces</b> |                      |                   |
| LVDS <sup>1,2</sup>            | N/A                  | 2.5               |
| BLVDS, RS DS <sup>2</sup>      | N/A                  | 2.5               |
| LVPECL <sup>2</sup>            | N/A                  | 3.3               |

1. MachXO1200 and MachXO2280 devices have dedicated LVDS buffers.

2. These interfaces can be emulated with external resistors in all devices.

3. Top Banks of MachXO1200 and MachXO2280 devices only.

## sysIO Buffer Banks

The number of Banks vary between the devices of this family. Eight Banks surround the two larger devices, the MachXO1200 and MachXO2280 (two Banks per side). The MachXO640 has four Banks (one Bank per side). The smallest member of this family, the MachXO256, has only two Banks.

Each sysIO buffer Bank is capable of supporting multiple I/O standards. Each Bank has its own I/O supply voltage ( $V_{CCIO}$ ) which allows it to be completely independent from the other Banks. Figure 2-18, Figure 2-18, Figure 2-20 and Figure 2-21 shows the sysIO Banks and their associated supplies for all devices.

the system. These capabilities make the MachXO ideal for many multiple power supply and hot-swap applications.

## Sleep Mode

The MachXO "C" devices ( $V_{CC} = 1.8/2.5/3.3V$ ) have a sleep mode that allows standby current to be reduced dramatically during periods of system inactivity. Entry and exit to Sleep mode is controlled by the SLEEPN pin.

During Sleep mode, the logic is non-operational, registers and EBR contents are not maintained, and I/Os are tri-stated. Do not enter Sleep mode during device programming or configuration operation. In Sleep mode, power supplies are in their normal operating range, eliminating the need for external switching of power supplies. Table 2-11 compares the characteristics of Normal, Off and Sleep modes.

**Table 2-11. Characteristics of Normal, Off and Sleep Modes**

| Characteristic                  | Normal        | Off             | Sleep           |
|---------------------------------|---------------|-----------------|-----------------|
| SLEEPN Pin                      | High          | —               | Low             |
| Static $I_{CC}$                 | Typical <10mA | 0               | Typical <100uA  |
| I/O Leakage                     | <10 $\mu$ A   | <1mA            | <10 $\mu$ A     |
| Power Supplies VCC/VCCIO/VCCAUX | Normal Range  | 0               | Normal Range    |
| Logic Operation                 | User Defined  | Non Operational | Non operational |
| I/O Operation                   | User Defined  | Tri-state       | Tri-state       |
| JTAG and Programming circuitry  | Operational   | Non-operational | Non-operational |
| EBR Contents and Registers      | Maintained    | Non-maintained  | Non-maintained  |

## SLEEPN Pin Characteristics

The SLEEPN pin behaves as an LVCMOS input with the voltage standard appropriate to the VCC supply for the device. This pin also has a weak pull-up, along with a Schmidt trigger and glitch filter to prevent false triggering. An external pull-up to VCC is recommended when Sleep Mode is not used to ensure the device stays in normal operation mode. Typically, the device enters sleep mode several hundred nanoseconds after SLEEPN is held at a valid low and restarts normal operation as specified in the Sleep Mode Timing table. The AC and DC specifications portion of this data sheet shows a detailed timing diagram.

## Oscillator

Every MachXO device has an internal CMOS oscillator. The oscillator can be routed as an input clock to the clock tree or to general routing resources. The oscillator frequency can be divided by internal logic. There is a dedicated programming bit to enable/disable the oscillator. The oscillator frequency ranges from 18MHz to 26MHz.

## Configuration and Testing

The following section describes the configuration and testing features of the MachXO family of devices.

### IEEE 1149.1-Compliant Boundary Scan Testability

All MachXO devices have boundary scan cells that are accessed through an IEEE 1149.1 compliant test access port (TAP). This allows functional testing of the circuit board, on which the device is mounted, through a serial scan path that can access all critical logic nodes. Internal registers are linked internally, allowing test data to be shifted in and loaded directly onto test nodes, or test data to be captured and shifted out for verification. The test access port consists of dedicated I/Os: TDI, TDO, TCK and TMS. The test access port shares its power supply with one of the VCCIO Banks (MachXO256:  $V_{CCIO1}$ ; MachXO640:  $V_{CCIO2}$ ; MachXO1200 and MachXO2280:  $V_{CCIO5}$ ) and can operate with LVCMOS3.3, 2.5, 1.8, 1.5, and 1.2 standards.

For more details on boundary scan test, please see information regarding additional technical documentation at the end of this data sheet.


**Table 3-2. BLVDS DC Conditions<sup>1</sup>**
**Over Recommended Operating Conditions**

| Symbol              | Description                 | Nominal |         | Units |
|---------------------|-----------------------------|---------|---------|-------|
|                     |                             | Zo = 45 | Zo = 90 |       |
| Z <sub>OUT</sub>    | Output impedance            | 100     | 100     | Ohms  |
| R <sub>TLEFT</sub>  | Left end termination        | 45      | 90      | Ohms  |
| R <sub>TRIGHT</sub> | Right end termination       | 45      | 90      | Ohms  |
| V <sub>OH</sub>     | Output high voltage         | 1.375   | 1.48    | V     |
| V <sub>OL</sub>     | Output low voltage          | 1.125   | 1.02    | V     |
| V <sub>OD</sub>     | Output differential voltage | 0.25    | 0.46    | V     |
| V <sub>CM</sub>     | Output common mode voltage  | 1.25    | 1.25    | V     |
| I <sub>DC</sub>     | DC output current           | 11.2    | 10.2    | mA    |

1. For input buffer, see LVDS table.

## LVPECL

The MachXO family supports the differential LVPECL standard through emulation. This output standard is emulated using complementary LVCMS outputs in conjunction with a parallel resistor across the driver outputs on all the devices. The LVPECL input standard is supported by the LVDS differential input buffer on certain devices. The scheme shown in Figure 3-3 is one possible solution for point-to-point signals.

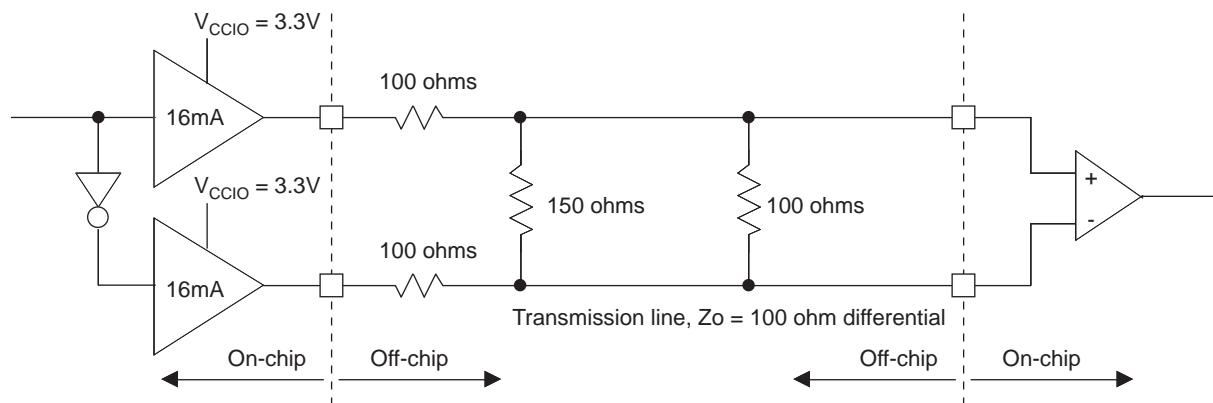**Figure 3-3. Differential LVPECL**

**Table 3-3. LVPECL DC Conditions<sup>1</sup>**
**Over Recommended Operating Conditions**

| Symbol            | Description                 | Nominal | Units |
|-------------------|-----------------------------|---------|-------|
| Z <sub>OUT</sub>  | Output impedance            | 100     | Ohms  |
| R <sub>P</sub>    | Driver parallel resistor    | 150     | Ohms  |
| R <sub>T</sub>    | Receiver termination        | 100     | Ohms  |
| V <sub>OH</sub>   | Output high voltage         | 2.03    | V     |
| V <sub>OL</sub>   | Output low voltage          | 1.27    | V     |
| V <sub>OD</sub>   | Output differential voltage | 0.76    | V     |
| V <sub>CM</sub>   | Output common mode voltage  | 1.65    | V     |
| Z <sub>BACK</sub> | Back impedance              | 85.7    | Ohms  |
| I <sub>DC</sub>   | DC output current           | 12.7    | mA    |

1. For input buffer, see LVDS table.

## MachXO External Switching Characteristics<sup>1</sup>

Over Recommended Operating Conditions

| Parameter  | Description                             | Device    | -5   |      | -4   |      | -3   |      | Units |
|--|---|-----------|------|------|------|------|------|------|-------|
|  |   |           | Min. | Max. | Min. | Max. | Min. | Max. |       |
| <b>General I/O Pin Parameters (Using Global Clock without PLL)<sup>1</sup></b> |   |           |      |      |      |      |      |      |       |
| t <sub>PD</sub>  | Best Case t <sub>PD</sub> Through 1 LUT | LCMxo256  | —    | 3.5  | —    | 4.2  | —    | 4.9  | ns    |
|  |   | LCMxo640  | —    | 3.5  | —    | 4.2  | —    | 4.9  | ns    |
|  |   | LCMxo1200 | —    | 3.6  | —    | 4.4  | —    | 5.1  | ns    |
|  |   | LCMxo2280 | —    | 3.6  | —    | 4.4  | —    | 5.1  | ns    |
| t <sub>CO</sub>  | Best Case Clock to Output - From PFU    | LCMxo256  | —    | 4.0  | —    | 4.8  | —    | 5.6  | ns    |
|  |   | LCMxo640  | —    | 4.0  | —    | 4.8  | —    | 5.7  | ns    |
|  |   | LCMxo1200 | —    | 4.3  | —    | 5.2  | —    | 6.1  | ns    |
|  |   | LCMxo2280 | —    | 4.3  | —    | 5.2  | —    | 6.1  | ns    |
| t <sub>SU</sub>  | Clock to Data Setup - To PFU            | LCMxo256  | 1.3  | —    | 1.6  | —    | 1.8  | —    | ns    |
|  |   | LCMxo640  | 1.1  | —    | 1.3  | —    | 1.5  | —    | ns    |
|  |   | LCMxo1200 | 1.1  | —    | 1.3  | —    | 1.6  | —    | ns    |
|  |   | LCMxo2280 | 1.1  | —    | 1.3  | —    | 1.5  | —    | ns    |
| t <sub>H</sub>   | Clock to Data Hold - To PFU             | LCMxo256  | -0.3 | —    | -0.3 | —    | -0.3 | —    | ns    |
|  |   | LCMxo640  | -0.1 | —    | -0.1 | —    | -0.1 | —    | ns    |
|  |   | LCMxo1200 | 0.0  | —    | 0.0  | —    | 0.0  | —    | ns    |
|  |   | LCMxo2280 | -0.4 | —    | -0.4 | —    | -0.4 | —    | ns    |
| f <sub>MAX_IO</sub>  | Clock Frequency of I/O and PFU Register | LCMxo256  | —    | 600  | —    | 550  | —    | 500  | MHz   |
|  |   | LCMxo640  | —    | 600  | —    | 550  | —    | 500  | MHz   |
|  |   | LCMxo1200 | —    | 600  | —    | 550  | —    | 500  | MHz   |
|  |   | LCMxo2280 | —    | 600  | —    | 550  | —    | 500  | MHz   |
| t <sub>SKEW_PRI</sub>  | Global Clock Skew Across Device         | LCMxo256  | —    | 200  | —    | 220  | —    | 240  | ps    |
|  |   | LCMxo640  | —    | 200  | —    | 220  | —    | 240  | ps    |
|  |   | LCMxo1200 | —    | 220  | —    | 240  | —    | 260  | ps    |
|  |   | LCMxo2280 | —    | 220  | —    | 240  | —    | 260  | ps    |

1. General timing numbers based on LVCMS2.5V, 12 mA.

Rev. A 0.19

## MachXO Internal Timing Parameters<sup>1</sup>


Over Recommended Operating Conditions

| Parameter  | Description  | -5    |      | -4    |      | -3    |      | Units |
|--|--|-------|------|-------|------|-------|------|-------|
|  |  | Min.  | Max. | Min.  | Max. | Min.  | Max. |       |
| <b>PFU/PFF Logic Mode Timing</b>                   |  |       |      |       |      |       |      |       |
| t <sub>LUT4_PFU</sub>                              | LUT4 delay (A to D inputs to F output)                       | —     | 0.28 | —     | 0.34 | —     | 0.39 | ns    |
| t <sub>LUT6_PFU</sub>                              | LUT6 delay (A to D inputs to OFX output)                     | —     | 0.44 | —     | 0.53 | —     | 0.62 | ns    |
| t <sub>LSR_PFU</sub>                               | Set/Reset to output of PFU                                   | —     | 0.90 | —     | 1.08 | —     | 1.26 | ns    |
| t <sub>SUM_PFU</sub>                               | Clock to Mux (M0,M1) input setup time                        | 0.10  | —    | 0.13  | —    | 0.15  | —    | ns    |
| t <sub>HM_PFU</sub>                                | Clock to Mux (M0,M1) input hold time                         | -0.05 | —    | -0.06 | —    | -0.07 | —    | ns    |
| t <sub>SUD_PFU</sub>                               | Clock to D input setup time                                  | 0.13  | —    | 0.16  | —    | 0.18  | —    | ns    |
| t <sub>HD_PFU</sub>                                | Clock to D input hold time                                   | -0.03 | —    | -0.03 | —    | -0.04 | —    | ns    |
| t <sub>CK2Q_PFU</sub>                              | Clock to Q delay, D-type register configuration              | —     | 0.40 | —     | 0.48 | —     | 0.56 | ns    |
| t <sub>LE2Q_PFU</sub>                              | Clock to Q delay latch configuration                         | —     | 0.53 | —     | 0.64 | —     | 0.74 | ns    |
| t <sub>LD2Q_PFU</sub>                              | D to Q throughput delay when latch is enabled                | —     | 0.55 | —     | 0.66 | —     | 0.77 | ns    |
| <b>PFU Dual Port Memory Mode Timing</b>            |  |       |      |       |      |       |      |       |
| t <sub>CORAM_PFU</sub>                             | Clock to Output  | —     | 0.40 | —     | 0.48 | —     | 0.56 | ns    |
| t <sub>SUDATA_PFU</sub>                            | Data Setup Time  | -0.18 | —    | -0.22 | —    | -0.25 | —    | ns    |
| t <sub>HDATA_PFU</sub>                             | Data Hold Time   | 0.28  | —    | 0.34  | —    | 0.39  | —    | ns    |
| t <sub>SUADDR_PFU</sub>                            | Address Setup Time   | -0.46 | —    | -0.56 | —    | -0.65 | —    | ns    |
| t <sub>HADDR_PFU</sub>                             | Address Hold Time  | 0.71  | —    | 0.85  | —    | 0.99  | —    | ns    |
| t <sub>SUWREN_PFU</sub>                            | Write/Read Enable Setup Time                                 | -0.22 | —    | -0.26 | —    | -0.30 | —    | ns    |
| t <sub>HWREN_PFU</sub>                             | Write/Read Enable Hold Time                                  | 0.33  | —    | 0.40  | —    | 0.47  | —    | ns    |
| <b>PIO Input/Output Buffer Timing</b>              |  |       |      |       |      |       |      |       |
| t <sub>IN_PIO</sub>                                | Input Buffer Delay   | —     | 0.75 | —     | 0.90 | —     | 1.06 | ns    |
| t <sub>OUT_PIO</sub>                               | Output Buffer Delay  | —     | 1.29 | —     | 1.54 | —     | 1.80 | ns    |
| <b>EBR Timing (1200 and 2280 Devices Only)</b>     |  |       |      |       |      |       |      |       |
| t <sub>CO_EBR</sub>                                | Clock to output from Address or Data with no output register | —     | 2.24 | —     | 2.69 | —     | 3.14 | ns    |
| t <sub>COO_EBR</sub>                               | Clock to output from EBR output Register                     | —     | 0.54 | —     | 0.64 | —     | 0.75 | ns    |
| t <sub>SUDATA_EBR</sub>                            | Setup Data to EBR Memory                                     | -0.26 | —    | -0.31 | —    | -0.37 | —    | ns    |
| t <sub>HDATA_EBR</sub>                             | Hold Data to EBR Memory                                      | 0.41  | —    | 0.49  | —    | 0.57  | —    | ns    |
| t <sub>SUADDR_EBR</sub>                            | Setup Address to EBR Memory                                  | -0.26 | —    | -0.31 | —    | -0.37 | —    | ns    |
| t <sub>HADDR_EBR</sub>                             | Hold Address to EBR Memory                                   | 0.41  | —    | 0.49  | —    | 0.57  | —    | ns    |
| t <sub>SUWREN_EBR</sub>                            | Setup Write/Read Enable to EBR Memory                        | -0.17 | —    | -0.20 | —    | -0.23 | —    | ns    |
| t <sub>HWREN_EBR</sub>                             | Hold Write/Read Enable to EBR Memory                         | 0.26  | —    | 0.31  | —    | 0.36  | —    | ns    |
| t <sub>SUCE_EBR</sub>                              | Clock Enable Setup Time to EBR Output Register               | 0.19  | —    | 0.23  | —    | 0.27  | —    | ns    |
| t <sub>HCE_EBR</sub>                               | Clock Enable Hold Time to EBR Output Register                | -0.13 | —    | -0.16 | —    | -0.18 | —    | ns    |
| t <sub>RSTO_EBR</sub>                              | Reset To Output Delay Time from EBR Output Register          | —     | 1.03 | —     | 1.23 | —     | 1.44 | ns    |
| <b>PLL Parameters (1200 and 2280 Devices Only)</b> |  |       |      |       |      |       |      |       |
| t <sub>RSTREC</sub>                                | Reset Recovery to Rising Clock                               | 1.00  | —    | 1.00  | —    | 1.00  | —    | ns    |
| t <sub>RSTSU</sub>                                 | Reset Signal Setup Time                                      | 1.00  | —    | 1.00  | —    | 1.00  | —    | ns    |

1. Internal parameters are characterized but not tested on every device.

Rev. A 0.19

**Figure 3-5. JTAG Port Timing Waveforms**

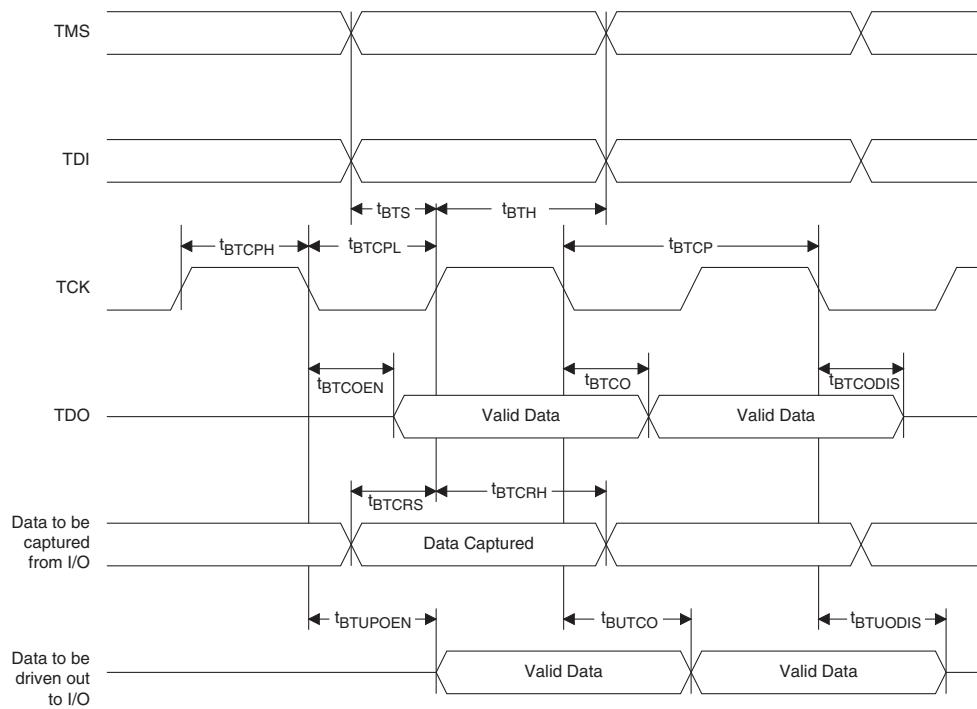

### Signal Descriptions

| Signal Name   | I/O | Descriptions  |
|---|-----|---|
| <b>General Purpose</b>  |     |   |
| P[Edge] [Row/Column Number]_[A/B/C/D/E/F]   | I/O | <p>[Edge] indicates the edge of the device on which the pad is located. Valid edge designations are L (Left), B (Bottom), R (Right), T (Top).</p> <p>[Row/Column Number] indicates the PFU row or the column of the device on which the PIO Group exists. When Edge is T (Top) or (Bottom), only need to specify Row Number. When Edge is L (Left) or R (Right), only need to specify Column Number.</p> <p>[A/B/C/D/E/F] indicates the PIO within the group to which the pad is connected.</p> <p>Some of these user programmable pins are shared with special function pins. When not used as special function pins, these pins can be programmed as I/Os for user logic.</p> <p>During configuration of the user-programmable I/Os, the user has an option to tri-state the I/Os and enable an internal pull-up resistor. This option also applies to unused pins (or those not bonded to a package pin). The default during configuration is for user-programmable I/Os to be tri-stated with an internal pull-up resistor enabled. When the device is erased, I/Os will be tri-stated with an internal pull-up resistor enabled.</p> |
| GSRN  | I   | Global RESET signal (active low). Dedicated pad, when not in use it can be used as an I/O pin.  |
| TSALL   | I   | TSALL is a dedicated pad for the global output enable signal. When TSALL is high all the outputs are tristated. It is a dual function pin. When not in use, it can be used as an I/O pin.   |
| NC  | —   | No connect.   |
| GND   | —   | GND - Ground. Dedicated pins.   |
| V <sub>CC</sub>   | —   | VCC - The power supply pins for core logic. Dedicated pins.   |
| V <sub>CCAUX</sub>  | —   | VCCAUX - the Auxiliary power supply pin. This pin powers up a variety of internal circuits including all the differential and referenced input buffers. Dedicated pins.   |
| V <sub>CCIOx</sub>  | —   | V <sub>CCIO</sub> - The power supply pins for I/O Bank x. Dedicated pins.   |
| SLEEPN <sup>1</sup>   | I   | Sleep Mode pin - Active low sleep pin. <sup>b</sup> When this pin is held high, the device operates normally. <sup>b</sup> This pin has a weak internal pull-up, but when unused, an external pull-up to V <sub>CC</sub> is recommended. When driven low, the device moves into Sleep mode after a specified time.  |
| <b>PLL and Clock Functions</b> (Used as user programmable I/O pins when not used for PLL or clock pins) |     |   |
| [LOC][0]_PLL[T, C]_IN   | —   | Reference clock (PLL) input Pads: [LOC] indicates location. Valid designations are ULM (Upper PLL) and LLM (Lower PLL). T = true and C = complement.  |
| [LOC][0]_PLL[T, C]_FB   | —   | Optional feedback (PLL) input Pads: [LOC] indicates location. Valid designations are ULM (Upper PLL) and LLM (Lower PLL). T = true and C = complement.  |
| PCLK [n]_[1:0]  | —   | Primary Clock Pads, n per side.   |
| <b>Test and Programming</b> (Dedicated pins)  |     |   |
| TMS   | I   | Test Mode Select input pin, used to control the 1149.1 state machine.   |
| TCK   | I   | Test Clock input pin, used to clock the 1149.1 state machine.   |
| TDI   | I   | Test Data input pin, used to load data into the device using an 1149.1 state machine.   |
| TDO   | O   | Output pin -Test Data output pin used to shift data out of the device using 1149.1.   |

<sup>1</sup>. Applies to MachXO "C" devices only. NC for "E" devices.

## Pin Information Summary

| Pin Type                                | LCMxo256C/E |           | LCMxo640C/E |          |           |           |                       |
|---|-------------|-----------|-------------|----------|-----------|-----------|-----------------------|
|   | 100 TQFP    | 100 csBGA | 100 TQFP    | 144 TQFP | 100 csBGA | 132 csBGA | 256 caBGA / 256 ftBGA |
| Single Ended User I/O                   | 78          | 78        | 74          | 113      | 74        | 101       | 159                   |
| Differential Pair User I/O <sup>1</sup> | 38          | 38        | 17          | 43       | 17        | 42        | 79                    |
| Muxed                                   | 6           | 6         | 6           | 6        | 6         | 6         | 6                     |
| TAP                                     | 4           | 4         | 4           | 4        | 4         | 4         | 4                     |
| Dedicated (Total Without Supplies)      | 5           | 5         | 5           | 5        | 5         | 5         | 5                     |
| VCC                                     | 2           | 2         | 2           | 4        | 2         | 4         | 4                     |
| VCCAUX                                  | 1           | 1         | 1           | 2        | 1         | 2         | 2                     |
| VCCIO                                   | Bank0       | 3         | 3           | 2        | 2         | 2         | 4                     |
|   | Bank1       | 3         | 3           | 2        | 2         | 2         | 4                     |
|   | Bank2       | —         | —           | 2        | 2         | 2         | 4                     |
|   | Bank3       | —         | —           | 2        | 2         | 2         | 4                     |
| GND                                     | 8           | 8         | 10          | 12       | 10        | 12        | 18                    |
| NC                                      | 0           | 0         | 0           | 0        | 0         | 0         | 52                    |
| Single Ended/Differential I/O per Bank  | Bank0       | 41/20     | 41/20       | 18/5     | 29/10     | 18/5      | 26/11                 |
|   | Bank1       | 37/18     | 37/18       | 21/4     | 30/11     | 21/4      | 27/12                 |
|   | Bank2       | —         | —           | 14/2     | 24/9      | 14/2      | 21/9                  |
|   | Bank3       | —         | —           | 21/6     | 30/13     | 21/6      | 27/10                 |
|   |             |           |             |          |           |           | 40/20                 |

1. These devices support emulated LVDS outputs.pLVDS inputs are not supported.

| Pin Type                                | LCMxo1200C/E |          |           |                       | LCMxo2280C/E |          |           |                       |           |
|---|--------------|----------|-----------|-----------------------|--------------|----------|-----------|-----------------------|-----------|
|   | 100 TQFP     | 144 TQFP | 132 csBGA | 256 caBGA / 256 ftBGA | 100 TQFP     | 144 TQFP | 132 csBGA | 256 caBGA / 256 ftBGA | 324 ftBGA |
| Single Ended User I/O                   | 73           | 113      | 101       | 211                   | 73           | 113      | 101       | 211                   | 271       |
| Differential Pair User I/O <sup>1</sup> | 27           | 48       | 42        | 105                   | 30           | 47       | 41        | 105                   | 134       |
| Muxed                                   | 6            | 6        | 6         | 6                     | 6            | 6        | 6         | 6                     | 6         |
| TAP                                     | 4            | 4        | 4         | 4                     | 4            | 4        | 4         | 4                     | 4         |
| Dedicated (Total Without Supplies)      | 5            | 5        | 5         | 5                     | 5            | 5        | 5         | 5                     | 5         |
| VCC                                     | 4            | 4        | 4         | 4                     | 2            | 4        | 4         | 4                     | 6         |
| VCCAUX                                  | 2            | 2        | 2         | 2                     | 2            | 2        | 2         | 2                     | 2         |
| VCCIO                                   | Bank0        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank1        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank2        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank3        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank4        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank5        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank6        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
|   | Bank7        | 1        | 1         | 1                     | 2            | 1        | 1         | 1                     | 2         |
| GND                                     | 8            | 12       | 12        | 18                    | 8            | 12       | 12        | 18                    | 24        |
| NC                                      | 0            | 0        | 0         | 0                     | 0            | 0        | 0         | 0                     | 0         |
| Single Ended/Differential I/O per Bank  | Bank0        | 10/3     | 14/6      | 13/5                  | 26/13        | 9/3      | 13/6      | 12/5                  | 24/12     |
|   | Bank1        | 8/2      | 15/7      | 13/5                  | 28/14        | 9/3      | 16/7      | 14/5                  | 30/15     |
|   | Bank2        | 10/4     | 15/7      | 13/6                  | 26/13        | 10/4     | 15/7      | 13/6                  | 26/13     |
|   | Bank3        | 11/5     | 15/7      | 14/7                  | 28/14        | 11/5     | 15/7      | 14/7                  | 28/14     |
|   | Bank4        | 8/3      | 14/5      | 13/5                  | 27/13        | 8/3      | 14/4      | 13/4                  | 29/14     |
|   | Bank5        | 5/2      | 10/4      | 8/2                   | 22/11        | 5/2      | 10/4      | 8/2                   | 20/10     |
|   | Bank6        | 10/3     | 15/6      | 13/6                  | 28/14        | 10/4     | 15/6      | 13/6                  | 28/14     |
|   | Bank7        | 11/5     | 15/6      | 14/6                  | 26/13        | 11/5     | 15/6      | 14/6                  | 26/13     |

1. These devices support on-chip LVDS buffers for left and right I/O Banks.

**LCMxo640, LCMxo1200 and LCMxo2280 Logic Signal Connections:  
132 csBGA**

| LCMxo640 |               |      |               |              | LCMxo1200 |               |      |                |              | LCMxo2280 |               |      |                |              |
|----------|---------------|------|---------------|--------------|-----------|---------------|------|----------------|--------------|-----------|---------------|------|----------------|--------------|
| Ball #   | Ball Function | Bank | Dual Function | Differential | Ball #    | Ball Function | Bank | Dual Function  | Differential | Ball #    | Ball Function | Bank | Dual Function  | Differential |
| B1       | PL2A          | 3    |               | T            | B1        | PL2A          | 7    |                | T            | B1        | PL2A          | 7    | LUM0_PLLT_FB_A | T            |
| C1       | PL2B          | 3    |               | C            | C1        | PL3C          | 7    |                | T            | C1        | PL3C          | 7    | LUM0_PLLT_IN_A | T            |
| B2       | PL2C          | 3    |               | T            | B2        | PL2B          | 7    |                | C            | B2        | PL2B          | 7    | LUM0_PLLC_FB_A | C            |
| C2       | PL2D          | 3    |               | C            | C2        | PL4A          | 7    |                | T*           | C2        | PL4A          | 7    |                | T*           |
| C3       | PL3A          | 3    |               | T            | C3        | PL3D          | 7    |                | C            | C3        | PL3D          | 7    | LUM0_PLLC_IN_A | C            |
| D1       | PL3B          | 3    |               | C            | D1        | PL4B          | 7    |                | C*           | D1        | PL4B          | 7    |                | C*           |
| D3       | PL3D          | 3    |               |              | D3        | PL4C          | 7    |                |              | D3        | PL4C          | 7    |                |              |
| E1       | GNDIO3        | 3    |               |              | E1        | GNDIO7        | 7    |                |              | E1        | GNDIO7        | 7    |                |              |
| E2       | PL5A          | 3    |               | T            | E2        | PL6A          | 7    |                | T*           | E2        | PL7A          | 7    |                | T*           |
| E3       | PL5B          | 3    | GSRN          | C            | E3        | PL6B          | 7    | GSRN           | C*           | E3        | PL7B          | 7    | GSRN           | C*           |
| F2       | PL5D          | 3    |               |              | F2        | PL6D          | 7    |                |              | F2        | PL7D          | 7    |                |              |
| F3       | PL6B          | 3    |               |              | F3        | PL7C          | 7    |                | T            | F3        | PL9C          | 7    |                | T            |
| G1       | PL6C          | 3    |               | T            | G1        | PL7D          | 7    |                | C            | G1        | PL9D          | 7    |                | C            |
| G2       | PL6D          | 3    |               | C            | G2        | PL8C          | 7    |                | T            | G2        | PL10C         | 7    |                | T            |
| G3       | PL7A          | 3    |               | T            | G3        | PL8D          | 7    |                | C            | G3        | PL10D         | 7    |                | C            |
| H2       | PL7B          | 3    |               | C            | H2        | PL10A         | 6    |                | T*           | H2        | PL12A         | 6    |                | T*           |
| H1       | PL7C          | 3    |               |              | H1        | PL10B         | 6    |                | C*           | H1        | PL12B         | 6    |                | C*           |
| H3       | VCC           | -    |               |              | H3        | VCC           | -    |                |              | H3        | VCC           | -    |                |              |
| J1       | PL8A          | 3    |               |              | J1        | PL11B         | 6    |                |              | J1        | PL14D         | 6    |                | C            |
| J2       | PL8C          | 3    | TSALL         |              | J2        | PL11C         | 6    | TSALL          | T            | J2        | PL14C         | 6    | TSALL          | T            |
| J3       | PL9A          | 3    |               | T            | J3        | PL11D         | 6    |                | C            | J3        | PL14B         | 6    |                |              |
| K2       | PL9B          | 3    |               | C            | K2        | PL12A         | 6    |                | T*           | K2        | PL15A         | 6    |                | T*           |
| K1       | PL9C          | 3    |               |              | K1        | PL12B         | 6    |                | C*           | K1        | PL15B         | 6    |                | C*           |
| L2       | GNDIO3        | 3    |               |              | L2        | GNDIO6        | 6    |                |              | L2        | GNDIO6        | 6    |                |              |
| L1       | PL10A         | 3    |               | T            | L1        | PL14A         | 6    | LLM0_PLLT_FB_A | T*           | L1        | PL17A         | 6    | LLM0_PLLT_FB_A | T*           |
| L3       | PL10B         | 3    |               | C            | L3        | PL14B         | 6    | LLM0_PLLC_FB_A | C*           | L3        | PL17B         | 6    | LLM0_PLLC_FB_A | C*           |
| M1       | PL11A         | 3    |               | T            | M1        | PL15A         | 6    | LLM0_PLLT_IN_A | T*           | M1        | PL18A         | 6    | LLM0_PLLT_IN_A | T*           |
| N1       | PL11B         | 3    |               | C            | N1        | PL16A         | 6    |                | T            | N1        | PL19A         | 6    |                | T            |
| M2       | PL11C         | 3    |               | T            | M2        | PL15B         | 6    | LLM0_PLLC_IN_A | C*           | M2        | PL18B         | 6    | LLM0_PLLC_IN_A | C*           |
| P1       | PL11D         | 3    |               | C            | P1        | PL16B         | 6    |                | C            | P1        | PL19B         | 6    |                | C            |
| P2       | GNDIO2        | 2    |               |              | P2        | GNDIO5        | 5    |                |              | P2        | GNDIO5        | 5    |                |              |
| P3       | TMS           | 2    | TMS           |              | P3        | TMS           | 5    | TMS            |              | P3        | TMS           | 5    | TMS            |              |
| M3       | PB2C          | 2    |               | T            | M3        | PB2C          | 5    |                | T            | M3        | PB2A          | 5    |                | T            |
| N3       | PB2D          | 2    |               | C            | N3        | PB2D          | 5    |                | C            | N3        | PB2B          | 5    |                | C            |
| P4       | TCK           | 2    | TCK           |              | P4        | TCK           | 5    | TCK            |              | P4        | TCK           | 5    | TCK            |              |
| M4       | PB3B          | 2    |               |              | M4        | PB3B          | 5    |                |              | M4        | PB3B          | 5    |                |              |
| N4       | PB3C          | 2    |               | T            | N4        | PB4A          | 5    |                | T            | N4        | PB4A          | 5    |                | T            |
| P5       | PB3D          | 2    |               | C            | P5        | PB4B          | 5    |                | C            | P5        | PB4B          | 5    |                | C            |
| N5       | TDO           | 2    | TDO           |              | N5        | TDO           | 5    | TDO            |              | N5        | TDO           | 5    | TDO            |              |
| M5       | TDI           | 2    | TDI           |              | M5        | TDI           | 5    | TDI            |              | M5        | TDI           | 5    | TDI            |              |
| N6       | PB4E          | 2    |               | T            | N6        | PB5C          | 5    |                |              | N6        | PB6C          | 5    |                |              |
| P6       | VCC           | -    |               |              | P6        | VCC           | -    |                |              | P6        | VCC           | -    |                |              |
| M6       | PB4F          | 2    |               | C            | M6        | PB6A          | 5    |                |              | M6        | PB8A          | 5    |                |              |
| P7       | VCCAUX        | -    |               |              | P7        | VCCAUX        | -    |                |              | P7        | VCCAUX        | -    |                |              |
| N7       | PB5A          | 2    |               | T            | N7        | PB6F          | 5    |                |              | N7        | PB8F          | 5    |                |              |
| M7       | PB5B          | 2    | PCLK2_1***    | C            | M7        | PB7B          | 4    | PCLK4_1***     |              | M7        | PB10F         | 4    | PCLK4_1***     |              |
| N8       | PB5D          | 2    |               |              | N8        | PB7C          | 4    |                | T            | N8        | PB10C         | 4    |                | T            |
| P8       | PB6A          | 2    |               | T            | P8        | PB7D          | 4    |                | C            | P8        | PB10D         | 4    |                | C            |
| M8       | PB6B          | 2    | PCLK2_0***    | C            | M8        | PB7F          | 4    | PCLK4_0***     |              | M8        | PB10B         | 4    | PCLK4_0***     |              |
| N9       | PB7A          | 2    |               | T            | N9        | PB9A          | 4    |                | T            | N9        | PB12A         | 4    |                | T            |

**LCMXO640, LCMXO1200 and LCMXO2280 Logic Signal Connections:  
 132 csBGA (Cont.)**

| LCMXO640 |               |      |               |              | LCMXO1200 |               |      |               |              | LCMXO2280 |               |      |               |              |
|----------|---------------|------|---------------|--------------|-----------|---------------|------|---------------|--------------|-----------|---------------|------|---------------|--------------|
| Ball #   | Ball Function | Bank | Dual Function | Differential | Ball #    | Ball Function | Bank | Dual Function | Differential | Ball #    | Ball Function | Bank | Dual Function | Differential |
| B9       | PT7B          | 0    |               | C            | B9        | PT9B          | 1    |               | C            | B9        | PT12D         | 1    |               | C            |
| A9       | PT7A          | 0    |               | T            | A9        | PT9A          | 1    |               | T            | A9        | PT12C         | 1    |               | T            |
| A8       | PT6B          | 0    | PCLK0_1***    | C            | A8        | PT7D          | 1    | PCLK1_1***    |              | A8        | PT10B         | 1    | PCLK1_1***    |              |
| B8       | PT6A          | 0    |               | T            | B8        | PT7B          | 1    |               |              | B8        | PT9D          | 1    |               |              |
| C8       | PT5B          | 0    | PCLK0_0***    | C            | C8        | PT6F          | 0    | PCLK1_0***    |              | C8        | PT9B          | 1    | PCLK1_0***    |              |
| B7       | PT5A          | 0    |               | T            | B7        | PT6D          | 0    |               |              | B7        | PT8D          | 0    |               |              |
| A7       | VCCAUX        | -    |               |              | A7        | VCCAUX        | -    |               |              | A7        | VCCAUX        | -    |               |              |
| C7       | VCC           | -    |               |              | C7        | VCC           | -    |               |              | C7        | VCC           | -    |               |              |
| A6       | PT4D          | 0    |               | C            | A6        | PT5D          | 0    |               | C            | A6        | PT7B          | 0    |               | C            |
| B6       | PT4C          | 0    |               | T            | B6        | PT5C          | 0    |               | T            | B6        | PT7A          | 0    |               | T            |
| C6       | PT3F          | 0    |               | C            | C6        | PT5B          | 0    |               | C            | C6        | PT6D          | 0    |               |              |
| B5       | PT3E          | 0    |               | T            | B5        | PT5A          | 0    |               | T            | B5        | PT6E          | 0    |               | T            |
| A5       | PT3D          | 0    |               |              | A5        | PT4B          | 0    |               |              | A5        | PT6F          | 0    |               | C            |
| B4       | GNDIO0        | 0    |               |              | B4        | GNDIO0        | 0    |               |              | B4        | GNDIO0        | 0    |               |              |
| A4       | PT3B          | 0    |               |              | A4        | PT3D          | 0    |               | C            | A4        | PT4B          | 0    |               | C            |
| C4       | PT2F          | 0    |               |              | C4        | PT3C          | 0    |               | T            | C4        | PT4A          | 0    |               | T            |
| A3       | PT2D          | 0    |               | C            | A3        | PT3B          | 0    |               | C            | A3        | PT3B          | 0    |               | C            |
| A2       | PT2C          | 0    |               | T            | A2        | PT2B          | 0    |               | C            | A2        | PT2B          | 0    |               | C            |
| B3       | PT2B          | 0    |               | C            | B3        | PT3A          | 0    |               | T            | B3        | PT3A          | 0    |               | T            |
| A1       | PT2A          | 0    |               | T            | A1        | PT2A          | 0    |               | T            | A1        | PT2A          | 0    |               | T            |
| F1       | GND           | -    |               |              | F1        | GND           | -    |               |              | F1        | GND           | -    |               |              |
| P9       | GND           | -    |               |              | P9        | GND           | -    |               |              | P9        | GND           | -    |               |              |
| J14      | GND           | -    |               |              | J14       | GND           | -    |               |              | J14       | GND           | -    |               |              |
| C9       | GND           | -    |               |              | C9        | GND           | -    |               |              | C9        | GND           | -    |               |              |
| C5       | VCCIO0        | 0    |               |              | C5        | VCCIO0        | 0    |               |              | C5        | VCCIO0        | 0    |               |              |
| B11      | VCCIO0        | 0    |               |              | B11       | VCCIO1        | 1    |               |              | B11       | VCCIO1        | 1    |               |              |
| E12      | VCCIO1        | 1    |               |              | E12       | VCCIO2        | 2    |               |              | E12       | VCCIO2        | 2    |               |              |
| L12      | VCCIO1        | 1    |               |              | L12       | VCCIO3        | 3    |               |              | L12       | VCCIO3        | 3    |               |              |
| M10      | VCCIO2        | 2    |               |              | M10       | VCCIO4        | 4    |               |              | M10       | VCCIO4        | 4    |               |              |
| N2       | VCCIO2        | 2    |               |              | N2        | VCCIO5        | 5    |               |              | N2        | VCCIO5        | 5    |               |              |
| D2       | VCCIO3        | 3    |               |              | D2        | VCCIO7        | 7    |               |              | D2        | VCCIO7        | 7    |               |              |
| K3       | VCCIO3        | 3    |               |              | K3        | VCCIO6        | 6    |               |              | K3        | VCCIO6        | 6    |               |              |

\*Supports true LVDS outputs.

\*\*NC for "E" devices.

\*\*\*Primary clock inputs are single-ended.

**LCMxo640, LCMxo1200 and LCMxo2280 Logic Signal Connections:  
 256 caBGA / 256 ftBGA (Cont.)**

| LCMxo640    |               |      |               |              | LCMxo1200   |               |      |               |              | LCMxo2280   |               |      |               |              |
|-------------|---------------|------|---------------|--------------|-------------|---------------|------|---------------|--------------|-------------|---------------|------|---------------|--------------|
| Ball Number | Ball Function | Bank | Dual Function | Differential | Ball Number | Ball Function | Bank | Dual Function | Differential | Ball Number | Ball Function | Bank | Dual Function | Differential |
| -           | -             |      |               |              | VCCIO4      | VCCIO4        | 4    |               |              | VCCIO4      | VCCIO4        | 4    |               |              |
| -           | -             |      |               |              | GND         | GNDIO4        | 4    |               |              | GND         | GNDIO4        | 4    |               |              |
| M10         | PB6A          | 2    |               | T            | M10         | PB7E          | 4    |               |              | M10         | PB10A         | 4    |               | T            |
| R9          | PB6C          | 2    |               | T            | R9          | PB8A          | 4    |               |              | R9          | PB11C         | 4    |               | T            |
| R10         | PB6D          | 2    |               | C            | R10         | PB8B          | 4    |               |              | R10         | PB11D         | 4    |               | C            |
| T10         | PB7C          | 2    |               | T            | T10         | PB8C          | 4    |               |              | T10         | PB12A         | 4    |               | T            |
| T11         | PB7D          | 2    |               | C            | T11         | PB8D          | 4    |               |              | T11         | PB12B         | 4    |               | C            |
| N10         | NC            |      |               |              | N10         | PB8E          | 4    |               |              | N10         | PB12C         | 4    |               | T            |
| N11         | NC            |      |               |              | N11         | PB8F          | 4    |               |              | N11         | PB12D         | 4    |               | C            |
| VCCIO2      | VCCIO2        | 2    |               |              | VCCIO4      | VCCIO4        | 4    |               |              | VCCIO4      | VCCIO4        | 4    |               |              |
| GND         | GNDIO2        | 2    |               |              | GND         | GNDIO4        | 4    |               |              | GND         | GNDIO4        | 4    |               |              |
| R11         | PB7E          | 2    |               | T            | R11         | PB9A          | 4    |               |              | R11         | PB13A         | 4    |               | T            |
| R12         | PB7F          | 2    |               | C            | R12         | PB9B          | 4    |               |              | R12         | PB13B         | 4    |               | C            |
| P11         | PB8A          | 2    |               | T            | P11         | PB9C          | 4    |               |              | P11         | PB13C         | 4    |               | T            |
| P12         | PB8B          | 2    |               | C            | P12         | PB9D          | 4    |               |              | P12         | PB13D         | 4    |               | C            |
| T13         | PB8C          | 2    |               | T            | T13         | PB9E          | 4    |               |              | T13         | PB14A         | 4    |               | T            |
| T12         | PB8D          | 2    |               | C            | T12         | PB9F          | 4    |               |              | T12         | PB14B         | 4    |               | C            |
| R13         | PB9A          | 2    |               | T            | R13         | PB10A         | 4    |               |              | R13         | PB14C         | 4    |               | T            |
| R14         | PB9B          | 2    |               | C            | R14         | PB10B         | 4    |               |              | R14         | PB14D         | 4    |               | C            |
| GND         | GND           | -    |               |              | GND         | GND           | -    |               |              | GND         | GND           | -    |               |              |
| T14         | PB9C          | 2    |               | T            | T14         | PB10C         | 4    |               |              | T14         | PB15A         | 4    |               | T            |
| T15         | PB9D          | 2    |               | C            | T15         | PB10D         | 4    |               |              | T15         | PB15B         | 4    |               | C            |
| P13**       | SLEEPN        | -    | SLEEPN        |              | P13**       | SLEEPN        | -    | SLEEPN        |              | P13**       | SLEEPN        | -    | SLEEPN        |              |
| P14         | PB9F          | 2    |               |              | P14         | PB10F         | 4    |               |              | P14         | PB15D         | 4    |               |              |
| R15         | NC            |      |               |              | R15         | PB11A         | 4    |               |              | R15         | PB16A         | 4    |               | T            |
| R16         | NC            |      |               |              | R16         | PB11B         | 4    |               |              | R16         | PB16B         | 4    |               | C            |
| P15         | NC            |      |               |              | P15         | PB11C         | 4    |               |              | P15         | PB16C         | 4    |               | T            |
| P16         | NC            |      |               |              | P16         | PB11D         | 4    |               |              | P16         | PB16D         | 4    |               | C            |
| VCCIO2      | VCCIO2        | 2    |               |              | VCCIO4      | VCCIO4        | 4    |               |              | VCCIO4      | VCCIO4        | 4    |               |              |
| GND         | GNDIO2        | 2    |               |              | GND         | GNDIO4        | 4    |               |              | GND         | GNDIO4        | 4    |               |              |
| GND         | GNDIO1        | 1    |               |              | GND         | GNDIO3        | 3    |               |              | GND         | GNDIO3        | 3    |               |              |
| VCCIO1      | VCCIO1        | 1    |               |              | VCCIO3      | VCCIO3        | 3    |               |              | VCCIO3      | VCCIO3        | 3    |               |              |
| M11         | NC            |      |               |              | M11         | PR16B         | 3    |               |              | M11         | PR20B         | 3    |               | C            |
| L11         | NC            |      |               |              | L11         | PR16A         | 3    |               |              | L11         | PR20A         | 3    |               | T            |
| N12         | NC            |      |               |              | N12         | PR15B         | 3    |               |              | N12         | PR18B         | 3    |               | C*           |
| N13         | NC            |      |               |              | N13         | PR15A         | 3    |               |              | N13         | PR18A         | 3    |               | T*           |
| M13         | NC            |      |               |              | M13         | PR14D         | 3    |               |              | M13         | PR17D         | 3    |               | C            |
| M12         | NC            |      |               |              | M12         | PR14C         | 3    |               |              | M12         | PR17C         | 3    |               | T            |
| N14         | PR11D         | 1    |               | C            | N14         | PR14B         | 3    |               |              | N14         | PR17B         | 3    |               | C*           |
| N15         | PR11C         | 1    |               | T            | N15         | PR14A         | 3    |               |              | N15         | PR17A         | 3    |               | T*           |
| L13         | PR11B         | 1    |               | C            | L13         | PR13D         | 3    |               |              | L13         | PR16D         | 3    |               | C            |
| L12         | PR11A         | 1    |               | T            | L12         | PR13C         | 3    |               |              | L12         | PR16C         | 3    |               | T            |
| M14         | PR10B         | 1    |               | C            | M14         | PR13B         | 3    |               |              | M14         | PR16B         | 3    |               | C*           |
| VCCIO1      | VCCIO1        | 1    |               |              | VCCIO3      | VCCIO3        | 3    |               |              | VCCIO3      | VCCIO3        | 3    |               |              |
| GND         | GNDIO1        | 1    |               |              | GND         | GNDIO3        | 3    |               |              | GND         | GNDIO3        | 3    |               |              |
| L14         | PR10A         | 1    |               | T            | L14         | PR13A         | 3    |               |              | L14         | PR16A         | 3    |               | T*           |
| N16         | PR10D         | 1    |               | C            | N16         | PR12D         | 3    |               |              | N16         | PR15D         | 3    |               | C            |
| M16         | PR10C         | 1    |               | T            | M16         | PR12C         | 3    |               |              | M16         | PR15C         | 3    |               | T            |
| M15         | PR9D          | 1    |               | C            | M15         | PR12B         | 3    |               |              | M15         | PR15B         | 3    |               | C*           |
| L15         | PR9C          | 1    |               | T            | L15         | PR12A         | 3    |               |              | L15         | PR15A         | 3    |               | T*           |
| L16         | PR9B          | 1    |               | C            | L16         | PR11D         | 3    |               |              | L16         | PR14D         | 3    |               | C            |
| K16         | PR9A          | 1    |               | T            | K16         | PR11C         | 3    |               |              | K16         | PR14C         | 3    |               | T            |
| K13         | PR8D          | 1    |               | C            | K13         | PR11B         | 3    |               |              | K13         | PR14B         | 3    |               | C*           |

**LCMxo2280 Logic Signal Connections: 324 ftBGA**

| LCMxo2280   |               |      |                |              |
|-------------|---------------|------|----------------|--------------|
| Ball Number | Ball Function | Bank | Dual Function  | Differential |
| GND         | GNDIO7        | 7    |                |              |
| VCCIO7      | VCCIO7        | 7    |                |              |
| D4          | PL2A          | 7    | LUM0_PLLT_FB_A | T            |
| F5          | PL2B          | 7    | LUM0_PLLC_FB_A | C            |
| B3          | PL3A          | 7    |                | T*           |
| C3          | PL3B          | 7    |                | C*           |
| E4          | PL3C          | 7    | LUM0_PLLT_IN_A | T            |
| G6          | PL3D          | 7    | LUM0_PLLC_IN_A | C            |
| A1          | PL4A          | 7    |                | T*           |
| B1          | PL4B          | 7    |                | C*           |
| F4          | PL4C          | 7    |                | T            |
| VCC         | VCC           | -    |                |              |
| E3          | PL4D          | 7    |                | C            |
| D2          | PL5A          | 7    |                | T*           |
| D3          | PL5B          | 7    |                | C*           |
| G5          | PL5C          | 7    |                | T            |
| F3          | PL5D          | 7    |                | C            |
| C2          | PL6A          | 7    |                | T*           |
| VCCIO7      | VCCIO7        | 7    |                |              |
| GND         | GNDIO7        | 7    |                |              |
| C1          | PL6B          | 7    |                | C*           |
| H5          | PL6C          | 7    |                | T            |
| G4          | PL6D          | 7    |                | C            |
| E2          | PL7A          | 7    |                | T*           |
| D1          | PL7B          | 7    | GSRN           | C*           |
| J6          | PL7C          | 7    |                | T            |
| H4          | PL7D          | 7    |                | C            |
| F2          | PL8A          | 7    |                | T*           |
| E1          | PL8B          | 7    |                | C*           |
| GND         | GND           | -    |                |              |
| J3          | PL8C          | 7    |                | T            |
| J5          | PL8D          | 7    |                | C            |
| G3          | PL9A          | 7    |                | T*           |
| H3          | PL9B          | 7    |                | C*           |
| K3          | PL9C          | 7    |                | T            |
| K5          | PL9D          | 7    |                | C            |
| F1          | PL10A         | 7    |                | T*           |
| VCCIO7      | VCCIO7        | 7    |                |              |
| GND         | GNDIO7        | 7    |                |              |
| G1          | PL10B         | 7    |                | C*           |
| K4          | PL10C         | 7    |                | T            |
| K6          | PL10D         | 7    |                | C            |

**LCMxo2280 Logic Signal Connections: 324 ftBGA (Cont.)**

| LCMxo2280   |               |      |                |              |
|-------------|---------------|------|----------------|--------------|
| Ball Number | Ball Function | Bank | Dual Function  | Differential |
| G2          | PL11A         | 6    |                | T*           |
| H2          | PL11B         | 6    |                | C*           |
| L3          | PL11C         | 6    |                | T            |
| L5          | PL11D         | 6    |                | C            |
| H1          | PL12A         | 6    |                | T*           |
| VCCIO6      | VCCIO6        | 6    |                |              |
| GND         | GNDIO6        | 6    |                |              |
| J2          | PL12B         | 6    |                | C*           |
| L4          | PL12C         | 6    |                | T            |
| L6          | PL12D         | 6    |                | C            |
| K2          | PL13A         | 6    |                | T*           |
| K1          | PL13B         | 6    |                | C*           |
| J1          | PL13C         | 6    |                | T            |
| VCC         | VCC           | -    |                |              |
| L2          | PL13D         | 6    |                | C            |
| M5          | PL14D         | 6    |                | C            |
| M3          | PL14C         | 6    | TSALL          | T            |
| L1          | PL14B         | 6    |                | C*           |
| M2          | PL14A         | 6    |                | T*           |
| M1          | PL15A         | 6    |                | T*           |
| N1          | PL15B         | 6    |                | C*           |
| M6          | PL15C         | 6    |                | T            |
| M4          | PL15D         | 6    |                | C            |
| VCCIO6      | VCCIO6        | 6    |                |              |
| GND         | GNDIO6        | 6    |                |              |
| P1          | PL16A         | 6    |                | T*           |
| P2          | PL16B         | 6    |                | C*           |
| N3          | PL16C         | 6    |                | T            |
| N4          | PL16D         | 6    |                | C            |
| GND         | GND           | -    |                |              |
| T1          | PL17A         | 6    | LLM0_PLLT_FB_A | T*           |
| R1          | PL17B         | 6    | LLM0_PLLC_FB_A | C*           |
| P3          | PL17C         | 6    |                | T            |
| N5          | PL17D         | 6    |                | C            |
| R3          | PL18A         | 6    | LLM0_PLLT_IN_A | T*           |
| R2          | PL18B         | 6    | LLM0_PLLC_IN_A | C*           |
| P4          | PL19A         | 6    |                | T            |
| N6          | PL19B         | 6    |                | C            |
| U1          | PL20A         | 6    |                | T            |
| VCCIO6      | VCCIO6        | 6    |                |              |
| GND         | GNDIO6        | 6    |                |              |
| GND         | GNDIO5        | 5    |                |              |
| VCCIO5      | VCCIO5        | 5    |                |              |

## Thermal Management

Thermal management is recommended as part of any sound FPGA design methodology. To assess the thermal characteristics of a system, Lattice specifies a maximum allowable junction temperature in all device data sheets. Designers must complete a thermal analysis of their specific design to ensure that the device and package do not exceed the junction temperature limits. Refer to the [Thermal Management](#) document to find the device/package specific thermal values.

## For Further Information


For further information regarding Thermal Management, refer to the following:

- [Thermal Management](#) document
- TN1090 - [Power Estimation and Management for MachXO Devices](#)
- Power Calculator tool included with the Lattice ispLEVER design tool, or as a standalone download from [www.latticesemi.com/software](http://www.latticesemi.com/software)

June 2013


Data Sheet DS1002

### Part Number Description

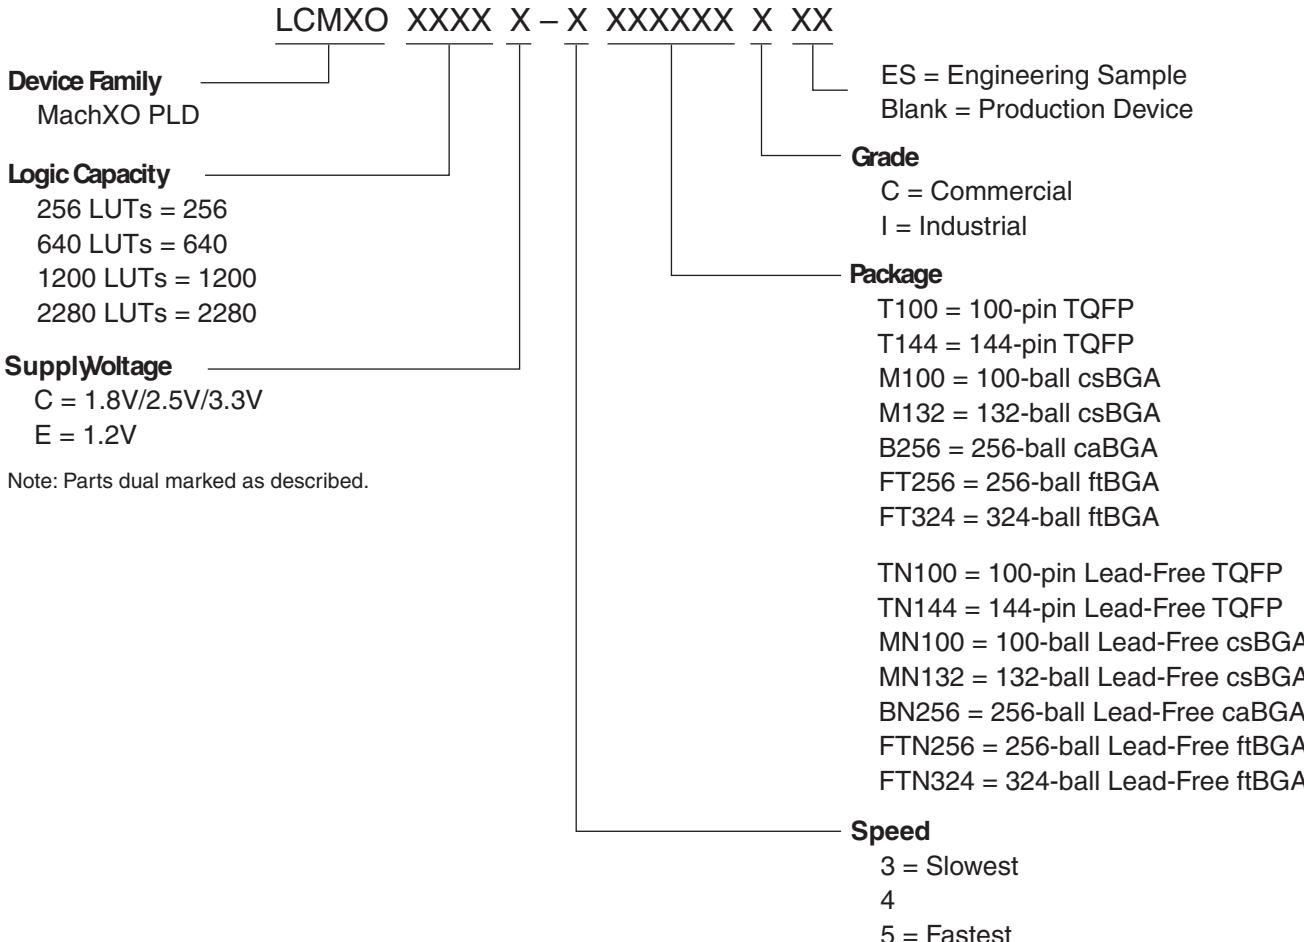

### Ordering Information

Note: MachXO devices are dual marked except the slowest commercial speed grade device.  
For example the commercial speed grade LCMXO640E-4F256C is also marked with industrial grade -3I grade.  
The slowest commercial speed grade does not have industrial markings.  
The markings appears as follows:



## Conventional Packaging

### Commercial

| Part Number      | LUTs | Supply Voltage | I/Os | Grade | Package | Pins | Temp. |
|------------------|------|----------------|------|-------|---------|------|-------|
| LCMxo256C-3T100C | 256  | 1.8V/2.5V/3.3V | 78   | -3    | TQFP    | 100  | COM   |
| LCMxo256C-4T100C | 256  | 1.8V/2.5V/3.3V | 78   | -4    | TQFP    | 100  | COM   |
| LCMxo256C-5T100C | 256  | 1.8V/2.5V/3.3V | 78   | -5    | TQFP    | 100  | COM   |
| LCMxo256C-3M100C | 256  | 1.8V/2.5V/3.3V | 78   | -3    | csBGA   | 100  | COM   |
| LCMxo256C-4M100C | 256  | 1.8V/2.5V/3.3V | 78   | -4    | csBGA   | 100  | COM   |
| LCMxo256C-5M100C | 256  | 1.8V/2.5V/3.3V | 78   | -5    | csBGA   | 100  | COM   |

| Part Number       | LUTs | Supply Voltage | I/Os | Grade | Package | Pins | Temp. |
|-------------------|------|----------------|------|-------|---------|------|-------|
| LCMxo640C-3T100C  | 640  | 1.8V/2.5V/3.3V | 74   | -3    | TQFP    | 100  | COM   |
| LCMxo640C-4T100C  | 640  | 1.8V/2.5V/3.3V | 74   | -4    | TQFP    | 100  | COM   |
| LCMxo640C-5T100C  | 640  | 1.8V/2.5V/3.3V | 74   | -5    | TQFP    | 100  | COM   |
| LCMxo640C-3M100C  | 640  | 1.8V/2.5V/3.3V | 74   | -3    | csBGA   | 100  | COM   |
| LCMxo640C-4M100C  | 640  | 1.8V/2.5V/3.3V | 74   | -4    | csBGA   | 100  | COM   |
| LCMxo640C-5M100C  | 640  | 1.8V/2.5V/3.3V | 74   | -5    | csBGA   | 100  | COM   |
| LCMxo640C-3T144C  | 640  | 1.8V/2.5V/3.3V | 113  | -3    | TQFP    | 144  | COM   |
| LCMxo640C-4T144C  | 640  | 1.8V/2.5V/3.3V | 113  | -4    | TQFP    | 144  | COM   |
| LCMxo640C-5T144C  | 640  | 1.8V/2.5V/3.3V | 113  | -5    | TQFP    | 144  | COM   |
| LCMxo640C-3M132C  | 640  | 1.8V/2.5V/3.3V | 101  | -3    | csBGA   | 132  | COM   |
| LCMxo640C-4M132C  | 640  | 1.8V/2.5V/3.3V | 101  | -4    | csBGA   | 132  | COM   |
| LCMxo640C-5M132C  | 640  | 1.8V/2.5V/3.3V | 101  | -5    | csBGA   | 132  | COM   |
| LCMxo640C-3B256C  | 640  | 1.8V/2.5V/3.3V | 159  | -3    | caBGA   | 256  | COM   |
| LCMxo640C-4B256C  | 640  | 1.8V/2.5V/3.3V | 159  | -4    | caBGA   | 256  | COM   |
| LCMxo640C-5B256C  | 640  | 1.8V/2.5V/3.3V | 159  | -5    | caBGA   | 256  | COM   |
| LCMxo640C-3FT256C | 640  | 1.8V/2.5V/3.3V | 159  | -3    | ftBGA   | 256  | COM   |
| LCMxo640C-4FT256C | 640  | 1.8V/2.5V/3.3V | 159  | -4    | ftBGA   | 256  | COM   |
| LCMxo640C-5FT256C | 640  | 1.8V/2.5V/3.3V | 159  | -5    | ftBGA   | 256  | COM   |

| Part Number        | LUTs | Supply Voltage | I/Os | Grade | Package | Pins | Temp. |
|--------------------|------|----------------|------|-------|---------|------|-------|
| LCMxo1200C-3T100C  | 1200 | 1.8V/2.5V/3.3V | 73   | -3    | TQFP    | 100  | COM   |
| LCMxo1200C-4T100C  | 1200 | 1.8V/2.5V/3.3V | 73   | -4    | TQFP    | 100  | COM   |
| LCMxo1200C-5T100C  | 1200 | 1.8V/2.5V/3.3V | 73   | -5    | TQFP    | 100  | COM   |
| LCMxo1200C-3T144C  | 1200 | 1.8V/2.5V/3.3V | 113  | -3    | TQFP    | 144  | COM   |
| LCMxo1200C-4T144C  | 1200 | 1.8V/2.5V/3.3V | 113  | -4    | TQFP    | 144  | COM   |
| LCMxo1200C-5T144C  | 1200 | 1.8V/2.5V/3.3V | 113  | -5    | TQFP    | 144  | COM   |
| LCMxo1200C-3M132C  | 1200 | 1.8V/2.5V/3.3V | 101  | -3    | csBGA   | 132  | COM   |
| LCMxo1200C-4M132C  | 1200 | 1.8V/2.5V/3.3V | 101  | -4    | csBGA   | 132  | COM   |
| LCMxo1200C-5M132C  | 1200 | 1.8V/2.5V/3.3V | 101  | -5    | csBGA   | 132  | COM   |
| LCMxo1200C-3B256C  | 1200 | 1.8V/2.5V/3.3V | 211  | -3    | caBGA   | 256  | COM   |
| LCMxo1200C-4B256C  | 1200 | 1.8V/2.5V/3.3V | 211  | -4    | caBGA   | 256  | COM   |
| LCMxo1200C-5B256C  | 1200 | 1.8V/2.5V/3.3V | 211  | -5    | caBGA   | 256  | COM   |
| LCMxo1200C-3FT256C | 1200 | 1.8V/2.5V/3.3V | 211  | -3    | ftBGA   | 256  | COM   |
| LCMxo1200C-4FT256C | 1200 | 1.8V/2.5V/3.3V | 211  | -4    | ftBGA   | 256  | COM   |
| LCMxo1200C-5FT256C | 1200 | 1.8V/2.5V/3.3V | 211  | -5    | ftBGA   | 256  | COM   |

| Date                  | Version         | Section                          | Change Summary  |
|-----------------------|-----------------|----------------------------------|---|
| April 2006<br>(cont.) | 02.0<br>(cont.) | Architecture<br>(cont.)          | <p>"Top View of the MachXO1200 Device" figure updated.</p> <p>"Top View of the MachXO640 Device" figure updated.</p> <p>"Top View of the MachXO256 Device" figure updated.</p> <p>"Slice Diagram" figure updated.</p> <p>Slice Signal Descriptions table updated.</p> <p>Routing section updated.</p> <p>sysCLOCK Phase Locked Loops (PLLs) section updated.</p> <p>PLL Diagram updated.</p> <p>PLL Signal Descriptions table updated.</p> <p>sysMEM Memory section has been updated.</p> <p>PIO Groups section has been updated.</p> <p>PIO section has been updated.</p> <p>MachXO PIO Block Diagram updated.</p> <p>Supported Input Standards table updated.</p> <p>MachXO Configuration and Programming diagram updated.</p>  |
|                       |                 | DC and Switching Characteristics | <p>Recommended Operating Conditions table - footnotes updated.</p> <p>MachXO256 and MachXO640 Hot Socketing Specifications - footnotes updated.</p> <p>Added MachXO1200 and MachXO2280 Hot Socketing Specifications table.</p> <p>DC Electrical Characteristics, footnotes have been updated.</p> <p>Supply Current (Sleep Mode) table has been updated, removed "4W" references. Footnotes have been updated.</p> <p>Supply Current (Standby) table and associated footnotes updated.</p> <p>Initialization Supply Current table and footnotes updated.</p> <p>Programming and Erase Flash Supply Current table and associated footnotes have been updated.</p> <p>Register-to-Register Performance table updated (rev. A 0.19).</p> <p>MachXO External Switching Characteristics updated (rev. A 0.19).</p> <p>MachXO Internal Timing Parameters updated (rev. A 0.19).</p> <p>MachXO Family Timing Adders updated (rev. A 0.19).</p> <p>sysCLOCK Timing updated (rev. A 0.19).</p> <p>MachXO "C" Sleep Mode Timing updated (A 0.19).</p> <p>JTAG Port Timing Specification updated (rev. A 0.19).</p> <p>Test Fixture Required Components table updated.</p> |
|                       |                 | Pinout Information               | <p>Signal Descriptions have been updated.</p> <p>Pin Information Summary has been updated. Footnote has been added.</p> <p>Power Supply and NC Connection table has been updated.</p> <p>Logic Signal Connections have been updated (PCLKTx_x --&gt; PCLKx_x)</p>   |
|                       |                 | Ordering Information             | <p>Removed "4W" references.</p> <p>Added 256-ftBGA Ordering Part Numbers for MachXO640.</p>   |
| May 2006              | 02.1            | Pinout Information               | <p>Removed [LOC][0]_PLL_RST from Signal Description table.</p> <p>PCLK footnote has been added to all appropriate pins.</p>   |
| August 2006           | 02.2            | Multiple                         | Removed 256 fpBGA information for MachXO640.  |