



Welcome to [E-XFL.COM](#)

Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	285
Number of Logic Elements/Cells	2280
Total RAM Bits	28262
Number of I/O	73
Number of Gates	-
Voltage - Supply	1.71V ~ 3.465V
Mounting Type	Surface Mount
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	100-LQFP
Supplier Device Package	100-TQFP (14x14)
Purchase URL	https://www.e-xfl.com/product-detail/lattice-semiconductor/lcmxo2280c-3tn100i

Modes of Operation

Each Slice is capable of four modes of operation: Logic, Ripple, RAM, and ROM. The Slice in the PFF is capable of all modes except RAM. Table 2-2 lists the modes and the capability of the Slice blocks.

Table 2-2. Slice Modes

	Logic	Ripple	RAM	ROM
PFU Slice	LUT 4x2 or LUT 5x1	2-bit Arithmetic Unit	SP 16x2	ROM 16x1 x 2
PFF Slice	LUT 4x2 or LUT 5x1	2-bit Arithmetic Unit	N/A	ROM 16x1 x 2

Logic Mode: In this mode, the LUTs in each Slice are configured as 4-input combinatorial lookup tables (LUT4). A LUT4 can have 16 possible input combinations. Any logic function with four inputs can be generated by programming this lookup table. Since there are two LUT4s per Slice, a LUT5 can be constructed within one Slice. Larger lookup tables such as LUT6, LUT7, and LUT8 can be constructed by concatenating other Slices.

Ripple Mode: Ripple mode allows the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each Slice:

- Addition 2-bit
- Subtraction 2-bit
- Add/Subtract 2-bit using dynamic control
- Up counter 2-bit
- Down counter 2-bit
- Ripple mode multiplier building block
- Comparator functions of A and B inputs
 - A greater-than-or-equal-to B
 - A not-equal-to B
 - A less-than-or-equal-to B

Two additional signals, Carry Generate and Carry Propagate, are generated per Slice in this mode, allowing fast arithmetic functions to be constructed by concatenating Slices.

RAM Mode: In this mode, distributed RAM can be constructed using each LUT block as a 16x2-bit memory. Through the combination of LUTs and Slices, a variety of different memories can be constructed.

The ispLEVER design tool supports the creation of a variety of different size memories. Where appropriate, the software will construct these using distributed memory primitives that represent the capabilities of the PFU. Table 2-3 shows the number of Slices required to implement different distributed RAM primitives. Figure 2-6 shows the distributed memory primitive block diagrams. Dual port memories involve the pairing of two Slices. One Slice functions as the read-write port, while the other companion Slice supports the read-only port. For more information on RAM mode in MachXO devices, please see details of additional technical documentation at the end of this data sheet.

Table 2-3. Number of Slices Required For Implementing Distributed RAM

	SPR16x2	DPR16x2
Number of Slices	1	2

Note: SPR = Single Port RAM, DPR = Dual Port RAM

The EBR memory supports three forms of write behavior for single or dual port operation:

1. **Normal** – data on the output appears only during the read cycle. During a write cycle, the data (at the current address) does not appear on the output. This mode is supported for all data widths.
2. **Write Through** – a copy of the input data appears at the output of the same port. This mode is supported for all data widths.
3. **Read-Before-Write** – when new data is being written, the old contents of the address appears at the output. This mode is supported for x9, x18 and x36 data widths.

FIFO Configuration

The FIFO has a write port with Data-in, CEW, WE and CLKW signals. There is a separate read port with Data-out, RCE, RE and CLKR signals. The FIFO internally generates Almost Full, Full, Almost Empty and Empty Flags. The Full and Almost Full flags are registered with CLKW. The Empty and Almost Empty flags are registered with CLKR. The range of programming values for these flags are in Table 2-7.

Table 2-7. Programmable FIFO Flag Ranges

Flag Name	Programming Range
Full (FF)	1 to (up to 2^N-1)
Almost Full (AF)	1 to Full-1
Almost Empty (AE)	1 to Full-1
Empty (EF)	0

N = Address bit width

The FIFO state machine supports two types of reset signals: RSTA and RSTB. The RSTA signal is a global reset that clears the contents of the FIFO by resetting the read/write pointer and puts the FIFO flags in their initial reset state. The RSTB signal is used to reset the read pointer. The purpose of this reset is to retransmit the data that is in the FIFO. In these applications it is important to keep careful track of when a packet is written into or read from the FIFO.

Memory Core Reset

The memory array in the EBR utilizes latches at the A and B output ports. These latches can be reset asynchronously. RSTA and RSTB are local signals, which reset the output latches associated with Port A and Port B respectively. The Global Reset (GSRN) signal resets both ports. The output data latches and associated resets for both ports are as shown in Figure 2-13.

Figure 2-20. MachXO640 Banks


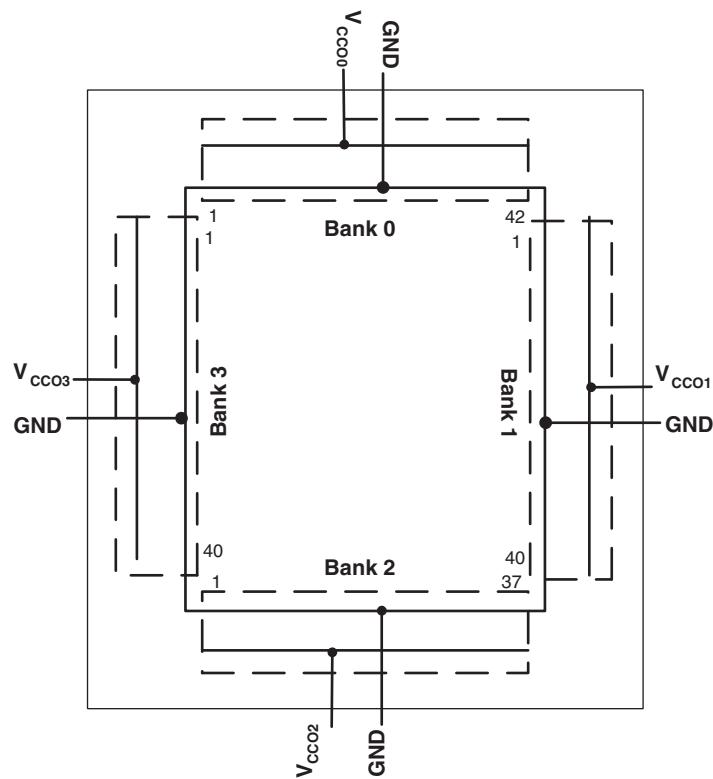


Figure 2-21. MachXO256 Banks

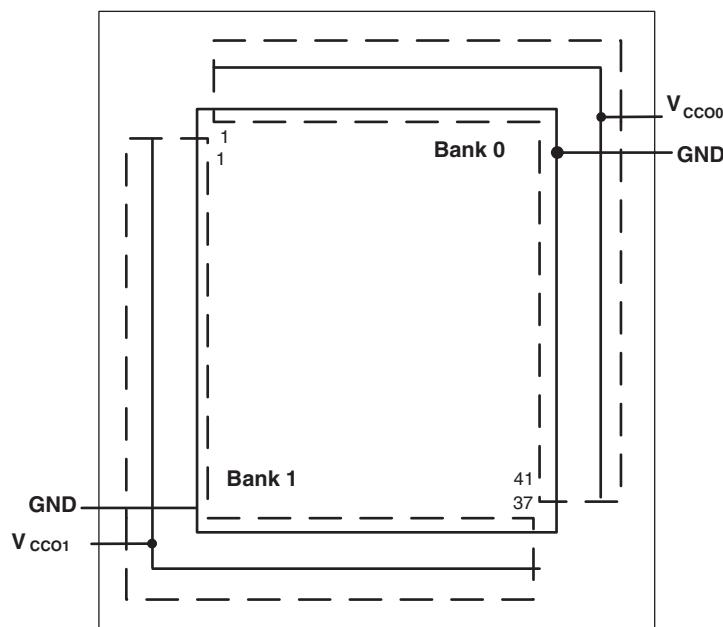

Hot Socketing

The MachXO devices have been carefully designed to ensure predictable behavior during power-up and power-down. Leakage into I/O pins is controlled to within specified limits. This allows for easy integration with the rest of

MachXO256 and MachXO640 Hot Socketing Specifications^{1, 2, 3}

Symbol	Parameter	Condition	Min.	Typ.	Max	Units
I_{DK}	Input or I/O leakage Current	$0 \leq V_{IN} \leq V_{IH}$ (MAX)	—	—	+/-1000	μA

1. Insensitive to sequence of V_{CC} , V_{CCAUX} , and V_{CCIO} . However, assumes monotonic rise/fall rates for V_{CC} , V_{CCAUX} , and V_{CCIO} .

2. $0 \leq V_{CC} \leq V_{CC}$ (MAX), $0 \leq V_{CCIO} \leq V_{CCIO}$ (MAX) and $0 \leq V_{CCAUX} \leq V_{CCAUX}$ (MAX).

3. I_{DK} is additive to I_{PU} , I_{PD} or I_{BH} .

MachXO1200 and MachXO2280 Hot Socketing Specifications^{1, 2, 3}

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
Non-LVDS General Purpose sysIos						
I_{DK}	Input or I/O Leakage Current	$0 \leq V_{IN} \leq V_{IH}$ (MAX.)	—	—	+/-1000	μA
LVDS General Purpose sysIos						
I_{DK_LVDS}	Input or I/O Leakage Current	$V_{IN} \leq V_{CCIO}$	—	—	+/-1000	μA
		$V_{IN} > V_{CCIO}$	—	35	—	mA

1. Insensitive to sequence of V_{CC} , V_{CCAUX} , and V_{CCIO} . However, assumes monotonic rise/fall rates for V_{CC} , V_{CCAUX} , and V_{CCIO} .

2. $0 \leq V_{CC} \leq V_{CC}$ (MAX), $0 \leq V_{CCIO} \leq V_{CCIO}$ (MAX), and $0 \leq V_{CCAUX} \leq V_{CCAUX}$ (MAX).

3. I_{DK} is additive to I_{PU} , I_{PW} or I_{BH} .

DC Electrical Characteristics

Over Recommended Operating Conditions

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
I_{IL}, I_{IH} ^{1, 4, 5}	Input or I/O Leakage	$0 \leq V_{IN} \leq (V_{CCIO} - 0.2V)$	—	—	10	μA
		$(V_{CCIO} - 0.2V) < V_{IN} \leq 3.6V$	—	—	40	μA
I_{PU}	I/O Active Pull-up Current	$0 \leq V_{IN} \leq 0.7 V_{CCIO}$	-30	—	-150	μA
I_{PD}	I/O Active Pull-down Current	V_{IL} (MAX) $\leq V_{IN} \leq V_{IH}$ (MAX)	30	—	150	μA
$I_{B HLS}$	Bus Hold Low sustaining current	$V_{IN} = V_{IL}$ (MAX)	30	—	—	μA
$I_{B HHS}$	Bus Hold High sustaining current	$V_{IN} = 0.7V_{CCIO}$	-30	—	—	μA
$I_{B HLO}$	Bus Hold Low Overdrive current	$0 \leq V_{IN} \leq V_{IH}$ (MAX)	—	—	150	μA
$I_{B HHO}$	Bus Hold High Overdrive current	$0 \leq V_{IN} \leq V_{IH}$ (MAX)	—	—	-150	μA
V_{BHT} ³	Bus Hold trip Points	$0 \leq V_{IN} \leq V_{IH}$ (MAX)	V_{IL} (MAX)	—	V_{IH} (MIN)	V
C1	I/O Capacitance ²	$V_{CCIO} = 3.3V, 2.5V, 1.8V, 1.5V, 1.2V$, $V_{CC} = \text{Typ.}$, $V_{IO} = 0$ to V_{IH} (MAX)	—	8	—	pf
C2	Dedicated Input Capacitance ²	$V_{CCIO} = 3.3V, 2.5V, 1.8V, 1.5V, 1.2V$, $V_{CC} = \text{Typ.}$, $V_{IO} = 0$ to V_{IH} (MAX)	—	8	—	pf

1. Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output driver tri-stated. It is not measured with the output driver active. Bus maintenance circuits are disabled.

2. T_A 25°C, $f = 1.0MHz$

3. Please refer to V_{IL} and V_{IH} in the sysIO Single-Ended DC Electrical Characteristics table of this document.

4. Not applicable to SLEEPN pin.

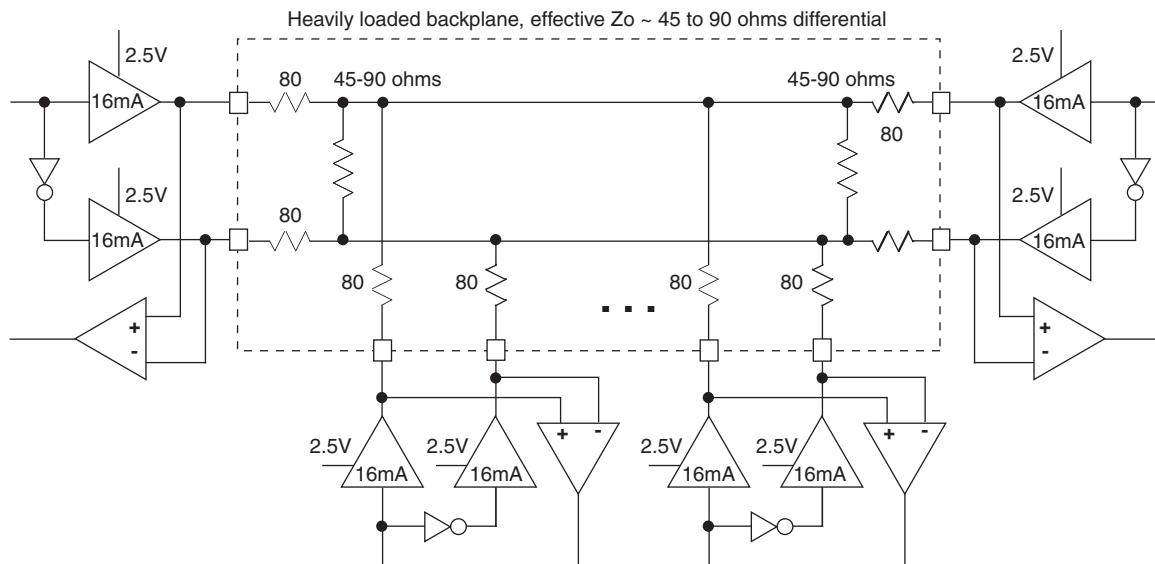
5. When V_{IH} is higher than V_{CCIO} , a transient current typically of 30ns in duration or less with a peak current of 6mA can occur on the high-to-low transition. For MachXO1200 and MachXO2280 true LVDS output pins, V_{IH} must be less than or equal to V_{CCIO} .

Table 3-1. LVDS DC Conditions
Over Recommended Operating Conditions

Parameter	Description	Typical	Units
Z_{OUT}	Output impedance	20	Ω
R_S	Driver series resistor	294	Ω
R_P	Driver parallel resistor	121	Ω
R_T	Receiver termination	100	Ω
V_{OH}	Output high voltage	1.43	V
V_{OL}	Output low voltage	1.07	V
V_{OD}	Output differential voltage	0.35	V
V_{CM}	Output common mode voltage	1.25	V
Z_{BACK}	Back impedance	100	Ω
I_{DC}	DC output current	3.66	mA

BLVDS

The MachXO family supports the BLVDS standard through emulation. The output is emulated using complementary LVCMS outputs in conjunction with a parallel external resistor across the driver outputs. The input standard is supported by the LVDS differential input buffer on certain devices. BLVDS is intended for use when multi-drop and bi-directional multi-point differential signaling is required. The scheme shown in Figure 3-2 is one possible solution for bi-directional multi-point differential signals.

Figure 3-2. BLVDS Multi-point Output Example


Typical Building Block Function Performance¹

Pin-to-Pin Performance (LVCMS25 12mA Drive)

Function	-5 Timing	Units
Basic Functions		
16-bit decoder	6.7	ns
4:1 MUX	4.5	ns
16:1 MUX	5.1	ns

Register-to-Register Performance

Function	-5 Timing	Units
Basic Functions		
16:1 MUX	487	MHz
16-bit adder	292	MHz
16-bit counter	388	MHz
64-bit counter	200	MHz
Embedded Memory Functions (1200 and 2280 Devices Only)		
256x36 Single Port RAM	284	MHz
512x18 True-Dual Port RAM	284	MHz
Distributed Memory Functions		
16x2 Single Port RAM	434	MHz
64x2 Single Port RAM	320	MHz
128x4 Single Port RAM	261	MHz
32x2 Pseudo-Dual Port RAM	314	MHz
64x4 Pseudo-Dual Port RAM	271	MHz

1. The above timing numbers are generated using the ispLEVER design tool. Exact performance may vary with device and tool version. The tool uses internal parameters that have been characterized but are not tested on every device.

Rev. A 0.19

Derating Logic Timing

Logic Timing provided in the following sections of the data sheet and the ispLEVER design tools are worst case numbers in the operating range. Actual delays may be much faster. The ispLEVER design tool from Lattice can provide logic timing numbers at a particular temperature and voltage.

Signal Descriptions

Signal Name	I/O	Descriptions
General Purpose		
P[Edge] [Row/Column Number]_[A/B/C/D/E/F]	I/O	<p>[Edge] indicates the edge of the device on which the pad is located. Valid edge designations are L (Left), B (Bottom), R (Right), T (Top).</p> <p>[Row/Column Number] indicates the PFU row or the column of the device on which the PIO Group exists. When Edge is T (Top) or (Bottom), only need to specify Row Number. When Edge is L (Left) or R (Right), only need to specify Column Number.</p> <p>[A/B/C/D/E/F] indicates the PIO within the group to which the pad is connected.</p> <p>Some of these user programmable pins are shared with special function pins. When not used as special function pins, these pins can be programmed as I/Os for user logic.</p> <p>During configuration of the user-programmable I/Os, the user has an option to tri-state the I/Os and enable an internal pull-up resistor. This option also applies to unused pins (or those not bonded to a package pin). The default during configuration is for user-programmable I/Os to be tri-stated with an internal pull-up resistor enabled. When the device is erased, I/Os will be tri-stated with an internal pull-up resistor enabled.</p>
GSRN	I	Global RESET signal (active low). Dedicated pad, when not in use it can be used as an I/O pin.
TSALL	I	TSALL is a dedicated pad for the global output enable signal. When TSALL is high all the outputs are tristated. It is a dual function pin. When not in use, it can be used as an I/O pin.
NC	—	No connect.
GND	—	GND - Ground. Dedicated pins.
V _{CC}	—	VCC - The power supply pins for core logic. Dedicated pins.
V _{CCAUX}	—	VCCAUX - the Auxiliary power supply pin. This pin powers up a variety of internal circuits including all the differential and referenced input buffers. Dedicated pins.
V _{CCIOx}	—	V _{CCIO} - The power supply pins for I/O Bank x. Dedicated pins.
SLEEPN ¹	I	Sleep Mode pin - Active low sleep pin. ^b When this pin is held high, the device operates normally. ^b This pin has a weak internal pull-up, but when unused, an external pull-up to V _{CC} is recommended. When driven low, the device moves into Sleep mode after a specified time.
PLL and Clock Functions (Used as user programmable I/O pins when not used for PLL or clock pins)		
[LOC][0]_PLL[T, C]_IN	—	Reference clock (PLL) input Pads: [LOC] indicates location. Valid designations are ULM (Upper PLL) and LLM (Lower PLL). T = true and C = complement.
[LOC][0]_PLL[T, C]_FB	—	Optional feedback (PLL) input Pads: [LOC] indicates location. Valid designations are ULM (Upper PLL) and LLM (Lower PLL). T = true and C = complement.
PCLK [n]_[1:0]	—	Primary Clock Pads, n per side.
Test and Programming (Dedicated pins)		
TMS	I	Test Mode Select input pin, used to control the 1149.1 state machine.
TCK	I	Test Clock input pin, used to clock the 1149.1 state machine.
TDI	I	Test Data input pin, used to load data into the device using an 1149.1 state machine.
TDO	O	Output pin -Test Data output pin used to shift data out of the device using 1149.1.

¹. Applies to MachXO "C" devices only. NC for "E" devices.

Power Supply and NC (Cont.)

Signal	132 csBGA ¹	256 caBGA / 256 ftBGA ¹	324 ftBGA ¹
VCC	H3, P6, G12, C7	G7, G10, K7, K10	F14, G11, G9, H7, L7, M9
VCCIO0	LCMxo640: B11, C5 LCMxo1200/2280: C5	LCMxo640: F8, F7, F9, F10 LCMxo1200/2280: F8, F7	G8, G7
VCCIO1	LCMxo640: L12, E12 LCMxo1200/2280: B11	LCMxo640: H11, G11, K11, J11 LCMxo1200/2280: F9, F10	G12, G10
VCCIO2	LCMxo640: N2, M10 LCMxo1200/2280: E12	LCMxo640: L9, L10, L8, L7 LCMxo1200/2280: H11, G11	J12, H12
VCCIO3	LCMxo640: D2, K3 LCMxo1200/2280: L12	LCMxo640: K6, J6, H6, G6 LCMxo1200/2280: K11, J11	L12, K12
VCCIO4	LCMxo640: None LCMxo1200/2280: M10	LCMxo640: None LCMxo1200/2280: L9, L10	M12, M11
VCCIO5	LCMxo640: None LCMxo1200/2280: N2	LCMxo640: None LCMxo1200/2280: L8, L7	M8, R9
VCCIO6	LCMxo640: None LCMxo1200/2280: K3	LCMxo640: None LCMxo1200/2280: K6, J6	M7, K7
VCCIO7	LCMxo640: None LCMxo1200/2280: D2	LCMxo640: None LCMxo1200/2280: H6, G6	H6, J7
VCCAUX	P7, A7	T9, A8	M10, F9
GND ²	F1, P9, J14, C9, A10, B4, L13, D13, P2, N11, E1, L2	A1, A16, F11, G8, G9, H7, H8, H9, H10, J7, J8, J9, J10, K8, K9, L6, T1, T16	E14, F16, H10, H11, H8, H9, J10, J11, J4, J8, J9, K10, K11, K17, K8, K9, L10, L11, L8, L9, N2, P14, P5, R7
NC ³	—	LCMxo640: E4, E5, F5, F6, C3, C2, G4, G5, H4, H5, K5, K4, M5, M4, P2, P3, N5, N6, M7, M8, N10, N11, R15, R16, P15, P16, M11, L11, N12, N13, M13, M12, K12, J12, F12, F13, E12, E13, D13, D14, B15, A15, C14, B14, E11, E10, E7, E6, D4, D3, B3, B2 LCMxo1200: None LCMxo2280: None	—

1. Pin orientation A1 starts from the upper left corner of the top side view with alphabetical order ascending vertically and numerical order ascending horizontally.
2. All grounds must be electrically connected at the board level. For fpBGA and ftBGA packages, the total number of GND balls is less than the actual number of GND logic connections from the die to the common package GND plane.
3. NC pins should not be connected to any active signals, VCC or GND.

LCMxo256 and LCMxo640 Logic Signal Connections: 100 csBGA (Cont.)

LCMxo256					LCMxo640				
Ball Number	Ball Function	Bank	Dual Function	Differential	Ball Number	Ball Function	Bank	Dual Function	Differential
P13	PB5A	1			P13	PB9C	2		T
M12*	SLEEPN	-	SLEEPN		M12*	SLEEPN	-	SLEEPN	
P14	PB5C	1		T	P14	PB9D	2		C
N13	PB5D	1		C	N13	PB9F	2		
N14	PR9B	0		C	N14	PR11D	1		C
M14	PR9A	0		T	M14	PR11B	1		C
L13	PR8B	0		C	L13	PR11C	1		T
L14	PR8A	0		T	L14	PR11A	1		T
M13	PR7D	0		C	M13	PR10D	1		C
K14	PR7C	0		T	K14	PR10C	1		T
K13	PR7B	0		C	K13	PR10B	1		C
J14	PR7A	0		T	J14	PR10A	1		T
J13	PR6B	0		C	J13	PR9D	1		
H13	PR6A	0		T	H13	PR9B	1		
G14	GNDIO0	0			G14	GNDIO1	1		
G13	PR5D	0		C	G13	PR7B	1		
F14	PR5C	0		T	F14	PR6C	1		
F13	PR5B	0		C	F13	PR6B	1		
E14	PR5A	0		T	E14	PR5D	1		
E13	PR4B	0		C	E13	PR5B	1		
D14	PR4A	0		T	D14	PR4D	1		
D13	PR3D	0		C	D13	PR4B	1		
C14	PR3C	0		T	C14	PR3D	1		
C13	PR3B	0		C	C13	PR3B	1		
B14	PR3A	0		T	B14	PR2D	1		
C12	PR2B	0		C	C12	PR2B	1		
B13	GNDIO0	0			B13	GNDIO1	1		
A13	PR2A	0		T	A13	PT9F	0		C
A12	PT5C	0			A12	PT9E	0		T
B11	PT5B	0		C	B11	PT9C	0		
A11	PT5A	0		T	A11	PT9A	0		
B12	PT4F	0		C	B12	VCCIO0	0		
A10	PT4E	0		T	A10	GNDIO0	0		
B10	PT4D	0		C	B10	PT7E	0		
A9	PT4C	0		T	A9	PT7A	0		
A8	PT4B	0	PCLK0_1**	C	A8	PT6B	0	PCLK0_1**	
B8	PT4A	0	PCLK0_0**	T	B8	PT5B	0	PCLK0_0**	C
A7	PT3D	0		C	A7	PT5A	0		T
B7	VCCAUX	-			B7	VCCAUX	-		
A6	PT3C	0		T	A6	PT4F	0		
B6	VCC	-			B6	VCC	-		
A5	PT3B	0		C	A5	PT3F	0		

**LCMXO640, LCMXO1200 and LCMXO2280 Logic Signal Connections:
 132 csBGA (Cont.)**

LCMXO640					LCMXO1200					LCMXO2280				
Ball #	Ball Function	Bank	Dual Function	Differential	Ball #	Ball Function	Bank	Dual Function	Differential	Ball #	Ball Function	Bank	Dual Function	Differential
B9	PT7B	0		C	B9	PT9B	1		C	B9	PT12D	1		C
A9	PT7A	0		T	A9	PT9A	1		T	A9	PT12C	1		T
A8	PT6B	0	PCLK0_1***	C	A8	PT7D	1	PCLK1_1***		A8	PT10B	1	PCLK1_1***	
B8	PT6A	0		T	B8	PT7B	1			B8	PT9D	1		
C8	PT5B	0	PCLK0_0***	C	C8	PT6F	0	PCLK1_0***		C8	PT9B	1	PCLK1_0***	
B7	PT5A	0		T	B7	PT6D	0			B7	PT8D	0		
A7	VCCAUX	-			A7	VCCAUX	-			A7	VCCAUX	-		
C7	VCC	-			C7	VCC	-			C7	VCC	-		
A6	PT4D	0		C	A6	PT5D	0		C	A6	PT7B	0		C
B6	PT4C	0		T	B6	PT5C	0		T	B6	PT7A	0		T
C6	PT3F	0		C	C6	PT5B	0		C	C6	PT6D	0		
B5	PT3E	0		T	B5	PT5A	0		T	B5	PT6E	0		T
A5	PT3D	0			A5	PT4B	0			A5	PT6F	0		C
B4	GNDIO0	0			B4	GNDIO0	0			B4	GNDIO0	0		
A4	PT3B	0			A4	PT3D	0		C	A4	PT4B	0		C
C4	PT2F	0			C4	PT3C	0		T	C4	PT4A	0		T
A3	PT2D	0		C	A3	PT3B	0		C	A3	PT3B	0		C
A2	PT2C	0		T	A2	PT2B	0		C	A2	PT2B	0		C
B3	PT2B	0		C	B3	PT3A	0		T	B3	PT3A	0		T
A1	PT2A	0		T	A1	PT2A	0		T	A1	PT2A	0		T
F1	GND	-			F1	GND	-			F1	GND	-		
P9	GND	-			P9	GND	-			P9	GND	-		
J14	GND	-			J14	GND	-			J14	GND	-		
C9	GND	-			C9	GND	-			C9	GND	-		
C5	VCCIO0	0			C5	VCCIO0	0			C5	VCCIO0	0		
B11	VCCIO0	0			B11	VCCIO1	1			B11	VCCIO1	1		
E12	VCCIO1	1			E12	VCCIO2	2			E12	VCCIO2	2		
L12	VCCIO1	1			L12	VCCIO3	3			L12	VCCIO3	3		
M10	VCCIO2	2			M10	VCCIO4	4			M10	VCCIO4	4		
N2	VCCIO2	2			N2	VCCIO5	5			N2	VCCIO5	5		
D2	VCCIO3	3			D2	VCCIO7	7			D2	VCCIO7	7		
K3	VCCIO3	3			K3	VCCIO6	6			K3	VCCIO6	6		

*Supports true LVDS outputs.

**NC for "E" devices.

***Primary clock inputs are single-ended.

**LCMXX640, LCMXO1200 and LCMXO2280 Logic Signal Connections:
144 TQFP**

Pin Number	LCMXX640				LCMXX1200				LCMXX2280				
	Ball Function	Bank	Dual Function	Differential	Ball Function	Bank	Dual Function	Differential	Ball Function	Bank	Dual Function	Differential	
1	PL2A	3		T	PL2A	7			T	PL2A	7	LUM0_PLLT_FB_A	T
2	PL2C	3		T	PL2B	7			C	PL2B	7	LUM0_PLLC_FB_A	C
3	PL2B	3		C	PL3A	7			T*	PL3A	7		T*
4	PL3A	3		T	PL3B	7			C*	PL3B	7		C*
5	PL2D	3		C	PL3C	7			T	PL3C	7	LUM0_PLLT_IN_A	T
6	PL3B	3		C	PL3D	7			C	PL3D	7	LUM0_PLLC_IN_A	C
7	PL3C	3		T	PL4A	7			T*	PL4A	7		T*
8	PL3D	3		C	PL4B	7			C*	PL4B	7		C*
9	PL4A	3			PL4C	7				PL4C	7		
10	VCCIO3	3			VCCIO7	7				VCCIO7	7		
11	GNDIO3	3			GNDIO7	7				GNDIO7	7		
12	PL4D	3			PL5C	7				PL6C	7		
13	PL5A	3		T	PL6A	7			T*	PL7A	7		T*
14	PL5B	3	GSRN	C	PL6B	7	GSRN		C*	PL7B	7	GSRN	C*
15	PL5D	3			PL6D	7				PL7D	7		
16	GND	-			GND	-				GND	-		
17	PL6C	3		T	PL7C	7			T	PL9C	7		T
18	PL6D	3		C	PL7D	7			C	PL9D	7		C
19	PL7A	3		T	PL10A	6			T*	PL13A	6		T*
20	PL7B	3		C	PL10B	6			C*	PL13B	6		C*
21	VCC	-			VCC	-				VCC	-		
22	PL8A	3		T	PL11A	6			T*	PL13D	6		
23	PL8B	3		C	PL11B	6			C*	PL14D	6		C
24	PL8C	3	TSALL		PL11C	6	TSALL			PL14C	6	TSALL	T
25	PL9C	3		T	PL12B	6				PL15B	6		
26	VCCIO3	3			VCCIO6	6				VCCIO6	6		
27	GNDIO3	3			GNDIO6	6				GNDIO6	6		
28	PL9D	3		C	PL13D	6				PL16D	6		
29	PL10A	3		T	PL14A	6	LLM0_PLLT_FB_A	T*		PL17A	6	LLM0_PLLT_FB_A	T*
30	PL10B	3		C	PL14B	6	LLM0_PLLC_FB_A	C*		PL17B	6	LLM0_PLLC_FB_A	C*
31	PL10C	3		T	PL14C	6			T	PL17C	6		T
32	PL11A	3		T	PL14D	6			C	PL17D	6		C
33	PL10D	3		C	PL15A	6	LLM0_PLLT_IN_A	T*		PL18A	6	LLM0_PLLT_IN_A	T*
34	PL11C	3		T	PL15B	6	LLM0_PLLC_IN_A	C*		PL18B	6	LLM0_PLLC_IN_A	C*
35	PL11B	3		C	PL16A	6			T	PL19A	6		T
36	PL11D	3		C	PL16B	6			C	PL19B	6		C
37	GNDIO2	2			GNDIO5	5				GNDIO5	5		
38	VCCIO2	2			VCCIO5	5				VCCIO5	5		
39	TMS	2	TMS		TMS	5	TMS			TMS	5	TMS	
40	PB2C	2			PB2C	5			T	PB2A	5		T
41	PB3A	2		T	PB2D	5			C	PB2B	5		C
42	TCK	2	TCK		TCK	5	TCK			TCK	5	TCK	
43	PB3B	2		C	PB3A	5			T	PB3A	5		T
44	PB3C	2		T	PB3B	5			C	PB3B	5		C
45	PB3D	2		C	PB4A	5			T	PB4A	5		T
46	PB4A	2		T	PB4B	5			C	PB4B	5		C
47	TDO	2	TDO		TDO	5	TDO			TDO	5	TDO	
48	PB4B	2		C	PB4D	5				PB4D	5		
49	PB4C	2		T	PB5A	5			T	PB5A	5		T
50	PB4D	2		C	PB5B	5			C	PB5B	5		C

**LCMxo640, LCMxo1200 and LCMxo2280 Logic Signal Connections:
 256 caBGA / 256 ftBGA (Cont.)**

LCMxo640					LCMxo1200					LCMxo2280				
Ball Number	Ball Function	Bank	Dual Function	Differential	Ball Number	Ball Function	Bank	Dual Function	Differential	Ball Number	Ball Function	Bank	Dual Function	Differential
J13	PR8C	1		T	J13	PR11A	3			J13	PR14A	3		T*
GND	GND	-			GND	GND	-			GND	GND	-		
K14	PR8B	1		C	K14	PR10D	3			K14	PR13D	3		C
J14	PR8A	1		T	J14	PR10C	3			J14	PR13C	3		T
K15	PR7D	1		C	K15	PR10B	3			K15	PR13B	3		C*
J15	PR7C	1		T	J15	PR10A	3			J15	PR13A	3		T*
-	-				GND	GNDIO3	3			GND	GNDIO3	3		
-	-				VCCIO3	VCCIO3	3			VCCIO3	VCCIO3	3		
K12	NC				K12	PR9D	3			K12	PR11D	3		C
J12	NC				J12	PR9C	3			J12	PR11C	3		T
J16	PR7B	1		C	J16	PR9B	3			J16	PR11B	3		C*
H16	PR7A	1		T	H16	PR9A	3			H16	PR11A	3		T*
H15	PR6B	1		C	H15	PR8D	2			H15	PR10D	2		C
G15	PR6A	1		T	G15	PR8C	2			G15	PR10C	2		T
H14	PR5D	1		C	H14	PR8B	2			H14	PR10B	2		C*
G14	PR5C	1		T	G14	PR8A	2			G14	PR10A	2		T*
GND	GNDIO1	1			GND	GNDIO2	2			GND	GNDIO2	2		
VCCIO1	VCCIO1	1			VCCIO2	VCCIO2	2			VCCIO2	VCCIO2	2		
H13	PR6D	1		C	H13	PR7D	2			H13	PR9D	2		C
H12	PR6C	1		T	H12	PR7C	2			H12	PR9C	2		T
G13	PR4D	1		C	G13	PR7B	2			G13	PR9B	2		C*
G12	PR4C	1		T	G12	PR7A	2			G12	PR9A	2		T*
G16	PR5B	1		C	G16	PR6D	2			G16	PR7D	2		C
F16	PR5A	1		T	F16	PR6C	2			F16	PR7C	2		T
F15	PR4B	1		C	F15	PR6B	2			F15	PR7B	2		C*
E15	PR4A	1		T	E15	PR6A	2			E15	PR7A	2		T*
E16	PR3B	1		C	E16	PR5D	2			E16	PR6D	2		C
D16	PR3A	1		T	D16	PR5C	2			D16	PR6C	2		T
VCCIO1	VCCIO1	1			VCCIO2	VCCIO2	2			VCCIO2	VCCIO2	2		
GND	GNDIO1	1			GND	GNDIO2	2			GND	GNDIO2	2		
D15	PR2D	1		C	D15	PR5B	2			D15	PR6B	2		C*
C15	PR2C	1		T	C15	PR5A	2			C15	PR6A	2		T*
C16	PR2B	1		C	C16	PR4D	2			C16	PR5D	2		C
B16	PR2A	1		T	B16	PR4C	2			B16	PR5C	2		T
F14	PR3D	1		C	F14	PR4B	2			F14	PR5B	2		C*
E14	PR3C	1		T	E14	PR4A	2			E14	PR5A	2		T*
-	-	-			-	-	-			GND	GND	-		
F12	NC				F12	PR3D	2			F12	PR4D	2		C
F13	NC				F13	PR3C	2			F13	PR4C	2		T
E12	NC				E12	PR3B	2			E12	PR4B	2		C*
E13	NC				E13	PR3A	2			E13	PR4A	2		T*
D13	NC				D13	PR2B	2			D13	PR3B	2		C*
D14	NC				D14	PR2A	2			D14	PR3A	2		T*
VCCIO0	VCCIO0	0			VCCIO2	VCCIO2	2			VCCIO2	VCCIO2	2		
GND	GNDIO0	0			GND	GNDIO2	2			GND	GNDIO2	2		
GND	GNDIO0	0			GND	GNDIO1	1			GND	GNDIO1	1		
VCCIO0	VCCIO0	0			VCCIO1	VCCIO1	1			VCCIO1	VCCIO1	1		
B15	NC				B15	PT11D	1			B15	PT16D	1		C
A15	NC				A15	PT11C	1			A15	PT16C	1		T
C14	NC				C14	PT11B	1			C14	PT16B	1		C
B14	NC				B14	PT11A	1			B14	PT16A	1		T
C13	PT9F	0		C	C13	PT10F	1			C13	PT15D	1		C
B13	PT9E	0		T	B13	PT10E	1			B13	PT15C	1		T

**LCMxo640, LCMxo1200 and LCMxo2280 Logic Signal Connections:
 256 caBGA / 256 ftBGA (Cont.)**

LCMxo640					LCMxo1200				LCMxo2280					
Ball Number	Ball Function	Bank	Dual Function	Differential	Ball Number	Ball Function	Bank	Dual Function	Differential	Ball Number	Ball Function	Bank	Dual Function	Differential
E11	NC				E11	PT10D	1		C	E11	PT15B	1		C
E10	NC				E10	PT10C	1		T	E10	PT15A	1		T
D12	PT9D	0		C	D12	PT10B	1		C	D12	PT14D	1		C
D11	PT9C	0		T	D11	PT10A	1		T	D11	PT14C	1		T
A14	PT7F	0		C	A14	PT9F	1		C	A14	PT14B	1		C
A13	PT7E	0		T	A13	PT9E	1		T	A13	PT14A	1		T
C12	PT8B	0		C	C12	PT9D	1		C	C12	PT13D	1		C
C11	PT8A	0		T	C11	PT9C	1		T	C11	PT13C	1		T
-	-			VCCIO1	VCCIO1	VCCIO1	1			VCCIO1	VCCIO1	1		
-	-			GND	GNDIO1	GNDIO1	1			GND	GNDIO1	1		
B12	PT7B	0		C	B12	PT9B	1		C	B12	PT12D	1		C
B11	PT7A	0		T	B11	PT9A	1		T	B11	PT12C	1		T
A12	PT7D	0		C	A12	PT8F	1		C	A12	PT12B	1		C
A11	PT7C	0		T	A11	PT8E	1		T	A11	PT12A	1		T
GND	GND	-		GND	GND	GND	-			GND	GND	-		
B10	PT5D	0		C	B10	PT8D	1		C	B10	PT11B	1		C
B9	PT5C	0		T	B9	PT8C	1		T	B9	PT11A	1		T
D10	PT8D	0		C	D10	PT8B	1		C	D10	PT10F	1		C
D9	PT8C	0		T	D9	PT8A	1		T	D9	PT10E	1		T
-	-			VCCIO1	VCCIO1	VCCIO1	1			VCCIO1	VCCIO1	1		
-	-			GND	GNDIO1	GNDIO1	1			GND	GNDIO1	1		
C10	PT6D	0		C	C10	PT7F	1		C	C10	PT10D	1		C
C9	PT6C	0		T	C9	PT7E	1		T	C9	PT10C	1		T
A9	PT6B	0	PCLK0_1***	C	A9	PT7D	1	PCLK1_1***	C	A9	PT10B	1	PCLK1_1***	C
A10	PT6A	0		T	A10	PT7C	1		T	A10	PT10A	1		T
E9	PT9B	0		C	E9	PT7B	1		C	E9	PT9D	1		C
E8	PT9A	0		T	E8	PT7A	1		T	E8	PT9C	1		T
D7	PT5B	0	PCLK0_0***	C	D7	PT6F	0	PCLK1_0***	C	D7	PT9B	1	PCLK1_0***	C
D8	PT5A	0		T	D8	PT6E	0		T	D8	PT9A	1		T
VCCIO0	VCCIO0	0		VCCIO0	VCCIO0	VCCIO0	0			VCCIO0	VCCIO0	0		
GND	GNDIO0	0		GND	GNDIO0	GNDIO0	0			GND	GNDIO0	0		
C8	PT4F	0		C	C8	PT6D	0		C	C8	PT8D	0		C
B8	PT4E	0		T	B8	PT6C	0		T	B8	PT8C	0		T
A8	VCCAUX	-		A8	VCCAUX	VCCAUX	-			A8	VCCAUX	-		
A7	PT4D	0		C	A7	PT6B	0		C	A7	PT7D	0		C
A6	PT4C	0		T	A6	PT6A	0		T	A6	PT7C	0		T
VCC	VCC	-		VCC	VCC	VCC	-			VCC	VCC	-		
B7	PT4B	0		C	B7	PT5F	0		C	B7	PT7B	0		C
B6	PT4A	0		T	B6	PT5E	0		T	B6	PT7A	0		T
C6	PT3C	0		T	C6	PT5C	0		T	C6	PT6A	0		T
C7	PT3D	0		C	C7	PT5D	0		C	C7	PT6B	0		C
A5	PT3E	0		T	A5	PT5A	0		T	A5	PT6C	0		T
A4	PT3F	0		C	A4	PT5B	0		C	A4	PT6D	0		C
E7	NC			E7	PT4C	0		T	E7	PT6E	0		T	
E6	NC			E6	PT4D	0		C	E6	PT6F	0		C	
B5	PT3B	0		C	B5	PT3F	0		C	B5	PT5D	0		C
B4	PT3A	0		T	B4	PT3E	0		T	B4	PT5C	0		T
D5	PT2D	0		C	D5	PT3D	0		C	D5	PT5B	0		C
D6	PT2C	0		T	D6	PT3C	0		T	D6	PT5A	0		T
C4	PT2E	0		T	C4	PT4A	0		T	C4	PT4A	0		T
C5	PT2F	0		C	C5	PT4B	0		C	C5	PT4B	0		C
-	-	-		-	-	-	-			GND	GND	-		
D4	NC			D4	PT2D	0		C	D4	PT3D	0		C	

LCMxo2280 Logic Signal Connections: 324 ftBGA (Cont.)

LCMxo2280				
Ball Number	Ball Function	Bank	Dual Function	Differential
G2	PL11A	6		T*
H2	PL11B	6		C*
L3	PL11C	6		T
L5	PL11D	6		C
H1	PL12A	6		T*
VCCIO6	VCCIO6	6		
GND	GNDIO6	6		
J2	PL12B	6		C*
L4	PL12C	6		T
L6	PL12D	6		C
K2	PL13A	6		T*
K1	PL13B	6		C*
J1	PL13C	6		T
VCC	VCC	-		
L2	PL13D	6		C
M5	PL14D	6		C
M3	PL14C	6	TSALL	T
L1	PL14B	6		C*
M2	PL14A	6		T*
M1	PL15A	6		T*
N1	PL15B	6		C*
M6	PL15C	6		T
M4	PL15D	6		C
VCCIO6	VCCIO6	6		
GND	GNDIO6	6		
P1	PL16A	6		T*
P2	PL16B	6		C*
N3	PL16C	6		T
N4	PL16D	6		C
GND	GND	-		
T1	PL17A	6	LLM0_PLLT_FB_A	T*
R1	PL17B	6	LLM0_PLLC_FB_A	C*
P3	PL17C	6		T
N5	PL17D	6		C
R3	PL18A	6	LLM0_PLLT_IN_A	T*
R2	PL18B	6	LLM0_PLLC_IN_A	C*
P4	PL19A	6		T
N6	PL19B	6		C
U1	PL20A	6		T
VCCIO6	VCCIO6	6		
GND	GNDIO6	6		
GND	GNDIO5	5		
VCCIO5	VCCIO5	5		

LCMxo2280 Logic Signal Connections: 324 ftBGA (Cont.)

LCMxo2280				
Ball Number	Ball Function	Bank	Dual Function	Differential
GND	GNDIO3	3		
VCCIO3	VCCIO3	3		
P15	PR20B	3		C
N14	PR20A	3		T
N15	PR19B	3		C
M13	PR19A	3		T
R15	PR18B	3		C*
T16	PR18A	3		T*
N16	PR17D	3		C
M14	PR17C	3		T
U17	PR17B	3		C*
VCC	VCC	-		
U18	PR17A	3		T*
R17	PR16D	3		C
R16	PR16C	3		T
P16	PR16B	3		C*
VCCIO3	VCCIO3	3		
GND	GNDIO3	3		
P17	PR16A	3		T*
L13	PR15D	3		C
M15	PR15C	3		T
T17	PR15B	3		C*
T18	PR15A	3		T*
L14	PR14D	3		C
L15	PR14C	3		T
R18	PR14B	3		C*
P18	PR14A	3		T*
GND	GND	-		
K15	PR13D	3		C
K13	PR13C	3		T
N17	PR13B	3		C*
N18	PR13A	3		T*
K16	PR12D	3		C
K14	PR12C	3		T
M16	PR12B	3		C*
L16	PR12A	3		T*
GND	GNDIO3	3		
VCCIO3	VCCIO3	3		
J16	PR11D	3		C
J14	PR11C	3		T
M17	PR11B	3		C*
L17	PR11A	3		T*
J15	PR10D	2		C

LCMXO2280 Logic Signal Connections: 324 ftBGA (Cont.)

LCMXO2280				
Ball Number	Ball Function	Bank	Dual Function	Differential
A10	PT8E	0		T
VCCIO0	VCCIO0	0		
GND	GNDIO0	0		
A9	PT8D	0		C
C9	PT8C	0		T
B9	PT8B	0		C
F9	VCCAUX	-		
A8	PT8A	0		T
B8	PT7D	0		C
C8	PT7C	0		T
VCC	VCC	-		
A7	PT7B	0		C
B7	PT7A	0		T
A6	PT6A	0		T
B6	PT6B	0		C
D8	PT6C	0		T
F8	PT6D	0		C
C7	PT6E	0		T
E8	PT6F	0		C
D7	PT5D	0		C
VCCIO0	VCCIO0	0		
GND	GNDIO0	0		
E7	PT5C	0		T
A5	PT5B	0		C
C6	PT5A	0		T
B5	PT4A	0		T
A4	PT4B	0		C
D6	PT4C	0		T
F7	PT4D	0		C
B4	PT4E	0		T
GND	GND	-		
C5	PT4F	0		C
F6	PT3D	0		C
E5	PT3C	0		T
E6	PT3B	0		C
D5	PT3A	0		T
A3	PT2D	0		C
C4	PT2C	0		T
A2	PT2B	0		C
B2	PT2A	0		T
VCCIO0	VCCIO0	0		
GND	GNDIO0	0		
E14	GND	-		

LCMXO2280 Logic Signal Connections: 324 ftBGA (Cont.)

LCMXO2280				
Ball Number	Ball Function	Bank	Dual Function	Differential
F16	GND	-		
H10	GND	-		
H11	GND	-		
H8	GND	-		
H9	GND	-		
J10	GND	-		
J11	GND	-		
J4	GND	-		
J8	GND	-		
J9	GND	-		
K10	GND	-		
K11	GND	-		
K17	GND	-		
K8	GND	-		
K9	GND	-		
L10	GND	-		
L11	GND	-		
L8	GND	-		
L9	GND	-		
N2	GND	-		
P14	GND	-		
P5	GND	-		
R7	GND	-		
F14	VCC	-		
G11	VCC	-		
G9	VCC	-		
H7	VCC	-		
L7	VCC	-		
M9	VCC	-		
H6	VCCIO7	7		
J7	VCCIO7	7		
M7	VCCIO6	6		
K7	VCCIO6	6		
M8	VCCIO5	5		
R9	VCCIO5	5		
M12	VCCIO4	4		
M11	VCCIO4	4		
L12	VCCIO3	3		
K12	VCCIO3	3		
J12	VCCIO2	2		
H12	VCCIO2	2		
G12	VCCIO1	1		
G10	VCCIO1	1		

Conventional Packaging

Industrial

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo256C-3T100I	256	1.8V/2.5V/3.3V	78	-3	TQFP	100	IND
LCMxo256C-4T100I	256	1.8V/2.5V/3.3V	78	-4	TQFP	100	IND
LCMxo256C-3M100I	256	1.8V/2.5V/3.3V	78	-3	csBGA	100	IND
LCMxo256C-4M100I	256	1.8V/2.5V/3.3V	78	-4	csBGA	100	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo640C-3T100I	640	1.8V/2.5V/3.3V	74	-3	TQFP	100	IND
LCMxo640C-4T100I	640	1.8V/2.5V/3.3V	74	-4	TQFP	100	IND
LCMxo640C-3M100I	640	1.8V/2.5V/3.3V	74	-3	csBGA	100	IND
LCMxo640C-4M100I	640	1.8V/2.5V/3.3V	74	-4	csBGA	100	IND
LCMxo640C-3T144I	640	1.8V/2.5V/3.3V	113	-3	TQFP	144	IND
LCMxo640C-4T144I	640	1.8V/2.5V/3.3V	113	-4	TQFP	144	IND
LCMxo640C-3M132I	640	1.8V/2.5V/3.3V	101	-3	csBGA	132	IND
LCMxo640C-4M132I	640	1.8V/2.5V/3.3V	101	-4	csBGA	132	IND
LCMxo640C-3B256I	640	1.8V/2.5V/3.3V	159	-3	caBGA	256	IND
LCMxo640C-4B256I	640	1.8V/2.5V/3.3V	159	-4	caBGA	256	IND
LCMxo640C-3FT256I	640	1.8V/2.5V/3.3V	159	-3	ftBGA	256	IND
LCMxo640C-4FT256I	640	1.8V/2.5V/3.3V	159	-4	ftBGA	256	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo1200C-3T100I	1200	1.8V/2.5V/3.3V	73	-3	TQFP	100	IND
LCMxo1200C-4T100I	1200	1.8V/2.5V/3.3V	73	-4	TQFP	100	IND
LCMxo1200C-3T144I	1200	1.8V/2.5V/3.3V	113	-3	TQFP	144	IND
LCMxo1200C-4T144I	1200	1.8V/2.5V/3.3V	113	-4	TQFP	144	IND
LCMxo1200C-3M132I	1200	1.8V/2.5V/3.3V	101	-3	csBGA	132	IND
LCMxo1200C-4M132I	1200	1.8V/2.5V/3.3V	101	-4	csBGA	132	IND
LCMxo1200C-3B256I	1200	1.8V/2.5V/3.3V	211	-3	caBGA	256	IND
LCMxo1200C-4B256I	1200	1.8V/2.5V/3.3V	211	-4	caBGA	256	IND
LCMxo1200C-3FT256I	1200	1.8V/2.5V/3.3V	211	-3	ftBGA	256	IND
LCMxo1200C-4FT256I	1200	1.8V/2.5V/3.3V	211	-4	ftBGA	256	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo2280C-3T100I	2280	1.8V/2.5V/3.3V	73	-3	TQFP	100	IND
LCMxo2280C-4T100I	2280	1.8V/2.5V/3.3V	73	-4	TQFP	100	IND
LCMxo2280C-3T144I	2280	1.8V/2.5V/3.3V	113	-3	TQFP	144	IND
LCMxo2280C-4T144I	2280	1.8V/2.5V/3.3V	113	-4	TQFP	144	IND
LCMxo2280C-3M132I	2280	1.8V/2.5V/3.3V	101	-3	csBGA	132	IND
LCMxo2280C-4M132I	2280	1.8V/2.5V/3.3V	101	-4	csBGA	132	IND
LCMxo2280C-3B256I	2280	1.8V/2.5V/3.3V	211	-3	caBGA	256	IND
LCMxo2280C-4B256I	2280	1.8V/2.5V/3.3V	211	-4	caBGA	256	IND
LCMxo2280C-3FT256I	2280	1.8V/2.5V/3.3V	211	-3	ftBGA	256	IND
LCMxo2280C-4FT256I	2280	1.8V/2.5V/3.3V	211	-4	ftBGA	256	IND
LCMxo2280C-3FT324I	2280	1.8V/2.5V/3.3V	271	-3	ftBGA	324	IND
LCMxo2280C-4FT324I	2280	1.8V/2.5V/3.3V	271	-4	ftBGA	324	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo256E-3T100I	256	1.2V	78	-3	TQFP	100	IND
LCMxo256E-4T100I	256	1.2V	78	-4	TQFP	100	IND
LCMxo256E-3M100I	256	1.2V	78	-3	csBGA	100	IND
LCMxo256E-4M100I	256	1.2V	78	-4	csBGA	100	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo640E-3T100I	640	1.2V	74	-3	TQFP	100	IND
LCMxo640E-4T100I	640	1.2V	74	-4	TQFP	100	IND
LCMxo640E-3M100I	640	1.2V	74	-3	csBGA	100	IND
LCMxo640E-4M100I	640	1.2V	74	-4	csBGA	100	IND
LCMxo640E-3T144I	640	1.2V	113	-3	TQFP	144	IND
LCMxo640E-4T144I	640	1.2V	113	-4	TQFP	144	IND
LCMxo640E-3M132I	640	1.2V	101	-3	csBGA	132	IND
LCMxo640E-4M132I	640	1.2V	101	-4	csBGA	132	IND
LCMxo640E-3B256I	640	1.2V	159	-3	caBGA	256	IND
LCMxo640E-4B256I	640	1.2V	159	-4	caBGA	256	IND
LCMxo640E-3FT256I	640	1.2V	159	-3	ftBGA	256	IND
LCMxo640E-4FT256I	640	1.2V	159	-4	ftBGA	256	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo1200E-3T100I	1200	1.2V	73	-3	TQFP	100	IND
LCMxo1200E-4T100I	1200	1.2V	73	-4	TQFP	100	IND
LCMxo1200E-3T144I	1200	1.2V	113	-3	TQFP	144	IND
LCMxo1200E-4T144I	1200	1.2V	113	-4	TQFP	144	IND
LCMxo1200E-3M132I	1200	1.2V	101	-3	csBGA	132	IND
LCMxo1200E-4M132I	1200	1.2V	101	-4	csBGA	132	IND
LCMxo1200E-3B256I	1200	1.2V	211	-3	caBGA	256	IND
LCMxo1200E-4B256I	1200	1.2V	211	-4	caBGA	256	IND
LCMxo1200E-3FT256I	1200	1.2V	211	-3	ftBGA	256	IND
LCMxo1200E-4FT256I	1200	1.2V	211	-4	ftBGA	256	IND

Part Number	LUTs	Supply Voltage	I/Os	Grade	Package	Pins	Temp.
LCMxo2280E-3T100I	2280	1.2V	73	-3	TQFP	100	IND
LCMxo2280E-4T100I	2280	1.2V	73	-4	TQFP	100	IND
LCMxo2280E-3T144I	2280	1.2V	113	-3	TQFP	144	IND
LCMxo2280E-4T144I	2280	1.2V	113	-4	TQFP	144	IND
LCMxo2280E-3M132I	2280	1.2V	101	-3	csBGA	132	IND
LCMxo2280E-4M132I	2280	1.2V	101	-4	csBGA	132	IND
LCMxo2280E-3B256I	2280	1.2V	211	-3	caBGA	256	IND
LCMxo2280E-4B256I	2280	1.2V	211	-4	caBGA	256	IND
LCMxo2280E-3FT256I	2280	1.2V	211	-3	ftBGA	256	IND
LCMxo2280E-4FT256I	2280	1.2V	211	-4	ftBGA	256	IND
LCMxo2280E-3FT324I	2280	1.2V	271	-3	ftBGA	324	IND
LCMxo2280E-4FT324I	2280	1.2V	271	-4	ftBGA	324	IND

Date	Version	Section	Change Summary
April 2006 (cont.)	02.0 (cont.)	Architecture (cont.)	<p>"Top View of the MachXO1200 Device" figure updated.</p> <p>"Top View of the MachXO640 Device" figure updated.</p> <p>"Top View of the MachXO256 Device" figure updated.</p> <p>"Slice Diagram" figure updated.</p> <p>Slice Signal Descriptions table updated.</p> <p>Routing section updated.</p> <p>sysCLOCK Phase Locked Loops (PLLs) section updated.</p> <p>PLL Diagram updated.</p> <p>PLL Signal Descriptions table updated.</p> <p>sysMEM Memory section has been updated.</p> <p>PIO Groups section has been updated.</p> <p>PIO section has been updated.</p> <p>MachXO PIO Block Diagram updated.</p> <p>Supported Input Standards table updated.</p> <p>MachXO Configuration and Programming diagram updated.</p>
		DC and Switching Characteristics	<p>Recommended Operating Conditions table - footnotes updated.</p> <p>MachXO256 and MachXO640 Hot Socketing Specifications - footnotes updated.</p> <p>Added MachXO1200 and MachXO2280 Hot Socketing Specifications table.</p> <p>DC Electrical Characteristics, footnotes have been updated.</p> <p>Supply Current (Sleep Mode) table has been updated, removed "4W" references. Footnotes have been updated.</p> <p>Supply Current (Standby) table and associated footnotes updated.</p> <p>Initialization Supply Current table and footnotes updated.</p> <p>Programming and Erase Flash Supply Current table and associated footnotes have been updated.</p> <p>Register-to-Register Performance table updated (rev. A 0.19).</p> <p>MachXO External Switching Characteristics updated (rev. A 0.19).</p> <p>MachXO Internal Timing Parameters updated (rev. A 0.19).</p> <p>MachXO Family Timing Adders updated (rev. A 0.19).</p> <p>sysCLOCK Timing updated (rev. A 0.19).</p> <p>MachXO "C" Sleep Mode Timing updated (A 0.19).</p> <p>JTAG Port Timing Specification updated (rev. A 0.19).</p> <p>Test Fixture Required Components table updated.</p>
		Pinout Information	<p>Signal Descriptions have been updated.</p> <p>Pin Information Summary has been updated. Footnote has been added.</p> <p>Power Supply and NC Connection table has been updated.</p> <p>Logic Signal Connections have been updated (PCLKTx_x --> PCLKx_x)</p>
		Ordering Information	<p>Removed "4W" references.</p> <p>Added 256-ftBGA Ordering Part Numbers for MachXO640.</p>
May 2006	02.1	Pinout Information	<p>Removed [LOC][0]_PLL_RST from Signal Description table.</p> <p>PCLK footnote has been added to all appropriate pins.</p>
August 2006	02.2	Multiple	Removed 256 fpBGA information for MachXO640.