


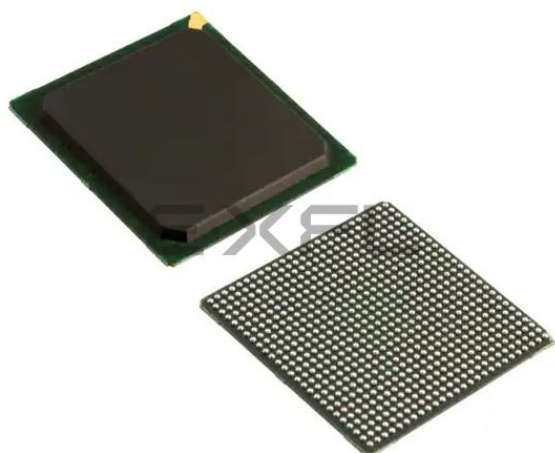

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                                          |
| Number of LABs/CLBs            | 18144                                                                                                                                                           |
| Number of Logic Elements/Cells | -                                                                                                                                                               |
| Total RAM Bits                 | 165888                                                                                                                                                          |
| Number of I/O                  | 418                                                                                                                                                             |
| Number of Gates                | 1000000                                                                                                                                                         |
| Voltage - Supply               | 1.425V ~ 1.575V                                                                                                                                                 |
| Mounting Type                  | Surface Mount                                                                                                                                                   |
| Operating Temperature          | -40°C ~ 85°C (TA)                                                                                                                                               |
| Package / Case                 | 676-BGA                                                                                                                                                         |
| Supplier Device Package        | 676-FBGA (27x27)                                                                                                                                                |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/ax1000-1fg676i">https://www.e-xfl.com/product-detail/microchip-technology/ax1000-1fg676i</a> |

## Thermal Characteristics

### Introduction

The temperature variable in Microsemi's Designer software refers to the junction temperature, not the ambient temperature. This is an important distinction because dynamic and static power consumption cause the chip junction temperature to be higher than the ambient temperature. EQ 1 can be used to calculate junction temperature.

$$T_J = \text{Junction Temperature} = \Delta T + T_a$$

EQ 1

Where:

$T_a$  = Ambient Temperature

$\Delta T$  = Temperature gradient between junction (silicon) and ambient

$$\Delta T = \theta_{ja} * P$$

EQ 2

Where:

$P$  = Power

$\theta_{ja}$  = Junction to ambient of package.  $\theta_{ja}$  numbers are located under Table 2-6 on page 2-7.

### Package Thermal Characteristics

The device junction-to-case thermal characteristic is  $\theta_{jc}$ , and the junction-to-ambient air characteristic is  $\theta_{ja}$ . The thermal characteristics for  $\theta_{ja}$  are shown with two different air flow rates.  $\theta_{jc}$  values are provided for reference. The absolute maximum junction temperature is 125°C.

The maximum power dissipation allowed for commercial- and industrial-grade devices is a function of  $\theta_{ja}$ . A sample calculation of the absolute maximum power dissipation allowed for an 896-pin FBGA package at commercial temperature and still air is as follows:

$$\text{Maximum Power Allowed} = \frac{\text{Max. junction temp. (°C)} - \text{Max. ambient temp. (°C)}}{\theta_{ja}(\text{°C/W})} = \frac{125^\circ\text{C} - 70^\circ\text{C}}{13.6^\circ\text{C/W}} = 4.04 \text{ W}$$



## Timing Characteristics

**Table 2-22 • 3.3 V LVTTL I/O Module**

Worst-Case Commercial Conditions  $V_{CCA} = 1.425\text{ V}$ ,  $V_{CCI} = 3.0\text{ V}$ ,  $T_J = 70^\circ\text{C}$

|                                                               |                                                                           | –2 Speed |       | –1 Speed |       | Std Speed |       |       |
|---------------------------------------------------------------|---------------------------------------------------------------------------|----------|-------|----------|-------|-----------|-------|-------|
| Parameter                                                     | Description                                                               | Min.     | Max.  | Min.     | Max.  | Min.      | Max.  | Units |
| <b>LVTTL Output Drive Strength = 1 (8 mA) / Low Slew Rate</b> |                                                                           |          |       |          |       |           |       |       |
| $t_{DP}$                                                      | Input Buffer                                                              |          | 1.68  |          | 1.92  |           | 2.26  | ns    |
| $t_{PY}$                                                      | Output Buffer                                                             |          | 14.28 |          | 16.27 |           | 19.13 | ns    |
| $t_{ENZL}$                                                    | Enable to Pad Delay through the Output Buffer—Z to Low                    |          | 15.25 |          | 17.37 |           | 20.42 | ns    |
| $t_{ENZH}$                                                    | Enable to Pad Delay through the Output Buffer—Z to High                   |          | 14.26 |          | 16.24 |           | 19.09 | ns    |
| $t_{ENLZ}$                                                    | Enable to Pad Delay through the Output Buffer—Low to Z                    |          | 1.56  |          | 1.57  |           | 1.58  | ns    |
| $t_{ENHZ}$                                                    | Enable to Pad Delay through the Output Buffer—High to Z                   |          | 1.95  |          | 1.96  |           | 1.97  | ns    |
| $t_{IOCLKQ}$                                                  | Sequential Clock-to-Q for the I/O Input Register                          |          | 0.67  |          | 0.77  |           | 0.90  | ns    |
| $t_{IOCLKY}$                                                  | Clock-to-output Y for the I/O Output Register and the I/O Enable Register |          | 0.67  |          | 0.77  |           | 0.90  | ns    |
| $t_{SUD}$                                                     | Data Input Set-Up                                                         |          | 0.23  |          | 0.27  |           | 0.31  | ns    |
| $t_{SUE}$                                                     | Enable Input Set-Up                                                       |          | 0.26  |          | 0.30  |           | 0.35  | ns    |
| $t_{HD}$                                                      | Data Input Hold                                                           |          | 0.00  |          | 0.00  |           | 0.00  | ns    |
| $t_{HE}$                                                      | Enable Input Hold                                                         |          | 0.00  |          | 0.00  |           | 0.00  | ns    |
| $t_{CPWHL}$                                                   | Clock Pulse Width High to Low                                             | 0.39     |       | 0.39     |       | 0.39      |       | ns    |
| $t_{CPWLH}$                                                   | Clock Pulse Width Low to High                                             | 0.39     |       | 0.39     |       | 0.39      |       | ns    |
| $t_{WASYN}$                                                   | Asynchronous Pulse Width                                                  | 0.37     |       | 0.37     |       | 0.37      |       | ns    |
| $t_{REASYN}$                                                  | Asynchronous Recovery Time                                                |          | 0.13  |          | 0.15  |           | 0.17  | ns    |
| $t_{HASYN}$                                                   | Asynchronous Removal Time                                                 |          | 0.00  |          | 0.00  |           | 0.00  | ns    |
| $t_{CLR}$                                                     | Asynchronous Clear-to-Q                                                   |          | 0.23  |          | 0.27  |           | 0.31  | ns    |
| $t_{PRESET}$                                                  | Asynchronous Preset-to-Q                                                  |          | 0.23  |          | 0.27  |           | 0.31  | ns    |




## Class II

**Table 2-53 • DC Input and Output Levels**

| VIL     |            | VIH        |         | VOL        | VOH        | IOL | IOH |
|---------|------------|------------|---------|------------|------------|-----|-----|
| Min., V | Max., V    | Min., V    | Max., V | Max., V    | Min., V    | mA  | mA  |
| -0.3    | VREF – 0.2 | VREF + 0.2 | 3.6     | VREF – 0.8 | VREF + 0.8 | 16  | –16 |

## AC Loadings



**Figure 2-24 • AC Test Loads**

**Table 2-54 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V) | VREF (typ) (V) | C <sub>load</sub> (pF) |
|---------------|----------------|----------------------|----------------|------------------------|
| VREF – 1.0    | VREF + 1.0     | VREF                 | 1.50           | 30                     |

Note: \* Measuring Point = VTRIP

## Timing Characteristics

**Table 2-55 • 3.3 V SSTL3 Class II I/O Module**

Worst-Case Commercial Conditions VCCA = 1.425 V, VCCI = 3.0V, T<sub>J</sub> = 70°C


|                                               |                                                                    | –2 Speed |      | –1 Speed |      | Std Speed |      |       |
|-----------------------------------------------|--------------------------------------------------------------------|----------|------|----------|------|-----------|------|-------|
| Parameter                                     | Description                                                        | Min.     | Max. | Min.     | Max. | Min.      | Max. | Units |
| <b>3.3 V SSTL3 Class II I/O Module Timing</b> |                                                                    |          |      |          |      |           |      |       |
| t <sub>DP</sub>                               | Input Buffer                                                       |          | 1.85 |          | 2.10 |           | 2.47 | ns    |
| t <sub>PY</sub>                               | Output Buffer                                                      |          | 2.17 |          | 2.47 |           | 2.91 | ns    |
| t <sub>CLKQ</sub>                             | Clock-to-Q for the I/O input register                              |          | 0.67 |          | 0.77 |           | 0.90 | ns    |
| t <sub>OCLKQ</sub>                            | Clock-to-Q for the I/O output register and the I/O enable register |          | 0.67 |          | 0.77 |           | 0.90 | ns    |
| t <sub>SUD</sub>                              | Data Input Set-Up                                                  |          | 0.23 |          | 0.27 |           | 0.31 | ns    |
| t <sub>SUE</sub>                              | Enable Input Set-Up                                                |          | 0.26 |          | 0.30 |           | 0.35 | ns    |
| t <sub>HD</sub>                               | Data Input Hold                                                    |          | 0.00 |          | 0.00 |           | 0.00 | ns    |
| t <sub>HE</sub>                               | Enable Input Hold                                                  |          | 0.00 |          | 0.00 |           | 0.00 | ns    |
| t <sub>CPWHL</sub>                            | Clock Pulse Width High to Low                                      | 0.39     |      | 0.39     |      | 0.39      |      | ns    |
| t <sub>CPWLH</sub>                            | Clock Pulse Width Low to High                                      | 0.39     |      | 0.39     |      | 0.39      |      | ns    |
| t <sub>WASYN</sub>                            | Asynchronous Pulse Width                                           | 0.37     |      | 0.37     |      | 0.37      |      | ns    |
| t <sub>REASYN</sub>                           | Asynchronous Recovery Time                                         |          | 0.13 |          | 0.15 |           | 0.17 | ns    |
| t <sub>HASYN</sub>                            | Asynchronous Removal Time                                          |          | 0.00 |          | 0.00 |           | 0.00 | ns    |
| t <sub>CLR</sub>                              | Asynchronous Clear-to-Q                                            |          | 0.23 |          | 0.27 |           | 0.31 | ns    |
| t <sub>PRESET</sub>                           | Asynchronous Preset-to-Q                                           |          | 0.23 |          | 0.27 |           | 0.31 | ns    |

## FIFO Flag Logic

The FIFO is user configurable into various DEPTHS and WIDTHS. Figure 2-62 shows the FIFO address counter details.

- Bits 11 to 5 are active for all modes.
- As the data word size is reduced, more least-significant bits are added to the address.
- As the number of cascaded blocks increases, the number of significant bits in the address increases.

For example, if four blocks are cascaded as a 1kx16 FIFO with each block having a 1kx4 aspect ratio, bits 11 to 2 of the address will be used to specify locations within each RAM block, whereas bits 13 and 12 will be used to specify the RAM block.

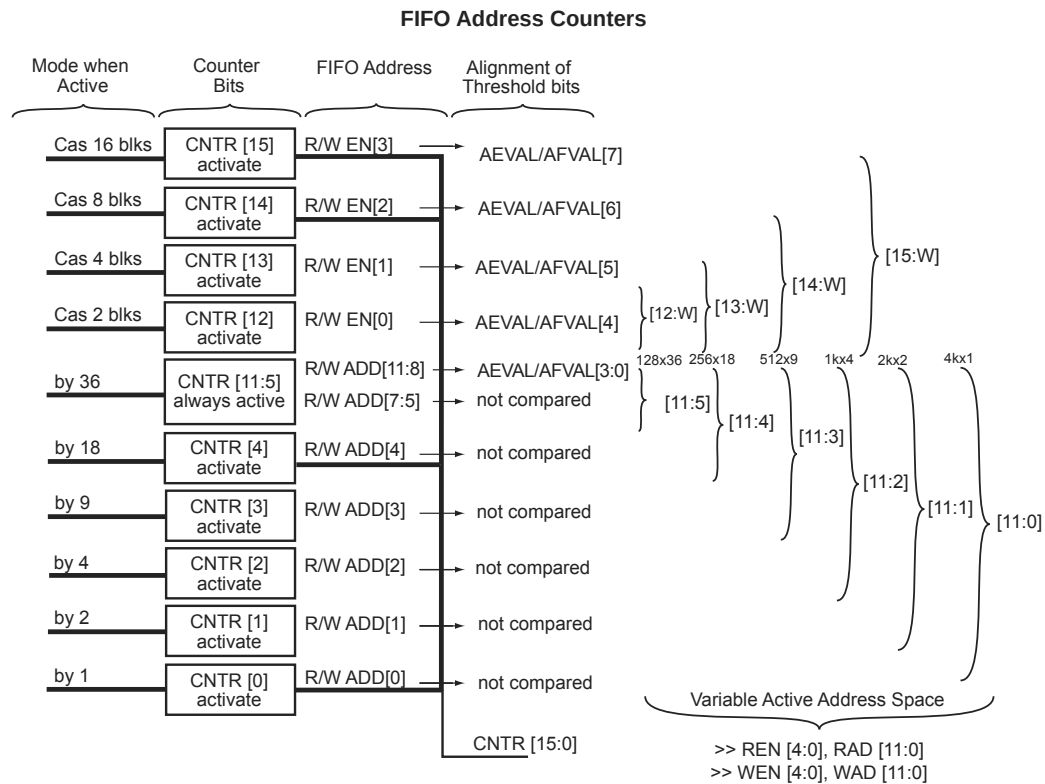

*Note: Inactive counter bits are set to zero.*

**Figure 2-62 • FIFO Address Counters**

The AFULL and AEMPTY flag threshold values are programmable. The threshold values are AFVAL and AEVAL, respectively. Although the trigger threshold for each flag is defined with eight bits, the effective number of threshold bits in the comparison depends on the configuration. The effective number of threshold bits corresponds to the range of active bits in the FIFO address space (Table 2-94).

**Table 2-94 • FIFO Flag Logic**

| Mode              | Inactive AEVAL/AFVAL Bits | Inactive DIFF Bits (set to 0) | DIFF Comparison to AFVAL/AEVAL |
|-------------------|---------------------------|-------------------------------|--------------------------------|
| Non-cascade       | [7:4]                     | [15:12]                       | DIFF[11:8] with AE/FVAL[3:0]   |
| Cascade 2 blocks  | [7:5]                     | [15:13]                       | DIFF[12:8] with AE/FVAL[4:0]   |
| Cascade 4 blocks  | [7:6]                     | [15:14]                       | DIFF[13:8] with AE/FVAL[5:0]   |
| Cascade 8 blocks  | [7]                       | [15]                          | DIFF[14:8] with AE/FVAL[6:0]   |
| Cascade 16 blocks | None                      | None                          | DIFF[15:8] with AE/FVAL[7:0]   |

**Table 2-102 • Sixteen FIFO Blocks Cascaded**  
**Worst-Case Commercial Conditions VCCA = 1.425 V, VCCI = 3.0 V, T<sub>J</sub> = 70°C**

|                      |                              | –2 Speed |       | –1 Speed |       | Std Speed |       | Units |
|----------------------|------------------------------|----------|-------|----------|-------|-----------|-------|-------|
| Parameter            | Description                  | Min.     | Max.  | Min.     | Max.  | Min.      | Max.  |       |
| FIFO Module Timing   |                              |          |       |          |       |           |       |       |
| t <sub>WSU</sub>     | Write Setup                  |          | 16.32 |          | 18.60 |           | 21.86 | ns    |
| t <sub>WHD</sub>     | Write Hold                   |          | 0.00  |          | 0.00  |           | 0.00  | ns    |
| t <sub>WCKH</sub>    | WCLK High                    |          | 0.75  |          | 0.75  |           | 0.75  | ns    |
| t <sub>WCKL</sub>    | WCLK Low                     |          | 13.40 |          | 13.40 |           | 13.40 | ns    |
| t <sub>WCKP</sub>    | Minimum WCLK Period          | 14.15    |       | 14.15    |       | 14.15     |       | ns    |
| t <sub>RSU</sub>     | Read Setup                   |          | 17.16 |          | 19.54 |           | 22.97 | ns    |
| t <sub>RHD</sub>     | Read Hold                    |          | 0.00  |          | 0.00  |           | 0.00  | ns    |
| t <sub>RCKH</sub>    | RCLK High                    |          | 0.73  |          | 0.73  |           | 0.73  | ns    |
| t <sub>RCKL</sub>    | RCLK Low                     |          | 14.41 |          | 14.41 |           | 14.41 | ns    |
| t <sub>RCKP</sub>    | Minimum RCLK period          | 15.14    |       | 15.14    |       | 15.14     |       | ns    |
| t <sub>CLRHF</sub>   | Clear High                   |          | 0.00  |          | 0.00  |           | 0.00  | ns    |
| t <sub>CLR2FF</sub>  | Clear-to-flag (EMPTY/FULL)   |          | 1.92  |          | 2.18  |           | 2.57  | ns    |
| t <sub>CLR2AF</sub>  | Clear-to-flag (AEMPTY/AFULL) |          | 4.39  |          | 5.00  |           | 5.88  | ns    |
| t <sub>CK2FF</sub>   | Clock-to-flag (EMPTY/FULL)   |          | 2.13  |          | 2.42  |           | 2.85  | ns    |
| t <sub>CK2AF</sub>   | Clock-to-flag (AEMPTY/AFULL) |          | 5.04  |          | 5.75  |           | 6.75  | ns    |
| t <sub>RCK2RD1</sub> | RCLK-To-OUT (Pipelined)      |          | 12.08 |          | 13.76 |           | 16.17 | ns    |
| t <sub>RCK2RD2</sub> | RCLK-To-OUT (Nonpipelined)   |          | 12.83 |          | 14.62 |           | 17.18 | ns    |

*Note:* Timing data for these sixteen cascaded FIFO blocks uses a depth of 65,536. For all other combinations, use Microsemi's timing software.

## Building RAM and FIFO Modules

RAM and FIFO modules can be generated and included in a design in two different ways:

- Using the SmartGen Core Generator where the user defines the depth and width of the FIFO/RAM, and then instantiates this block into the design (refer to the *SmartGen*, *FlashROM*, *Analog System Builder*, and *Flash Memory System Builder* User's Guide for more information).
- The alternative is to instantiate the RAM/FIFO blocks manually, using inverters for polarity control and tying all unused data bits to ground.

## Other Architectural Features

### Low Power Mode

Although designed for high performance, the AX architecture also allows the user to place the device into a low power mode. Each I/O bank in an Axcelerator device can be configured individually, when in low power mode, to tristate all outputs, disable inputs, or both. The low power mode is activated by asserting the LP pin, which is grounded in normal operation.

While in the low power mode, the device is still fully functional and all internal logic states are preserved. This allows a user to disable all but a few signals and operate the part in a low-frequency, watchdog

| BG729           |            | BG729           |            | BG729           |            |
|-----------------|------------|-----------------|------------|-----------------|------------|
| AX1000 Function | Pin Number | AX1000 Function | Pin Number | AX1000 Function | Pin Number |
| IO218PB6F20     | V2         | IO236PB7F22     | L1         | IO255NB7F23     | F5         |
| IO219NB6F20     | T1         | IO237NB7F22     | L4         | IO255PB7F23     | G5         |
| IO219PB6F20     | U1         | IO237PB7F22     | L3         | IO256NB7F23     | F3         |
| IO220NB6F20     | R5         | IO238NB7F22     | L6         | IO256PB7F23     | F4         |
| IO220PB6F20     | R6         | IO238PB7F22     | M6         | IO257NB7F23     | H7         |
| IO221NB6F20     | T3         | IO239NB7F22     | M8         | IO257PB7F23     | J7         |
| IO221PB6F20     | T4         | IO239PB7F22     | M7         | Dedicated I/O   |            |
| IO222NB6F20     | R2         | IO240NB7F22     | K2         | GND             | A1         |
| IO222PB6F20     | T2         | IO240PB7F22     | K1         | GND             | A2         |
| IO223NB6F20     | P8         | IO241NB7F22     | K4         | GND             | A25        |
| IO223PB6F20     | P9         | IO241PB7F22     | K3         | GND             | A26        |
| IO224NB6F20     | R3         | IO242NB7F22     | K5         | GND             | A27        |
| IO224PB6F20     | R4         | IO242PB7F22     | L5         | GND             | A3         |
| Bank 7          |            | IO243NB7F22     | J2         | GND             | AC24       |
| IO225NB7F21     | P1         | IO243PB7F22     | J1         | GND             | AE1        |
| IO225PB7F21     | R1         | IO244NB7F22     | J4         | GND             | AE2        |
| IO226NB7F21     | P3         | IO244PB7F22     | J3         | GND             | AE25       |
| IO226PB7F21     | P2         | IO245NB7F22     | H2         | GND             | AE26       |
| IO227NB7F21     | N7         | IO245PB7F22     | H1         | GND             | AE27       |
| IO227PB7F21     | P7         | IO246NB7F22     | H4         | GND             | AE3        |
| IO228NB7F21     | P5         | IO246PB7F22     | H3         | GND             | AE5        |
| IO228PB7F21     | P4         | IO247NB7F23     | L8         | GND             | AF1        |
| IO229NB7F21     | N2         | IO247PB7F23     | L7         | GND             | AF2        |
| IO229PB7F21     | N1         | IO248NB7F23     | J6         | GND             | AF25       |
| IO230NB7F21     | N6         | IO248PB7F23     | K6         | GND             | AF26       |
| IO230PB7F21     | P6         | IO249NB7F23     | H5         | GND             | AF27       |
| IO231NB7F21     | N9         | IO249PB7F23     | J5         | GND             | AF3        |
| IO231PB7F21     | N8         | IO250NB7F23     | G2         | GND             | AG1        |
| IO232NB7F21     | N4         | IO250PB7F23     | G1         | GND             | AG2        |
| IO232PB7F21     | N3         | IO251NB7F23     | K8         | GND             | AG25       |
| IO233NB7F21     | M2         | IO251PB7F23     | K7         | GND             | AG26       |
| IO233PB7F21     | M1         | IO252NB7F23     | G4         | GND             | AG27       |
| IO234NB7F21     | M4         | IO252PB7F23     | G3         | GND             | AG3        |
| IO234PB7F21     | M3         | IO253NB7F23     | F2         | GND             | B1         |
| IO235NB7F21     | M5         | IO253PB7F23     | F1         | GND             | B2         |
| IO235PB7F21     | N5         | IO254NB7F23     | G6         | GND             | B25        |
| IO236NB7F22     | L2         | IO254PB7F23     | H6         | GND             | B26        |

| BG729           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| VCCIB0          | B4         |
| VCCIB0          | C4         |
| VCCIB0          | J10        |
| VCCIB0          | J11        |
| VCCIB0          | J12        |
| VCCIB0          | K12        |
| VCCIB0          | K13        |
| VCCIB1          | A24        |
| VCCIB1          | B24        |
| VCCIB1          | C24        |
| VCCIB1          | J16        |
| VCCIB1          | J17        |
| VCCIB1          | J18        |
| VCCIB1          | K15        |
| VCCIB1          | K16        |
| VCCIB2          | D25        |
| VCCIB2          | D26        |
| VCCIB2          | D27        |
| VCCIB2          | K19        |
| VCCIB2          | L19        |
| VCCIB2          | M18        |
| VCCIB2          | M19        |
| VCCIB2          | N18        |
| VCCIB3          | AD25       |
| VCCIB3          | AD26       |
| VCCIB3          | AD27       |
| VCCIB3          | R18        |
| VCCIB3          | T18        |
| VCCIB3          | T19        |
| VCCIB3          | U19        |
| VCCIB3          | V19        |
| VCCIB4          | AE24       |
| VCCIB4          | AF24       |
| VCCIB4          | AG24       |
| VCCIB4          | V15        |
| VCCIB4          | V16        |
| VCCIB4          | W16        |

| BG729           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| VCCIB4          | W17        |
| VCCIB4          | W18        |
| VCCIB5          | AE4        |
| VCCIB5          | AF4        |
| VCCIB5          | AG4        |
| VCCIB5          | V12        |
| VCCIB5          | V13        |
| VCCIB5          | W10        |
| VCCIB5          | W11        |
| VCCIB5          | W12        |
| VCCIB6          | AD1        |
| VCCIB6          | AD2        |
| VCCIB6          | AD3        |
| VCCIB6          | R10        |
| VCCIB6          | T10        |
| VCCIB6          | T9         |
| VCCIB6          | U9         |
| VCCIB6          | V9         |
| VCCIB7          | D1         |
| VCCIB7          | D2         |
| VCCIB7          | D3         |
| VCCIB7          | K9         |
| VCCIB7          | L9         |
| VCCIB7          | M10        |
| VCCIB7          | M9         |
| VCCIB7          | N10        |
| VCOMPLA         | B13        |
| VCOMPLB         | A14        |
| VCOMPLC         | A15        |
| VCOMPLD         | J15        |
| VCOMPLE         | AG15       |
| VCOMPLF         | W15        |
| VCOMPLG         | AC14       |
| VCOMPLH         | W13        |
| VPUMP           | D24        |

| FG484                |            |
|----------------------|------------|
| AX500 Function       | Pin Number |
| IO163NB7F15          | G5         |
| IO163PB7F15          | G6         |
| IO164NB7F15          | D1         |
| IO164PB7F15          | E1         |
| IO165NB7F15          | F4         |
| IO165PB7F15          | G4         |
| IO166NB7F15          | D2         |
| IO166PB7F15          | E2         |
| IO167NB7F15          | F5         |
| IO167PB7F15          | E4         |
| <b>Dedicated I/O</b> |            |
| VCCDA                | H7         |
| GND                  | A1         |
| GND                  | A11        |
| GND                  | A12        |
| GND                  | A2         |
| GND                  | A21        |
| GND                  | A22        |
| GND                  | AA1        |
| GND                  | AA2        |
| GND                  | AA21       |
| GND                  | AA22       |
| GND                  | AB1        |
| GND                  | AB11       |
| GND                  | AB12       |
| GND                  | AB2        |
| GND                  | AB21       |
| GND                  | AB22       |
| GND                  | B1         |
| GND                  | B2         |
| GND                  | B21        |
| GND                  | B22        |
| GND                  | C20        |
| GND                  | C3         |
| GND                  | D19        |

| FG484          |            |
|----------------|------------|
| AX500 Function | Pin Number |
| GND            | D4         |
| GND            | E18        |
| GND            | E5         |
| GND            | G18        |
| GND            | H15        |
| GND            | H8         |
| GND            | J14        |
| GND            | J9         |
| GND            | K10        |
| GND            | K11        |
| GND            | K12        |
| GND            | K13        |
| GND            | L1         |
| GND            | L10        |
| GND            | L11        |
| GND            | L12        |
| GND            | L13        |
| GND            | L22        |
| GND            | M1         |
| GND            | M10        |
| GND            | M11        |
| GND            | M12        |
| GND            | M13        |
| GND            | M22        |
| GND            | N10        |
| GND            | N11        |
| GND            | N12        |
| GND            | N13        |
| GND            | P14        |
| GND            | P9         |
| GND            | R15        |
| GND            | R8         |
| GND            | U16        |
| GND            | U6         |
| GND            | V18        |


| FG484          |            |
|----------------|------------|
| AX500 Function | Pin Number |
| GND            | V5         |
| GND            | W19        |
| GND            | W4         |
| GND            | Y20        |
| GND            | Y3         |
| GND/LP         | G7         |
| NC             | AB8        |
| NC             | AB16       |
| NC             | C10        |
| NC             | C11        |
| NC             | C14        |
| PRA            | G11        |
| PRB            | F11        |
| PRC            | T12        |
| PRD            | U12        |
| TCK            | G8         |
| TDI            | F9         |
| TDO            | F7         |
| TMS            | F6         |
| TRST           | F8         |
| VCCA           | G17        |
| VCCA           | J10        |
| VCCA           | J11        |
| VCCA           | J12        |
| VCCA           | J13        |
| VCCA           | J7         |
| VCCA           | K14        |
| VCCA           | K9         |
| VCCA           | L14        |
| VCCA           | L9         |
| VCCA           | M14        |
| VCCA           | M9         |
| VCCA           | N14        |
| VCCA           | N9         |
| VCCA           | P10        |

| FG484           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| IO167PB5F15     | AA12       |
| IO169NB5F15     | AA9        |
| IO169PB5F15     | AA10       |
| IO170NB5F15     | AB9        |
| IO170PB5F15     | AB10       |
| IO171NB5F16     | W8         |
| IO171PB5F16     | W9         |
| IO172NB5F16     | Y8         |
| IO172PB5F16     | Y9         |
| IO173NB5F16     | U8         |
| IO173PB5F16     | U9         |
| IO174NB5F16     | AA7        |
| IO174PB5F16     | AA8        |
| IO175NB5F16     | AB5        |
| IO175PB5F16     | AB6        |
| IO176NB5F16     | AA5        |
| IO176PB5F16     | AA6        |
| IO177NB5F16     | AA4        |
| IO177PB5F16     | AB4        |
| IO178NB5F16     | Y6         |
| IO178PB5F16     | Y7         |
| IO179NB5F16     | T7         |
| IO179PB5F16     | T8         |
| IO180NB5F16     | W6         |
| IO180PB5F16     | W7         |
| IO181NB5F17     | Y4         |
| IO181PB5F17     | Y5         |
| IO184NB5F17     | AB7        |
| IO187NB5F17     | V3         |
| IO187PB5F17     | W3         |
| IO188NB5F17     | V4         |
| IO188PB5F17     | W5         |
| IO192NB5F17     | V6         |
| IO192PB5F17     | V7         |
| Bank 6          |            |

| FG484           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| IO194NB6F18     | V2         |
| IO194PB6F18     | W2         |
| IO195NB6F18     | U5         |
| IO195PB6F18     | T5         |
| IO200NB6F18     | T4         |
| IO200PB6F18     | U4         |
| IO201NB6F18     | P6         |
| IO201PB6F18     | R6         |
| IO203NB6F19     | U2         |
| IO204NB6F19     | T3         |
| IO204PB6F19     | U3         |
| IO205NB6F19     | P5         |
| IO205PB6F19     | R5         |
| IO208NB6F19     | V1         |
| IO208PB6F19     | W1         |
| IO209NB6F19     | P7         |
| IO209PB6F19     | R7         |
| IO212NB6F19     | P4         |
| IO212PB6F19     | R4         |
| IO214NB6F20     | P3         |
| IO214PB6F20     | R3         |
| IO215NB6F20     | M6         |
| IO215PB6F20     | N6         |
| IO216NB6F20     | R2         |
| IO216PB6F20     | T2         |
| IO217NB6F20     | T1         |
| IO217PB6F20     | U1         |
| IO219NB6F20     | M5         |
| IO219PB6F20     | N5         |
| IO220NB6F20     | P1         |
| IO220PB6F20     | R1         |
| IO221NB6F20     | N2         |
| IO221PB6F20     | P2         |
| IO222NB6F20     | M3         |
| IO222PB6F20     | N3         |

| FG484           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| IO223NB6F20     | M7         |
| IO223PB6F20     | N7         |
| IO224NB6F20     | M4         |
| IO224PB6F20     | N4         |
| Bank 7          |            |
| IO225NB7F21     | M2         |
| IO225PB7F21     | N1         |
| IO226NB7F21     | K2         |
| IO226PB7F21     | K1         |
| IO228NB7F21     | L3         |
| IO228PB7F21     | L2         |
| IO229NB7F21     | K5         |
| IO229PB7F21     | L5         |
| IO230NB7F21     | H1         |
| IO230PB7F21     | J1         |
| IO231NB7F21     | H2         |
| IO231PB7F21     | J2         |
| IO232NB7F21     | K4         |
| IO232PB7F21     | K3         |
| IO233NB7F21     | K6         |
| IO233PB7F21     | L6         |
| IO234NB7F21     | F1         |
| IO234PB7F21     | G1         |
| IO235NB7F21     | F2         |
| IO235PB7F21     | G2         |
| IO236NB7F22     | H3         |
| IO236PB7F22     | J3         |
| IO237NB7F22     | K7         |
| IO237PB7F22     | L7         |
| IO241NB7F22     | H6         |
| IO241PB7F22     | J6         |
| IO242NB7F22     | H4         |
| IO242PB7F22     | J4         |
| IO243NB7F22     | H5         |
| IO243PB7F22     | J5         |

## FG676

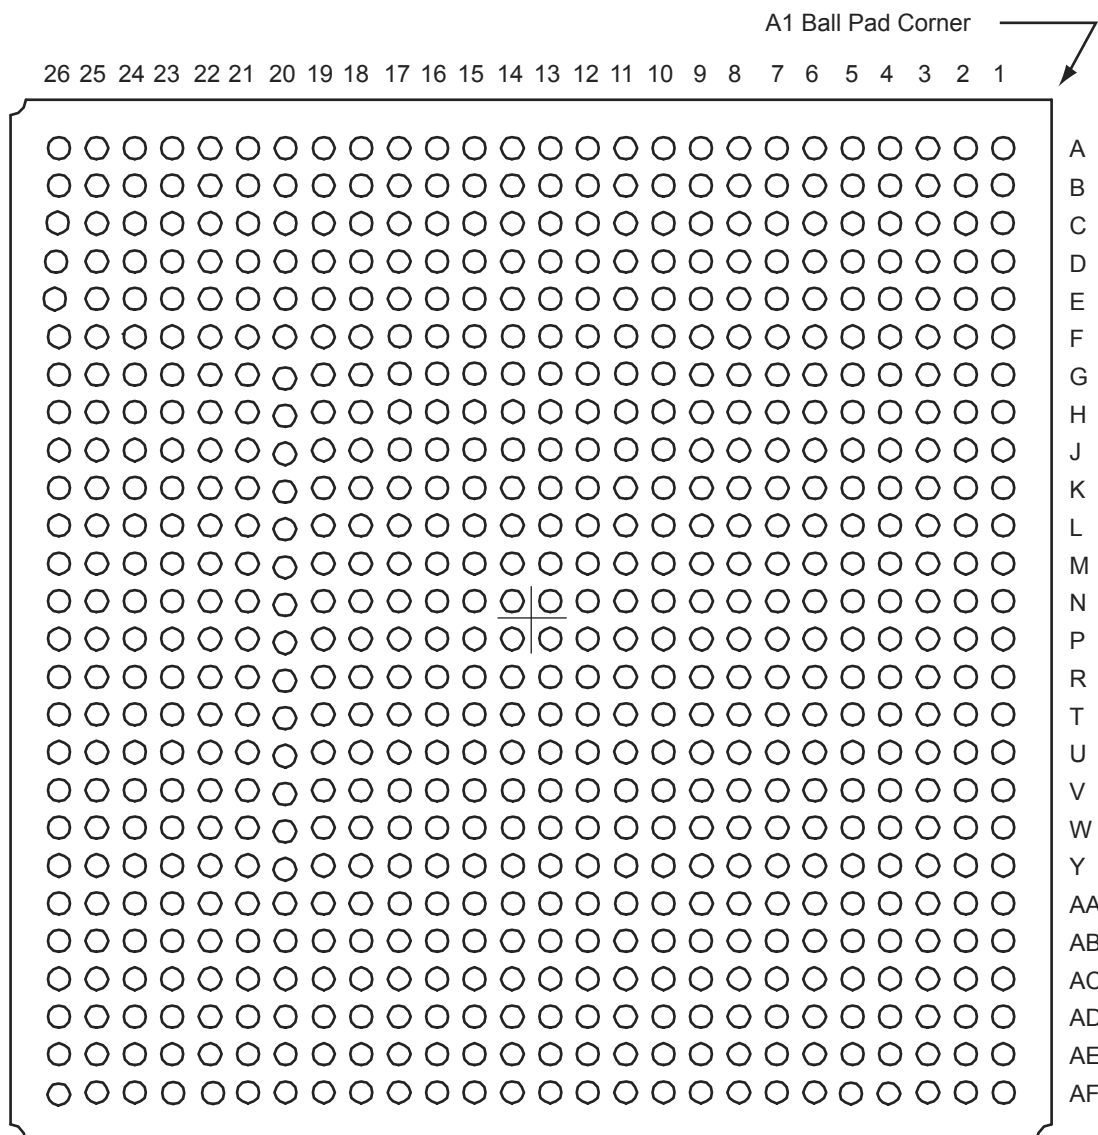

### Note

For Package Manufacturing and Environmental information, visit Resource center at <http://www.microsemi.com/soc/products/rescenter/package/index.html>.



| FG676           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| <b>Bank 0</b>   |            |
| IO00NB0F0       | B4         |
| IO00PB0F0       | C4         |
| IO02NB0F0       | E7         |
| IO02PB0F0       | E6         |
| IO03NB0F0       | D6         |
| IO03PB0F0       | D5         |
| IO04NB0F0       | B5         |
| IO04PB0F0       | C5         |
| IO05NB0F0       | A5         |
| IO05PB0F0       | A4         |
| IO06NB0F0       | F7         |
| IO06PB0F0       | F6         |
| IO07NB0F0       | B6         |
| IO07PB0F0       | C6         |
| IO08NB0F0       | C7         |
| IO08PB0F0       | D7         |
| IO10NB0F0       | F8         |
| IO10PB0F0       | E8         |
| IO11NB0F0       | A7         |
| IO11PB0F0       | A6         |
| IO12NB0F1       | C8         |
| IO12PB0F1       | D8         |
| IO13NB0F1       | B8         |
| IO13PB0F1       | B7         |
| IO14NB0F1       | D9         |
| IO14PB0F1       | E9         |
| IO16NB0F1       | F10        |
| IO16PB0F1       | F9         |
| IO18NB0F1       | B9         |
| IO18PB0F1       | C9         |
| IO19NB0F1       | A10        |
| IO19PB0F1       | A9         |
| IO20NB0F1       | D10        |
| IO20PB0F1       | E10        |
| IO21NB0F1       | B10        |

| FG676            |            |
|------------------|------------|
| AX1000 Function  | Pin Number |
| IO21PB0F1        | C10        |
| IO22NB0F2        | F11        |
| IO22PB0F2        | G11        |
| IO24NB0F2        | D11        |
| IO24PB0F2        | E11        |
| IO26NB0F2        | C12        |
| IO26PB0F2        | C11        |
| IO28NB0F2        | F12        |
| IO28PB0F2        | G12        |
| IO30NB0F2/HCLKAN | A12        |
| IO30PB0F2/HCLKAP | B12        |
| IO31NB0F2/HCLKBN | C13        |
| IO31PB0F2/HCLKBP | B13        |
| <b>Bank 1</b>    |            |
| IO32NB1F3/HCLKCN | C15        |
| IO32PB1F3/HCLKCP | C14        |
| IO33NB1F3/HCLKDN | A15        |
| IO33PB1F3/HCLKDP | B15        |
| IO35NB1F3        | B16        |
| IO35PB1F3        | A16        |
| IO36NB1F3        | F15        |
| IO36PB1F3        | G15        |
| IO38NB1F3        | F16        |
| IO38PB1F3        | G16        |
| IO40NB1F3        | A18        |
| IO40PB1F3        | A17        |
| IO41NB1F4        | C18        |
| IO41PB1F4        | C17        |
| IO42NB1F4        | D16        |
| IO42PB1F4        | E16        |
| IO44NB1F4        | D18        |
| IO44PB1F4        | D17        |
| IO45NB1F4        | B19        |
| IO45PB1F4        | B18        |
| IO46NB1F4        | B20        |
| IO46PB1F4        | A20        |

| FG676           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| IO48NB1F4       | F17        |
| IO48PB1F4       | E17        |
| IO49NB1F4       | A22        |
| IO49PB1F4       | A21        |
| IO50NB1F4       | E18        |
| IO50PB1F4       | F18        |
| IO51NB1F4       | D19        |
| IO51PB1F4       | C19        |
| IO52NB1F4       | D20        |
| IO52PB1F4       | C20        |
| IO54NB1F5       | B22        |
| IO54PB1F5       | B21        |
| IO55NB1F5       | D21        |
| IO55PB1F5       | C21        |
| IO56NB1F5       | F19        |
| IO56PB1F5       | E19        |
| IO57NB1F5       | B23        |
| IO57PB1F5       | A23        |
| IO58NB1F5       | D22        |
| IO58PB1F5       | C22        |
| IO59NB1F5       | B24        |
| IO59PB1F5       | A24        |
| IO60NB1F5       | E21        |
| IO60PB1F5       | E20        |
| IO62NB1F5       | D23        |
| IO62PB1F5       | C23        |
| IO63NB1F5       | F21        |
| IO63PB1F5       | F20        |
| <b>Bank 2</b>   |            |
| IO64NB2F6       | H21        |
| IO64PB2F6       | G21        |
| IO65NB2F6       | G22        |
| IO65PB2F6       | F22        |
| IO66NB2F6       | F24        |
| IO66PB2F6       | F23        |
| IO67NB2F6       | E24        |

| FG896           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| GND             | A13        |
| GND             | A18        |
| GND             | A2         |
| GND             | A23        |
| GND             | A29        |
| GND             | A8         |
| GND             | AA10       |
| GND             | AA21       |
| GND             | AA28       |
| GND             | AA3        |
| GND             | AB2        |
| GND             | AB22       |
| GND             | AB29       |
| GND             | AB9        |
| GND             | AC1        |
| GND             | AC30       |
| GND             | AE25       |
| GND             | AE6        |
| GND             | AF26       |
| GND             | AF5        |
| GND             | AG27       |
| GND             | AG4        |
| GND             | AH10       |
| GND             | AH15       |
| GND             | AH16       |
| GND             | AH21       |
| GND             | AH28       |
| GND             | AH3        |
| GND             | AJ1        |
| GND             | AJ2        |
| GND             | AJ22       |
| GND             | AJ29       |
| GND             | AJ30       |
| GND             | AJ9        |
| GND             | AK13       |

| FG896           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| GND             | AK18       |
| GND             | AK2        |
| GND             | AK23       |
| GND             | AK29       |
| GND             | AK8        |
| GND             | B1         |
| GND             | B2         |
| GND             | B22        |
| GND             | B29        |
| GND             | B30        |
| GND             | B9         |
| GND             | C10        |
| GND             | C15        |
| GND             | C16        |
| GND             | C21        |
| GND             | C28        |
| GND             | C3         |
| GND             | D27        |
| GND             | D28        |
| GND             | D4         |
| GND             | E26        |
| GND             | E5         |
| GND             | H1         |
| GND             | H30        |
| GND             | J2         |
| GND             | J22        |
| GND             | J29        |
| GND             | J9         |
| GND             | K10        |
| GND             | K21        |
| GND             | K28        |
| GND             | K3         |
| GND             | L11        |
| GND             | L20        |
| GND             | M12        |

| FG896           |            |
|-----------------|------------|
| AX1000 Function | Pin Number |
| GND             | M13        |
| GND             | M14        |
| GND             | M15        |
| GND             | M16        |
| GND             | M17        |
| GND             | M18        |
| GND             | M19        |
| GND             | N1         |
| GND             | N12        |
| GND             | N13        |
| GND             | N14        |
| GND             | N15        |
| GND             | N16        |
| GND             | N17        |
| GND             | N18        |
| GND             | N19        |
| GND             | N30        |
| GND             | P12        |
| GND             | P13        |
| GND             | P14        |
| GND             | P15        |
| GND             | P16        |
| GND             | P17        |
| GND             | P18        |
| GND             | P19        |
| GND             | R12        |
| GND             | R13        |
| GND             | R14        |
| GND             | R15        |
| GND             | R16        |
| GND             | R17        |
| GND             | R18        |
| GND             | R19        |
| GND             | R28        |
| GND             | R3         |


| FG1152          |            | FG1152          |            | FG1152          |            |
|-----------------|------------|-----------------|------------|-----------------|------------|
| AX2000 Function | Pin Number | AX2000 Function | Pin Number | AX2000 Function | Pin Number |
| IO51PB1F4       | J20        | IO69NB1F6       | C27        | IO86NB2F8       | J28        |
| IO52NB1F4       | B20        | IO69PB1F6       | C26        | IO86PB2F8       | J27        |
| IO52PB1F4       | A20        | IO70NB1F6       | H24        | IO87NB2F8       | M25        |
| IO53NB1F4       | F20        | IO70PB1F6       | G24        | IO87PB2F8       | L25        |
| IO53PB1F4       | E20        | IO71NB1F6       | H23        | IO88NB2F8       | L26        |
| IO54NB1F5       | B21        | IO71PB1F6       | G23        | IO88PB2F8       | K26        |
| IO54PB1F5       | A21        | IO72NB1F6       | B28        | IO89NB2F8       | G31        |
| IO55NB1F5       | K21        | IO72PB1F6       | A28        | IO89PB2F8       | F31        |
| IO55PB1F5       | J21        | IO73NB1F6       | E26        | IO90NB2F8       | H29        |
| IO56NB1F5       | D21        | IO73PB1F6       | E25        | IO90PB2F8       | G29        |
| IO56PB1F5       | C21        | IO74NB1F6       | F26        | IO91NB2F8       | K28        |
| IO57NB1F5       | G22        | IO74PB1F6       | F25        | IO91PB2F8       | K27        |
| IO57PB1F5       | G21        | IO75NB1F6       | K25        | IO92NB2F8       | J30        |
| IO58NB1F5       | E22        | IO75PB1F6       | K24        | IO92PB2F8       | H30        |
| IO58PB1F5       | E21        | IO76NB1F7       | D27        | IO93NB2F8       | L28        |
| IO59NB1F5       | D22        | IO76PB1F7       | D26        | IO93PB2F8       | L27        |
| IO59PB1F5       | C22        | IO77NB1F7       | B29        | IO94NB2F8       | K29        |
| IO60NB1F5       | B23        | IO77PB1F7       | A29        | IO94PB2F8       | J29        |
| IO60PB1F5       | A23        | IO78NB1F7       | D28        | IO95NB2F8       | K31        |
| IO61NB1F5       | H22        | IO78PB1F7       | C28        | IO95PB2F8       | J31        |
| IO61PB1F5       | H21        | IO79NB1F7       | H25        | IO96NB2F9       | J32        |
| IO62NB1F5       | C24        | IO79PB1F7       | G25        | IO96PB2F9       | H32        |
| IO62PB1F5       | C23        | IO80NB1F7       | F27        | IO97NB2F9       | M27        |
| IO63NB1F5       | F23        | IO80PB1F7       | E27        | IO97PB2F9       | M26        |
| IO63PB1F5       | F22        | IO81NB1F7       | J25        | IO98NB2F9       | L30        |
| IO64NB1F6       | B24        | IO81PB1F7       | J24        | IO98PB2F9       | K30        |
| IO64PB1F6       | A24        | IO82NB1F7       | D29        | IO99NB2F9       | N25        |
| IO65NB1F6       | J22        | IO82PB1F7       | C29        | IO99PB2F9       | N26        |
| IO65PB1F6       | K22        | IO83NB1F7       | H26        | IO100NB2F9      | M29        |
| IO66NB1F6       | B25        | IO83PB1F7       | G26        | IO100PB2F9      | L29        |
| IO66PB1F6       | A25        | IO84NB1F7       | F28        | IO101NB2F9      | L33        |
| IO67NB1F6       | K23        | IO84PB1F7       | E28        | IO101PB2F9      | L32        |
| IO67PB1F6       | J23        | IO85NB1F7       | H27        | IO102NB2F9      | K34        |
| IO68NB1F6       | F24        | IO85PB1F7       | G27        | IO102PB2F9      | K33        |
| IO68PB1F6       | E24        | Bank 2          |            | IO103NB2F9      | N28        |

| CQ208                |            |
|----------------------|------------|
| AX250 Function       | Pin Number |
| IO110PB7F7           | 19         |
| IO112NB7F7           | 16         |
| IO112PB7F7           | 17         |
| IO117NB7F7           | 12         |
| IO117PB7F7           | 13         |
| IO119NB7F7           | 10         |
| IO119PB7F7           | 11         |
| IO121PB7F7           | 7          |
| IO122NB7F7           | 5          |
| IO122PB7F7           | 6          |
| IO123NB7F7           | 3          |
| IO123PB7F7           | 4          |
| <b>Dedicated I/O</b> |            |
| GND                  | 9          |
| GND                  | 15         |
| GND                  | 21         |
| GND                  | 32         |
| GND                  | 39         |
| GND                  | 46         |
| GND                  | 51         |
| GND                  | 59         |
| GND                  | 65         |
| GND                  | 69         |
| GND                  | 90         |
| GND                  | 94         |
| GND                  | 99         |
| GND                  | 104        |
| GND                  | 113        |
| GND                  | 119        |
| GND                  | 125        |
| GND                  | 136        |
| GND                  | 143        |
| GND                  | 150        |
| GND                  | 155        |
| GND                  | 164        |
| GND                  | 169        |
| GND                  | 173        |

| CQ208          |            |
|----------------|------------|
| AX250 Function | Pin Number |
| GND            | 194        |
| GND            | 196        |
| GND            | 201        |
| GND/LP         | 208        |
| PRA            | 184        |
| PRB            | 183        |
| PRC            | 80         |
| PRD            | 79         |
| TCK            | 205        |
| TDI            | 204        |
| TDO            | 203        |
| TMS            | 206        |
| TRST           | 207        |
| VCCA           | 2          |
| VCCA           | 14         |
| VCCA           | 38         |
| VCCA           | 52         |
| VCCA           | 64         |
| VCCA           | 93         |
| VCCA           | 118        |
| VCCA           | 142        |
| VCCA           | 156        |
| VCCA           | 168        |
| VCCA           | 195        |
| VCCDA          | 1          |
| VCCDA          | 26         |
| VCCDA          | 53         |
| VCCDA          | 63         |
| VCCDA          | 78         |
| VCCDA          | 95         |
| VCCDA          | 105        |
| VCCDA          | 130        |
| VCCDA          | 157        |
| VCCDA          | 167        |
| VCCDA          | 182        |
| VCCDA          | 202        |
| VCCIB0         | 193        |

| CQ208          |            |
|----------------|------------|
| AX250 Function | Pin Number |
| VCCIB0         | 200        |
| VCCIB1         | 163        |
| VCCIB1         | 172        |
| VCCIB2         | 135        |
| VCCIB2         | 149        |
| VCCIB3         | 112        |
| VCCIB3         | 124        |
| VCCIB4         | 89         |
| VCCIB4         | 98         |
| VCCIB5         | 58         |
| VCCIB5         | 68         |
| VCCIB6         | 31         |
| VCCIB6         | 45         |
| VCCIB7         | 8          |
| VCCIB7         | 20         |
| VCCPLA         | 189        |
| VCCPLB         | 187        |
| VCCPLC         | 178        |
| VCCPLD         | 176        |
| VCCPLE         | 85         |
| VCCPLF         | 83         |
| VCCPLG         | 74         |
| VCCPLH         | 72         |
| VCOMPLA        | 190        |
| VCOMPLB        | 188        |
| VCOMPLC        | 179        |
| VCOMPLD        | 177        |
| VCOMPLE        | 86         |
| VCOMPLF        | 84         |
| VCOMPLG        | 75         |
| VCOMPLH        | 73         |
| VPUMP          | 158        |

## CQ256

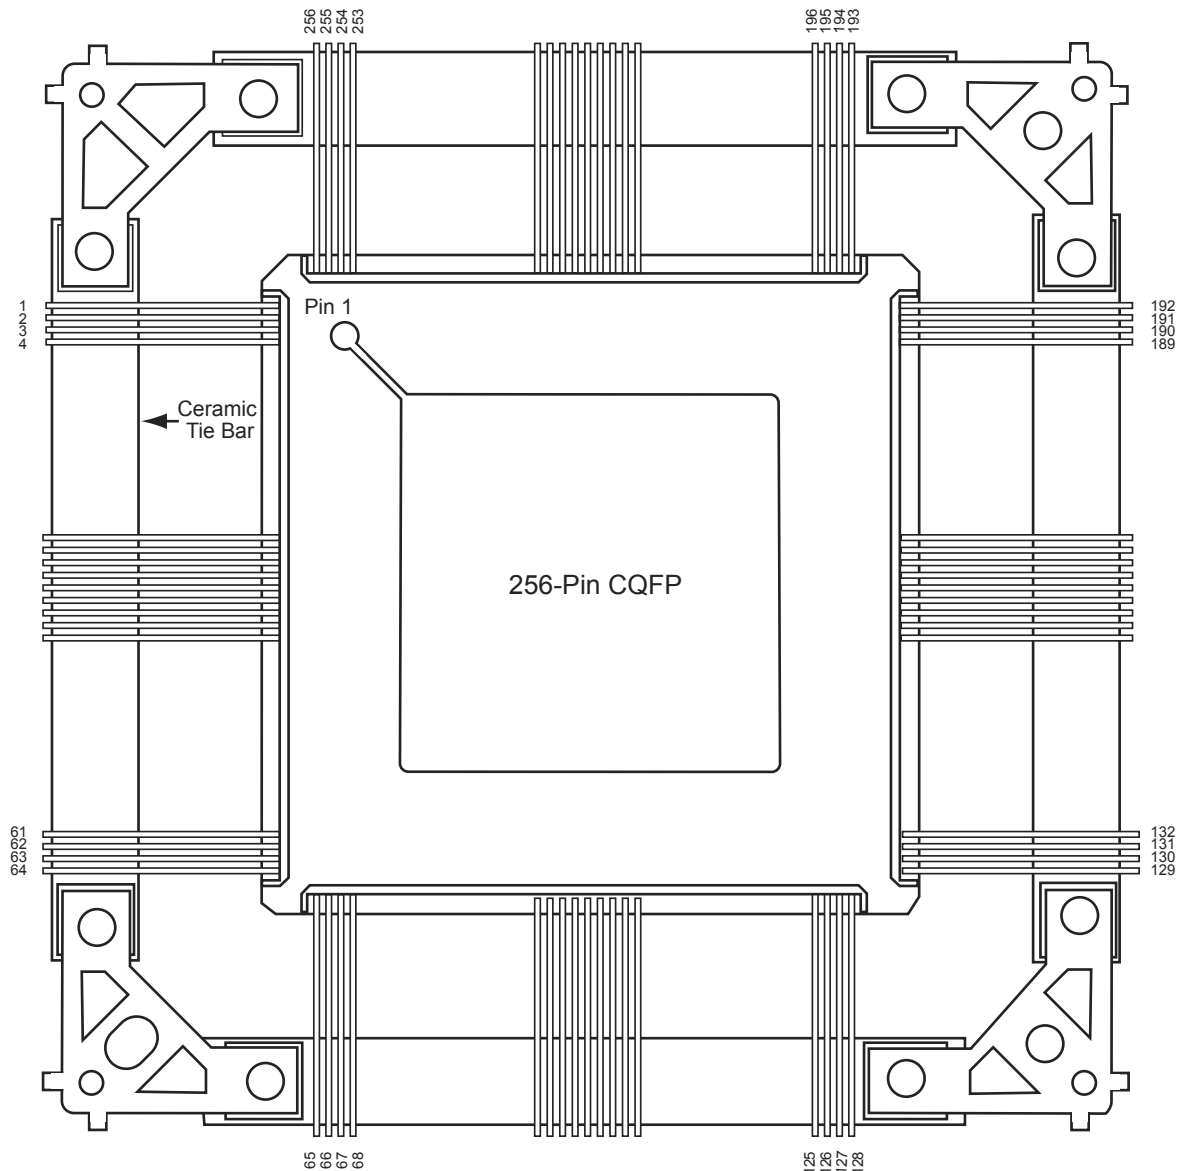

### Note

For Package Manufacturing and Environmental information, visit the Resource center at <http://www.microsemi.com/soc/products/solutions/package/docs.aspx>.

| CQ352            |            |
|------------------|------------|
| AX250 Function   | Pin Number |
| <b>Bank 0</b>    |            |
| IO00NB0F0        | 341        |
| IO00PB0F0        | 342        |
| IO01NB0F0        | 343        |
| IO02NB0F0        | 337        |
| IO02PB0F0        | 338        |
| IO04NB0F0        | 335        |
| IO04PB0F0        | 336        |
| IO06NB0F0        | 331        |
| IO06PB0F0        | 332        |
| IO08NB0F0        | 325        |
| IO08PB0F0        | 326        |
| IO10NB0F0        | 323        |
| IO10PB0F0        | 324        |
| IO12NB0F0/HCLKAN | 319        |
| IO12PB0F0/HCLKAP | 320        |
| IO13NB0F0/HCLKBN | 313        |
| IO13PB0F0/HCLKBP | 314        |
| <b>Bank 1</b>    |            |
| IO14NB1F1/HCLKCN | 305        |
| IO14PB1F1/HCLKCP | 306        |
| IO15NB1F1/HCLKDN | 299        |
| IO15PB1F1/HCLKDP | 300        |
| IO16NB1F1        | 289        |
| IO16PB1F1        | 290        |
| IO17NB1F1        | 295        |
| IO17PB1F1        | 296        |
| IO18NB1F1        | 287        |
| IO18PB1F1        | 288        |
| IO20NB1F1        | 283        |
| IO20PB1F1        | 284        |
| IO22NB1F1        | 277        |
| IO22PB1F1        | 278        |
| IO23NB1F1        | 281        |
| IO23PB1F1        | 282        |

| CQ352          |            |
|----------------|------------|
| AX250 Function | Pin Number |
| IO24NB1F1      | 275        |
| IO24PB1F1      | 276        |
| IO25NB1F1      | 271        |
| IO25PB1F1      | 272        |
| IO27NB1F1      | 269        |
| IO27PB1F1      | 270        |
| <b>Bank 2</b>  |            |
| IO29NB2F2      | 261        |
| IO29PB2F2      | 262        |
| IO30NB2F2      | 259        |
| IO30PB2F2      | 260        |
| IO31NB2F2      | 255        |
| IO31PB2F2      | 256        |
| IO33NB2F2      | 249        |
| IO33PB2F2      | 250        |
| IO34NB2F2      | 253        |
| IO34PB2F2      | 254        |
| IO35NB2F2      | 247        |
| IO35PB2F2      | 248        |
| IO36NB2F2      | 243        |
| IO36PB2F2      | 244        |
| IO37NB2F2      | 241        |
| IO37PB2F2      | 242        |
| IO38NB2F2      | 237        |
| IO38PB2F2      | 238        |
| IO39NB2F2      | 235        |
| IO39PB2F2      | 236        |
| IO41NB2F2      | 231        |
| IO41PB2F2      | 232        |
| IO42NB2F2      | 229        |
| IO42PB2F2      | 230        |
| IO43NB2F2      | 225        |
| IO43PB2F2      | 226        |
| IO44NB2F2      | 223        |
| IO44PB2F2      | 224        |

| CQ352          |            |
|----------------|------------|
| AX250 Function | Pin Number |
| <b>Bank 3</b>  |            |
| IO45NB3F3      | 217        |
| IO45PB3F3      | 218        |
| IO46NB3F3      | 219        |
| IO46PB3F3      | 220        |
| IO47NB3F3      | 213        |
| IO47PB3F3      | 214        |
| IO48NB3F3      | 211        |
| IO48PB3F3      | 212        |
| IO49NB3F3      | 207        |
| IO49PB3F3      | 208        |
| IO51NB3F3      | 205        |
| IO51PB3F3      | 206        |
| IO52NB3F3      | 201        |
| IO52PB3F3      | 202        |
| IO53NB3F3      | 199        |
| IO53PB3F3      | 200        |
| IO54NB3F3      | 195        |
| IO54PB3F3      | 196        |
| IO55NB3F3      | 193        |
| IO55PB3F3      | 194        |
| IO56NB3F3      | 187        |
| IO56PB3F3      | 188        |
| IO57NB3F3      | 189        |
| IO57PB3F3      | 190        |
| IO59NB3F3      | 183        |
| IO59PB3F3      | 184        |
| IO60NB3F3      | 181        |
| IO60PB3F3      | 182        |
| IO61NB3F3      | 179        |
| IO61PB3F3      | 180        |
| <b>Bank 4</b>  |            |
| IO62NB4F4      | 172        |
| IO62PB4F4      | 173        |
| IO64NB4F4      | 166        |

| CQ352          |            |
|----------------|------------|
| AX500 Function | Pin Number |
| VCCDA          | 346        |
| VCCIB0         | 321        |
| VCCIB0         | 333        |
| VCCIB0         | 344        |
| VCCIB1         | 273        |
| VCCIB1         | 285        |
| VCCIB1         | 297        |
| VCCIB2         | 227        |
| VCCIB2         | 239        |
| VCCIB2         | 245        |
| VCCIB2         | 257        |
| VCCIB3         | 185        |
| VCCIB3         | 197        |
| VCCIB3         | 203        |
| VCCIB3         | 215        |
| VCCIB4         | 144        |
| VCCIB4         | 156        |
| VCCIB4         | 168        |
| VCCIB5         | 96         |
| VCCIB5         | 108        |
| VCCIB5         | 120        |
| VCCIB6         | 50         |
| VCCIB6         | 62         |
| VCCIB6         | 68         |
| VCCIB6         | 80         |
| VCCIB7         | 8          |
| VCCIB7         | 20         |
| VCCIB7         | 26         |
| VCCIB7         | 38         |
| VCCPLA         | 317        |
| VCCPLB         | 315        |
| VCCPLC         | 303        |
| VCCPLD         | 301        |
| VCCPLE         | 140        |
| VCCPLF         | 138        |

| CQ352          |            |
|----------------|------------|
| AX500 Function | Pin Number |
| VCCPLG         | 126        |
| VCCPLH         | 124        |
| VCOMPLA        | 318        |
| VCOMPLB        | 316        |
| VCOMPLC        | 304        |
| VCOMPLD        | 302        |
| VCOMPLE        | 141        |
| VCOMPLF        | 139        |
| VCOMPLG        | 127        |
| VCOMPLH        | 125        |
| VPUMP          | 267        |

| CG624           |            | CG624           |            | CG624           |            |
|-----------------|------------|-----------------|------------|-----------------|------------|
| AX1000 Function | Pin Number | AX1000 Function | Pin Number | AX1000 Function | Pin Number |
| GND             | A8         | GND/LP          | E8         | GND             | V1         |
| GND             | AA10       | GND             | H1         | GND             | V25        |
| GND             | AA16       | GND             | H21        | GND             | V5         |
| GND             | AA18       | GND             | H25        | NC              | A14        |
| GND             | AA21       | GND             | K21        | NC              | AA20       |
| GND             | AA5        | GND             | K23        | NC              | AB13       |
| GND             | AB22       | GND             | K3         | NC              | AD4        |
| GND             | AB4        | GND             | L11        | NC              | AE12       |
| GND             | AC10       | GND             | L12        | NC              | F21        |
| GND             | AC16       | GND             | L13        | NC              | G10        |
| GND             | AC23       | GND             | L14        | PRA             | F13        |
| GND             | AC3        | GND             | L15        | PRB             | A13        |
| GND             | AD1        | GND             | M11        | PRC             | AB12       |
| GND             | AD2        | GND             | M12        | PRD             | AE13       |
| GND             | AD24       | GND             | M13        | TCK             | F5         |
| GND             | AD25       | GND             | M14        | TDI             | C5         |
| GND             | AE1        | GND             | M15        | TDO             | F6         |
| GND             | AE18       | GND             | N11        | TMS             | D6         |
| GND             | AE2        | GND             | N12        | TRST            | E6         |
| GND             | AE24       | GND             | N13        | VCCA            | AB20       |
| GND             | AE25       | GND             | N14        | VCCA            | F22        |
| GND             | AE8        | GND             | N15        | VCCA            | F4         |
| GND             | B1         | GND             | P11        | VCCA            | J17        |
| GND             | B2         | GND             | P12        | VCCA            | J9         |
| GND             | B24        | GND             | P13        | VCCA            | K10        |
| GND             | B25        | GND             | P14        | VCCA            | K11        |
| GND             | C10        | GND             | P15        | VCCA            | K15        |
| GND             | C16        | GND             | R11        | VCCA            | K16        |
| GND             | C23        | GND             | R12        | VCCA            | L10        |
| GND             | C3         | GND             | R13        | VCCA            | L16        |
| GND             | D22        | GND             | R14        | VCCA            | R10        |
| GND             | D4         | GND             | R15        | VCCA            | R16        |
| GND             | E10        | GND             | T21        | VCCA            | T10        |
| GND             | E16        | GND             | T23        | VCCA            | T11        |
| GND             | E21        | GND             | T3         | VCCA            | T15        |
| GND             | E5         | GND             | T5         | VCCA            | T16        |



| Revision              | Changes                                                                                                                                                                | Page           |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Revision 12<br>(v2.4) | Revised ordering information and timing data to reflect phase out of –3 speed grade options.                                                                           |                |
|                       | Table 2-3 was updated.                                                                                                                                                 | 2              |
| Revision 11<br>(v2.3) | The "Packaging Data" section is new.                                                                                                                                   | iv             |
|                       | Table 2-2 was updated.                                                                                                                                                 | 2-1            |
|                       | "VCCDA Supply Voltage" was updated.                                                                                                                                    | 2-9            |
|                       | "PRA/B/C/D Probe A, B, C and D" was updated.                                                                                                                           | 2-10           |
|                       | The "User I/Os" was updated.                                                                                                                                           | 2-11           |
| Revision 10<br>(v2.2) | Figure 1-3 was updated.                                                                                                                                                | 1-2            |
|                       | Table 2-2 was updated.                                                                                                                                                 | 2-1            |
|                       | The "Power-Up/Down Sequence" section was updated.                                                                                                                      | 2-1            |
|                       | Table 2-4 was updated.                                                                                                                                                 | 2-3            |
|                       | Table 2-5 was updated.                                                                                                                                                 | 2-4            |
|                       | The "Timing Characteristics" section was added.                                                                                                                        | 2-7            |
|                       | Table 2-7 was updated.                                                                                                                                                 | 2-7            |
|                       | Figure 2-1 was updated.                                                                                                                                                | 2-8            |
|                       | The External Setup and Clock-to-Out (Pad-to-Pad) equations in the "Hardwired Clock – Using LVTTTL 24 mA High Slew Clock I/O" section were updated.                     | 2-8            |
|                       | The External Setup and Clock-to-Out (Pad-to-Pad) in the "Routed Clock – Using LVTTTL 24 mA High Slew Clock I/O" section were updated.                                  | 2-8            |
|                       | The "Global Pins" section was updated.                                                                                                                                 | 2-10           |
|                       | The "User I/Os" section was updated.                                                                                                                                   | 2-11           |
|                       | Table 2-17 was updated.                                                                                                                                                | 2-19           |
|                       | Figure 2-8 was updated.                                                                                                                                                | 2-20           |
|                       | Figure 2-13 and Figure 2-14 were updated.                                                                                                                              | 2-24           |
|                       | The following timing parameters were renamed in I/O timing characteristic tables from Table 2-22 to Table 2-60:<br>$t_{IOCLKQ} > t_{CLKQ}$<br>$t_{IOCLKY} > t_{OCLKQ}$ | 2-26 to 2-52   |
|                       | Timing numbers were updated from Table 2-22 to Table 2-78.                                                                                                             | 2-26 to 2-69   |
|                       | The "R-Cell" section was updated.                                                                                                                                      | 2-58           |
|                       | Figure 2-59 was updated.                                                                                                                                               | 2-89           |
|                       | Figure 2-60 was updated.                                                                                                                                               | 2-89           |
|                       | Figure 2-67 was updated.                                                                                                                                               | 2-100          |
|                       | Figure 2-68 was updated.                                                                                                                                               | 2-101          |
|                       | Table 2-89 to Table 2-93 were updated.                                                                                                                                 | 2-90 to 2-94   |
|                       | Table 2-98 to Table 2-102 were updated.                                                                                                                                | 2-102 to 2-106 |