



Welcome to [E-XFL.COM](#)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                            |
| Number of LABs/CLBs            | -                                                                                                                                                                   |
| Number of Logic Elements/Cells | 10200                                                                                                                                                               |
| Total RAM Bits                 | 282624                                                                                                                                                              |
| Number of I/O                  | 147                                                                                                                                                                 |
| Number of Gates                | -                                                                                                                                                                   |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                                                       |
| Mounting Type                  | Surface Mount                                                                                                                                                       |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                                                  |
| Package / Case                 | 208-BFQFP                                                                                                                                                           |
| Supplier Device Package        | 208-PQFP (28x28)                                                                                                                                                    |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfec10e-3qn208i">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfec10e-3qn208i</a> |

## **Introduction**

The LatticeECP/EC family of FPGA devices is optimized to deliver mainstream FPGA features at low cost. For maximum performance and value, the LatticeECP™ (Economy Plus) FPGA concept combines an efficient FPGA fabric with high-speed dedicated functions. Lattice's first family to implement this approach is the LatticeECP-DSP™ (Economy Plus DSP) family, providing dedicated high-performance DSP blocks on-chip. The LatticeEC™ (Economy) family supports all the general purpose features of LatticeECP devices without dedicated function blocks to achieve lower cost solutions.

The LatticeECP/EC FPGA fabric, which was designed from the outset with low cost in mind, contains all the critical FPGA elements: LUT-based logic, distributed and embedded memory, PLLs and support for mainstream I/Os. Dedicated DDR memory interface logic is also included to support this memory that is becoming increasingly prevalent in cost-sensitive applications.

The ispLEVER® design tool suite from Lattice allows large complex designs to be efficiently implemented using the LatticeECP/EC FPGA family. Synthesis library support for LatticeECP/EC is available for popular logic synthesis tools. The ispLEVER tool uses the synthesis tool output along with the constraints from its floor planning tools to place and route the design in the LatticeECP/EC device. The ispLEVER tool extracts the timing from the routing and back-annotates it into the design for timing verification.

Lattice provides many pre-designed IP (Intellectual Property) ispLeverCORE™ modules for the LatticeECP/EC family. By using these IPs as standardized blocks, designers are free to concentrate on the unique aspects of their design, increasing their productivity.

## Architecture Overview

The LatticeECP-DSP and LatticeEC architectures contain an array of logic blocks surrounded by Programmable I/O Cells (PIC). Interspersed between the rows of logic blocks are rows of sysMEM Embedded Block RAM (EBR), as shown in Figures 2-1 and 2-2. In addition, LatticeECP-DSP supports an additional row of DSP blocks, as shown in Figure 2-2.

There are two kinds of logic blocks, the Programmable Functional Unit (PFU) and Programmable Functional unit without RAM/ROM (PFF). The PFU contains the building blocks for logic, arithmetic, RAM, ROM and register functions. The PFF block contains building blocks for logic, arithmetic and ROM functions. Both PFU and PFF blocks are optimized for flexibility, allowing complex designs to be implemented quickly and efficiently. Logic Blocks are arranged in a two-dimensional array. Only one type of block is used per row. The PFU blocks are used on the outside rows. The rest of the core consists of rows of PFF blocks interspersed with rows of PFU blocks. For every three rows of PFF blocks there is a row of PFU blocks.


Each PIC block encompasses two PIOs (PIO pairs) with their respective sysI/O interfaces. PIO pairs on the left and right edges of the device can be configured as LVDS transmit/receive pairs. sysMEM EBRs are large dedicated fast memory blocks. They can be configured as RAM or ROM.

The PFU, PFF, PIC and EBR Blocks are arranged in a two-dimensional grid with rows and columns as shown in Figure 2-1. The blocks are connected with many vertical and horizontal routing channel resources. The place and route software tool automatically allocates these routing resources.


At the end of the rows containing the sysMEM Blocks are the sysCLOCK Phase Locked Loop (PLL) Blocks. These PLLs have multiply, divide and phase shifting capability; they are used to manage the phase relationship of the clocks. The LatticeECP/EC architecture provides up to four PLLs per device.

Every device in the family has a JTAG Port with internal Logic Analyzer (ispTRACY) capability. The sysCONFIG™ port which allows for serial or parallel device configuration. The LatticeECP/EC devices use 1.2V as their core voltage.

**Figure 2-1. Simplified Block Diagram, LatticeEC Device (Top Level)**

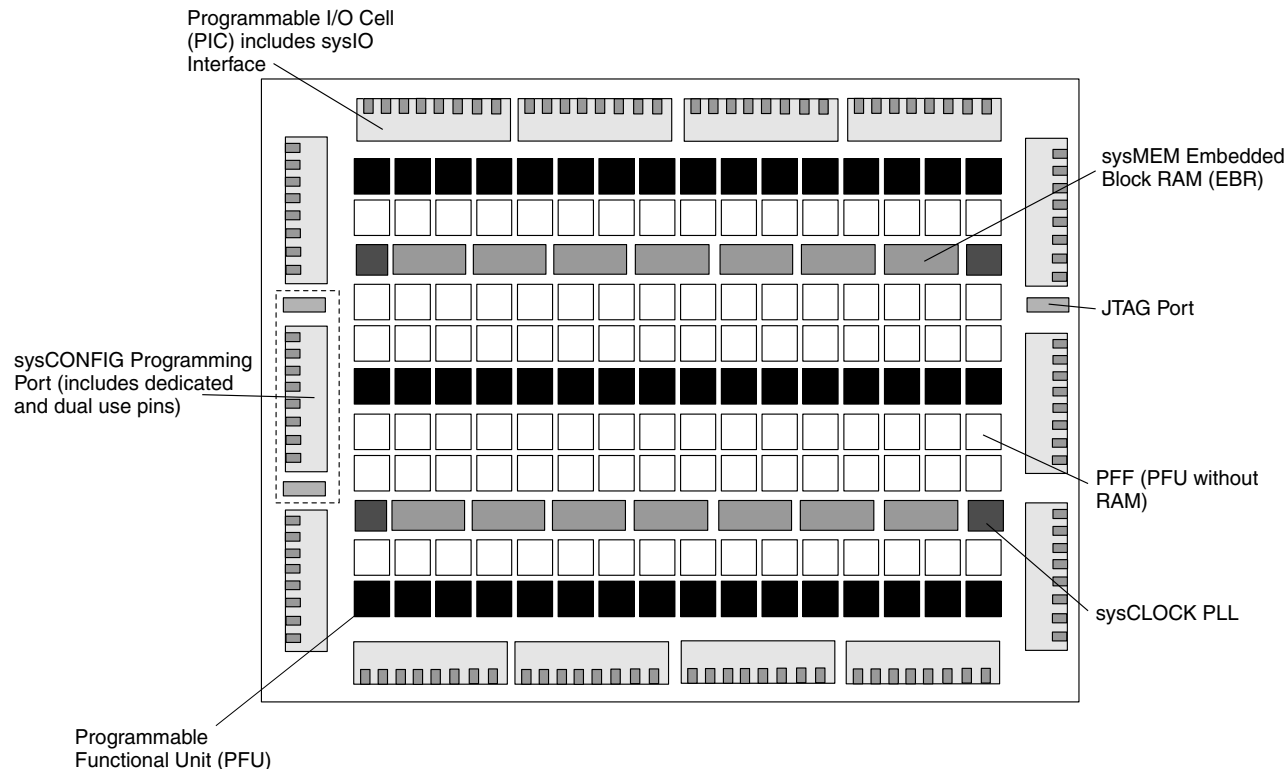

**Figure 2-2. Simplified Block Diagram, LatticeECP-DSP Device (Top Level)**

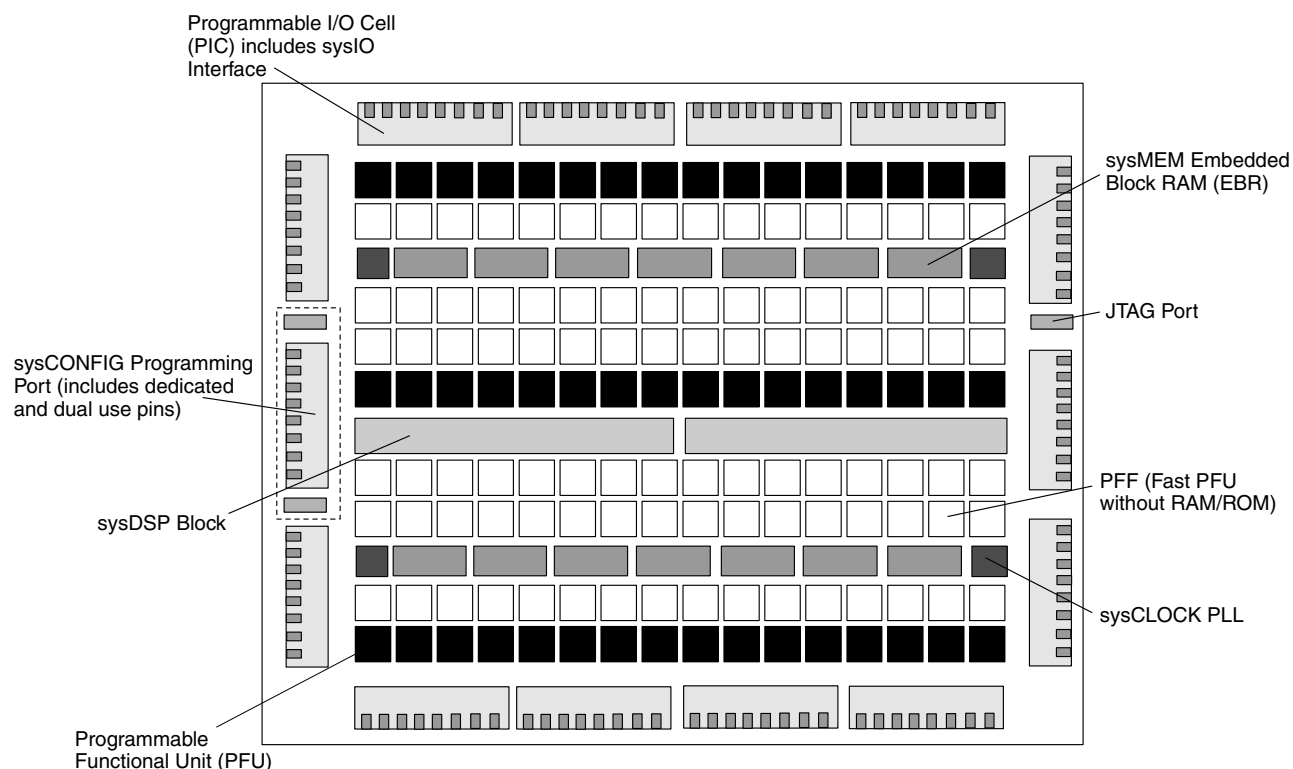


## Memory Cascading

Larger and deeper blocks of RAM can be created using EBR sysMEM Blocks. Typically, the Lattice design tools cascade memory transparently, based on specific design inputs.

## Single, Dual and Pseudo-Dual Port Modes

Figure 2-15 shows the four basic memory configurations and their input/output names. In all the sysMEM RAM modes the input data and address for the ports are registered at the input of the memory array. The output data of the memory is optionally registered at the output.

**Figure 2-15. sysMEM EBR Primitives**

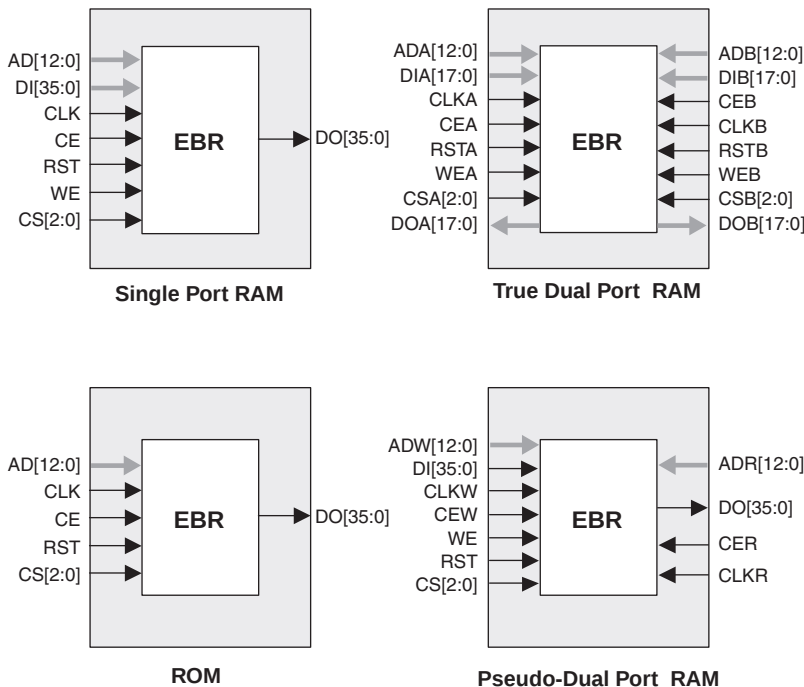

The EBR memory supports three forms of write behavior for single port or dual port operation:

1. **Normal** – data on the output appears only during read cycle. During a write cycle, the data (at the current address) does not appear on the output. This mode is supported for all data widths.
2. **Write Through** – a copy of the input data appears at the output of the same port during a write cycle. This mode is supported for all data widths.
3. **Read-Before-Write** – when new data is being written, the old content of the address appears at the output. This mode is supported for x9, x18 and x36 data widths.


## Memory Core Reset

The memory array in the EBR utilizes latches at the A and B output ports. These latches can be reset asynchronously or synchronously. RSTA and RSTB are local signals, which reset the output latches associated with Port A and Port B, respectively. The Global Reset (GSRN) signal resets both ports. The output data latches and associated resets for both ports are as shown in Figure 2-16.

### RSDS

The LatticeECP/EC devices support differential RSDS standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The RSDS input standard is supported by the LVDS differential input buffer. The scheme shown in Figure 3-4 is one possible solution for RSDS standard implementation. Use LVDS25E mode with suggested resistors for RSDS operation. Resistor values in Figure 3-4 are industry standard values for 1% resistors.


**Figure 3-4. RSDS (Reduced Swing Differential Standard)**

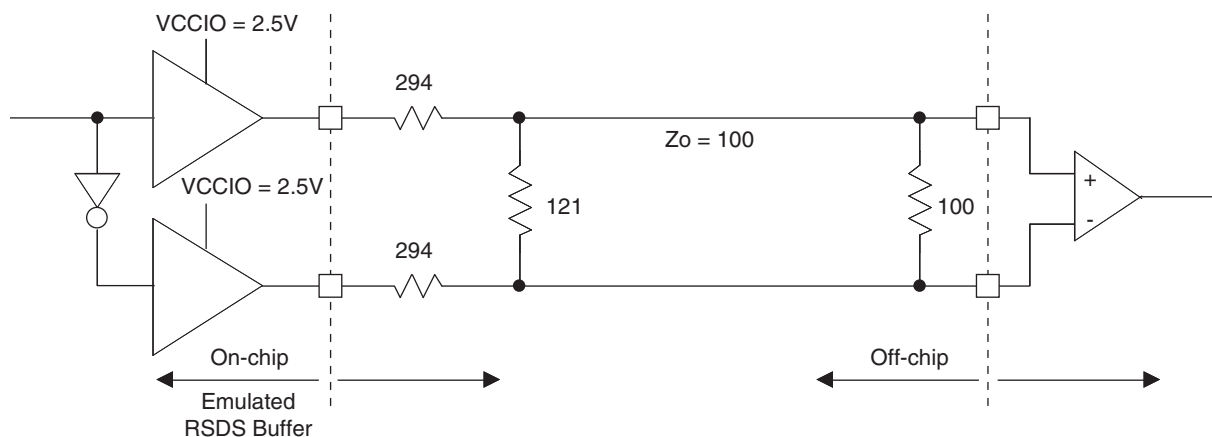

**Table 3-4. RSDS DC Conditions**


| Parameter  | Description                 | Typical | Units |
|------------|-----------------------------|---------|-------|
| $Z_{OUT}$  | Output impedance            | 20      | ohm   |
| $R_S$      | Driver series resistor      | 294     | ohm   |
| $R_P$      | Driver parallel resistor    | 121     | ohm   |
| $R_T$      | Receiver termination        | 100     | ohm   |
| $V_{OH}$   | Output high voltage         | 1.35    | V     |
| $V_{OL}$   | Output low voltage          | 1.15    | V     |
| $V_{OD}$   | Output differential voltage | 0.20    | V     |
| $V_{CM}$   | Output common mode voltage  | 1.25    | V     |
| $Z_{BACK}$ | Back impedance              | 101.5   | ohm   |
| $I_{DC}$   | DC output current           | 3.66    | mA    |

**Figure 3-10. Read Before Write (SP Read/Write on Port A, Input Registers Only)**

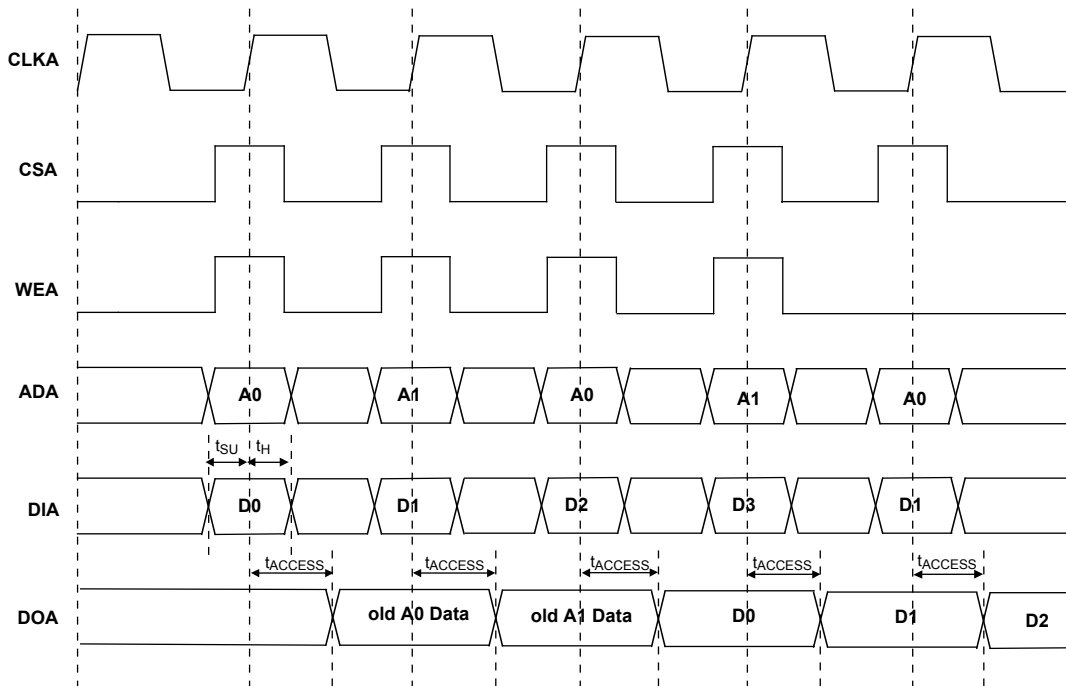

Note: Input data and address are registered at the positive edge of the clock and output data appears after the positive edge of the clock.

**Figure 3-11. Write Through (SP Read/Write On Port A, Input Registers Only)**

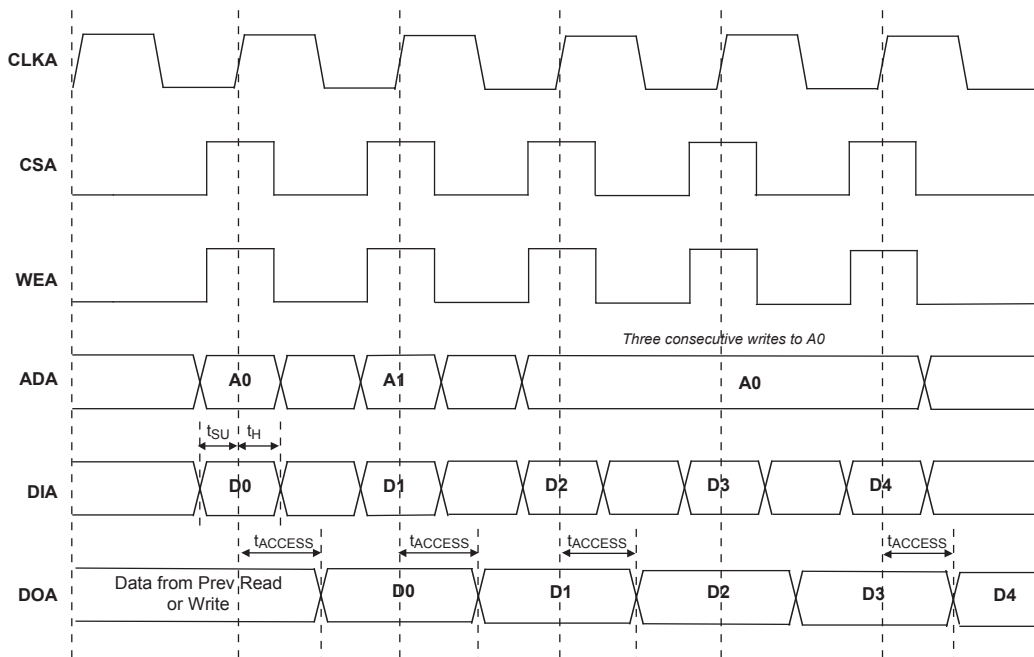

Note: Input data and address are registered at the positive edge of the clock and output data appears after the positive edge of the clock.

**LatticeECP/EC Family Timing Adders<sup>1, 2, 3</sup> (Continued)**
**Over Recommended Operating Conditions**

| Buffer Type    | Description                    | -5    | -4    | -3    | Units |
|----------------|--------------------------------|-------|-------|-------|-------|
| HSTL15_II      | HSTL_15 class II               | 0.10  | 0.12  | 0.14  | ns    |
| HSTL15_III     | HSTL_15 class III              | 0.10  | 0.12  | 0.14  | ns    |
| HSTL15D_I      | Differential HSTL 15 class I   | 0.08  | 0.10  | 0.11  | ns    |
| HSTL15D_III    | Differential HSTL 15 class III | 0.10  | 0.12  | 0.14  | ns    |
| SSTL33_I       | SSTL_3 class I                 | -0.05 | -0.06 | -0.07 | ns    |
| SSTL33_II      | SSTL_3 class II                | 0.40  | 0.48  | 0.56  | ns    |
| SSTL33D_I      | Differential SSTL_3 class I    | -0.05 | -0.06 | -0.07 | ns    |
| SSTL33D_II     | Differential SSTL_3 class II   | 0.40  | 0.48  | 0.56  | ns    |
| SSTL25_I       | SSTL_2 class I                 | 0.05  | 0.07  | 0.08  | ns    |
| SSTL25_II      | SSTL_2 class II                | 0.25  | 0.30  | 0.35  | ns    |
| SSTL25D_I      | Differential SSTL_2 class I    | 0.05  | 0.07  | 0.08  | ns    |
| SSTL25D_II     | Differential SSTL_2 class II   | 0.25  | 0.30  | 0.35  | ns    |
| SSTL18_I       | SSTL_1.8 class I               | 0.01  | 0.01  | 0.01  | ns    |
| SSTL18D_I      | Differential SSTL_1.8 class I  | 0.01  | 0.01  | 0.01  | ns    |
| LVTTTL33_4mA   | LVTTTL 4mA drive               | 0.09  | 0.11  | 0.13  | ns    |
| LVTTTL33_8mA   | LVTTTL 8mA drive               | 0.07  | 0.08  | 0.09  | ns    |
| LVTTTL33_12mA  | LVTTTL 12mA drive              | -0.03 | -0.04 | -0.05 | ns    |
| LVTTTL33_16mA  | LVTTTL 16mA drive              | 0.36  | 0.43  | 0.51  | ns    |
| LVTTTL33_20mA  | LVTTTL 20mA drive              | 0.28  | 0.33  | 0.39  | ns    |
| LVC MOS33_4mA  | LVC MOS 3.3 4mA drive          | 0.09  | 0.11  | 0.13  | ns    |
| LVC MOS33_8mA  | LVC MOS 3.3 8mA drive          | 0.07  | 0.08  | 0.09  | ns    |
| LVC MOS33_12mA | LVC MOS 3.3 12mA drive         | -0.03 | -0.04 | -0.05 | ns    |
| LVC MOS33_16mA | LVC MOS 3.3 16mA drive         | 0.36  | 0.43  | 0.51  | ns    |
| LVC MOS33_20mA | LVC MOS 3.3 20mA drive         | 0.28  | 0.33  | 0.39  | ns    |
| LVC MOS25_4mA  | LVC MOS 2.5 4mA drive          | 0.18  | 0.21  | 0.25  | ns    |
| LVC MOS25_8mA  | LVC MOS 2.5 8mA drive          | 0.10  | 0.12  | 0.14  | ns    |
| LVC MOS25_12mA | LVC MOS 2.5 12mA drive         | 0.00  | 0.00  | 0.00  | ns    |
| LVC MOS25_16mA | LVC MOS 2.5 16mA drive         | 0.22  | 0.26  | 0.31  | ns    |
| LVC MOS25_20mA | LVC MOS 2.5 20mA drive         | 0.14  | 0.16  | 0.19  | ns    |
| LVC MOS18_4mA  | LVC MOS 1.8 4mA drive          | 0.15  | 0.18  | 0.21  | ns    |
| LVC MOS18_8mA  | LVC MOS 1.8 8mA drive          | 0.06  | 0.08  | 0.09  | ns    |
| LVC MOS18_12mA | LVC MOS 1.8 12mA drive         | 0.01  | 0.01  | 0.01  | ns    |
| LVC MOS18_16mA | LVC MOS 1.8 16mA drive         | 0.16  | 0.19  | 0.22  | ns    |
| LVC MOS15_4mA  | LVC MOS 1.5 4mA drive          | 0.26  | 0.31  | 0.36  | ns    |
| LVC MOS15_8mA  | LVC MOS 1.5 8mA drive          | 0.04  | 0.04  | 0.05  | ns    |
| LVC MOS12_2mA  | LVC MOS 1.2 2mA drive          | 0.36  | 0.43  | 0.50  | ns    |
| LVC MOS12_6mA  | LVC MOS 1.2 6mA drive          | 0.08  | 0.10  | 0.11  | ns    |
| LVC MOS12_4mA  | LVC MOS 1.2 4mA drive          | 0.36  | 0.43  | 0.50  | ns    |
| PCI33          | PCI33                          | 1.05  | 1.26  | 1.46  | ns    |

1. Timing adders are characterized but not tested on every device.

2. LVC MOS timing measured with the load specified in Switching Test Conditions table of this document.

3. All other standards according to the appropriate specification.

Timing v.G 0.30

## LatticeECP/EC sysCONFIG Port Timing Specifications (Continued)

Over Recommended Operating Conditions

| Parameter    | Description                               | Min.     | Typ. | Max.     | Units |
|--------------|-------------------------------------------|----------|------|----------|-------|
| $t_{SOE}$    | CSSPIN Active Setup Time                  | 300      |      | —        | ns    |
| $t_{CSPID}$  | CSSPIN Low to First Clock Edge Setup Time | 300+3cyc |      | 600+6cyc | ns    |
| $f_{MAXSPI}$ | Max Frequency for SPI                     | —        |      | 25       | MHz   |
| $t_{SUSPI}$  | SOSPI Data Setup Time Before CCLK         | 7        |      | —        | ns    |
| $t_{HSPI}$   | SOSPI Data Hold Time After CCLK           | 1        |      | —        | ns    |

Timing v.G 0.30

### Master Clock

| Clock Mode | Min. | Typ. | Max. | Units |
|------------|------|------|------|-------|
| 2.5MHz     | 1.75 | 2.5  | 3.25 | MHz   |
| 5 MHz      | 3.78 | 5.4  | 7.02 | MHz   |
| 10 MHz     | 7    | 10   | 13   | MHz   |
| 15 MHz     | 10.5 | 15   | 19.5 | MHz   |
| 20 MHz     | 14   | 20   | 26   | MHz   |
| 25 MHz     | 18.2 | 26   | 33.8 | MHz   |
| 30 MHz     | 21   | 30   | 39   | MHz   |
| 35 MHz     | 23.8 | 34   | 44.2 | MHz   |
| 40 MHz     | 28.7 | 41   | 53.3 | MHz   |
| 45 MHz     | 31.5 | 45   | 58.5 | MHz   |
| 50 MHz     | 35.7 | 51   | 66.3 | MHz   |
| 55 MHz     | 38.5 | 55   | 71.5 | MHz   |
| 60 MHz     | 42   | 60   | 78   | MHz   |
| Duty Cycle | 40   | —    | 60   | %     |

Timing v.G 0.30

## PICs and DDR Data (DQ) Pins Associated with the DDR Strobe (DQS) Pin

| PICs Associated with DQS Strobe | PIO Within PIC | DDR Strobe (DQS) and Data (DQ) Pins |
|---------------------------------|----------------|-------------------------------------|
| P[Edge] [n-4]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |
| P[Edge] [n-3]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |
| P[Edge] [n-2]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |
| P[Edge] [n-1]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |
| P[Edge] [n]                     | A              | [Edge]DQSn                          |
|                                 | B              | DQ                                  |
| P[Edge] [n+1]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |
| P[Edge] [n+2]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |
| P[Edge] [n+3]                   | A              | DQ                                  |
|                                 | B              | DQ                                  |

**Notes:**

1. "n" is a Row/Column PIC number
2. The DDR interface is designed for memories that support one DQS strobe per eight bits of data. In some packages, all the potential DDR data (DQ) pins may not be available.
3. PIC numbering definitions are provided in the "Signal Names" column of the Signal Descriptions table.

## Power Supply and NC Connections

| Signals        | 100 TQFP                      | 144 TQFP                                                                                                                                              | 208 PQFP                                                                                                                                                                                                                                                                                                                                                                | 256 fpBGA                                                                                                                                                                                                                   |
|----------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VCC            | 12, 64                        | <b>EC1, EC3:</b> 13, 92, 99<br><b>ECP/EC6:</b> 11, 13, 92, 99                                                                                         | <b>EC1, EC3:</b> 26, 128, 135<br><b>ECP/EC6:</b> 24, 26, 128, 135<br><b>ECP/EC10:</b> 5, 24, 26, 128, 135, 152                                                                                                                                                                                                                                                          | E12, E5, E8, M12, M5, M9, F6, F11, L11, L6                                                                                                                                                                                  |
| VCCIO0         | 100                           | 136, 143                                                                                                                                              | <b>EC1:</b> 187, 208<br><b>EC3, ECP/EC6, ECP/EC10:</b> 187, 197, 208                                                                                                                                                                                                                                                                                                    | F7, F8                                                                                                                                                                                                                      |
| VCCIO1         | 86                            | 110, 125                                                                                                                                              | 157, 176                                                                                                                                                                                                                                                                                                                                                                | F9, F10                                                                                                                                                                                                                     |
| VCCIO2         | 73                            | 108                                                                                                                                                   | <b>EC1:</b> 155<br><b>EC3, ECP/EC6, ECP/EC10:</b> 145, 155                                                                                                                                                                                                                                                                                                              | G11, H11                                                                                                                                                                                                                    |
| VCCIO3         | 56                            | 73, 84                                                                                                                                                | 106, 120                                                                                                                                                                                                                                                                                                                                                                | J11, K11                                                                                                                                                                                                                    |
| VCCIO4         | 38                            | 55, 71                                                                                                                                                | 85, 104                                                                                                                                                                                                                                                                                                                                                                 | L9, L10                                                                                                                                                                                                                     |
| VCCIO5         | 26                            | 38, 44                                                                                                                                                | <b>EC1:</b> 53, 74<br><b>EC2, ECP/EC6, ECP/EC10:</b> 53, 64, 74                                                                                                                                                                                                                                                                                                         | L7, L8                                                                                                                                                                                                                      |
| VCCIO6         | 24                            | 24, 36                                                                                                                                                | 37, 51                                                                                                                                                                                                                                                                                                                                                                  | J6, K6                                                                                                                                                                                                                      |
| VCCIO7         | 2                             | 1                                                                                                                                                     | <b>EC1:</b> 2<br><b>EC3, ECP/EC6, ECP/EC10:</b> 2, 13                                                                                                                                                                                                                                                                                                                   | G6, H6                                                                                                                                                                                                                      |
| VCCJ           | 18                            | 19                                                                                                                                                    | 32                                                                                                                                                                                                                                                                                                                                                                      | L4                                                                                                                                                                                                                          |
| VCCAUX         | 37, 87                        | 54, 126                                                                                                                                               | <b>EC1:</b> 84, 177<br><b>EC3, ECP/EC6, ECP/EC10:</b> 22, 84, 136, 177                                                                                                                                                                                                                                                                                                  | B15, R2                                                                                                                                                                                                                     |
| VCCPLL         | —                             | —                                                                                                                                                     | —                                                                                                                                                                                                                                                                                                                                                                       | —                                                                                                                                                                                                                           |
| GND, GND0-GND7 | 1, 14, 25, 35, 51, 68, 74, 89 | <b>EC1, EC3:</b> 15, 28, 37, 52, 63, 72, 80, 96, 98, 109, 117, 128, 144<br><b>ECP/EC6:</b> 12, 15, 28, 37, 52, 63, 72, 80, 96, 98, 109, 117, 128, 144 | <b>EC1:</b> 1, 28, 41, 52, 82, 93, 105, 116, 132, 134, 156, 168, 179<br><b>EC3:</b> 1, 28, 41, 52, 72, 82, 93, 105, 116, 132, 134, 138, 156, 168, 179, 189<br><b>ECP/EC6:</b> 1, 18, 25, 28, 41, 52, 72, 82, 93, 105, 116, 132, 134, 138, 156, 168, 179, 189<br><b>ECP/EC10:</b> 1, 6, 18, 25, 28, 41, 52, 72, 82, 93, 105, 116, 132, 134, 138, 151, 156, 168, 179, 189 | A1, A16, G10, G7, G8, G9, H10, H7, H8, H9, J10, J7, J8, J9, K10, K7, K8, K9, T1, T16                                                                                                                                        |
| NC             | —                             | <b>EC1, EC3:</b> 11, 12<br><b>ECP6/EC6:</b> None                                                                                                      | <b>EC1:</b> 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 18, 22, 24, 25, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 72, 103, 136, 138, 144, 145, 146, 147, 148, 149, 150, 151, 152, 158, 189, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207<br><b>EC3:</b> 5, 6, 18, 24, 25, 103, 151, 152, 158<br><b>ECP/EC6:</b> 5, 6, 151, 152<br><b>ECP/EC10:</b> None               | <b>EC3:</b> G5, H5, F2, F1, H4, H3, G2, G1, J4, J3, J5, K5, H2, H1, J2, J1, R12, H16, H15, G16, G15, K12, J12, J14, J15, F16, F15, J13, H13, H14, G14, E16, E15, B13, C13<br><b>ECP/EC10:</b> None<br><b>ECP/EC15:</b> None |

**LFEC1, LFEC3 Logic Signal Connections: 100 TQFP (Cont.)**

| Pin Number | LFEC1        |      |      |                | LFEC3        |      |      |                |
|------------|--------------|------|------|----------------|--------------|------|------|----------------|
|            | Pin Function | Bank | LVDS | Dual Function  | Pin Function | Bank | LVDS | Dual Function  |
| 41         | PB11A        | 4    | T    | VREF1_4        | PB19A        | 4    | T    | VREF1_4        |
| 42         | PB11B        | 4    | C    | CSN            | PB19B        | 4    | C    | CSN            |
| 43         | PB12B        | 4    |      | D0/SPID7       | PB20B        | 4    |      | D0/SPID7       |
| 44         | PB13A        | 4    | T    | D2/SPID5       | PB21A        | 4    | T    | D2/SPID5       |
| 45         | PB13B        | 4    | C    | D1/SPID6       | PB21B        | 4    | C    | D1/SPID6       |
| 46         | PB14A        | 4    | T    | BDQS14         | PB22A        | 4    | T    | BDQS22         |
| 47         | PB14B        | 4    | C    | D3/SPID4       | PB22B        | 4    | C    | D3/SPID4       |
| 48         | PB15B        | 4    |      | D4/SPID3       | PB23B        | 4    |      | D4/SPID3       |
| 49         | PB16B        | 4    |      | D5/SPID2       | PB24B        | 4    |      | D5/SPID2       |
| 50         | PB17B        | 4    |      | D6/SPID1       | PB25B        | 4    |      | D6/SPID1       |
| 51*        | GND3<br>GND4 | -    |      |                | GND3<br>GND4 | -    |      |                |
| 52         | PR10B        | 3    | C    | RLM0_PLLC_FB_A | PR14B        | 3    | C    | RLM0_PLLC_FB_A |
| 53         | PR10A        | 3    | T    | RLM0_PLLT_FB_A | PR14A        | 3    | T    | RLM0_PLLT_FB_A |
| 54         | PR9B         | 3    | C    | RLM0_PLLC_IN_A | PR13B        | 3    | C    | RLM0_PLLC_IN_A |
| 55         | PR9A         | 3    | T    | RLM0_PLLT_IN_A | PR13A        | 3    | T    | RLM0_PLLT_IN_A |
| 56         | VCCIO3       | 3    |      |                | VCCIO3       | 3    |      |                |
| 57         | PR8B         | 3    | C    | DI/CSSPIN      | PR12B        | 3    | C    | DI/CSSPIN      |
| 58         | PR8A         | 3    | T    | DOUT/CSON      | PR12A        | 3    | T    | DOUT/CSON      |
| 59         | PR7B         | 3    | C    | BUSY/SISPI     | PR11B        | 3    | C    | BUSY/SISPI     |
| 60         | PR7A         | 3    | T    | D7/SPID0       | PR11A        | 3    | T    | D7/SPID0       |
| 61         | CFG2         | 3    |      |                | CFG2         | 3    |      |                |
| 62         | CFG1         | 3    |      |                | CFG1         | 3    |      |                |
| 63         | CFG0         | 3    |      |                | CFG0         | 3    |      |                |
| 64         | VCC          | -    |      |                | VCC          | -    |      |                |
| 65         | PROGRAMN     | 3    |      |                | PROGRAMN     | 3    |      |                |
| 66         | CCLK         | 3    |      |                | CCLK         | 3    |      |                |
| 67         | INITN        | 3    |      |                | INITN        | 3    |      |                |
| 68         | GND          | -    |      |                | GND          | -    |      |                |
| 69         | DONE         | 3    |      |                | DONE         | 3    |      |                |
| 70         | PR5B         | 2    | C    | PCLKC2_0       | PR9B         | 2    | C    | PCLKC2_0       |
| 71         | PR5A         | 2    | T    | PCLKT2_0       | PR9A         | 2    | T    | PCLKT2_0       |
| 72         | PR2B         | 2    |      | VREF1_2        | PR2B         | 2    |      | VREF1_2        |
| 73         | VCCIO2       | 2    |      |                | VCCIO2       | 2    |      |                |
| 74         | GND2         | 2    |      |                | GND2         | 2    |      |                |
| 75         | PT17B        | 1    | C    |                | PT25B        | 1    | C    |                |
| 76         | PT17A        | 1    | T    |                | PT25A        | 1    | T    |                |
| 77         | PT14B        | 1    | C    |                | PT22B        | 1    | C    |                |
| 78         | PT14A        | 1    | T    | TDQS14         | PT22A        | 1    | T    | TDQS22         |
| 79         | PT13A        | 1    |      |                | PT21A        | 1    |      |                |
| 80         | PT12B        | 1    | C    |                | PT20B        | 1    | C    |                |
| 81         | PT12A        | 1    | T    |                | PT20A        | 1    | T    |                |

**LFEC1, LFEC3, LFEC6/EC6 Logic Signal Connections: 144 TQFP**

| Pin Number | LFEC1        |      |       |                | LFEC3        |      |       |                | LFEC6/EC6    |      |       |                |
|------------|--------------|------|-------|----------------|--------------|------|-------|----------------|--------------|------|-------|----------------|
|            | Pin Function | Bank | LVD S | Dual Function  | Pin Function | Bank | LVD S | Dual Function  | Pin Function | Bank | LVD S | Dual Function  |
| 1          | VCCIO7       | 7    |       |                | VCCIO7       | 7    |       |                | VCCIO7       | 7    |       |                |
| 2          | PL2A         | 7    | T     | VREF2_7        | PL2A         | 7    | T     | VREF2_7        | PL2A         | 7    | T     | VREF2_7        |
| 3          | PL2B         | 7    | C     | VREF1_7        | PL2B         | 7    | C     | VREF1_7        | PL2B         | 7    | C     | VREF1_7        |
| 4          | PL3A         | 7    | T     |                | PL7A         | 7    | T     |                | PL7A         | 7    | T     |                |
| 5          | PL3B         | 7    | C     |                | PL7B         | 7    | C     |                | PL7B         | 7    | C     |                |
| 6          | PL4A         | 7    | T     |                | PL8A         | 7    | T     |                | PL8A         | 7    | T     |                |
| 7          | PL4B         | 7    | C     |                | PL8B         | 7    | C     |                | PL8B         | 7    | C     |                |
| 8          | PL5A         | 7    | T     | PCLKT7_0       | PL9A         | 7    | T     | PCLKT7_0       | PL9A         | 7    | T     | PCLKT7_0       |
| 9          | PL5B         | 7    | C     | PCLKC7_0       | PL9B         | 7    | C     | PCLKC7_0       | PL9B         | 7    | C     | PCLKC7_0       |
| 10         | XRES         | 6    |       |                | XRES         | 6    |       |                | XRES         | 6    |       |                |
| 11         | NC           | -    |       |                | NC           | -    |       |                | VCC          | -    |       |                |
| 12         | NC           | -    |       |                | NC           | -    |       |                | GND          | -    |       |                |
| 13         | VCC          | -    |       |                | VCC          | -    |       |                | VCC          | -    |       |                |
| 14         | TCK          | 6    |       |                | TCK          | 6    |       |                | TCK          | 6    |       |                |
| 15         | GND          | -    |       |                | GND          | -    |       |                | GND          | -    |       |                |
| 16         | TDI          | 6    |       |                | TDI          | 6    |       |                | TDI          | 6    |       |                |
| 17         | TMS          | 6    |       |                | TMS          | 6    |       |                | TMS          | 6    |       |                |
| 18         | TDO          | 6    |       |                | TDO          | 6    |       |                | TDO          | 6    |       |                |
| 19         | VCCJ         | 6    |       |                | VCCJ         | 6    |       |                | VCCJ         | 6    |       |                |
| 20         | PL7A         | 6    | T     | LLM0_PLLT_IN_A | PL11A        | 6    | T     | LLM0_PLLT_IN_A | PL20A        | 6    | T     | LLM0_PLLT_IN_A |
| 21         | PL7B         | 6    | C     | LLM0_PLLC_IN_A | PL11B        | 6    | C     | LLM0_PLLC_IN_A | PL20B        | 6    | C     | LLM0_PLLC_IN_A |
| 22         | PL8A         | 6    | T     | LLM0_PLLT_FB_A | PL12A        | 6    | T     | LLM0_PLLT_FB_A | PL21A        | 6    | T     | LLM0_PLLT_FB_A |
| 23         | PL8B         | 6    | C     | LLM0_PLLC_FB_A | PL12B        | 6    | C     | LLM0_PLLC_FB_A | PL21B        | 6    | C     | LLM0_PLLC_FB_A |
| 24         | VCCIO6       | 6    |       |                | VCCIO6       | 6    |       |                | VCCIO6       | 6    |       |                |
| 25         | PL9A         | 6    | T     |                | PL13A        | 6    | T     |                | PL22A        | 6    | T     |                |
| 26         | PL9B         | 6    | C     |                | PL13B        | 6    | C     |                | PL22B        | 6    | C     |                |
| 27         | PL10A        | 6    | T     |                | PL14A        | 6    | T     |                | PL23A        | 6    | T     |                |
| 28         | GND6         | 6    |       |                | GND6         | 6    |       |                | GND6         | 6    |       |                |
| 29         | PL10B        | 6    | C     |                | PL14B        | 6    | C     |                | PL23B        | 6    | C     |                |
| 30         | PL11A        | 6    | T     | LDQS11         | PL15A        | 6    | T     | LDQS15         | PL24A        | 6    | T     | LDQS24         |
| 31         | PL11B        | 6    | C     |                | PL15B        | 6    | C     |                | PL24B        | 6    | C     |                |
| 32         | PL12A        | 6    | T     |                | PL16A        | 6    | T     |                | PL25A        | 6    | T     |                |
| 33         | PL12B        | 6    | C     |                | PL16B        | 6    | C     |                | PL25B        | 6    | C     |                |
| 34         | PL14A        | 6    | T     | VREF1_6        | PL18A        | 6    | T     | VREF1_6        | PL27A        | 6    | T     | VREF1_6        |
| 35         | PL14B        | 6    | C     | VREF2_6        | PL18B        | 6    | C     | VREF2_6        | PL27B        | 6    | C     | VREF2_6        |
| 36         | VCCIO6       | 6    |       |                | VCCIO6       | 6    |       |                | VCCIO6       | 6    |       |                |
| 37*        | GND5<br>GND6 | -    |       |                | GND5<br>GND6 | -    |       |                | GND5<br>GND6 | -    |       |                |
| 38         | VCCIO5       | 5    |       |                | VCCIO5       | 5    |       |                | VCCIO5       | 5    |       |                |
| 39         | PB2A         | 5    | T     |                | PB10A        | 5    | T     |                | PB10A        | 5    | T     |                |
| 40         | PB2B         | 5    | C     |                | PB10B        | 5    | C     |                | PB10B        | 5    | C     |                |
| 41         | PB3A         | 5    | T     |                | PB11A        | 5    | T     |                | PB11A        | 5    | T     |                |
| 42         | PB3B         | 5    | C     |                | PB11B        | 5    | C     |                | PB11B        | 5    | C     |                |
| 43         | PB5B         | 5    |       |                | PB13B        | 5    |       |                | PB13B        | 5    |       |                |
| 44         | VCCIO5       | 5    |       |                | VCCIO5       | 5    |       |                | VCCIO5       | 5    |       |                |
| 45         | PB6A         | 5    | T     | BDQS6          | PB14A        | 5    | T     | BDQS14         | PB14A        | 5    | T     | BDQS14         |
| 46         | PB6B         | 5    | C     |                | PB14B        | 5    | C     |                | PB14B        | 5    | C     |                |
| 47         | PB7A         | 5    | T     |                | PB15A        | 5    | T     |                | PB15A        | 5    | T     |                |
| 48         | PB7B         | 5    | C     |                | PB15B        | 5    | C     |                | PB15B        | 5    | C     |                |
| 49         | PB8A         | 5    | T     | VREF2_5        | PB16A        | 5    | T     | VREF2_5        | PB16A        | 5    | T     | VREF2_5        |

**LFEC6P/EC6, LFEC6P/EC10 Logic Signal Connections: 208 PQFP (Cont.)**

| Pin Number | LFEC6P/EC6   |      |      |                | LFEC6P/EC10  |      |      |                |
|------------|--------------|------|------|----------------|--------------|------|------|----------------|
|            | Pin Function | Bank | LVDS | Dual Function  | Pin Function | Bank | LVDS | Dual Function  |
| 85         | VCCIO4       | 4    |      |                | VCCIO4       | 4    |      |                |
| 86         | PB18A        | 4    | T    | WRITEN         | PB26A        | 4    | T    | WRITEN         |
| 87         | PB18B        | 4    | C    | CS1N           | PB26B        | 4    | C    | CS1N           |
| 88         | PB19A        | 4    | T    | VREF1_4        | PB27A        | 4    | T    | VREF1_4        |
| 89         | PB19B        | 4    | C    | CSN            | PB27B        | 4    | C    | CSN            |
| 90         | PB20A        | 4    | T    | VREF2_4        | PB28A        | 4    | T    | VREF2_4        |
| 91         | PB20B        | 4    | C    | D0/SPID7       | PB28B        | 4    | C    | D0/SPID7       |
| 92         | PB21A        | 4    | T    | D2/SPID5       | PB29A        | 4    | T    | D2/SPID5       |
| 93         | GND4         | 4    |      |                | GND4         | 4    |      |                |
| 94         | PB21B        | 4    | C    | D1/SPID6       | PB29B        | 4    | C    | D1/SPID6       |
| 95         | PB22A        | 4    | T    | BDQS22         | PB30A        | 4    | T    | BDQS30         |
| 96         | PB22B        | 4    | C    | D3/SPID4       | PB30B        | 4    | C    | D3/SPID4       |
| 97         | PB23A        | 4    | T    |                | PB31A        | 4    | T    |                |
| 98         | PB23B        | 4    | C    | D4/SPID3       | PB31B        | 4    | C    | D4/SPID3       |
| 99         | PB24A        | 4    | T    |                | PB32A        | 4    | T    |                |
| 100        | PB24B        | 4    | C    | D5/SPID2       | PB32B        | 4    | C    | D5/SPID2       |
| 101        | PB25A        | 4    | T    |                | PB33A        | 4    | T    |                |
| 102        | PB25B        | 4    | C    | D6/SPID1       | PB33B        | 4    | C    | D6/SPID1       |
| 103        | PB33A        | 4    |      |                | PB41A        | 4    |      |                |
| 104        | VCCIO4       | 4    |      |                | VCCIO4       | 4    |      |                |
| 105*       | GND3<br>GND4 | -    |      |                | GND3<br>GND4 | -    |      |                |
| 106        | VCCIO3       | 3    |      |                | VCCIO3       | 3    |      |                |
| 107        | PR27B        | 3    | C    | VREF2_3        | PR36B        | 3    | C    | VREF2_3        |
| 108        | PR27A        | 3    | T    | VREF1_3        | PR36A        | 3    | T    | VREF1_3        |
| 109        | PR26B        | 3    | C    |                | PR35B        | 3    | C    |                |
| 110        | PR26A        | 3    | T    |                | PR35A        | 3    | T    |                |
| 111        | PR25B        | 3    | C    |                | PR34B        | 3    | C    |                |
| 112        | PR25A        | 3    | T    |                | PR34A        | 3    | T    |                |
| 113        | PR24B        | 3    | C    |                | PR33B        | 3    | C    |                |
| 114        | PR24A        | 3    | T    | RDQS24         | PR33A        | 3    | T    | RDQS33         |
| 115        | PR23B        | 3    | C    | RLM0_PLLC_FB_A | PR32B        | 3    | C    | RLM0_PLLC_FB_A |
| 116        | GND3         | 3    |      |                | GND3         | 3    |      |                |
| 117        | PR23A        | 3    | T    | RLM0_PLLT_FB_A | PR32A        | 3    | T    | RLM0_PLLT_FB_A |
| 118        | PR22B        | 3    | C    | RLM0_PLLC_IN_A | PR31B        | 3    | C    | RLM0_PLLC_IN_A |
| 119        | PR22A        | 3    | T    | RLM0_PLLT_IN_A | PR31A        | 3    | T    | RLM0_PLLT_IN_A |
| 120        | VCCIO3       | 3    |      |                | VCCIO3       | 3    |      |                |
| 121        | PR21B        | 3    | C    | DI/CSSPIN      | PR30B        | 3    | C    | DI/CSSPIN      |
| 122        | PR21A        | 3    | T    | DOUT/CSON      | PR30A        | 3    | T    | DOUT/CSON      |
| 123        | PR20B        | 3    | C    | BUSY/SISPI     | PR29B        | 3    | C    | BUSY/SISPI     |
| 124        | PR20A        | 3    | T    | D7/SPID0       | PR29A        | 3    | T    | D7/SPID0       |
| 125        | CFG2         | 3    |      |                | CFG2         | 3    |      |                |
| 126        | CFG1         | 3    |      |                | CFG1         | 3    |      |                |

**LFEC6/EC6, LFEC6/EC10 Logic Signal Connections: 208 PQFP (Cont.)**

| Pin Number | LFEC6/LFEC6  |      |      |               | LFEC10/LFEC10 |      |      |               |
|------------|--------------|------|------|---------------|---------------|------|------|---------------|
|            | Pin Function | Bank | LVDS | Dual Function | Pin Function  | Bank | LVDS | Dual Function |
| 169        | PT21A        | 1    | T    |               | PT29A         | 1    | T    |               |
| 170        | PT20B        | 1    | C    |               | PT28B         | 1    | C    |               |
| 171        | PT20A        | 1    | T    |               | PT28A         | 1    | T    |               |
| 172        | PT19B        | 1    | C    | VREF2_1       | PT27B         | 1    | C    | VREF2_1       |
| 173        | PT19A        | 1    | T    | VREF1_1       | PT27A         | 1    | T    | VREF1_1       |
| 174        | PT18B        | 1    | C    |               | PT26B         | 1    | C    |               |
| 175        | PT18A        | 1    | T    |               | PT26A         | 1    | T    |               |
| 176        | VCCIO1       | 1    |      |               | VCCIO1        | 1    |      |               |
| 177        | VCCAUX       | -    |      |               | VCCAUX        | -    |      |               |
| 178        | PT17B        | 0    | C    | PCLKC0_0      | PT25B         | 0    | C    | PCLKC0_0      |
| 179        | GND0         | 0    |      |               | GND0          | 0    |      |               |
| 180        | PT17A        | 0    | T    | PCLKT0_0      | PT25A         | 0    | T    | PCLKT0_0      |
| 181        | PT16B        | 0    | C    | VREF1_0       | PT24B         | 0    | C    | VREF1_0       |
| 182        | PT16A        | 0    | T    | VREF2_0       | PT24A         | 0    | T    | VREF2_0       |
| 183        | PT15B        | 0    | C    |               | PT23B         | 0    | C    |               |
| 184        | PT15A        | 0    | T    |               | PT23A         | 0    | T    |               |
| 185        | PT14B        | 0    | C    |               | PT22B         | 0    | C    |               |
| 186        | PT14A        | 0    | T    | TDQS14        | PT22A         | 0    | T    | TDQS22        |
| 187        | VCCIO0       | 0    |      |               | VCCIO0        | 0    |      |               |
| 188        | PT13B        | 0    | C    |               | PT21B         | 0    | C    |               |
| 189        | GND0         | 0    |      |               | GND0          | 0    |      |               |
| 190        | PT13A        | 0    | T    |               | PT21A         | 0    | T    |               |
| 191        | PT12B        | 0    | C    |               | PT20B         | 0    | C    |               |
| 192        | PT12A        | 0    | T    |               | PT20A         | 0    | T    |               |
| 193        | PT11B        | 0    | C    |               | PT19B         | 0    | C    |               |
| 194        | PT11A        | 0    | T    |               | PT19A         | 0    | T    |               |
| 195        | PT10B        | 0    | C    |               | PT18B         | 0    | C    |               |
| 196        | PT10A        | 0    | T    |               | PT18A         | 0    | T    |               |
| 197        | VCCIO0       | 0    |      |               | VCCIO0        | 0    |      |               |
| 198        | PT6B         | 0    | C    |               | PT6B          | 0    | C    |               |
| 199        | PT6A         | 0    | T    | TDQS6         | PT6A          | 0    | T    | TDQS6         |
| 200        | PT5B         | 0    | C    |               | PT5B          | 0    | C    |               |
| 201        | PT5A         | 0    | T    |               | PT5A          | 0    | T    |               |
| 202        | PT4B         | 0    | C    |               | PT4B          | 0    | C    |               |
| 203        | PT4A         | 0    | T    |               | PT4A          | 0    | T    |               |
| 204        | PT3B         | 0    | C    |               | PT3B          | 0    | C    |               |
| 205        | PT3A         | 0    | T    |               | PT3A          | 0    | T    |               |
| 206        | PT2B         | 0    | C    |               | PT2B          | 0    | C    |               |
| 207        | PT2A         | 0    | T    |               | PT2A          | 0    | T    |               |
| 208        | VCCIO0       | 0    |      |               | VCCIO0        | 0    |      |               |

\*Double bonded to the pin.

**LFEC3 and LFECP/EC6 Logic Signal Connections: 256 fpBGA**

| Ball Number | LFEC3         |      |      |               | LFECP6/LFEC6  |      |      |               |
|-------------|---------------|------|------|---------------|---------------|------|------|---------------|
|             | Ball Function | Bank | LVDS | Dual Function | Ball Function | Bank | LVDS | Dual Function |
| GND         | GND7          | 7    |      |               | GND7          | 7    |      |               |
| D4          | PL2A          | 7    | T    | VREF2_7       | PL2A          | 7    | T    | VREF2_7       |
| D3          | PL2B          | 7    | C    | VREF1_7       | PL2B          | 7    | C    | VREF1_7       |
| C3          | PL3A          | 7    | T    |               | PL3A          | 7    | T    |               |
| C2          | PL3B          | 7    | C    |               | PL3B          | 7    | C    |               |
| B1          | PL4A          | 7    | T    |               | PL4A          | 7    | T    |               |
| C1          | PL4B          | 7    | C    |               | PL4B          | 7    | C    |               |
| E3          | PL5A          | 7    | T    |               | PL5A          | 7    | T    |               |
| E4          | PL5B          | 7    | C    |               | PL5B          | 7    | C    |               |
| F4          | PL6A          | 7    | T    | LDQS6         | PL6A          | 7    | T    | LDQS6         |
| F5          | PL6B          | 7    | C    |               | PL6B          | 7    | C    |               |
| G4          | PL7A          | 7    | T    |               | PL7A          | 7    | T    |               |
| G3          | PL7B          | 7    | C    |               | PL7B          | 7    | C    |               |
| D2          | PL8A          | 7    | T    |               | PL8A          | 7    | T    |               |
| D1          | PL8B          | 7    | C    |               | PL8B          | 7    | C    |               |
| E1          | PL9A          | 7    | T    | PCLKT7_0      | PL9A          | 7    | T    | PCLKT7_0      |
| GND         | GND7          | 7    |      |               | GND7          | 7    |      |               |
| E2          | PL9B          | 7    | C    | PCLKC7_0      | PL9B          | 7    | C    | PCLKC7_0      |
| F3          | XRES          | 6    |      |               | XRES          | 6    |      |               |
| G5          | NC            | -    |      |               | PL11A         | 6    | T    |               |
| H5          | NC            | -    |      |               | PL11B         | 6    | C    |               |
| F2          | NC            | -    |      |               | PL12A         | 6    | T    |               |
| F1          | NC            | -    |      |               | PL12B         | 6    | C    |               |
| H4          | NC            | -    |      |               | PL13A         | 6    | T    |               |
| H3          | NC            | -    |      |               | PL13B         | 6    | C    |               |
| G2          | NC            | -    |      |               | PL14A         | 6    | T    |               |
| -           | -             | -    |      |               | GND6          | 6    |      |               |
| G1          | NC            | -    |      |               | PL14B         | 6    | C    |               |
| J4          | NC            | -    |      |               | PL15A         | 6    | T    | LDQS15        |
| J3          | NC            | -    |      |               | PL15B         | 6    | C    |               |
| J5          | NC            | -    |      |               | PL16A         | 6    | T    |               |
| K5          | NC            | -    |      |               | PL16B         | 6    | C    |               |
| H2          | NC            | -    |      |               | PL17A         | 6    | T    |               |
| H1          | NC            | -    |      |               | PL17B         | 6    | C    |               |
| J2          | NC            | -    |      |               | PL18A         | 6    | T    |               |
| -           | -             | -    |      |               | GND6          | 6    |      |               |
| J1          | NC            | -    |      |               | PL18B         | 6    | C    |               |
| K4          | TCK           | 6    |      |               | TCK           | 6    |      |               |
| K3          | TDI           | 6    |      |               | TDI           | 6    |      |               |
| L3          | TMS           | 6    |      |               | TMS           | 6    |      |               |
| L5          | TDO           | 6    |      |               | TDO           | 6    |      |               |
| L4          | VCCJ          | 6    |      |               | VCCJ          | 6    |      |               |

**LFECP/EC10 and LFECP/EC15 Logic Signal Connections: 256 fpBGA (Cont.)**

| Ball Number | LFECP10/LFEC10 |      |      |                | LFECP15/LFEC15 |      |      |                |
|-------------|----------------|------|------|----------------|----------------|------|------|----------------|
|             | Ball Function  | Bank | LVDS | Dual Function  | Ball Function  | Bank | LVDS | Dual Function  |
| L3          | TMS            | 6    |      |                | TMS            | 6    |      |                |
| L5          | TDO            | 6    |      |                | TDO            | 6    |      |                |
| L4          | VCCJ           | 6    |      |                | VCCJ           | 6    |      |                |
| K2          | PL29A          | 6    | T    | LLM0_PLLT_IN_A | PL37A          | 6    | T    | LLM0_PLLT_IN_A |
| K1          | PL29B          | 6    | C    | LLM0_PLLC_IN_A | PL37B          | 6    | C    | LLM0_PLLC_IN_A |
| L2          | PL30A          | 6    | T    | LLM0_PLLT_FB_A | PL38A          | 6    | T    | LLM0_PLLT_FB_A |
| L1          | PL30B          | 6    | C    | LLM0_PLLC_FB_A | PL38B          | 6    | C    | LLM0_PLLC_FB_A |
| M2          | PL31A          | 6    | T    |                | PL39A          | 6    | T    |                |
| M1          | PL31B          | 6    | C    |                | PL39B          | 6    | C    |                |
| N1          | PL32A          | 6    | T    |                | PL40A          | 6    | T    |                |
| GND         | GND6           | 6    |      |                | GND6           | 6    |      |                |
| -           | -              | -    |      |                | GND6           | 6    |      |                |
| N2          | PL32B          | 6    | C    |                | PL40B          | 6    | C    |                |
| M4          | PL33A          | 6    | T    | LDQS33         | PL41A          | 6    | T    | LDQS41         |
| M3          | PL33B          | 6    | C    |                | PL41B          | 6    | C    |                |
| P1          | PL34A          | 6    | T    |                | PL42A          | 6    | T    |                |
| R1          | PL34B          | 6    | C    |                | PL42B          | 6    | C    |                |
| P2          | PL35A          | 6    | T    |                | PL43A          | 6    | T    |                |
| P3          | PL35B          | 6    | C    |                | PL43B          | 6    | C    |                |
| N3          | PL36A          | 6    | T    | VREF1_6        | PL44A          | 6    | T    | VREF1_6        |
| N4          | PL36B          | 6    | C    | VREF2_6        | PL44B          | 6    | C    | VREF2_6        |
| GND         | GND6           | 6    |      |                | GND6           | 6    |      |                |
| GND         | GND5           | 5    |      |                | GND5           | 5    |      |                |
| GND         | GND5           | 5    |      |                | GND5           | 5    |      |                |
| P4          | PB10A          | 5    | T    |                | PB10A          | 5    | T    |                |
| N5          | PB10B          | 5    | C    |                | PB10B          | 5    | C    |                |
| P5          | PB11A          | 5    | T    |                | PB11A          | 5    | T    |                |
| P6          | PB11B          | 5    | C    |                | PB11B          | 5    | C    |                |
| R4          | PB12A          | 5    | T    |                | PB12A          | 5    | T    |                |
| R3          | PB12B          | 5    | C    |                | PB12B          | 5    | C    |                |
| T2          | PB13A          | 5    | T    |                | PB13A          | 5    | T    |                |
| GND         | GND5           | 5    |      |                | GND5           | 5    |      |                |
| T3          | PB13B          | 5    | C    |                | PB13B          | 5    | C    |                |
| R5          | PB14A          | 5    | T    | BDQS14         | PB14A          | 5    | T    | BDQS14         |
| R6          | PB14B          | 5    | C    |                | PB14B          | 5    | C    |                |
| T4          | PB15A          | 5    | T    |                | PB15A          | 5    | T    |                |
| T5          | PB15B          | 5    | C    |                | PB15B          | 5    | C    |                |
| N6          | PB16A          | 5    | T    |                | PB16A          | 5    | T    |                |
| M6          | PB16B          | 5    | C    |                | PB16B          | 5    | C    |                |
| T6          | PB17A          | 5    | T    |                | PB17A          | 5    | T    |                |
| GND         | GND5           | 5    |      |                | GND5           | 5    |      |                |
| T7          | PB17B          | 5    | C    |                | PB17B          | 5    | C    |                |
| P7          | PB18A          | 5    | T    |                | PB18A          | 5    | T    |                |

**LFECP/EC20, LFECP/EC33 Logic Signal Connections: 672 fpBGA (Cont.)**

| LFEC20/LFECP20 |               |      |      |               | LFECP/EC33  |               |      |      |               |
|----------------|---------------|------|------|---------------|-------------|---------------|------|------|---------------|
| Ball Number    | Ball Function | Bank | LVDS | Dual Function | Ball Number | Ball Function | Bank | LVDS | Dual Function |
| AF22           | PB51A         | 4    | T    |               | AF22        | PB51A         | 4    | T    |               |
| AB17           | PB51B         | 4    | C    |               | AB17        | PB51B         | 4    | C    |               |
| AE22           | PB52A         | 4    | T    |               | AE22        | PB52A         | 4    | T    |               |
| AA18           | PB52B         | 4    | C    |               | AA18        | PB52B         | 4    | C    |               |
| AE19           | PB53A         | 4    | T    |               | AE19        | PB53A         | 4    | T    |               |
| GND            | GND4          | 4    |      |               | GND         | GND4          | 4    |      |               |
| AE20           | PB53B         | 4    | C    |               | AE20        | PB53B         | 4    | C    |               |
| AA19           | PB54A         | 4    | T    | BDQS54        | AA19        | PB54A         | 4    | T    | BDQS54        |
| Y18            | PB54B         | 4    | C    |               | Y18         | PB54B         | 4    | C    |               |
| AF23           | PB55A         | 4    | T    |               | AF23        | PB55A         | 4    | T    |               |
| AA20           | PB55B         | 4    | C    |               | AA20        | PB55B         | 4    | C    |               |
| AC18           | PB56A         | 4    | T    |               | AC18        | PB56A         | 4    | T    |               |
| AB18           | PB56B         | 4    | C    |               | AB18        | PB56B         | 4    | C    |               |
| AF24           | PB57A         | 4    | T    |               | AF24        | PB57A         | 4    | T    |               |
| -              | -             | -    |      |               | GND         | GND4          | 4    |      |               |
| AE23           | PB57B         | 4    | C    |               | AE23        | PB57B         | 4    | C    |               |
| AD19           | NC            | -    |      |               | AD19        | PB58A         | 4    | T    |               |
| AD20           | NC            | -    |      |               | AD20        | PB58B         | 4    | C    |               |
| AC19           | NC            | -    |      |               | AC19        | PB59A         | 4    | T    |               |
| AB19           | NC            | -    |      |               | AB19        | PB59B         | 4    | C    |               |
| AD21           | NC            | -    |      |               | AD21        | PB60A         | 4    | T    |               |
| AC20           | NC            | -    |      |               | AC20        | PB60B         | 4    | C    |               |
| AF25           | NC            | -    |      |               | AF25        | PB61A         | 4    | T    |               |
| -              | -             | -    |      |               | GND         | GND4          | 4    |      |               |
| AE25           | NC            | -    |      |               | AE25        | PB61B         | 4    | C    |               |
| AB21           | NC            | -    |      |               | AB21        | PB62A         | 4    | T    | BDQS62        |
| AB20           | NC            | -    |      |               | AB20        | PB62B         | 4    | C    |               |
| AE24           | NC            | -    |      |               | AE24        | PB63A         | 4    | T    |               |
| AD23           | NC            | -    |      |               | AD23        | PB63B         | 4    | C    |               |
| AD22           | NC            | -    |      |               | AD22        | PB64A         | 4    | T    |               |
| AC21           | NC            | -    |      |               | AC21        | PB64B         | 4    | C    |               |
| AC22           | NC            | -    |      |               | AC22        | PB65A         | 4    | T    |               |
| AB22           | NC            | -    |      |               | AB22        | PB65B         | 4    | C    |               |
| GND            | GND4          | 4    |      |               | GND         | GND4          | 4    |      |               |
| GND            | GND3          | 3    |      |               | GND         | GND3          | 3    |      |               |
| AC23           | PR48B         | 3    | C    | VREF2_3       | AC23        | PR68B         | 3    | C    | VREF2_3       |
| AC24           | PR48A         | 3    | T    | VREF1_3       | AC24        | PR68A         | 3    | T    | VREF1_3       |
| AD24           | NC            | -    |      |               | AD24        | PR67B         | 3    | C    |               |
| AD25           | NC            | -    |      |               | AD25        | PR67A         | 3    | T    |               |
| AE26           | NC            | -    |      |               | AE26        | PR66B         | 3    | C    |               |
| AD26           | NC            | -    |      |               | AD26        | PR66A         | 3    | T    |               |
| Y20            | NC            | -    |      |               | Y20         | PR65B         | 3    | C    |               |

**LFECP/EC20, LFECP/EC33 Logic Signal Connections: 672 fpBGA (Cont.)**

| LFEC20/LFECP20 |               |      |      |               | LFECP/EC33  |               |      |      |               |
|----------------|---------------|------|------|---------------|-------------|---------------|------|------|---------------|
| Ball Number    | Ball Function | Bank | LVDS | Dual Function | Ball Number | Ball Function | Bank | LVDS | Dual Function |
| U21            | PR36B         | 3    | C    |               | U21         | PR48B         | 3    | C    |               |
| T21            | PR36A         | 3    | T    | RDQS36        | T21         | PR48A         | 3    | T    | RDQS48        |
| T25            | PR35B         | 3    | C    |               | T25         | PR47B         | 3    | C    |               |
| GND            | GND3          | 3    |      |               | GND         | GND3          | 3    |      |               |
| T26            | PR35A         | 3    | T    |               | T26         | PR47A         | 3    | T    |               |
| T22            | PR34B         | 3    | C    |               | T22         | PR46B         | 3    | C    |               |
| T23            | PR34A         | 3    | T    |               | T23         | PR46A         | 3    | T    |               |
| T24            | PR33B         | 3    | C    |               | T24         | PR45B         | 3    | C    |               |
| R23            | PR33A         | 3    | T    |               | R23         | PR45A         | 3    | T    |               |
| R25            | PR32B         | 3    | C    |               | R25         | PR44B         | 3    | C    |               |
| R24            | PR32A         | 3    | T    |               | R24         | PR44A         | 3    | T    |               |
| R26            | PR31B         | 3    | C    |               | R26         | PR43B         | 3    | C    |               |
| GND            | GND3          | 3    |      |               | GND         | GND3          | 3    |      |               |
| P26            | PR31A         | 3    | T    |               | P26         | PR43A         | 3    | T    |               |
| R21            | PR30B         | 3    | C    |               | R21         | PR42B         | 3    | C    |               |
| R22            | PR30A         | 3    | T    |               | R22         | PR42A         | 3    | T    |               |
| P25            | PR29B         | 3    | C    |               | P25         | PR41B         | 3    | C    |               |
| P24            | PR29A         | 3    | T    |               | P24         | PR41A         | 3    | T    |               |
| P23            | PR28B         | 3    | C    |               | P23         | PR40B         | 3    | C    |               |
| P22            | PR28A         | 3    | T    | RDQS28        | P22         | PR40A         | 3    | T    | RDQS40        |
| N26            | PR27B         | 3    | C    |               | N26         | PR39B         | 3    | C    |               |
| GND            | GND3          | 3    |      |               | GND         | GND3          | 3    |      |               |
| M26            | PR27A         | 3    | T    |               | M26         | PR39A         | 3    | T    |               |
| N21            | PR26B         | 3    | C    |               | N21         | PR38B         | 3    | C    |               |
| P21            | PR26A         | 3    | T    |               | P21         | PR38A         | 3    | T    |               |
| N23            | PR25B         | 3    | C    |               | N23         | PR37B         | 3    | C    |               |
| N22            | PR25A         | 3    | T    |               | N22         | PR37A         | 3    | T    |               |
| N25            | PR24B         | 3    | C    |               | N25         | PR36B         | 3    | C    |               |
| N24            | PR24A         | 3    | T    |               | N24         | PR36A         | 3    | T    |               |
| L26            | PR22B         | 2    | C    | PCLKC2_0      | L26         | PR34B         | 2    | C    | PCLKC2_0      |
| GND            | GND2          | 2    |      |               | GND         | GND2          | 2    |      |               |
| K26            | PR22A         | 2    | T    | PCLKT2_0      | K26         | PR34A         | 2    | T    | PCLKT2_0      |
| M22            | PR21B         | 2    | C    |               | M22         | PR33B         | 2    | C    |               |
| M23            | PR21A         | 2    | T    |               | M23         | PR33A         | 2    | T    |               |
| M25            | PR20B         | 2    | C    |               | M25         | PR32B         | 2    | C    |               |
| M24            | PR20A         | 2    | T    |               | M24         | PR32A         | 2    | T    |               |
| M21            | PR19B         | 2    | C    |               | M21         | PR31B         | 2    | C    |               |
| L21            | PR19A         | 2    | T    | RDQS19        | L21         | PR31A         | 2    | T    | RDQS31        |
| L22            | PR18B         | 2    | C    |               | L22         | PR30B         | 2    | C    |               |
| GND            | GND2          | 2    |      |               | GND         | GND2          | 2    |      |               |
| L23            | PR18A         | 2    | T    |               | L23         | PR30A         | 2    | T    |               |
| L25            | PR17B         | 2    | C    |               | L25         | PR29B         | 2    | C    |               |

**LatticeEC Commercial (Continued)**

| Part Number     | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|-----------------|------|-------|-----------------|------------|-------|-------|
| LFEC10E-4FN256C | 195  | -4    | Lead-Free fpBGA | 256        | COM   | 10.2K |
| LFEC10E-5FN256C | 195  | -5    | Lead-Free fpBGA | 256        | COM   | 10.2K |
| LFEC10E-3QN208C | 147  | -3    | Lead-Free PQFP  | 208        | COM   | 10.2K |
| LFEC10E-4QN208C | 147  | -4    | Lead-Free PQFP  | 208        | COM   | 10.2K |
| LFEC10E-5QN208C | 147  | -5    | Lead-Free PQFP  | 208        | COM   | 10.2K |

| Part Number     | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|-----------------|------|-------|-----------------|------------|-------|-------|
| LFEC15E-3FN484C | 352  | -3    | Lead-Free fpBGA | 484        | COM   | 15.3K |
| LFEC15E-4FN484C | 352  | -4    | Lead-Free fpBGA | 484        | COM   | 15.3K |
| LFEC15E-5FN484C | 352  | -5    | Lead-Free fpBGA | 484        | COM   | 15.3K |
| LFEC15E-3FN256C | 195  | -3    | Lead-Free fpBGA | 256        | COM   | 15.3K |
| LFEC15E-4FN256C | 195  | -4    | Lead-Free fpBGA | 256        | COM   | 15.3K |
| LFEC15E-5FN256C | 195  | -5    | Lead-Free fpBGA | 256        | COM   | 15.3K |

| Part Number     | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|-----------------|------|-------|-----------------|------------|-------|-------|
| LFEC20E-3FN672C | 400  | -3    | Lead-Free fpBGA | 672        | COM   | 19.7K |
| LFEC20E-4FN672C | 400  | -4    | Lead-Free fpBGA | 672        | COM   | 19.7K |
| LFEC20E-5FN672C | 400  | -5    | Lead-Free fpBGA | 672        | COM   | 19.7K |
| LFEC20E-3FN484C | 360  | -3    | Lead-Free fpBGA | 484        | COM   | 19.7K |
| LFEC20E-4FN484C | 360  | -4    | Lead-Free fpBGA | 484        | COM   | 19.7K |
| LFEC20E-5FN484C | 360  | -5    | Lead-Free fpBGA | 484        | COM   | 19.7K |

| Part Number     | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|-----------------|------|-------|-----------------|------------|-------|-------|
| LFEC33E-3FN672C | 496  | -3    | Lead-Free fpBGA | 672        | COM   | 32.8K |
| LFEC33E-4FN672C | 496  | -4    | Lead-Free fpBGA | 672        | COM   | 32.8K |
| LFEC33E-5FN672C | 496  | -5    | Lead-Free fpBGA | 672        | COM   | 32.8K |
| LFEC33E-3FN484C | 360  | -3    | Lead-Free fpBGA | 484        | COM   | 32.8K |
| LFEC33E-4FN484C | 360  | -4    | Lead-Free fpBGA | 484        | COM   | 32.8K |
| LFEC33E-5FN484C | 360  | -5    | Lead-Free fpBGA | 484        | COM   | 32.8K |

**LatticeECP Industrial (Continued)**

| Part Number      | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|------------------|------|-------|-----------------|------------|-------|-------|
| LFCEP20E-3FN672I | 400  | -3    | Lead-Free fpBGA | 672        | IND   | 19.7K |
| LFCEP20E-4FN672I | 400  | -4    | Lead-Free fpBGA | 672        | IND   | 19.7K |
| LFCEP20E-3FN484I | 400  | -3    | Lead-Free fpBGA | 484        | IND   | 19.7K |
| LFCEP20E-4FN484I | 400  | -4    | Lead-Free fpBGA | 484        | IND   | 19.7K |

| Part Number      | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|------------------|------|-------|-----------------|------------|-------|-------|
| LFCEP33E-3FN672I | 496  | -3    | Lead-Free fpBGA | 672        | IND   | 32.8K |
| LFCEP33E-4FN672I | 496  | -4    | Lead-Free fpBGA | 672        | IND   | 32.8K |
| LFCEP33E-3FN484I | 360  | -3    | Lead-Free fpBGA | 484        | IND   | 32.8K |
| LFCEP33E-4FN484I | 360  | -4    | Lead-Free fpBGA | 484        | IND   | 32.8K |