



Welcome to [E-XFL.COM](http://E-XFL.COM)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications,

#### Details

|                                |   |
|--------------------------------|---|
| Product Status                 | Obsolete  |
| Number of LABs/CLBs            | -   |
| Number of Logic Elements/Cells | 3100  |
| Total RAM Bits                 | 56320   |
| Number of I/O                  | 67  |
| Number of Gates                | -   |
| Voltage - Supply               | 1.14V ~ 1.26V   |
| Mounting Type                  | Surface Mount   |
| Operating Temperature          | -40°C ~ 100°C (TJ)  |
| Package / Case                 | 100-LQFP  |
| Supplier Device Package        | 100-TQFP (14x14)  |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfec3e-4tn100i">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfec3e-4tn100i</a> |

**Modes of Operation**

Each Slice is capable of four modes of operation: Logic, Ripple, RAM and ROM. The Slice in the PFF is capable of all modes except RAM. Table 2-2 lists the modes and the capability of the Slice blocks.

**Table 2-2. Slice Modes**

|           | <b>Logic</b>       | <b>Ripple</b>         | <b>RAM</b> | <b>ROM</b>  |
|-----------|--------------------|-----------------------|------------|-------------|
| PFU Slice | LUT 4x2 or LUT 5x1 | 2-bit Arithmetic Unit | SPR16x2    | ROM16x1 x 2 |
| PFF Slice | LUT 4x2 or LUT 5x1 | 2-bit Arithmetic Unit | N/A        | ROM16x1 x 2 |

**Logic Mode:** In this mode, the LUTs in each Slice are configured as 4-input combinatorial lookup tables. A LUT4 can have 16 possible input combinations. Any logic function with four inputs can be generated by programming this lookup table. Since there are two LUT4s per Slice, a LUT5 can be constructed within one Slice. Larger lookup tables such as LUT6, LUT7 and LUT8 can be constructed by concatenating other Slices.

**Ripple Mode:** Ripple mode allows the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each Slice:

- Addition 2-bit
- Subtraction 2-bit
- Add/Subtract 2-bit using dynamic control
- Up counter 2-bit
- Down counter 2-bit
- Ripple mode multiplier building block
- Comparator functions of A and B inputs
  - A greater-than-or-equal-to B
  - A not-equal-to B
  - A less-than-or-equal-to B

Ripple Mode includes an optional configuration that performs arithmetic using fast carry chain methods. In this configuration (also referred to as CCU2 mode) two additional signals, Carry Generate and Carry Propagate, are generated on a per slice basis to allow fast arithmetic functions to be constructed by concatenating Slices.

**RAM Mode:** In this mode, distributed RAM can be constructed using each LUT block as a 16x1-bit memory. Through the combination of LUTs and Slices, a variety of different memories can be constructed.


The Lattice design tools support the creation of a variety of different size memories. Where appropriate, the software will construct these using distributed memory primitives that represent the capabilities of the PFU. Table 2-3 shows the number of Slices required to implement different distributed RAM primitives. Figure 2-5 shows the distributed memory primitive block diagrams. Dual port memories involve the pairing of two Slices, one Slice functions as the read-write port. The other companion Slice supports the read-only port. For more information about using RAM in LatticeECP/EC devices, please see the list of technical documentation at the end of this data sheet.

**Table 2-3. Number of Slices Required For Implementing Distributed RAM**

|                  | <b>SPR16x2</b> | <b>DPR16x2</b> |
|------------------|----------------|----------------|
| Number of slices | 1              | 2              |

Note: SPR = Single Port RAM, DPR = Dual Port RAM

**Figure 2-14. DCS Waveforms**

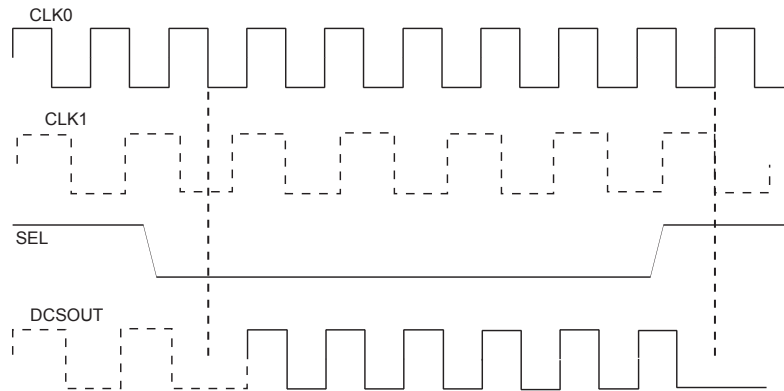

## sysMEM Memory

The LatticeECP/EC devices contain a number of sysMEM Embedded Block RAM (EBR). The EBR consists of a 9-Kbit RAM, with dedicated input and output registers.

### sysMEM Memory Block

The sysMEM block can implement single port, dual port or pseudo dual port memories. Each block can be used in a variety of depths and widths as shown in Table 2-6.

**Table 2-6. sysMEM Block Configurations**

| Memory Mode      | Configurations |
|------------------|----------------|
| Single Port      | 8,192 x 1      |
|                  | 4,096 x 2      |
|                  | 2,048 x 4      |
|                  | 1,024 x 9      |
|                  | 512 x 18       |
|                  | 256 x 36       |
| True Dual Port   | 8,192 x 1      |
|                  | 4,096 x 2      |
|                  | 2,048 x 4      |
|                  | 1,024 x 9      |
|                  | 512 x 18       |
| Pseudo Dual Port | 8,192 x 1      |
|                  | 4,096 x 2      |
|                  | 2,048 x 4      |
|                  | 1,024 x 9      |
|                  | 512 x 18       |
|                  | 256 x 36       |


### Bus Size Matching

All of the multi-port memory modes support different widths on each of the ports. The RAM bits are mapped LSB word 0 to MSB word 0, LSB word 1 to MSB word 1 and so on. Although the word size and number of words for each port varies, this mapping scheme applies to each port.

### RAM Initialization and ROM Operation

If desired, the contents of the RAM can be pre-loaded during device configuration. By preloading the RAM block during the chip configuration cycle and disabling the write controls, the sysMEM block can also be utilized as a ROM.

**Figure 2-16. Memory Core Reset**

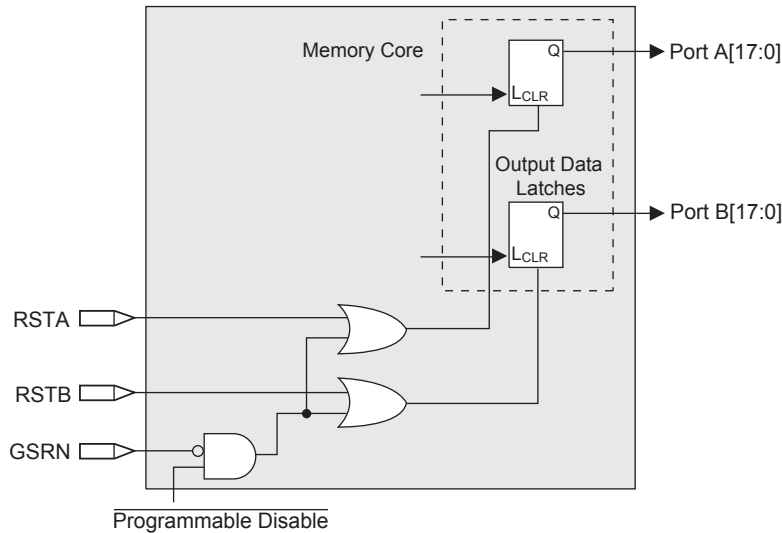


For further information about sysMEM EBR block, please see the the list of technical documentation at the end of this data sheet.

**EBR Asynchronous Reset**

EBR asynchronous reset or GSR (if used) can only be applied if all clock enables are low for a clock cycle before the reset is applied and released a clock cycle after the reset is released, as shown in Figure 2-17. The GSR input to the EBR is always asynchronous.

**Figure 2-17. EBR Asynchronous Reset (Including GSR) Timing Diagram**

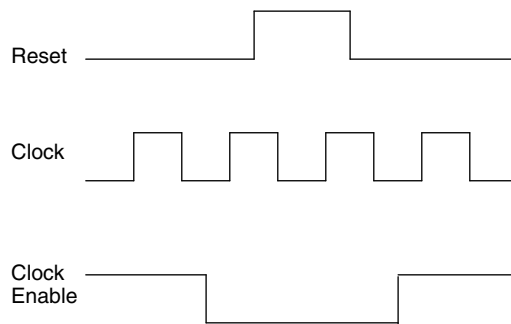

If all clock enables remain enabled, the EBR asynchronous reset or GSR may only be applied and released after the EBR read and write clock inputs are in a steady state condition for a minimum of  $1/f_{MAX}$  (EBR clock). The reset release must adhere to the EBR synchronous reset setup time before the next active read or write clock edge.

If an EBR is pre-loaded during configuration, the GSR input must be disabled or the release of the GSR during device Wake Up must occur before the release of the device I/Os becomes active.


These instructions apply to all EBR RAM and ROM implementations.

Note that there are no reset restrictions if the EBR synchronous reset is used and the EBR GSR input is disabled.

**sysDSP Block**

The LatticeECP-DSP family provides a sysDSP block, making it ideally suited for low cost, high performance Digital Signal Processing (DSP) applications. Typical functions used in these applications are Finite Impulse Response (FIR) filters; Fast Fourier Transforms (FFT) functions, correlators, Reed-Solomon/Turbo/Convolution encoders and


Figure 2-20. MAC sysDSP Element

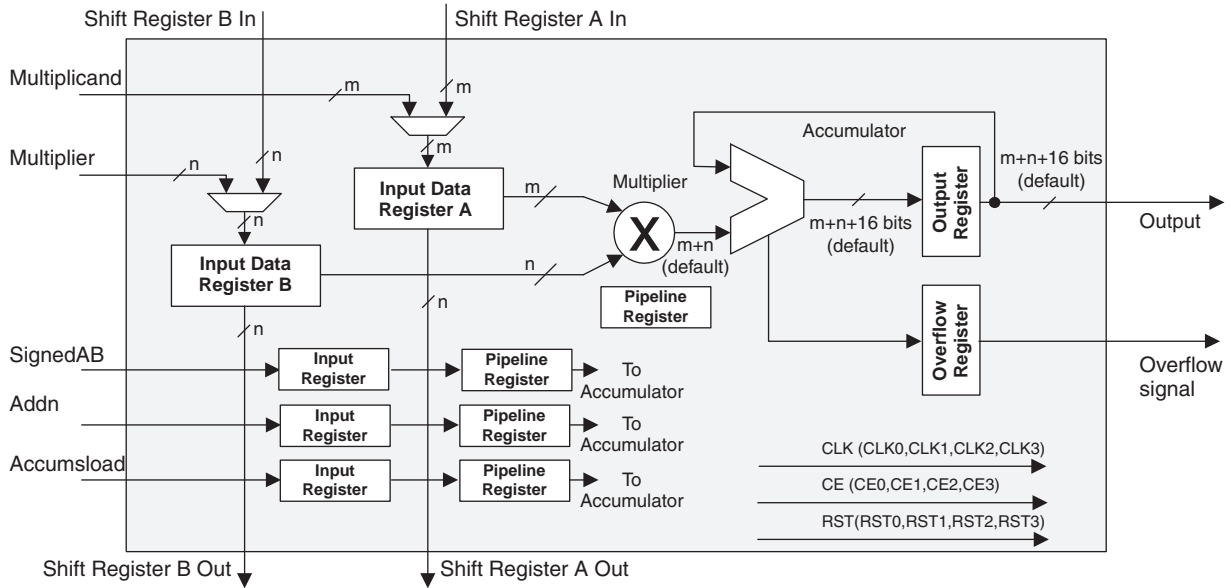

**MULTADD sysDSP Element**

In this case, the operands A0 and B0 are multiplied and the result is added/subtracted with the result of the multiplier operation of operands A1 and A2. The user can enable the input, output and pipeline registers. Figure 2-21 shows the MULTADD sysDSP element.


Figure 2-21. MULTADD

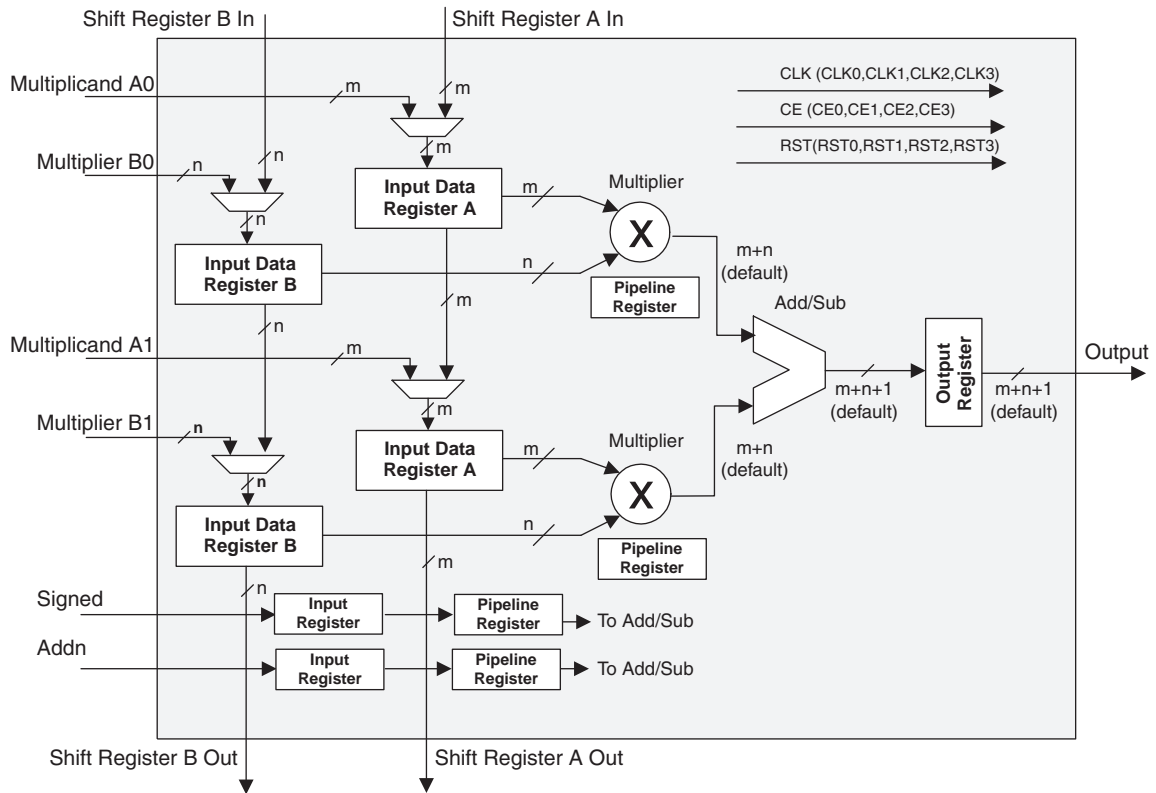

**Table 2-12. PIO Signal List**

| Name         | Type                            | Description  |
|--------------|---------------------------------|--|
| CE0, CE1     | Control from the core           | Clock enables for input and output block FFs.                            |
| CLK0, CLK1   | Control from the core           | System clocks for input and output blocks.                               |
| LSR          | Control from the core           | Local Set/Reset.   |
| GSRN         | Control from routing            | Global Set/Reset (active low).   |
| INCK         | Input to the core               | Input to Primary Clock Network or PLL reference inputs.                  |
| DQS          | Input to PIO                    | DQS signal from logic (routing) to PIO.                                  |
| INDD         | Input to the core               | Unregistered data input to core.   |
| INFF         | Input to the core               | Registered input on positive edge of the clock (CLK0).                   |
| IPOS0, IPOS1 | Input to the core               | DDR <sub>X</sub> registered inputs to the core.                          |
| ONEG0        | Control from the core           | Output signals from the core for SDR and DDR operation.                  |
| OPOS0,       | Control from the core           | Output signals from the core for DDR operation                           |
| OPOS1 ONEG1  | Tristate control from the core  | Signals to Tristate Register block for DDR operation.                    |
| TD           | Tristate control from the core  | Tristate signal from the core used in SDR operation.                     |
| DDRCLKPOL    | Control from clock polarity bus | Controls the polarity of the clock (CLK0) that feed the DDR input block. |

**Figure 2-25. DQS Routing**

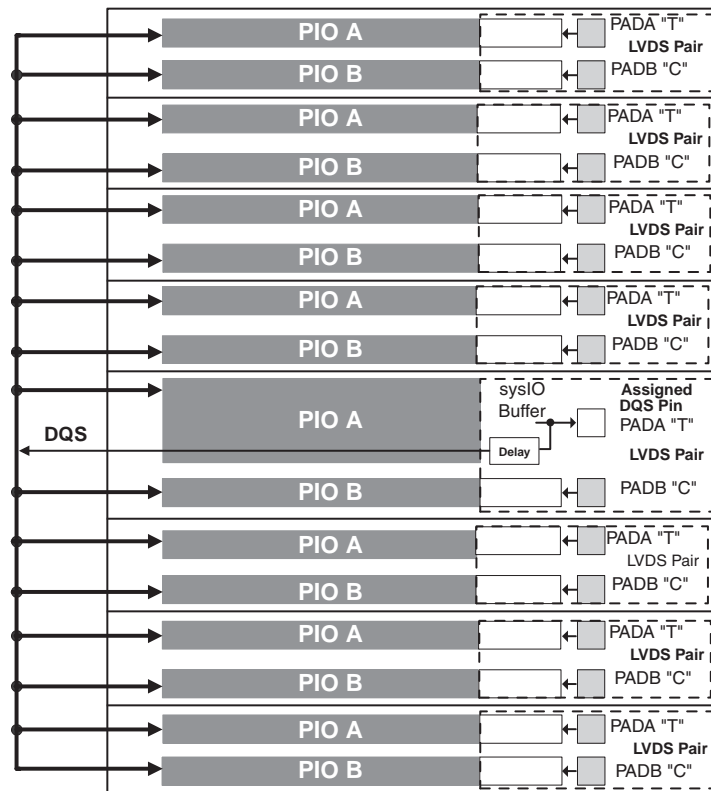

**PIO**

The PIO contains four blocks: an input register block, output register block, tristate register block and a control logic block. These blocks contain registers for both single data rate (SDR) and double data rate (DDR) operation along with the necessary clock and selection logic. Programmable delay lines used to shift incoming clock and data signals are also included in these blocks.

## sysI/O Differential Electrical Characteristics

### LVDS

#### Over Recommended Operating Conditions

| Parameter Symbol   | Parameter Description                        | Test Conditions                       | Min.        | Typ. | Max.  | Units   |
|--------------------|--|---------------------------------------|-------------|------|-------|---------|
| $V_{INP}, V_{INM}$ | Input voltage                                |                                       | 0           | —    | 2.4   | V       |
| $V_{THD}$          | Differential input threshold                 |                                       | +/-100      | —    | —     | mV      |
| $V_{CM}$           | Input common mode voltage                    | 100mV $\delta V_{THD}$                | $V_{THD}/2$ | 1.2  | 1.8   | V       |
|                    |  | 200mV $\delta V_{THD}$                | $V_{THD}/2$ | 1.2  | 1.9   | V       |
|                    |  | 350mV $\delta V_{THD}$                | $V_{THD}/2$ | 1.2  | 2.0   | V       |
| $I_{IN}$           | Input current                                | Power on or power off                 | —           | —    | +/-10 | $\mu$ A |
| $V_{OH}$           | Output high voltage for $V_{OP}$ or $V_{OM}$ | $R_T = 100$ Ohm                       | —           | 1.38 | 1.60  | V       |
| $V_{OL}$           | Output low voltage for $V_{OP}$ or $V_{OM}$  | $R_T = 100$ Ohm                       | 0.9V        | 1.03 | —     | V       |
| $V_{OD}$           | Output voltage differential                  | $(V_{OP} - V_{OM}), R_T = 100$ Ohm    | 250         | 350  | 450   | mV      |
| $\Delta V_{OD}$    | Change in $V_{OD}$ between high and low      |                                       | —           | —    | 50    | mV      |
| $V_{OS}$           | Output voltage offset                        | $(V_{OP} + V_{OM})/2, R_T = 100$ Ohm  | 1.125       | 1.25 | 1.375 | V       |
| $\Delta V_{OS}$    | Change in $V_{OS}$ between H and L           |                                       | —           | —    | 50    | mV      |
| $I_{OSD}$          | Output short circuit current                 | $V_{OD} = 0$ V Driver outputs shorted | —           | —    | 6     | mA      |

### LVPECL

The LatticeECP/EC devices support differential LVPECL standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The LVPECL input standard is supported by the LVDS differential input buffer. The scheme shown in Figure 3-3 is one possible solution for point-to-point signals.

Figure 3-3. Differential LVPECL

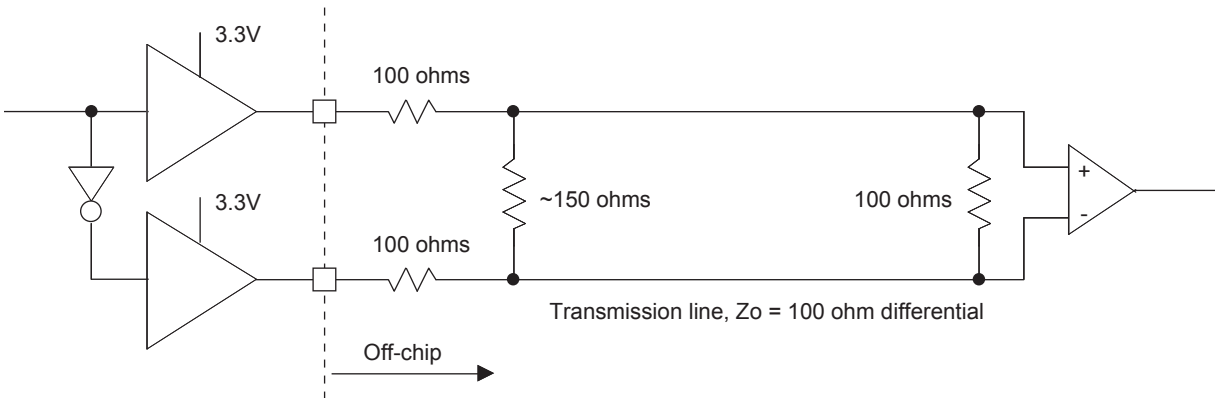


Table 3-3. LVPECL DC Conditions<sup>1</sup>

#### Over Recommended Operating Conditions

| Parameter         | Description                 | Typical | Units |
|-------------------|-----------------------------|---------|-------|
| Z <sub>OUT</sub>  | Output impedance            | 100     | ohm   |
| R <sub>P</sub>    | Driver parallel resistor    | 150     | ohm   |
| R <sub>T</sub>    | Receiver termination        | 100     | ohm   |
| V <sub>OH</sub>   | Output high voltage         | 2.03    | V     |
| V <sub>OL</sub>   | Output low voltage          | 1.27    | V     |
| V <sub>OD</sub>   | Output differential voltage | 0.76    | V     |
| V <sub>CM</sub>   | Output common mode voltage  | 1.65    | V     |
| Z <sub>BACK</sub> | Back impedance              | 85.7    | ohm   |
| I <sub>DC</sub>   | DC output current           | 12.7    | mA    |

1. For input buffer, see LVDS table.

For further information about LVPECL, BLVDS and other differential interfaces please see the list of technical information at the end of this data sheet.



**LFEC1, LFEC3 Logic Signal Connections: 208 PQFP (Cont.)**

| Pin Number | LFEC1        |      |      |               | LFEC3        |      |      |               |
|------------|--------------|------|------|---------------|--------------|------|------|---------------|
|            | Pin Function | Bank | LVDS | Dual Function | Pin Function | Bank | LVDS | Dual Function |
| 43         | PL11A        | 6    | T    | LDQS11        | PL15A        | 6    | T    | LDQS15        |
| 44         | PL11B        | 6    | C    |               | PL15B        | 6    | C    |               |
| 45         | PL12A        | 6    | T    |               | PL16A        | 6    | T    |               |
| 46         | PL12B        | 6    | C    |               | PL16B        | 6    | C    |               |
| 47         | PL13A        | 6    | T    |               | PL17A        | 6    | T    |               |
| 48         | PL13B        | 6    | C    |               | PL17B        | 6    | C    |               |
| 49         | PL14A        | 6    | T    | VREF1_6       | PL18A        | 6    | T    | VREF1_6       |
| 50         | PL14B        | 6    | C    | VREF2_6       | PL18B        | 6    | C    | VREF2_6       |
| 51         | VCCIO6       | 6    |      |               | VCCIO6       | 6    |      |               |
| 52*        | GND5<br>GND6 | -    |      |               | GND5<br>GND6 | -    |      |               |
| 53         | VCCIO5       | 5    |      |               | VCCIO5       | 5    |      |               |
| 54         | NC           | -    |      |               | PB2A         | 5    | T    |               |
| 55         | NC           | -    |      |               | PB2B         | 5    | C    |               |
| 56         | NC           | -    |      |               | PB3A         | 5    | T    |               |
| 57         | NC           | -    |      |               | PB3B         | 5    | C    |               |
| 58         | NC           | -    |      |               | PB4A         | 5    | T    |               |
| 59         | NC           | -    |      |               | PB4B         | 5    | C    |               |
| 60         | NC           | -    |      |               | PB5A         | 5    | T    |               |
| 61         | NC           | -    |      |               | PB5B         | 5    | C    |               |
| 62         | NC           | -    |      |               | PB6A         | 5    | T    | BDQS6         |
| 63         | NC           | -    |      |               | PB6B         | 5    | C    |               |
| 64         | NC           | -    |      |               | VCCIO5       | 5    |      |               |
| 65         | PB2A         | 5    | T    |               | PB10A        | 5    | T    |               |
| 66         | PB2B         | 5    | C    |               | PB10B        | 5    | C    |               |
| 67         | PB3A         | 5    | T    |               | PB11A        | 5    | T    |               |
| 68         | PB3B         | 5    | C    |               | PB11B        | 5    | C    |               |
| 69         | PB4A         | 5    | T    |               | PB12A        | 5    | T    |               |
| 70         | PB4B         | 5    | C    |               | PB12B        | 5    | C    |               |
| 71         | PB5A         | 5    | T    |               | PB13A        | 5    | T    |               |
| 72         | NC           | -    |      |               | GND5         | 5    |      |               |
| 73         | PB5B         | 5    | C    |               | PB13B        | 5    | C    |               |
| 74         | VCCIO5       | 5    |      |               | VCCIO5       | 5    |      |               |
| 75         | PB6A         | 5    | T    | BDQS6         | PB14A        | 5    | T    | BDQS14        |
| 76         | PB6B         | 5    | C    |               | PB14B        | 5    | C    |               |
| 77         | PB7A         | 5    | T    |               | PB15A        | 5    | T    |               |
| 78         | PB7B         | 5    | C    |               | PB15B        | 5    | C    |               |
| 79         | PB8A         | 5    | T    | VREF2_5       | PB16A        | 5    | T    | VREF2_5       |
| 80         | PB8B         | 5    | C    | VREF1_5       | PB16B        | 5    | C    | VREF1_5       |
| 81         | PB9A         | 5    | T    | PCLKT5_0      | PB17A        | 5    | T    | PCLKT5_0      |
| 82         | GND5         | 5    |      |               | GND5         | 5    |      |               |
| 83         | PB9B         | 5    | C    | PCLKC5_0      | PB17B        | 5    | C    | PCLKC5_0      |
| 84         | VCCAUX       | -    |      |               | VCCAUX       | -    |      |               |

**LFEC1, LFEC3 Logic Signal Connections: 208 PQFP (Cont.)**

| Pin Number | LFEC1        |      |      |                | LFEC3        |      |      |                |
|------------|--------------|------|------|----------------|--------------|------|------|----------------|
|            | Pin Function | Bank | LVDS | Dual Function  | Pin Function | Bank | LVDS | Dual Function  |
| 85         | VCCIO4       | 4    |      |                | VCCIO4       | 4    |      |                |
| 86         | PB10A        | 4    | T    | WRITEN         | PB18A        | 4    | T    | WRITEN         |
| 87         | PB10B        | 4    | C    | CS1N           | PB18B        | 4    | C    | CS1N           |
| 88         | PB11A        | 4    | T    | VREF1_4        | PB19A        | 4    | T    | VREF1_4        |
| 89         | PB11B        | 4    | C    | CSN            | PB19B        | 4    | C    | CSN            |
| 90         | PB12A        | 4    | T    | VREF2_4        | PB20A        | 4    | T    | VREF2_4        |
| 91         | PB12B        | 4    | C    | D0/SPID7       | PB20B        | 4    | C    | D0/SPID7       |
| 92         | PB13A        | 4    | T    | D2/SPID5       | PB21A        | 4    | T    | D2/SPID5       |
| 93         | GND4         | 4    |      |                | GND4         | 4    |      |                |
| 94         | PB13B        | 4    | C    | D1/SPID6       | PB21B        | 4    | C    | D1/SPID6       |
| 95         | PB14A        | 4    | T    | BDQS14         | PB22A        | 4    | T    | BDQS22         |
| 96         | PB14B        | 4    | C    | D3/SPID4       | PB22B        | 4    | C    | D3/SPID4       |
| 97         | PB15A        | 4    | T    |                | PB23A        | 4    | T    |                |
| 98         | PB15B        | 4    | C    | D4/SPID3       | PB23B        | 4    | C    | D4/SPID3       |
| 99         | PB16A        | 4    | T    |                | PB24A        | 4    | T    |                |
| 100        | PB16B        | 4    | C    | D5/SPID2       | PB24B        | 4    | C    | D5/SPID2       |
| 101        | PB17A        | 4    | T    |                | PB25A        | 4    | T    |                |
| 102        | PB17B        | 4    | C    | D6/SPID1       | PB25B        | 4    | C    | D6/SPID1       |
| 103        | NC           | -    |      |                | NC           | -    |      |                |
| 104        | VCCIO4       | 4    |      |                | VCCIO4       | 4    |      |                |
| 105*       | GND3<br>GND4 | -    |      |                | GND3<br>GND4 | -    |      |                |
| 106        | VCCIO3       | 3    |      |                | VCCIO3       | 3    |      |                |
| 107        | PR14B        | 3    | C    | VREF2_3        | PR18B        | 3    | C    | VREF2_3        |
| 108        | PR14A        | 3    | T    | VREF1_3        | PR18A        | 3    | T    | VREF1_3        |
| 109        | PR13B        | 3    | C    |                | PR17B        | 3    | C    |                |
| 110        | PR13A        | 3    | T    |                | PR17A        | 3    | T    |                |
| 111        | PR12B        | 3    | C    |                | PR16B        | 3    | C    |                |
| 112        | PR12A        | 3    | T    |                | PR16A        | 3    | T    |                |
| 113        | PR11B        | 3    | C    |                | PR15B        | 3    | C    |                |
| 114        | PR11A        | 3    | T    | RDQS11         | PR15A        | 3    | T    | RDQS15         |
| 115        | PR10B        | 3    | C    | RLM0_PLLC_FB_A | PR14B        | 3    | C    | RLM0_PLLC_FB_A |
| 116        | GND3         | 3    |      |                | GND3         | 3    |      |                |
| 117        | PR10A        | 3    | T    | RLM0_PLLT_FB_A | PR14A        | 3    | T    | RLM0_PLLT_FB_A |
| 118        | PR9B         | 3    | C    | RLM0_PLLC_IN_A | PR13B        | 3    | C    | RLM0_PLLC_IN_A |
| 119        | PR9A         | 3    | T    | RLM0_PLLT_IN_A | PR13A        | 3    | T    | RLM0_PLLT_IN_A |
| 120        | VCCIO3       | 3    |      |                | VCCIO3       | 3    |      |                |
| 121        | PR8B         | 3    | C    | DI/CSSPIN      | PR12B        | 3    | C    | DI/CSSPIN      |
| 122        | PR8A         | 3    | T    | DOUT/CSON      | PR12A        | 3    | T    | DOUT/CSON      |
| 123        | PR7B         | 3    | C    | BUSY/SISPI     | PR11B        | 3    | C    | BUSY/SISPI     |
| 124        | PR7A         | 3    | T    | D7/SPID0       | PR11A        | 3    | T    | D7/SPID0       |
| 125        | CFG2         | 3    |      |                | CFG2         | 3    |      |                |
| 126        | CFG1         | 3    |      |                | CFG1         | 3    |      |                |

**LFECP/EC6, LFECP/EC10 Logic Signal Connections: 208 PQFP (Cont.)**

| Pin Number | LFECP6/LFEC6 |      |      |               | LFECP10/LFEC10 |      |      |               |
|------------|--------------|------|------|---------------|----------------|------|------|---------------|
|            | Pin Function | Bank | LVDS | Dual Function | Pin Function   | Bank | LVDS | Dual Function |
| 43         | PL24A        | 6    | T    | LDQS24        | PL33A          | 6    | T    | LDQS33        |
| 44         | PL24B        | 6    | C    |               | PL33B          | 6    | C    |               |
| 45         | PL25A        | 6    | T    |               | PL34A          | 6    | T    |               |
| 46         | PL25B        | 6    | C    |               | PL34B          | 6    | C    |               |
| 47         | PL26A        | 6    | T    |               | PL35A          | 6    | T    |               |
| 48         | PL26B        | 6    | C    |               | PL35B          | 6    | C    |               |
| 49         | PL27A        | 6    | T    | VREF1_6       | PL36A          | 6    | T    | VREF1_6       |
| 50         | PL27B        | 6    | C    | VREF2_6       | PL36B          | 6    | C    | VREF2_6       |
| 51         | VCCIO6       | 6    |      |               | VCCIO6         | 6    |      |               |
| 52*        | GND5<br>GND6 | -    |      |               | GND5<br>GND6   | -    |      |               |
| 53         | VCCIO5       | 5    |      |               | VCCIO5         | 5    |      |               |
| 54         | PB2A         | 5    | T    |               | PB2A           | 5    | T    |               |
| 55         | PB2B         | 5    | C    |               | PB2B           | 5    | C    |               |
| 56         | PB3A         | 5    | T    |               | PB3A           | 5    | T    |               |
| 57         | PB3B         | 5    | C    |               | PB3B           | 5    | C    |               |
| 58         | PB4A         | 5    | T    |               | PB4A           | 5    | T    |               |
| 59         | PB4B         | 5    | C    |               | PB4B           | 5    | C    |               |
| 60         | PB5A         | 5    | T    |               | PB5A           | 5    | T    |               |
| 61         | PB5B         | 5    | C    |               | PB5B           | 5    | C    |               |
| 62         | PB6A         | 5    | T    | BDQS6         | PB6A           | 5    | T    | BDQS6         |
| 63         | PB6B         | 5    | C    |               | PB6B           | 5    | C    |               |
| 64         | VCCIO5       | 5    |      |               | VCCIO5         | 5    |      |               |
| 65         | PB10A        | 5    | T    |               | PB18A          | 5    | T    |               |
| 66         | PB10B        | 5    | C    |               | PB18B          | 5    | C    |               |
| 67         | PB11A        | 5    | T    |               | PB19A          | 5    | T    |               |
| 68         | PB11B        | 5    | C    |               | PB19B          | 5    | C    |               |
| 69         | PB12A        | 5    | T    |               | PB20A          | 5    | T    |               |
| 70         | PB12B        | 5    | C    |               | PB20B          | 5    | C    |               |
| 71         | PB13A        | 5    | T    |               | PB21A          | 5    | T    |               |
| 72         | GND5         | 5    |      |               | GND5           | 5    |      |               |
| 73         | PB13B        | 5    | C    |               | PB21B          | 5    | C    |               |
| 74         | VCCIO5       | 5    |      |               | VCCIO5         | 5    |      |               |
| 75         | PB14A        | 5    | T    | BDQS14        | PB22A          | 5    | T    | BDQS22        |
| 76         | PB14B        | 5    | C    |               | PB22B          | 5    | C    |               |
| 77         | PB15A        | 5    | T    |               | PB23A          | 5    | T    |               |
| 78         | PB15B        | 5    | C    |               | PB23B          | 5    | C    |               |
| 79         | PB16A        | 5    | T    | VREF2_5       | PB24A          | 5    | T    | VREF2_5       |
| 80         | PB16B        | 5    | C    | VREF1_5       | PB24B          | 5    | C    | VREF1_5       |
| 81         | PB17A        | 5    | T    | PCLKT5_0      | PB25A          | 5    | T    | PCLKT5_0      |
| 82         | GND5         | 5    |      |               | GND5           | 5    |      |               |
| 83         | PB17B        | 5    | C    | PCLKC5_0      | PB25B          | 5    | C    | PCLKC5_0      |
| 84         | VCCAUX       | -    |      |               | VCCAUX         | -    |      |               |

**LFEC6/EC6, LFEC6/EC10 Logic Signal Connections: 208 PQFP (Cont.)**

| Pin Number | LFEC6/LFEC6  |      |      |                | LFEC10/LFEC10 |      |      |                |
|------------|--------------|------|------|----------------|---------------|------|------|----------------|
|            | Pin Function | Bank | LVDS | Dual Function  | Pin Function  | Bank | LVDS | Dual Function  |
| 85         | VCCIO4       | 4    |      |                | VCCIO4        | 4    |      |                |
| 86         | PB18A        | 4    | T    | WRITEN         | PB26A         | 4    | T    | WRITEN         |
| 87         | PB18B        | 4    | C    | CS1N           | PB26B         | 4    | C    | CS1N           |
| 88         | PB19A        | 4    | T    | VREF1_4        | PB27A         | 4    | T    | VREF1_4        |
| 89         | PB19B        | 4    | C    | CSN            | PB27B         | 4    | C    | CSN            |
| 90         | PB20A        | 4    | T    | VREF2_4        | PB28A         | 4    | T    | VREF2_4        |
| 91         | PB20B        | 4    | C    | D0/SPID7       | PB28B         | 4    | C    | D0/SPID7       |
| 92         | PB21A        | 4    | T    | D2/SPID5       | PB29A         | 4    | T    | D2/SPID5       |
| 93         | GND4         | 4    |      |                | GND4          | 4    |      |                |
| 94         | PB21B        | 4    | C    | D1/SPID6       | PB29B         | 4    | C    | D1/SPID6       |
| 95         | PB22A        | 4    | T    | BDQS22         | PB30A         | 4    | T    | BDQS30         |
| 96         | PB22B        | 4    | C    | D3/SPID4       | PB30B         | 4    | C    | D3/SPID4       |
| 97         | PB23A        | 4    | T    |                | PB31A         | 4    | T    |                |
| 98         | PB23B        | 4    | C    | D4/SPID3       | PB31B         | 4    | C    | D4/SPID3       |
| 99         | PB24A        | 4    | T    |                | PB32A         | 4    | T    |                |
| 100        | PB24B        | 4    | C    | D5/SPID2       | PB32B         | 4    | C    | D5/SPID2       |
| 101        | PB25A        | 4    | T    |                | PB33A         | 4    | T    |                |
| 102        | PB25B        | 4    | C    | D6/SPID1       | PB33B         | 4    | C    | D6/SPID1       |
| 103        | PB33A        | 4    |      |                | PB41A         | 4    |      |                |
| 104        | VCCIO4       | 4    |      |                | VCCIO4        | 4    |      |                |
| 105*       | GND3<br>GND4 | -    |      |                | GND3<br>GND4  | -    |      |                |
| 106        | VCCIO3       | 3    |      |                | VCCIO3        | 3    |      |                |
| 107        | PR27B        | 3    | C    | VREF2_3        | PR36B         | 3    | C    | VREF2_3        |
| 108        | PR27A        | 3    | T    | VREF1_3        | PR36A         | 3    | T    | VREF1_3        |
| 109        | PR26B        | 3    | C    |                | PR35B         | 3    | C    |                |
| 110        | PR26A        | 3    | T    |                | PR35A         | 3    | T    |                |
| 111        | PR25B        | 3    | C    |                | PR34B         | 3    | C    |                |
| 112        | PR25A        | 3    | T    |                | PR34A         | 3    | T    |                |
| 113        | PR24B        | 3    | C    |                | PR33B         | 3    | C    |                |
| 114        | PR24A        | 3    | T    | RDQS24         | PR33A         | 3    | T    | RDQS33         |
| 115        | PR23B        | 3    | C    | RLM0_PLLC_FB_A | PR32B         | 3    | C    | RLM0_PLLC_FB_A |
| 116        | GND3         | 3    |      |                | GND3          | 3    |      |                |
| 117        | PR23A        | 3    | T    | RLM0_PLLT_FB_A | PR32A         | 3    | T    | RLM0_PLLT_FB_A |
| 118        | PR22B        | 3    | C    | RLM0_PLLC_IN_A | PR31B         | 3    | C    | RLM0_PLLC_IN_A |
| 119        | PR22A        | 3    | T    | RLM0_PLLT_IN_A | PR31A         | 3    | T    | RLM0_PLLT_IN_A |
| 120        | VCCIO3       | 3    |      |                | VCCIO3        | 3    |      |                |
| 121        | PR21B        | 3    | C    | DI/CSSPIN      | PR30B         | 3    | C    | DI/CSSPIN      |
| 122        | PR21A        | 3    | T    | DOUT/CSON      | PR30A         | 3    | T    | DOUT/CSON      |
| 123        | PR20B        | 3    | C    | BUSY/SISPI     | PR29B         | 3    | C    | BUSY/SISPI     |
| 124        | PR20A        | 3    | T    | D7/SPID0       | PR29A         | 3    | T    | D7/SPID0       |
| 125        | CFG2         | 3    |      |                | CFG2          | 3    |      |                |
| 126        | CFG1         | 3    |      |                | CFG1          | 3    |      |                |

**LFECP/EC10 and LFECP/EC15 Logic Signal Connections: 256 fpBGA (Cont.)**

| Ball Number | LFECP10/LFEC10 |      |      |               | LFECP15/LFEC15 |      |      |               |
|-------------|----------------|------|------|---------------|----------------|------|------|---------------|
|             | Ball Function  | Bank | LVDS | Dual Function | Ball Function  | Bank | LVDS | Dual Function |
| G12         | PR18A          | 2    | T    | PCLKT2_0      | PR22A          | 2    | T    | PCLKT2_0      |
| G13         | PR17B          | 2    | C    |               | PR21B          | 2    | C    |               |
| F13         | PR17A          | 2    | T    |               | PR21A          | 2    | T    |               |
| F12         | PR16B          | 2    | C    |               | PR20B          | 2    | C    |               |
| E13         | PR16A          | 2    | T    |               | PR20A          | 2    | T    |               |
| D16         | PR15B          | 2    | C    |               | PR19B          | 2    | C    |               |
| D15         | PR15A          | 2    | T    |               | PR19A          | 2    | T    | RDQS19        |
| F14         | PR14B          | 2    | C    |               | PR18B          | 2    | C    |               |
| GND         | GND2           | 2    |      |               | GND2           | 2    |      |               |
| E14         | PR14A          | 2    | T    |               | PR18A          | 2    | T    |               |
| C16         | PR13B          | 2    | C    |               | PR17B          | 2    | C    |               |
| B16         | PR13A          | 2    | T    |               | PR17A          | 2    | T    |               |
| C15         | PR12B          | 2    | C    |               | PR16B          | 2    | C    |               |
| C14         | PR12A          | 2    | T    |               | PR16A          | 2    | T    |               |
| GND         | GND2           | 2    |      |               | GND2           | 2    |      |               |
| -           | -              | -    |      |               | GND2           | 2    |      |               |
| D14         | PR2B           | 2    | C    | VREF1_2       | PR2B           | 2    | C    | VREF1_2       |
| D13         | PR2A           | 2    | T    | VREF2_2       | PR2A           | 2    | T    | VREF2_2       |
| GND         | GND2           | 2    |      |               | GND2           | 2    |      |               |
| GND         | GND1           | 1    |      |               | GND1           | 1    |      |               |
| GND         | GND1           | 1    |      |               | GND1           | 1    |      |               |
| -           | -              | -    |      |               | GND1           | 1    |      |               |
| -           | -              | -    |      |               | GND1           | 1    |      |               |
| B13         | PT34B          | 1    | C    |               | PT34B          | 1    | C    |               |
| C13         | PT34A          | 1    | T    |               | PT34A          | 1    | T    |               |
| C12         | PT33B          | 1    | C    |               | PT33B          | 1    | C    |               |
| GND         | GND1           | 1    |      |               | GND1           | 1    |      |               |
| D12         | PT33A          | 1    | T    |               | PT33A          | 1    | T    |               |
| A15         | PT32B          | 1    | C    |               | PT32B          | 1    | C    |               |
| B14         | PT32A          | 1    | T    |               | PT32A          | 1    | T    |               |
| D11         | PT31B          | 1    | C    |               | PT31B          | 1    | C    |               |
| C11         | PT31A          | 1    | T    |               | PT31A          | 1    | T    |               |
| E10         | PT30B          | 1    | C    |               | PT30B          | 1    | C    |               |
| E11         | PT30A          | 1    | T    | TDQS30        | PT30A          | 1    | T    | TDQS30        |
| A14         | PT29B          | 1    | C    |               | PT29B          | 1    | C    |               |
| GND         | GND1           | 1    |      |               | GND1           | 1    |      |               |
| A13         | PT29A          | 1    | T    |               | PT29A          | 1    | T    |               |
| D10         | PT28B          | 1    | C    |               | PT28B          | 1    | C    |               |
| C10         | PT28A          | 1    | T    |               | PT28A          | 1    | T    |               |
| A12         | PT27B          | 1    | C    | VREF2_1       | PT27B          | 1    | C    | VREF2_1       |
| B12         | PT27A          | 1    | T    | VREF1_1       | PT27A          | 1    | T    | VREF1_1       |
| A11         | PT26B          | 1    | C    |               | PT26B          | 1    | C    |               |
| B11         | PT26A          | 1    | T    |               | PT26A          | 1    | T    |               |

**LFECP/EC6, LFECP/EC10, LFECP/EC15 Logic Signal Connections:  
 484 fpBGA (Cont.)**

| LFECP6/LFEC6 |               |      |      |               | LFECP10/LFEC10 |               |      |      |               | LFECP/LFEC15 |               |      |      |               |
|--------------|---------------|------|------|---------------|----------------|---------------|------|------|---------------|--------------|---------------|------|------|---------------|
| Ball Number  | Ball Function | Bank | LVDS | Dual Function | Ball Number    | Ball Function | Bank | LVDS | Dual Function | Ball Number  | Ball Function | Bank | LVDS | Dual Function |
| F14          | PT23B         | 1    | C    |               | F14            | PT31B         | 1    | C    |               | F14          | PT31B         | 1    | C    |               |
| D14          | PT23A         | 1    | T    |               | D14            | PT31A         | 1    | T    |               | D14          | PT31A         | 1    | T    |               |
| E13          | PT22B         | 1    | C    |               | E13            | PT30B         | 1    | C    |               | E13          | PT30B         | 1    | C    |               |
| G13          | PT22A         | 1    | T    | TDQS22        | G13            | PT30A         | 1    | T    | TDQS30        | G13          | PT30A         | 1    | T    | TDQS30        |
| A12          | PT21B         | 1    | C    |               | A12            | PT29B         | 1    | C    |               | A12          | PT29B         | 1    | C    |               |
| GND          | GND1          | 1    |      |               | GND            | GND1          | 1    |      |               | GND          | GND1          | 1    |      |               |
| B12          | PT21A         | 1    | T    |               | B12            | PT29A         | 1    | T    |               | B12          | PT29A         | 1    | T    |               |
| F13          | PT20B         | 1    | C    |               | F13            | PT28B         | 1    | C    |               | F13          | PT28B         | 1    | C    |               |
| D13          | PT20A         | 1    | T    |               | D13            | PT28A         | 1    | T    |               | D13          | PT28A         | 1    | T    |               |
| F12          | PT19B         | 1    | C    | VREF2_1       | F12            | PT27B         | 1    | C    | VREF2_1       | F12          | PT27B         | 1    | C    | VREF2_1       |
| D12          | PT19A         | 1    | T    | VREF1_1       | D12            | PT27A         | 1    | T    | VREF1_1       | D12          | PT27A         | 1    | T    | VREF1_1       |
| F11          | PT18B         | 1    | C    |               | F11            | PT26B         | 1    | C    |               | F11          | PT26B         | 1    | C    |               |
| C12          | PT18A         | 1    | T    |               | C12            | PT26A         | 1    | T    |               | C12          | PT26A         | 1    | T    |               |
| A11          | PT17B         | 0    | C    | PCLKC0_0      | A11            | PT25B         | 0    | C    | PCLKC0_0      | A11          | PT25B         | 0    | C    | PCLKC0_0      |
| GND          | GND0          | 0    |      |               | GND            | GND0          | 0    |      |               | GND          | GND0          | 0    |      |               |
| A10          | PT17A         | 0    | T    | PCLKT0_0      | A10            | PT25A         | 0    | T    | PCLKT0_0      | A10          | PT25A         | 0    | T    | PCLKT0_0      |
| E12          | PT16B         | 0    | C    | VREF1_0       | E12            | PT24B         | 0    | C    | VREF1_0       | E12          | PT24B         | 0    | C    | VREF1_0       |
| E11          | PT16A         | 0    | T    | VREF2_0       | E11            | PT24A         | 0    | T    | VREF2_0       | E11          | PT24A         | 0    | T    | VREF2_0       |
| B11          | PT15B         | 0    | C    |               | B11            | PT23B         | 0    | C    |               | B11          | PT23B         | 0    | C    |               |
| C11          | PT15A         | 0    | T    |               | C11            | PT23A         | 0    | T    |               | C11          | PT23A         | 0    | T    |               |
| B9           | PT14B         | 0    | C    |               | B9             | PT22B         | 0    | C    |               | B9           | PT22B         | 0    | C    |               |
| B10          | PT14A         | 0    | T    | TDQS14        | B10            | PT22A         | 0    | T    | TDQS22        | B10          | PT22A         | 0    | T    | TDQS22        |
| A9           | PT13B         | 0    | C    |               | A9             | PT21B         | 0    | C    |               | A9           | PT21B         | 0    | C    |               |
| GND          | GND0          | 0    |      |               | GND            | GND0          | 0    |      |               | GND          | GND0          | 0    |      |               |
| A8           | PT13A         | 0    | T    |               | A8             | PT21A         | 0    | T    |               | A8           | PT21A         | 0    | T    |               |
| D11          | PT12B         | 0    | C    |               | D11            | PT20B         | 0    | C    |               | D11          | PT20B         | 0    | C    |               |
| C10          | PT12A         | 0    | T    |               | C10            | PT20A         | 0    | T    |               | C10          | PT20A         | 0    | T    |               |
| A7           | PT11B         | 0    | C    |               | A7             | PT19B         | 0    | C    |               | A7           | PT19B         | 0    | C    |               |
| A6           | PT11A         | 0    | T    |               | A6             | PT19A         | 0    | T    |               | A6           | PT19A         | 0    | T    |               |
| B7           | PT10B         | 0    | C    |               | B7             | PT18B         | 0    | C    |               | B7           | PT18B         | 0    | C    |               |
| B8           | PT10A         | 0    | T    |               | B8             | PT18A         | 0    | T    |               | B8           | PT18A         | 0    | T    |               |
| A5           | PT9B          | 0    | C    |               | A5             | PT17B         | 0    | C    |               | A5           | PT17B         | 0    | C    |               |
| GND          | GND0          | 0    |      |               | GND            | GND0          | 0    |      |               | GND          | GND0          | 0    |      |               |
| B6           | PT9A          | 0    | T    |               | B6             | PT17A         | 0    | T    |               | B6           | PT17A         | 0    | T    |               |
| G10          | PT8B          | 0    | C    |               | G10            | PT16B         | 0    | C    |               | G10          | PT16B         | 0    | C    |               |
| E10          | PT8A          | 0    | T    |               | E10            | PT16A         | 0    | T    |               | E10          | PT16A         | 0    | T    |               |
| F10          | PT7B          | 0    | C    |               | F10            | PT15B         | 0    | C    |               | F10          | PT15B         | 0    | C    |               |
| D10          | PT7A          | 0    | T    |               | D10            | PT15A         | 0    | T    |               | D10          | PT15A         | 0    | T    |               |
| G9           | PT6B          | 0    | C    |               | G9             | PT14B         | 0    | C    |               | G9           | PT14B         | 0    | C    |               |
| E9           | PT6A          | 0    | T    | TDQS6         | E9             | PT14A         | 0    | T    | TDQS14        | E9           | PT14A         | 0    | T    | TDQS14        |
| C9           | PT5B          | 0    | C    |               | C9             | PT13B         | 0    | C    |               | C9           | PT13B         | 0    | C    |               |
| GND          | -             | -    |      |               | GND            | GND0          | 0    |      |               | GND          | GND0          | 0    |      |               |
| C8           | PT5A          | 0    | T    |               | C8             | PT13A         | 0    | T    |               | C8           | PT13A         | 0    | T    |               |
| F9           | PT4B          | 0    | C    |               | F9             | PT12B         | 0    | C    |               | F9           | PT12B         | 0    | C    |               |
| D9           | PT4A          | 0    | T    |               | D9             | PT12A         | 0    | T    |               | D9           | PT12A         | 0    | T    |               |
| F8           | PT3B          | 0    | C    |               | F8             | PT11B         | 0    | C    |               | F8           | PT11B         | 0    | C    |               |
| D7           | PT3A          | 0    | T    |               | D7             | PT11A         | 0    | T    |               | D7           | PT11A         | 0    | T    |               |
| D8           | PT2B          | 0    | C    |               | D8             | PT10B         | 0    | C    |               | D8           | PT10B         | 0    | C    |               |
| C7           | PT2A          | 0    | T    |               | C7             | PT10A         | 0    | T    |               | C7           | PT10A         | 0    | T    |               |
| GND          | GND0          | 0    |      |               | GND            | GND0          | 0    |      |               | GND          | GND0          | 0    |      |               |

**LFECP/EC20 and LFECP/EC33 Logic Signal Connections: 484 fpBGA (Cont.)**

| LFECP20/LFEC20 |               |      |       |               | LFECP/LFEC33 |               |      |       |               |
|----------------|---------------|------|-------|---------------|--------------|---------------|------|-------|---------------|
| Ball Number    | Ball Function | Bank | LVD S | Dual Function | Ball Number  | Ball Function | Bank | LVD S | Dual Function |
| Y13            | PB40A         | 4    | T     |               | Y13          | PB40A         | 4    | T     |               |
| V14            | PB40B         | 4    | C     | D5/SPID2      | V14          | PB40B         | 4    | C     | D5/SPID2      |
| AA13           | PB41A         | 4    | T     |               | AA13         | PB41A         | 4    | T     |               |
| GND            | GND4          | 4    |       |               | GND          | GND4          | 4    |       |               |
| AB13           | PB41B         | 4    | C     | D6/SPID1      | AB13         | PB41B         | 4    | C     | D6/SPID1      |
| AA14           | PB42A         | 4    | T     |               | AA14         | PB42A         | 4    | T     |               |
| Y14            | PB42B         | 4    | C     |               | Y14          | PB42B         | 4    | C     |               |
| Y15            | PB43A         | 4    | T     |               | Y15          | PB43A         | 4    | T     |               |
| W15            | PB43B         | 4    | C     |               | W15          | PB43B         | 4    | C     |               |
| V15            | PB44A         | 4    | T     |               | V15          | PB44A         | 4    | T     |               |
| T14            | PB44B         | 4    | C     |               | T14          | PB44B         | 4    | C     |               |
| AB14           | PB45A         | 4    | T     |               | AB14         | PB45A         | 4    | T     |               |
| GND            | GND4          | 4    |       |               | GND          | GND4          | 4    |       |               |
| AB15           | PB45B         | 4    | C     |               | AB15         | PB45B         | 4    | C     |               |
| AB16           | PB46A         | 4    | T     | BDQS46        | AB16         | PB46A         | 4    | T     | BDQS46        |
| AA15           | PB46B         | 4    | C     |               | AA15         | PB46B         | 4    | C     |               |
| AB17           | PB47A         | 4    | T     |               | AB17         | PB47A         | 4    | T     |               |
| AA16           | PB47B         | 4    | C     |               | AA16         | PB47B         | 4    | C     |               |
| AB18           | PB48A         | 4    | T     |               | AB18         | PB48A         | 4    | T     |               |
| AA17           | PB48B         | 4    | C     |               | AA17         | PB48B         | 4    | C     |               |
| AB19           | PB49A         | 4    | T     |               | AB19         | PB49A         | 4    | T     |               |
| GND            | GND4          | 4    |       |               | GND          | GND4          | 4    |       |               |
| AA18           | PB49B         | 4    | C     |               | AA18         | PB49B         | 4    | C     |               |
| W16            | PB50A         | 4    | T     |               | W16          | PB50A         | 4    | T     |               |
| U15            | PB50B         | 4    | C     |               | U15          | PB50B         | 4    | C     |               |
| V16            | PB51A         | 4    | T     |               | V16          | PB51A         | 4    | T     |               |
| U16            | PB51B         | 4    | C     |               | U16          | PB51B         | 4    | C     |               |
| Y17            | PB52A         | 4    | T     |               | Y17          | PB52A         | 4    | T     |               |
| V17            | PB52B         | 4    | C     |               | V17          | PB52B         | 4    | C     |               |
| AB20           | PB53A         | 4    | T     |               | AB20         | PB53A         | 4    | T     |               |
| GND            | GND4          | 4    |       |               | GND          | GND4          | 4    |       |               |
| AA19           | PB53B         | 4    | C     |               | AA19         | PB53B         | 4    | C     |               |
| Y16            | PB54A         | 4    | T     | BDQS54        | Y16          | PB54A         | 4    | T     | BDQS54        |
| W17            | PB54B         | 4    | C     |               | W17          | PB54B         | 4    | C     |               |
| AA20           | PB55A         | 4    | T     |               | AA20         | PB55A         | 4    | T     |               |
| Y19            | PB55B         | 4    | C     |               | Y19          | PB55B         | 4    | C     |               |
| Y18            | PB56A         | 4    | T     |               | Y18          | PB56A         | 4    | T     |               |
| W18            | PB56B         | 4    | C     |               | W18          | PB56B         | 4    | C     |               |
| T17            | PB57A         | 4    | T     |               | T17          | PB57A         | 4    | T     |               |
| U17            | PB57B         | 4    | C     |               | U17          | PB57B         | 4    | C     |               |
| GND            | -             | -    |       |               | GND          | GND4          | 4    |       |               |
| GND            | GND4          | 4    |       |               | GND          | GND4          | 4    |       |               |
| GND            | GND3          | 3    |       |               | GND          | GND4          | 4    |       |               |
| GND            | -             | -    |       |               | GND          | GND3          | 3    |       |               |

**LFCEP/EC20, LFCEP/EC33 Logic Signal Connections: 672 fpBGA (Cont.)**

| LFCEP/EC20  |               |      |      |               | LFCEP/EC33  |               |      |      |               |
|-------------|---------------|------|------|---------------|-------------|---------------|------|------|---------------|
| Ball Number | Ball Function | Bank | LVDS | Dual Function | Ball Number | Ball Function | Bank | LVDS | Dual Function |
| Y6          | NC            | -    |      |               | Y6          | PL62A         | 6    | T    |               |
| W7          | NC            | -    |      |               | W7          | PL62B         | 6    | C    |               |
| AA4         | NC            | -    |      |               | AA4         | PL63A         | 6    | T    |               |
| AB3         | NC            | -    |      |               | AB3         | PL63B         | 6    | C    |               |
| AC2         | NC            | -    |      |               | AC2         | PL64A         | 6    | T    |               |
| -           | -             | -    |      |               | GND         | GND6          | 6    |      |               |
| AC3         | NC            | -    |      |               | AC3         | PL64B         | 6    | C    |               |
| AA5         | NC            | -    |      |               | AA5         | PL65A         | 6    | T    | LDQS65        |
| AB5         | NC            | -    |      |               | AB5         | PL65B         | 6    | C    |               |
| AD3         | NC            | -    |      |               | AD3         | PL66A         | 6    | T    |               |
| AD2         | NC            | -    |      |               | AD2         | PL66B         | 6    | C    |               |
| AE1         | NC            | -    |      |               | AE1         | PL67A         | 6    | T    |               |
| AD1         | NC            | -    |      |               | AD1         | PL67B         | 6    | C    |               |
| AB4         | PL48A         | 6    | T    | VREF1_6       | AB4         | PL68A         | 6    | T    | VREF1_6       |
| AC4         | PL48B         | 6    | C    | VREF2_6       | AC4         | PL68B         | 6    | C    | VREF2_6       |
| GND         | GND6          | 6    |      |               | GND         | GND6          | 6    |      |               |
| GND         | GND5          | 5    |      |               | GND         | GND5          | 5    |      |               |
| AB6         | PB2A          | 5    | T    |               | AB6         | PB2A          | 5    | T    |               |
| AA6         | PB2B          | 5    | C    |               | AA6         | PB2B          | 5    | C    |               |
| AC7         | PB3A          | 5    | T    |               | AC7         | PB3A          | 5    | T    |               |
| Y8          | PB3B          | 5    | C    |               | Y8          | PB3B          | 5    | C    |               |
| AB7         | PB4A          | 5    | T    |               | AB7         | PB4A          | 5    | T    |               |
| AA7         | PB4B          | 5    | C    |               | AA7         | PB4B          | 5    | C    |               |
| AC6         | PB5A          | 5    | T    |               | AC6         | PB5A          | 5    | T    |               |
| AC5         | PB5B          | 5    | C    |               | AC5         | PB5B          | 5    | C    |               |
| AB8         | PB6A          | 5    | T    | BDQS6         | AB8         | PB6A          | 5    | T    | BDQS6         |
| AC8         | PB6B          | 5    | C    |               | AC8         | PB6B          | 5    | C    |               |
| AE2         | PB7A          | 5    | T    |               | AE2         | PB7A          | 5    | T    |               |
| AA8         | PB7B          | 5    | C    |               | AA8         | PB7B          | 5    | C    |               |
| AF2         | PB8A          | 5    | T    |               | AF2         | PB8A          | 5    | T    |               |
| Y9          | PB8B          | 5    | C    |               | Y9          | PB8B          | 5    | C    |               |
| AD5         | PB9A          | 5    | T    |               | AD5         | PB9A          | 5    | T    |               |
| GND         | GND5          | 5    |      |               | GND         | GND5          | 5    |      |               |
| AD4         | PB9B          | 5    | C    |               | AD4         | PB9B          | 5    | C    |               |
| AD8         | PB10A         | 5    | T    |               | AD8         | PB10A         | 5    | T    |               |
| AC9         | PB10B         | 5    | C    |               | AC9         | PB10B         | 5    | C    |               |
| AE3         | PB11A         | 5    | T    |               | AE3         | PB11A         | 5    | T    |               |
| AB9         | PB11B         | 5    | C    |               | AB9         | PB11B         | 5    | C    |               |
| AF3         | PB12A         | 5    | T    |               | AF3         | PB12A         | 5    | T    |               |
| AD9         | PB12B         | 5    | C    |               | AD9         | PB12B         | 5    | C    |               |
| AE4         | PB13A         | 5    | T    |               | AE4         | PB13A         | 5    | T    |               |
| GND         | GND5          | 5    |      |               | GND         | GND5          | 5    |      |               |



**LFCEP/EC20, LFCEP/EC33 Logic Signal Connections: 672 fpBGA (Cont.)**

| LFCEP/EC20  |               |      |      |               | LFCEP/EC33  |               |      |      |               |
|-------------|---------------|------|------|---------------|-------------|---------------|------|------|---------------|
| Ball Number | Ball Function | Bank | LVDS | Dual Function | Ball Number | Ball Function | Bank | LVDS | Dual Function |
| M10         | GND           | -    |      |               | M10         | GND           | -    |      |               |
| M11         | GND           | -    |      |               | M11         | GND           | -    |      |               |
| M12         | GND           | -    |      |               | M12         | GND           | -    |      |               |
| M13         | GND           | -    |      |               | M13         | GND           | -    |      |               |
| M14         | GND           | -    |      |               | M14         | GND           | -    |      |               |
| M15         | GND           | -    |      |               | M15         | GND           | -    |      |               |
| M16         | GND           | -    |      |               | M16         | GND           | -    |      |               |
| M17         | GND           | -    |      |               | M17         | GND           | -    |      |               |
| N10         | GND           | -    |      |               | N10         | GND           | -    |      |               |
| N11         | GND           | -    |      |               | N11         | GND           | -    |      |               |
| N12         | GND           | -    |      |               | N12         | GND           | -    |      |               |
| N13         | GND           | -    |      |               | N13         | GND           | -    |      |               |
| N14         | GND           | -    |      |               | N14         | GND           | -    |      |               |
| N15         | GND           | -    |      |               | N15         | GND           | -    |      |               |
| N16         | GND           | -    |      |               | N16         | GND           | -    |      |               |
| N17         | GND           | -    |      |               | N17         | GND           | -    |      |               |
| P10         | GND           | -    |      |               | P10         | GND           | -    |      |               |
| P11         | GND           | -    |      |               | P11         | GND           | -    |      |               |
| P12         | GND           | -    |      |               | P12         | GND           | -    |      |               |
| P13         | GND           | -    |      |               | P13         | GND           | -    |      |               |
| P14         | GND           | -    |      |               | P14         | GND           | -    |      |               |
| P15         | GND           | -    |      |               | P15         | GND           | -    |      |               |
| P16         | GND           | -    |      |               | P16         | GND           | -    |      |               |
| P17         | GND           | -    |      |               | P17         | GND           | -    |      |               |
| R10         | GND           | -    |      |               | R10         | GND           | -    |      |               |
| R11         | GND           | -    |      |               | R11         | GND           | -    |      |               |
| R12         | GND           | -    |      |               | R12         | GND           | -    |      |               |
| R13         | GND           | -    |      |               | R13         | GND           | -    |      |               |
| R14         | GND           | -    |      |               | R14         | GND           | -    |      |               |
| R15         | GND           | -    |      |               | R15         | GND           | -    |      |               |
| R16         | GND           | -    |      |               | R16         | GND           | -    |      |               |
| R17         | GND           | -    |      |               | R17         | GND           | -    |      |               |
| T10         | GND           | -    |      |               | T10         | GND           | -    |      |               |
| T11         | GND           | -    |      |               | T11         | GND           | -    |      |               |
| T12         | GND           | -    |      |               | T12         | GND           | -    |      |               |
| T13         | GND           | -    |      |               | T13         | GND           | -    |      |               |
| T14         | GND           | -    |      |               | T14         | GND           | -    |      |               |
| T15         | GND           | -    |      |               | T15         | GND           | -    |      |               |
| T16         | GND           | -    |      |               | T16         | GND           | -    |      |               |
| T17         | GND           | -    |      |               | T17         | GND           | -    |      |               |
| U10         | GND           | -    |      |               | U10         | GND           | -    |      |               |
| U11         | GND           | -    |      |               | U11         | GND           | -    |      |               |

**LFCEP/EC20, LFCEP/EC33 Logic Signal Connections: 672 fpBGA (Cont.)**

| LFCEP/EC20  |               |      |      |               | LFCEP/EC33  |               |      |      |               |
|-------------|---------------|------|------|---------------|-------------|---------------|------|------|---------------|
| Ball Number | Ball Function | Bank | LVDS | Dual Function | Ball Number | Ball Function | Bank | LVDS | Dual Function |
| J14         | VCCIO1        | 1    |      |               | J14         | VCCIO1        | 1    |      |               |
| J15         | VCCIO1        | 1    |      |               | J15         | VCCIO1        | 1    |      |               |
| J16         | VCCIO1        | 1    |      |               | J16         | VCCIO1        | 1    |      |               |
| J17         | VCCIO1        | 1    |      |               | J17         | VCCIO1        | 1    |      |               |
| K17         | VCCIO2        | 2    |      |               | K17         | VCCIO2        | 2    |      |               |
| K18         | VCCIO2        | 2    |      |               | K18         | VCCIO2        | 2    |      |               |
| L18         | VCCIO2        | 2    |      |               | L18         | VCCIO2        | 2    |      |               |
| M18         | VCCIO2        | 2    |      |               | M18         | VCCIO2        | 2    |      |               |
| N18         | VCCIO2        | 2    |      |               | N18         | VCCIO2        | 2    |      |               |
| N19         | VCCIO2        | 2    |      |               | N19         | VCCIO2        | 2    |      |               |
| P18         | VCCIO3        | 3    |      |               | P18         | VCCIO3        | 3    |      |               |
| P19         | VCCIO3        | 3    |      |               | P19         | VCCIO3        | 3    |      |               |
| R18         | VCCIO3        | 3    |      |               | R18         | VCCIO3        | 3    |      |               |
| R19         | VCCIO3        | 3    |      |               | R19         | VCCIO3        | 3    |      |               |
| T18         | VCCIO3        | 3    |      |               | T18         | VCCIO3        | 3    |      |               |
| U18         | VCCIO3        | 3    |      |               | U18         | VCCIO3        | 3    |      |               |
| V14         | VCCIO4        | 4    |      |               | V14         | VCCIO4        | 4    |      |               |
| V15         | VCCIO4        | 4    |      |               | V15         | VCCIO4        | 4    |      |               |
| V16         | VCCIO4        | 4    |      |               | V16         | VCCIO4        | 4    |      |               |
| V17         | VCCIO4        | 4    |      |               | V17         | VCCIO4        | 4    |      |               |
| W14         | VCCIO4        | 4    |      |               | W14         | VCCIO4        | 4    |      |               |
| W15         | VCCIO4        | 4    |      |               | W15         | VCCIO4        | 4    |      |               |
| V10         | VCCIO5        | 5    |      |               | V10         | VCCIO5        | 5    |      |               |
| V11         | VCCIO5        | 5    |      |               | V11         | VCCIO5        | 5    |      |               |
| V12         | VCCIO5        | 5    |      |               | V12         | VCCIO5        | 5    |      |               |
| V13         | VCCIO5        | 5    |      |               | V13         | VCCIO5        | 5    |      |               |
| W12         | VCCIO5        | 5    |      |               | W12         | VCCIO5        | 5    |      |               |
| W13         | VCCIO5        | 5    |      |               | W13         | VCCIO5        | 5    |      |               |
| P8          | VCCIO6        | 6    |      |               | P8          | VCCIO6        | 6    |      |               |
| P9          | VCCIO6        | 6    |      |               | P9          | VCCIO6        | 6    |      |               |
| R8          | VCCIO6        | 6    |      |               | R8          | VCCIO6        | 6    |      |               |
| R9          | VCCIO6        | 6    |      |               | R9          | VCCIO6        | 6    |      |               |
| T9          | VCCIO6        | 6    |      |               | T9          | VCCIO6        | 6    |      |               |
| U9          | VCCIO6        | 6    |      |               | U9          | VCCIO6        | 6    |      |               |
| K9          | VCCIO7        | 7    |      |               | K9          | VCCIO7        | 7    |      |               |
| L9          | VCCIO7        | 7    |      |               | L9          | VCCIO7        | 7    |      |               |
| M8          | VCCIO7        | 7    |      |               | M8          | VCCIO7        | 7    |      |               |
| M9          | VCCIO7        | 7    |      |               | M9          | VCCIO7        | 7    |      |               |
| N8          | VCCIO7        | 7    |      |               | N8          | VCCIO7        | 7    |      |               |
| N9          | VCCIO7        | 7    |      |               | N9          | VCCIO7        | 7    |      |               |
| G13         | VCCAUX        | -    |      |               | G13         | VCCAUX        | -    |      |               |
| H20         | VCCAUX        | -    |      |               | H20         | VCCAUX        | -    |      |               |

**LatticeECP Commercial**

| Part Number    | I/Os | Grade | Package | Pins | Temp. | LUTs |
|----------------|------|-------|---------|------|-------|------|
| LFCEP6E-3F484C | 224  | -3    | fpBGA   | 484  | COM   | 6.1K |
| LFCEP6E-4F484C | 224  | -4    | fpBGA   | 484  | COM   | 6.1K |
| LFCEP6E-5F484C | 224  | -5    | fpBGA   | 484  | COM   | 6.1K |
| LFCEP6E-3F256C | 195  | -3    | fpBGA   | 256  | COM   | 6.1K |
| LFCEP6E-4F256C | 195  | -4    | fpBGA   | 256  | COM   | 6.1K |
| LFCEP6E-5F256C | 195  | -5    | fpBGA   | 256  | COM   | 6.1K |
| LFCEP6E-3Q208C | 147  | -3    | PQFP    | 208  | COM   | 6.1K |
| LFCEP6E-4Q208C | 147  | -4    | PQFP    | 208  | COM   | 6.1K |
| LFCEP6E-5Q208C | 147  | -5    | PQFP    | 208  | COM   | 6.1K |
| LFCEP6E-3T144C | 97   | -3    | TQFP    | 144  | COM   | 6.1K |
| LFCEP6E-4T144C | 97   | -4    | TQFP    | 144  | COM   | 6.1K |
| LFCEP6E-5T144C | 97   | -5    | TQFP    | 144  | COM   | 6.1K |

| Part Number     | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|-------|---------|------|-------|-------|
| LFCEP10E-3F484C | 288  | -3    | fpBGA   | 484  | COM   | 10.2K |
| LFCEP10E-4F484C | 288  | -4    | fpBGA   | 484  | COM   | 10.2K |
| LFCEP10E-5F484C | 288  | -5    | fpBGA   | 484  | COM   | 10.2K |
| LFCEP10E-3F256C | 195  | -3    | fpBGA   | 256  | COM   | 10.2K |
| LFCEP10E-4F256C | 195  | -4    | fpBGA   | 256  | COM   | 10.2K |
| LFCEP10E-5F256C | 195  | -5    | fpBGA   | 256  | COM   | 10.2K |
| LFCEP10E-3Q208C | 147  | -3    | PQFP    | 208  | COM   | 10.2K |
| LFCEP10E-4Q208C | 147  | -4    | PQFP    | 208  | COM   | 10.2K |
| LFCEP10E-5Q208C | 147  | -5    | PQFP    | 208  | COM   | 10.2K |

| Part Number     | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|-------|---------|------|-------|-------|
| LFCEP15E-3F484C | 352  | -3    | fpBGA   | 484  | COM   | 15.3K |
| LFCEP15E-4F484C | 352  | -4    | fpBGA   | 484  | COM   | 15.3K |
| LFCEP15E-5F484C | 352  | -5    | fpBGA   | 484  | COM   | 15.3K |
| LFCEP15E-3F256C | 195  | -3    | fpBGA   | 256  | COM   | 15.3K |
| LFCEP15E-4F256C | 195  | -4    | fpBGA   | 256  | COM   | 15.3K |
| LFCEP15E-5F256C | 195  | -5    | fpBGA   | 256  | COM   | 15.3K |

| Part Number     | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|-------|---------|------|-------|-------|
| LFCEP20E-3F672C | 400  | -3    | fpBGA   | 672  | COM   | 19.7K |
| LFCEP20E-4F672C | 400  | -4    | fpBGA   | 672  | COM   | 19.7K |
| LFCEP20E-5F672C | 400  | -5    | fpBGA   | 672  | COM   | 19.7K |
| LFCEP20E-3F484C | 360  | -3    | fpBGA   | 484  | COM   | 19.7K |
| LFCEP20E-4F484C | 360  | -4    | fpBGA   | 484  | COM   | 19.7K |
| LFCEP20E-5F484C | 360  | -5    | fpBGA   | 484  | COM   | 19.7K |

| Part Number     | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|-------|---------|------|-------|-------|
| LFCEP33E-3F672C | 496  | -3    | fpBGA   | 672  | COM   | 32.8K |
| LFCEP33E-4F672C | 496  | -4    | fpBGA   | 672  | COM   | 32.8K |
| LFCEP33E-5F672C | 496  | -5    | fpBGA   | 672  | COM   | 32.8K |

**LatticeEC Industrial (Continued)**

| Part Number    | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|----------------|------|-------|---------|------|-------|-------|
| LFEC15E-3F484I | 352  | -3    | fpBGA   | 484  | IND   | 15.3K |
| LFEC15E-4F484I | 352  | -4    | fpBGA   | 484  | IND   | 15.3K |
| LFEC15E-3F256I | 195  | -3    | fpBGA   | 256  | IND   | 15.3K |
| LFEC15E-4F256I | 195  | -4    | fpBGA   | 256  | IND   | 15.3K |

| Part Number    | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|----------------|------|-------|---------|------|-------|-------|
| LFEC20E-3F672I | 400  | -3    | fpBGA   | 672  | IND   | 19.7K |
| LFEC20E-4F672I | 400  | -4    | fpBGA   | 672  | IND   | 19.7K |
| LFEC20E-3F484I | 360  | -3    | fpBGA   | 484  | IND   | 19.7K |
| LFEC20E-4F484I | 360  | -4    | fpBGA   | 484  | IND   | 19.7K |

| Part Number    | I/Os | Grade | Package | Pins | Temp. | LUTs |
|----------------|------|-------|---------|------|-------|------|
| LFEC33E-3F672I | 496  | -3    | fpBGA   | 672  | IND   | 32.8 |
| LFEC33E-4F672I | 496  | -4    | fpBGA   | 672  | IND   | 32.8 |
| LFEC33E-3F484I | 360  | -3    | fpBGA   | 484  | IND   | 32.8 |
| LFEC33E-4F484I | 360  | -4    | fpBGA   | 484  | IND   | 32.8 |

**LatticeECP Industrial**

| Part Number   | I/Os | Grade | Package | Pins | Temp. | LUTs |
|---------------|------|-------|---------|------|-------|------|
| LFEC6E-3F484I | 224  | -3    | fpBGA   | 484  | IND   | 6.1K |
| LFEC6E-4F484I | 224  | -4    | fpBGA   | 484  | IND   | 6.1K |
| LFEC6E-3F256I | 195  | -3    | fpBGA   | 256  | IND   | 6.1K |
| LFEC6E-4F256I | 195  | -4    | fpBGA   | 256  | IND   | 6.1K |
| LFEC6E-3Q208I | 147  | -3    | PQFP    | 208  | IND   | 6.1K |
| LFEC6E-4Q208I | 147  | -4    | PQFP    | 208  | IND   | 6.1K |
| LFEC6E-3T144I | 97   | -3    | TQFP    | 144  | IND   | 6.1K |
| LFEC6E-4T144I | 97   | -4    | TQFP    | 144  | IND   | 6.1K |

| Part Number    | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|----------------|------|-------|---------|------|-------|-------|
| LFEC10E-3F484I | 288  | -3    | fpBGA   | 484  | IND   | 10.2K |
| LFEC10E-4F484I | 288  | -4    | fpBGA   | 484  | IND   | 10.2K |
| LFEC10E-3F256I | 195  | -3    | fpBGA   | 256  | IND   | 10.2K |
| LFEC10E-4F256I | 195  | -4    | fpBGA   | 256  | IND   | 10.2K |
| LFEC10E-3Q208I | 147  | -3    | PQFP    | 208  | IND   | 10.2K |
| LFEC10E-4Q208I | 147  | -4    | PQFP    | 208  | IND   | 10.2K |

| Part Number    | I/Os | Grade | Package | Pins | Temp. | LUTs  |
|----------------|------|-------|---------|------|-------|-------|
| LFEC15E-3F484I | 352  | -3    | fpBGA   | 484  | IND   | 15.3K |
| LFEC15E-4F484I | 352  | -4    | fpBGA   | 484  | IND   | 15.3K |
| LFEC15E-3F256I | 195  | -3    | fpBGA   | 256  | IND   | 15.3K |
| LFEC15E-4F256I | 195  | -4    | fpBGA   | 256  | IND   | 15.3K |

**Lead-Free Packaging**
**LatticeEC Commercial**

| Part Number    | I/Os | Grade | Package        | Pins/Balls | Temp. | LUTs |
|----------------|------|-------|----------------|------------|-------|------|
| LFEC1E-3QN208C | 112  | -3    | Lead-Free PQFP | 208        | COM   | 1.5K |
| LFEC1E-4QN208C | 112  | -4    | Lead-Free PQFP | 208        | COM   | 1.5K |
| LFEC1E-5QN208C | 112  | -5    | Lead-Free PQFP | 208        | COM   | 1.5K |
| LFEC1E-3TN144C | 97   | -3    | Lead-Free TQFP | 144        | COM   | 1.5K |
| LFEC1E-4TN144C | 97   | -4    | Lead-Free TQFP | 144        | COM   | 1.5K |
| LFEC1E-5TN144C | 97   | -5    | Lead-Free TQFP | 144        | COM   | 1.5K |
| LFEC1E-3TN100C | 67   | -3    | Lead-Free TQFP | 100        | COM   | 1.5K |
| LFEC1E-4TN100C | 67   | -4    | Lead-Free TQFP | 100        | COM   | 1.5K |
| LFEC1E-5TN100C | 67   | -5    | Lead-Free TQFP | 100        | COM   | 1.5K |

| Part Number    | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs |
|----------------|------|-------|-----------------|------------|-------|------|
| LFEC3E-3FN256C | 160  | -3    | Lead-Free fpBGA | 256        | COM   | 3.1K |
| LFEC3E-4FN256C | 160  | -4    | Lead-Free fpBGA | 256        | COM   | 3.1K |
| LFEC3E-5FN256C | 160  | -5    | Lead-Free fpBGA | 256        | COM   | 3.1K |
| LFEC3E-3QN208C | 145  | -3    | Lead-Free PQFP  | 208        | COM   | 3.1K |
| LFEC3E-4QN208C | 145  | -4    | Lead-Free PQFP  | 208        | COM   | 3.1K |
| LFEC3E-5QN208C | 145  | -5    | Lead-Free PQFP  | 208        | COM   | 3.1K |
| LFEC3E-3TN144C | 97   | -3    | Lead-Free TQFP  | 144        | COM   | 3.1K |
| LFEC3E-4TN144C | 97   | -4    | Lead-Free TQFP  | 144        | COM   | 3.1K |
| LFEC3E-5TN144C | 97   | -5    | Lead-Free TQFP  | 144        | COM   | 3.1K |
| LFEC3E-3TN100C | 67   | -3    | Lead-Free TQFP  | 100        | COM   | 3.1K |
| LFEC3E-4TN100C | 67   | -4    | Lead-Free TQFP  | 100        | COM   | 3.1K |
| LFEC3E-5TN100C | 67   | -5    | Lead-Free TQFP  | 100        | COM   | 3.1K |

| Part Number    | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs |
|----------------|------|-------|-----------------|------------|-------|------|
| LFEC6E-3FN484C | 224  | -3    | Lead-Free fpBGA | 484        | COM   | 6.1K |
| LFEC6E-4FN484C | 224  | -4    | Lead-Free fpBGA | 484        | COM   | 6.1K |
| LFEC6E-5FN484C | 224  | -5    | Lead-Free fpBGA | 484        | COM   | 6.1K |
| LFEC6E-3FN256C | 195  | -3    | Lead-Free fpBGA | 256        | COM   | 6.1K |
| LFEC6E-4FN256C | 195  | -4    | Lead-Free fpBGA | 256        | COM   | 6.1K |
| LFEC6E-5FN256C | 195  | -5    | Lead-Free fpBGA | 256        | COM   | 6.1K |
| LFEC6E-3QN208C | 147  | -3    | Lead-Free PQFP  | 208        | COM   | 6.1K |
| LFEC6E-4QN208C | 147  | -4    | Lead-Free PQFP  | 208        | COM   | 6.1K |
| LFEC6E-5QN208C | 147  | -5    | Lead-Free PQFP  | 208        | COM   | 6.1K |
| LFEC6E-3TN144C | 97   | -3    | Lead-Free TQFP  | 144        | COM   | 6.1K |
| LFEC6E-4TN144C | 97   | -4    | Lead-Free TQFP  | 144        | COM   | 6.1K |
| LFEC6E-5TN144C | 97   | -5    | Lead-Free TQFP  | 144        | COM   | 6.1K |

| Part Number     | I/Os | Grade | Package         | Pins/Balls | Temp. | LUTs  |
|-----------------|------|-------|-----------------|------------|-------|-------|
| LFEC10E-3FN484C | 288  | -3    | Lead-Free fpBGA | 484        | COM   | 10.2K |
| LFEC10E-4FN484C | 288  | -4    | Lead-Free fpBGA | 484        | COM   | 10.2K |
| LFEC10E-5FN484C | 288  | -5    | Lead-Free fpBGA | 484        | COM   | 10.2K |
| LFEC10E-3FN256C | 195  | -3    | Lead-Free fpBGA | 256        | COM   | 10.2K |