AMD Xilinx - XC6VLX75T-L1FF784I Datasheet

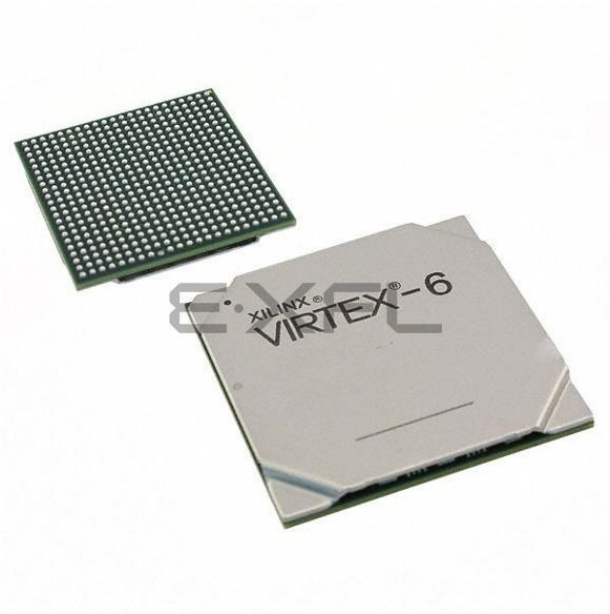

Welcome to E-XFL.COM

Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details	
Product Status	Active
Number of LABs/CLBs	5820
Number of Logic Elements/Cells	74496
Total RAM Bits	5750784
Number of I/O	360
Number of Gates	-
Voltage - Supply	0.91V ~ 0.97V
Mounting Type	Surface Mount
Operating Temperature	-40°C ~ 100°C (TJ)
Package / Case	784-BBGA, FCBGA
Supplier Device Package	784-FCBGA (29x29)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc6vlx75t-l1ff784i

Table 2: **Recommended Operating Conditions**

Symbol	Description	Min	Max	Units
V_{CCINT}	Internal supply voltage relative to GND for all devices except -1L devices.	0.95	1.05	V
	For -1L commercial temperature range devices: internal supply voltage relative to GND, T_j = 0°C to +85°C	0.87	0.93	V
	For -1L industrial temperature range devices: internal supply voltage relative to GND, T_j = –40°C to +100°C	0.91	0.97	V
V_{CCAUX}	Auxiliary supply voltage relative to GND	2.375	2.625	V
V_{CCO}(1)(2)(3)	Supply voltage relative to GND	1.14	2.625	V
V_{IN}	2.5V supply voltage relative to GND	GND – 0.20	2.625	V
	2.5V and below supply voltage relative to GND	GND – 0.20	V_{CCO} + 0.2	V
I_{IN}(5)	Maximum current through any pin in a powered or unpowered bank when forward biasing the clamp diode.	–	10	mA
V_{BATT}(6)	Battery voltage relative to GND	1.0	2.5	V
V_{FS}(7)	External voltage supply for eFUSE programming	2.375	2.625	V
T_j	Junction temperature operating range for commercial (C) temperature devices	0	85	°C
	Junction temperature operating range for extended (E) temperature devices	0	100	°C
	Junction temperature operating range for industrial (I) temperature devices	–40	100	°C
	Junction temperature operating range for military (M) temperature devices	–55	125	°C

Notes:

1. Configuration data is retained even if V_{CCO} drops to 0V.
2. Includes V_{CCO} of 1.2V, 1.5V, 1.8V, and 2.5V.
3. The configuration supply voltage V_{CC_CONFIG} is also known as V_{CCO_0}.
4. All voltages are relative to ground.
5. A total of 100 mA per bank should not be exceeded.
6. V_{BATT} is required only when using bitstream encryption. If battery is not used, connect V_{BATT} to either ground or V_{CCAUX}.
7. During eFUSE programming, V_{FS} must be within the recommended operating range and T_j = +15°C to +85°C. Otherwise, V_{FS} can be connected to GND.

Important Note

Typical values for quiescent supply current are specified at nominal voltage, 85°C junction temperatures (T_j). Xilinx recommends analyzing static power consumption at T_j = 85°C because the majority of designs operate near the high end of the commercial temperature range. Quiescent supply current is specified by speed grade for Virtex-6 devices. Use the XPower™ Estimator (XPE) spreadsheet tool (download at http://www.xilinx.com/power) to calculate static power consumption for conditions other than those specified in Table 4.

Table 4: **Typical Quiescent Supply Current**

Symbol	Description	Device	Speed and Temperature Grade						Units
			-3 (C)	-2 (C, E, & I)	-1 (C & I)	-1 (I & M)[2]	-1L (C)	-1L (I)[1]	
I_{CCINTQ}	Quiescent V_{CCINT} supply current	XC6VLX75T	927	927	927	N/A	656	741	mA
		XC6VLX130T	1563	1563	1563	N/A	1102	1245	mA
		XC6VLX195T	2059	2059	2059	N/A	1441	1628	mA
		XC6VLX240T	2478	2478	2478	N/A	1733	1957	mA
		XC6VLX365T	3001	3001	3001	N/A	2092	2363	mA
		XC6VLX550T[3]	N/A	4515	4515	N/A	3147	3555	mA
		XC6VLX760[3]	N/A	5094	5094	N/A	3471	3921	mA
		XC6VSX315TXC6V6 Tmj9 0i 1.9(4.4(1441)-283e)5(6.1-3841.(6.C[(XC6V6 Tmj95(mA)]TJ4(7A)-3648.4-.00))T4							

Power-On Power Supply Requirements

Xilinx FPGAs require a certain amount of supply current during power-on to insure proper device initialization. The actual current consumed depends on the power-on sequence and ramp rate of the power supply.

The recommended power-on sequence for Virtex-6 devices is V_{CCINT}, V_{CCAUX}, and V_{CCO} to meet the power-up current requirements listed in Table 5. V_{CCINT} can be powered up or down at any time, but power up current specifications can vary from Table 5. The device will have no physical damage or reliability concerns if V_{CCINT}, V_{CCAUX}, and V_{CCO} sequence cannot be followed.

If the recommended power-up sequence cannot be followed and the I/Os must remain 3-stated throughout configuration, then V_{CCAUX} must be powered prior to V_{CCO} or V_{CCAUX} and V_{CCO} must be powered by the same supply. Similarly, for power-down, the reverse V_{CCAUX} and V_{CCO} sequence is recommended if the I/Os are to remain 3-stated.

The GTH transceiver supplies must be powered using a MGTHAVCC, MGTHAVCCRX, MGTHAVCCPLL, and MGTHAVTT sequence. There are no sequencing requirement for these supplies with respect to the other FPGA supply voltages. For more detail see Table 27: *GTH Transceiver Power Supply Sequencing*. There are no sequencing requirements for the GTX transceivers power supplies.

Table 5 shows the minimum current, in addition to I_{CCQ}, that are required by Virtex-6 devices for proper power-on and configuration. If the current minimums shown in Table 4 and Table 5 are met, the device powers on after all three supplies have passed through their power-on reset threshold voltages. The FPGA must be configured after applying V_{CCINT}, V_{CCAUX}, and V_{CCO} for the appropriate configuration banks. Once initialized and configured, use the XPE tools to estimate current drain on these supplies.

Table 5: **Power-On Current for Virtex-6 Devices**

Device	$I_{CCINTMIN}$	$I_{CCAUXMIN}$	I_{CCOMIN}	Units
	Typ[(1)]	Typ[(1)]	Typ[(1)]	
XC6VLX75T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 10	I_{CCOQ} + 30 mA per bank	mA
XC6VLX130T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 10	I_{CCOQ} + 30 mA per bank	mA
XC6VLX195T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VLX240T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VLX365T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VLX550T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VLX760	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VSX315T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VSX475T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 50	I_{CCOQ} + 30 mA per bank	mA
XC6VHX250T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VHX255T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VHX380T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XC6VHX565T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 40	I_{CCOQ} + 30 mA per bank	mA
XQ6VLX130T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 100	I_{CCOQ} + 30 mA per bank	mA
XQ6VLX240T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 100	I_{CCOQ} + 30 mA per bank	mA
XQ6VLX550T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 100	I_{CCOQ} + 30 mA per bank	mA
XQ6VSX315T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 100	I_{CCOQ} + 40 mA per bank	mA
XQ6VSX475T	See I_{CCINTQ} in Table 4	I_{CCAUXQ} + 100	I_{CCOQ} + 40 mA per bank	mA

Notes:

1. Typical values are specified at nominal voltage, 25°C.
2. Use the XPower Estimator (XPE) spreadsheet tool (download at http://www.xilinx.com/power) to calculate maximum power-on currents.

GTX Transceiver Specifications

GTX Transceiver DC Characteristics

Table 13: **Absolute Maximum Ratings for GTX Transceivers**[(1)]

Symbol	Description	Min	Max	Units
MGTAVCC	Analog supply voltage for the GTX transmitter and receiver circuits relative to GND	–0.5	1.1	V
MGTAVTT	Analog supply voltage for the GTX transmitter and receiver termination circuits relative to GND	–0.5	1.32	V
MGTAVTTRCAL	Analog supply voltage for the resistor calibration circuit of the GTX transceiver column	–0.5	1.32	V
V_{IN}	Receiver (RXP/RXN) and Transmitter (TXP/TXN) absolute input voltage	–0.5	1.32	V
$V_{MGTREFCLK}$	Reference clock absolute input voltage	–0.5	1.32	V

Notes:

1. Stresses beyond those listed under Absolute Maximum Ratings might cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time might affect device reliability.

Table 14: **Recommended Operating Conditions for GTX Transceivers**[(1)(2)]

Symbol	Description	Speed Grade	PLL Frequency	Min	Typ	Max	Units
MGTAVCC	Analog supply voltage for the GTX transmitter and receiver circuits relative to GND	-3, -2[(3)]	> 2.7 GHz	1.0	1.03	1.06	V
		-3, -2[(3)]	≤ 2.7 GHz	0.95	1.0	1.06	V
		-1	≤ 2.7 GHz	0.95	1.0	1.06	V
		-1L	≤ 2.7 GHz	0.95	1.0	1.05	V
MGTAVTT	Analog supply voltage for the GTX transmitter and receiver termination circuits relative to GND	All	–	1.14	1.2	1.26	V
MGTAVTTRCAL	Analog supply voltage for the resistor calibration circuit of the GTX transceiver column	All	–	1.14	1.2	1.26	V

Notes:

1. Each voltage listed requires the filter circuit described in UG366: *Virtex-6 FPGA GTX Transceivers User Guide*.
2. Voltages are specified for the temperature range of T_j = –40°C to +100°C for all XC devices and T_j = –55°C to +125°C for the XQ devices
3. If a GTX Quad contains transceivers operating with a mixture of PLL frequencies above and below 2.7 GHz, the MGTAVCC voltage supply must be in the range of 1.0V to 1.06V.

Table 15: **GTX Transceiver Supply Current (per Lane)** [(1)(2)]

Symbol	Description	Typ	Max	Units
$I_{MGTAVTT}$	MGTAVTT supply current for one GTX transceiver	55.9	Note 2	mA
$I_{MGTAVCC}$	MGTAVCC supply current for one GTX transceiver	56.1		mA
$MGTR_{REF}$	Precision reference resistor for internal calibration termination	100.0 ± 1% tolerance		Ω

Notes:

1. Typical values are specified at nominal voltage, 25°C, with a 3.125 Gb/s line rate.
2. Values for currents of other transceiver configurations and conditions can be obtained by using the XPower Estimator (XPE) or XPower Analyzer (XPA) tools.

Table 16: **GTX Transceiver Quiescent Supply Current (per Lane) (1)(2)(3)**

Symbol	Description	Typ(4)	Max	Units
$I_{MGTAVTTQ}$	Quiescent MGTAVTT supply current for one GTX transceiver	0.9	Note 2	mA
$I_{MGTAVCCQ}$	Quiescent MGTAVCC supply current for one GTX transceiver	3.5		mA

Notes:

1. Device powered and unconfigured.
2. Currents for conditions other than values specified in this table can be obtained by using the XPE or XPA tools.
3. GTX transceiver quiescent supply current for an entire device can be calculated by multiplying the values in this table by the number of available GTX transceivers.
4. Typical values are specified at nominal voltage, 25°C.

GTX Transceiver DC Input and Output Levels

Table 17 summarizes the DC output specifications of the GTX transceivers in Virtex-6 FPGAs. Consult UG366: *Virtex-6 FPGA GTX Transceivers User Guide* for further details.

Table 17: **GTX Transceiver DC Specifications**

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV_{PPIN}	Differential peak-to-peak input voltage	External AC coupled ≤ 4.25 Gb/s	125	–	2000	mV
		External AC coupled > 4.25 Gb/s	175	–	2000	mV
V_{IN}	Absolute input voltage	DC coupled MGTAVTT = 1.2V	–400	–	MGTAVTT	mV
V_{CMIN}	Common mode input voltage	DC coupled MGTAVTT = 1.2V	–	2/3 MGTAVTT	–	mV
DV_{PPOUT}	Differential peak-to-peak output voltage(1)	Transmitter output swing is set to maximum setting	–	–	1000	mV
$V_{CMOUTDC}$						

Table 23: **GTX Transceiver Transmitter Switching Characteristics**

Symbol	Description	Condition	Min	Typ	Max	Units
F_{GTXTX}	Serial data rate range		0.480	–	F_{GTXMAX}	Gb/s
T_{RTX}	TX Rise time	20%–80%	–	120	–	ps
T_{FTX}	TX Fall time	80%–20%	–	120	–	ps
T_{LLSKEW}	TX lane-to-lane skew(1)		–	–	350	ps
$V_{TXOOBVDPP}$	Electrical idle amplitude		–	–	15	mV
$T_{TXOOBTRANSITION}$	Electrical idle transition time		–	–	75	ns
$TJ_{6.5}$	Total Jitter(2)(3)	6.5 Gb/s	–	–	0.33	UI
$DJ_{6.5}$	Deterministic Jitter(2)(3)		–	–	0.17	UI
$TJ_{5.0}$	Total Jitter(2)(3)	5.0 Gb/s	–	–	0.33	UI
$DJ_{5.0}$	Deterministic Jitter(2)(3)		–	–	0.15	UI
$TJ_{4.25}$	Total Jitter(2)(3)	4.25 Gb/s	–	–	0.33	UI
$DJ_{4.25}$	Deterministic Jitter(2)(3)		–	–	0.14	UI
$TJ_{3.75}$	Total Jitter(2)(3)	3.75 Gb/s	–	–	0.34	UI
$DJ_{3.75}$	Deterministic Jitter(2)(3)		–	–	0.16	UI
$TJ_{3.125}$	Total Jitter(2)(3)	3.125 Gb/s	–	–	0.2	UI
$DJ_{3.125}$	Deterministic Jitter(2)(3)		–	–	0.1	UI
$TJ_{3.125L}$	Total Jitter(2)(3)	3.125 Gb/s(4)	–	–	0.35	UI
$DJ_{3.125L}$	Deterministic Jitter(2)(3)		–	–	0.16	UI
$TJ_{2.5}$	Total Jitter(2)(3)	2.5 Gb/s(5)	–	–	0.20	UI
$DJ_{2.5}$	Deterministic Jitter(2)(3)		–	–	0.08	UI
$TJ_{1.25}$	Total Jitter(2)(3)	1.25 Gb/s(6)	–	–	0.15	UI
$DJ_{1.25}$	Deterministic Jitter(2)(3)		–	–	0.06	UI
TJ_{600}	Total Jitter(2)(3)	600 Mb/s	–	–	0.1	UI
DJ_{600}	Deterministic Jitter(2)(3)		–	–	0.03	UI
TJ_{480}	Total Jitter(2)(3)	480 Mb/s	–	–	0.1	UI
DJ_{480}	Deterministic Jitter(2)(3)		–	–	0.03	UI

Notes:

1. Using same REFCLK input with TXENPMAPHASEALIGN enabled for up to 12 consecutive transmitters (three fully populated GTX Quads).
2. Using PLL_DIVSEL_FB = 2, 20-bit internal data width. These values are NOT intended for protocol specific compliance determinations.
3. All jitter values are based on a bit-error ratio of $1e^{-12}$.
4. PLL frequency at 1.5625 GHz and OUTDIV = 1.
5. PLL frequency at 2.5 GHz and OUTDIV = 2.
6. PLL frequency at 2.5 GHz and OUTDIV = 4.

GTH Transceiver Switching Characteristics

Consult UG371: *Virtex-6 FPGA GTH Transceivers User Guide* for further information.

Table 32: **GTH Transceiver Maximum Data Rate and PLL Frequency Range**

Symbol	Description	Conditions	Speed Grade			Units
			-3	-2	-1	
F_{GTHMAX}	Maximum GTH transceiver data rate	PLL Output Divider = 1	11.182	11.182	10.32	Gb/s
		PLL Output Divider = 4	2.795	2.795	2.58	Gb/s
F_{GTHMIN}	Minimum GTH transceiver data rate(1)	PLL Output Divider = 1	9.92	9.92	9.92	Gb/s
		PLL Output Divider = 4	2.48	2.48	2.48	Gb/s
$F_{GPLLMAX}$	Maximum GTH PLL frequency		5.591	5.591	5.16	GHz
$F_{GPLLMIN}$	Minimum GTH PLL frequency		4.96	4.96	4.96	GHz

Notes:

1. Lower data rates can be achieved using FPGA logic based oversampling designs.

Table 33: **GTH Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics**

Symbol	Description	Speed Grade			Units
		-3	-2	-1	
$F_{GTHDRPCLK}$	GTHDRPCLK maximum frequency	70	70	60	MHz

Table 34: **GTH Transceiver Reference Clock Switching Characteristics**

Symbol	Description	Conditions	All Speed Grades			Units
			Min	Typ	Max	
F_{GCLK}	Reference clock frequency range	-1 speed grade	150	–	645	MHz
		-2 and -3 speed grades	150	–	700	MHz
T_{RCLK}	Reference clock rise time	20% – 80%	–	200	–	ps
T_{FCLK}	Reference clock fall time	80% – 20%	–	200	–	ps
T_{DCREF}	Reference clock duty cycle	CLK	45	50	55	%
T_{LOCK}	Clock recovery frequency acquisition time	Initial PLL lock	–	–	2	ms
T_{PHASE}	Clock recovery phase acquisition time	Lock to data after PLL has locked to the reference clock	–	–	20	µs

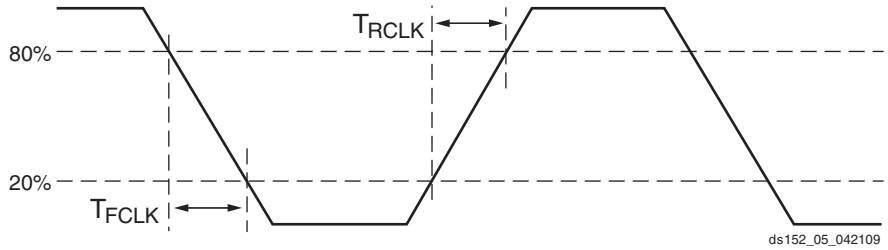

Figure 5: **Reference Clock Timing Parameters**

Table 37: **GTH Transceiver Receiver Switching Characteristics**

Symbol	Description		Min	Typ	Max	Units
R_{XRL}	Run length (CID)		8000	–	–	UI
$R_{XPPMTOL}$	Data/REFCLK PPM offset tolerance		–200	–	200	ppm
SJ Jitter Tolerance[(1)(2)(3)(4)]						
$JT_SJ_{11.18}$	Sinusoidal Jitter	11.18 Gb/s	0.3	–	–	UI
$JT_SJ_{10.32}$	Sinusoidal Jitter	10.32 Gb/s	0.3	–	–	UI
$JT_SJ_{9.95}$	Sinusoidal Jitter	9.95 Gb/s	0.3	–	–	UI
$JT_SJ_{2.667}$	Sinusoidal Jitter	2.667 Gb/s	0.5	–	–	UI
$JT_SJ_{2.48}$	Sinusoidal Jitter	2.48 Gb/s	0.5	–	–	UI

Notes:
1. These values are NOT intended for protocol specific compliance determinations.
2. All jitter values are based on a bit error ratio of $1e^{-12}$.
3. The frequency of the injected sinusoidal jitter is 80 MHz.
4. High-frequency jitter tolerance including 6 db of channel loss at a high frequency of the data rate divided by two.

Ethernet MAC Switching Characteristics

Consult UG368: *Virtex-6 FPGA Embedded Tri-mode Ethernet MAC User Guide* for further information.

Table 38: **Maximum Ethernet MAC Performance**

Symbol	Description	Conditions	Speed Grade				Units
			-3	-2	-1	-1L	
$F_{TEMACCLIENT}$	Client interface maximum frequency	10 Mb/s – 8-bit width	2.5[(1)]	2.5[(1)]	2.5[(1)]	2.5[(1)]	MHz
		100 Mb/s – 8-bit width	25[(2)]	25[(2)]	25[(2)]	25[(2)]	MHz
		1000 Mb/s – 8-bit width	125	125	125	125	MHz
		1000 Mb/s – 16-bit width	62.5	62.5	62.5	62.5	MHz
		2000 Mb/s – 16-bit width	125	125	125	N/A	MHz
		2500 Mb/s – 16-bit width	156.25	156.25	156.25	N/A	MHz
$F_{TEMACPHY}$	Physical interface maximum frequency	10 Mb/s – 4-bit width	2.5	2.5	2.5	2.5	MHz
		100 Mb/s – 4-bit width	25	25	25	25	MHz
		1000 Mb/s – 8-bit width	125	125	125	125	MHz
		2000 Mb/s – 8-bit width	250	250	250	N/A	MHz
		2500 Mb/s – 8-bit width	312.5	312.5	312.5	N/A	MHz

Notes:
1. When not using clock enable, the F_{MAX} is lowered to 1.25 MHz.
2. When not using clock enable, the F_{MAX} is lowered to 12.5 MHz.

I/O Standard Adjustment Measurement Methodology

Input Delay Measurements

Table 47 shows the test setup parameters used for measuring input delay.

Table 47: **Input Delay Measurement Methodology**

Description	I/O Standard Attribute	V_L (1)(2)	V_H (1)(2)	V_{MEAS} (1)(4)(5)	V_{REF} (1)(3)(5)
LVCMOS, 2.5V	LVCMOS25	0	2.5	1.25	–
LVCMOS, 1.8V	LVCMOS18	0	1.8	0.9	–
LVCMOS, 1.5V	LVCMOS15	0	1.5	0.75	–
HSTL (High-Speed Transceiver Logic), Class I & II	HSTL_I, HSTL_II	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.75
HSTL, Class III	HSTL_III	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
HSTL, Class I & II, 1.8V	HSTL_I_18, HSTL_II_18	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
HSTL, Class III 1.8V	HSTL_III_18	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	1.08
SSTL (Stub Terminated Transceiver Logic), Class I & II, 3.3V	SSTL3_I, SSTL3_II	V_{REF} – 1.00	V_{REF} + 1.00	V_{REF}	1.5
SSTL, Class I & II, 2.5V	SSTL2_I, SSTL2_II	V_{REF} – 0.75	V_{REF} + 0.75	V_{REF}	1.25
SSTL, Class I & II, 1.8V	SSTL18_I, SSTL18_II	V_{REF} – 0.5	V_{REF} + 0.5	V_{REF}	0.90
LVDS (Low-Voltage Differential Signaling), 2.5V	LVDS_25	1.2 – 0.125	1.2 + 0.125	0(6)	–
LVDSEXT (LVDS Extended Mode), 2.5V	LVDSEXT_25	1.2 – 0.125	1.2 + 0.125	0(6)	–
HT (HyperTransport), 2.5V	LDT_25	0.6 – 0.125	0.6 + 0.125	0(6)	–

Notes:

1. The input delay measurement methodology parameters for LVDCI are the same for LVCMOS standards of the same voltage. Input delay measurement methodology parameters for HSLVDCI are the same as for HSTL_II standards of the same voltage. Parameters for all other DCI standards are the same for the corresponding non-DCI standards.
2. Input waveform switches between V_L and V_H.
3. Measurements are made at typical, minimum, and maximum V_{REF} values. Reported delays reflect worst case of these measurements. V_{REF} values listed are typical.
4. Input voltage level from which measurement starts.
5. This is an input voltage reference that bears no relation to the V_{REF} / V_{MEAS} parameters found in IBIS models and/or noted in Figure 6.
6. The value given is the differential input voltage.

DSP48E1 Switching Characteristics

Table 58: **DSP48E1 Switching Characteristics**

Symbol	Description	Speed Grade					Units
		-3	-2	-1 (XC)	-1 (XQ)	-1L	
Setup and Hold Times of Data/Control Pins to the Input Register Clock							
$T_{DSPDCK_\{A, ACIN; B, BCIN\}_\{AREG; BREG\}}$/ $T_{DSPCKD_\{A, ACIN; B, BCIN\}_\{AREG; BREG\}}$	{A, ACIN, B, BCIN} input to {A, B} register CLK	0.25/ 0.27	0.29/ 0.30	0.35/ 0.34	0.36/ 0.34	0.46/ 0.39	ns
$T_{DSPDCK_C_CREG}$/$T_{DSPCKD_C_CREG}$	C input to C register CLK	0.16/ 0.20	0.19/ 0.22	0.22/ 0.24	0.25/ 0.24	0.33/ 0.30	ns
$T_{DSPDCK_D_DREG}$/$T_{DSPCKD_D_DREG}$	D input to D register CLK	0.07/ 0.31	0.10/ 0.34	0.15/ 0.39	0.16/ 0.39	0.24/ 0.45	ns
Setup and Hold Times of Data Pins to the Pipeline Register Clock							
$T_{DSPDCK_\{A, ACIN, B, BCIN\}_MREG_MULT}$/ $T_{DSPCKD_\{A, ACIN, B, BCIN\}_MREG_MULT}$	{A, ACIN, B, BCIN} input to M register CLK	2.36/ 0.04	2.70/ 0.04	3.21/ 0.04	3.21/ 0.04	3.66/ 0.02	ns
$T_{DSPDCK_\{A, D\}_ADREG}$/ $T_{DSPCKD_\{A, D\}_ADREG}$	{A, D} input to AD register CLK	1.24/ 0.10	1.42/ 0.12	1.69/ 0.13	1.69/ 0.13	1.91/ 0.16	ns
Setup and Hold Times of Data/Control Pins to the Output Register Clock							
$T_{DSPDCK_\{A, ACIN, B, BCIN\}_PREG_MULT}$/ $T_{DSPCKD_\{A, ACIN, B, BCIN\}_PREG_MULT}$	{A, ACIN, B, BCIN} input to P register CLK using multiplier	3.83/ –0.13	4.37/ –0.13	5.20/ –0.13	5.20/ –0.13	5.94/ –0.24	ns
$T_{DSPDCK_D_PREG_MULT}$/ $T_{DSPCKD_D_PREG_MULT}$	D input to P register CLK	3.62/ –0.47	4.13/ –0.47	4.90/ –0.47	4.90/ –0.47	5.61/ –0.77	ns
$T_{DSPDCK_\{A, ACIN, B, BCIN\}_PREG}$/ $T_{DSPCKD_\{A, ACIN, B, BCIN\}_PREG}$	{A, ACIN, B, BCIN} input to P register CLK not using multiplier	1.59/ –0.13	1.81/ –0.13	2.15/ –0.13	2.15/ –0.13	2.44/ –0.24	ns
$T_{DSPDCK_C_PREG}$/ $T_{DSPCKD_C_PREG}$	C input to P register CLK	1.42/ –0.10	1.61/ –0.10	1.91/ –0.10	1.91/ –0.10	2.16/ –0.19	ns
$T_{DSPDCK_\{PCIN, CARRYCASCIN, MULTSIGNIN\}_PREG}$/ $T_{DSPCKD_\{PCIN, CARRYCASCIN, MULTSIGNIN\}_PREG}$	{PCIN, CARRYCASCIN, MULTSIGNIN} input to P register CLK	1.23/ –0.02	1.41/ –0.02	1.67/ –0.02	1.67/ –0.02	1.91/ –0.07	ns
Setup and Hold Times of the CE Pins							
$T_{DSPDCK_\{CEA; CEB\}_\{AREG; BREG\}}$/ $T_{DSPCKD_\{CEA; CEB\}_\{AREG; BREG\}}$	{CEA; CEB} input to {A; B} register CLK	0.14/ 0.19	0.17/ 0.22	0.22/ 0.25	0.22/ 0.25	0.30/ 0.28	ns
$T_{DSPDCK_CEC_CREG}$/ $T_{DSPCKD_CEC_CREG}$	CEC input to C register CLK	0.15/ 0.18	0.18/ 0.20	0.24/ 0.23	0.24/ 0.23	0.31/ 0.26	ns
$T_{DSPDCK_CED_DREG}$/ $T_{DSPCKD_CED_DREG}$	CED input to D register CLK	0.20/ 0.12	0.24/ 0.13	0.31/ 0.14	0.31/ 0.14	0.43/ 0.16	ns
$T_{DSPDCK_CEM_MREG}$/ $T_{DSPCKD_CEM_MREG}$	CEM input to M register CLK	0.16/ 0.19	0.20/ 0.21	0.26/ 0.25	0.26/ 0.25	0.32/ 0.28	ns
$T_{DSPDCK_CEP_PREG}$/ $T_{DSPCKD_CEP_PREG}$	CEP input to P register CLK	0.32/ 0.02	0.38/ 0.02	0.46/ 0.03	0.46/ 0.03	0.54/ 0.04	ns
Setup and Hold Times of the RST Pins							
$T_{DSPDCK_\{RSTA; RSTB\}_\{AREG; BREG\}}$/ $T_{DSPCKD_\{RSTA; RSTB\}_\{AREG; BREG\}}$	{RSTA, RSTB} input to {A, B} register CLK	0.27/ 0.17	0.31/ 0.19	0.38/ 0.22	0.38/ 0.22	0.41/ 0.25	ns
$T_{DSPDCK_RSTC_CREG}$/ $T_{DSPCKD_RSTC_CREG}$	RSTC input to C register CLK	0.18/ 0.08	0.20/ 0.08	0.23/ 0.09	0.23/ 0.09	0.27/ 0.11	ns
$T_{DSPDCK_RSTD_DREG}$/ $T_{DSPCKD_RSTD_DREG}$	RSTD input to D register CLK	0.28/ 0.15	0.32/ 0.16	0.38/ 0.19	0.38/ 0.19	0.45/ 0.21	ns
$T_{DSPDCK_RSTM_MREG}$/ $T_{DSPCKD_RSTM_MREG}$	RSTM input to M register CLK	0.20/ 0.24	0.23/ 0.26	0.26/ 0.30	0.26/ 0.30	0.29/ 0.34	ns

Table 58: **DSP48E1 Switching Characteristics *(Cont'd)***

Symbol	Description	Speed Grade					Units
		-3	-2	-1 (XC)	-1 (XQ)	-1L	
$T_{DSPDCK_RSTP_PREG}$/ $T_{DSPCKD_RSTP_PREG}$	RSTP input to P register CLK	0.26/ 0.04	0.30/ 0.04	0.35/ 0.05	0.35/ 0.05	0.43/ 0.06	ns
Combinatorial Delays from Input Pins to Output Pins							
$T_{DSPDO_\{A, B\}_\{P, CARRYOUT\}_MULT}$	{A, B} input to {P, CARRYOUT} output using multiplier	3.76	4.29	5.08	5.08	5.87	ns
$T_{DSPDO_D_\{P, CARRYOUT\}_MULT}$	D input to {P, CARRYOUT} output using multiplier	3.57	4.07	4.82	4.82	5.57	ns
$T_{DSPDO_\{A, B\}_\{P, CARRYOUT\}}$	{A, B} input to {P, CARRYOUT} output not using multiplier	1.55	1.76	2.07	2.07	2.41	ns
$T_{DSPDO_\{C, CARRYIN\}_\{P, CARRYOUT\}}$	{C, CARRYIN} input to {P, CARRYOUT} output	1.38	1.56	1.83	1.83	2.13	ns
Combinatorial Delays from Input Pins to Cascading Output Pins							
$T_{DSPDO_\{A; B\}_\{ACOUT; BCOUT\}}$	{A, B} input to {ACOUT, BCOUT} output	0.49	0.56	0.65	0.65	0.73	ns
$T_{DSPDO_\{A, B\}_\{PCOUT, CARRYCASCOUT, MULTSIGNOUT\}_MULT}$	{A, B} input to {PCOUT, CARRYCASCOUT, MULTSIGNOUT} output using multiplier	3.87	4.42	5.24	5.24	6.09	ns
$T_{DSPDO_D_\{PCOUT, CARRYCASCOUT, MULTSIGNOUT\}_MULT}$	D input to {PCOUT, CARRYCASCOUT, MULTSIGNOUT} output using multiplier	3.66	4.17	4.94	4.94	5.76	ns
$T_{DSPDO_\{A, B\}_\{PCOUT, CARRYCASCOUT, MULTSIGNOUT\}}$	{A, B} input to {PCOUT, CARRYCASCOUT, MULTSIGNOUT} output not using multiplier	1.64	1.86	2.19	2.19	2.60	ns
$T_{DSPDO__\{C, CARRYIN\}_\{PCOUT, CARRYCASCOUT,MULTSIGNOUT\}}$	{C, CARRYIN} input to {PCOUT, CARRYCASCOUT, MULTSIGNOUT} output	1.46	1.66	1.95	1.95	2.32	ns
Combinatorial Delays from Cascading Input Pins to All Output Pins							
$T_{DSPDO_\{ACIN, BCIN\}_\{P, CARRYOUT\}_MULT}$	{ACIN, BCIN} input to {P, CARRYOUT} output using multiplier	3.67	4.19	4.97	4.97	5.75	ns
$T_{DSPDO_\{ACIN, BCIN\}_\{P, CARRYOUT}$	{ACIN, BCIN} input to {P, CARRYOUT} output not using multiplier	1.43	1.63	1.92	1.92	2.25	ns
$T_{DSPDO_\{ACIN; BCIN\}_\{ACOUT; BCOUT\}}$	{ACIN, BCIN} input to {ACOUT, BCOUT} output	0.36	0.42	0.49	0.49	0.56	ns
$T_{DSPDO_\{ACIN, BCIN\}_\{PCOUT, CARRYCASCOUT, MULTSIGNOUT\}_MULT}$	{ACIN, BCIN} input to {PCOUT, CARRYCASCOUT, MULTSIGNOUT} output using multiplier	3.76	4.29	5.10	5.10	5.94	ns
$T_{DSPDO_\{ACIN, BCIN\}_\{PCOUT, CARRYCASCOUT, MULTSIGNOUT\}}$	{ACIN, BCIN} input to {PCOUT, CARRYCASCOUT, MULTSIGNOUT} output not using multiplier	1.52	1.73	2.05	2.05	2.44	ns
$T_{DSPDO_\{PCIN, CARRYCASCIN, MULTSIGNIN\}_\{P, CARRYOUT\}}$	{PCIN, CARRYCASCIN, MULTSIGNIN} input to {P, CARRYOUT} output	1.19	1.35	1.60	1.60	1.87	ns

Table 58: **DSP48E1 Switching Characteristics *(Cont'd)***

Symbol	Description	Speed Grade					Units
		-3	-2	-1 (XC)	-1 (XQ)	-1L	
Maximum Frequency							
F_{MAX}	With all registers used	600	540	450	450	410	MHz
F_{MAX_PATDET}	With pattern detector	551	483	408	408	356	MHz
$F_{MAX_MULT_NOMREG}$	Two register multiply without MREG	356	311	262	262	224	MHz
$F_{MAX_MULT_NOMREG_PATDET}$	Two register multiply without MREG with pattern detect	327	286	241	241	211	MHz
$F_{MAX_PREADD_MULT_NOADREG}$	Without ADREG	398	347	292	292	254	MHz
$F_{MAX_PREADD_MULT_NOADREG_PATDET}$	Without ADREG with pattern detect	398	347	292	292	254	MHz
$F_{MAX_NOPIPELINEREG}$	Without pipeline registers (MREG, ADREG)	266	233	196	196	171	MHz
$F_{MAX_NOPIPELINEREG_PATDET}$	Without pipeline registers (MREG, ADREG) with pattern detect	250	219	184	184	160	MHz

Configuration Switching Characteristics

Table 59: **Configuration Switching Characteristics**

Symbol	Description	Speed Grade				Units
		-3	-2	-1	-1L	
Power-up Timing Characteristics						
T_{PL} (1)	Program Latency	5	5	5	5	ms, Max
T_{POR} (1)	Power-on-Reset	15/55	15/55	15/55	15/60	ms, Min/Max
T_{ICCK}	CCLK (output) delay	400	400	400	400	ns, Min
$T_{PROGRAM}$	Program Pulse Width	250	250	250	250	ns, Min
Master/Slave Serial Mode Programming Switching						
T_{DCCK}/T_{CCKD}	DIN Setup/Hold, slave mode	4.0/0.0	4.0/0.0	4.0/0.0	4.5/0.0	ns, Min
T_{DSCCK}/T_{SCCKD}	DIN Setup/Hold, master mode	4.0/0.0	4.0/0.0	4.0/0.0	5.0/0.0	ns, Min
T_{CCO}	DOUT at 2.5V	6	6	6	7	ns, Max
	DOUT at 1.8V	6	6	6	7	ns, Max
F_{MCCK}	Maximum CCLK frequency, serial modes	105	105	105	70	MHz, Max
$F_{MCCKTOL}$	Frequency Tolerance, master mode with respect to nominal CCLK.	55	55	55	60	%
F_{MSCCK}	Slave mode external CCLK	100	100	100	100	MHz
SelectMAP Mode Programming Switching						
T_{SMDCCK}/T_{SMCCKD}	SelectMAP Data Setup/Hold	4.0/0.0	4.0/0.0	4.0/0.0	5.5/0.0	ns, Min
$T_{SMCSCCK}/T_{SMCCKCS}$	CSI_B Setup/Hold	4.0/0.0	4.0/0.0	4.0/0.0	5.5/0.0	ns, Min
T_{SMCCKW}/T_{SMWCCK}	RDWR_B Setup/Hold	10.0/0.0	10.0/0.0	10.0/0.0	16.0/0.0	ns, Min
$T_{SMCKCSO}$	CSO_B clock to out (330 Ω pull-up resistor required)	6	6	6	7	ns, Max
T_{SMCO}	CCLK to DATA out in readback at 2.5V	6	6	6	7	ns, Max
	CCLK to DATA out in readback at 1.8V	6	6	6	7	ns, Max

Table 59: **Configuration Switching Characteristics *(Cont'd)***

Symbol	Description	Speed Grade				Units
		-3	-2	-1	-1L	
T_{SMCKBY}	CCLK to BUSY out in readback at 2.5V	6	6	6	7	ns, Max
	CCLK to BUSY out in readback at 1.8V	6	6	6	7	ns, Max
F_{SMCCK}	Maximum Frequency with respect to nominal CCLK	100	100	100	70	MHz, Max
F_{RBCCK}	Maximum Readback Frequency with respect to nominal CCLK	100	100	100	60	MHz, Max
$F_{MCCKTOL}$	Frequency tolerance, master mode with respect to nominal CCLK	55	55	55	60	%
Boundary-Scan Port Timing Specifications						
T_{TAPTCK}/T_{TCKTAP}	TMS and TDI Setup time before TCK/ Hold time after TCK	3.0/2.0	3.0/2.0	3.0/2.0	4.0/2.0	ns, Min
T_{TCKTDO}	TCK falling edge to TDO output valid at 2.5V	6	6	6	7	ns, Max
	TCK falling edge to TDO output valid at 1.8V	6	6	6	7	ns, Max
F_{TCK}	Maximum configuration TCK clock frequency	66	66	66	33	MHz, Max
F_{TCKB_MIN}	Minimum boundary-scan TCK clock frequency when using IEEE Std 1149.6 (AC-JTAG). Minimum operating temperature for IEEE Std 1149.6 is 0°C.	15	15	15	15	MHz, Min
F_{TCKB}	Maximum boundary-scan TCK clock frequency	66	66	66	33	MHz, Max
BPI Master Flash Mode Programming Switching						
T_{BPICCO}[(2)]	ADDR[25:0], RS[1:0], FCS_B, FOE_B, FWE_B outputs valid after CCLK rising edge at 2.5V	6	6	6	7	ns
	ADDR[25:0], RS[1:0], FCS_B, FOE_B, FWE_B outputs valid after CCLK rising edge at 1.8V	6	6	6	7	ns
T_{BPIDCC}/T_{BPICCD}	Setup/Hold on D[15:0] data input pins	4.0/0.0	4.0/0.0	4.0/0.0	5.0/0.0	ns
$T_{INITADDR}$	Minimum period of initial ADDR[25:0] address cycles	3	3	3	3	CCLK cycles
SPI Master Flash Mode Programming Switching						
$T_{SPIDCC}/T_{SPIDCCD}$	DIN Setup/Hold before/after the rising CCLK edge	3.0/0.0	3.0/0.0	3.0/0.0	3.5/0.0	ns
T_{SPICCM}	MOSI clock to out at 2.5V	6	6	6	7	ns
	MOSI clock to out at 1.8V	6	6	6	7	ns
$T_{SPICCFC}$	FCS_B clock to out at 2.5V	6	6	6	7	ns
	FCS_B clock to out at 1.8V	6	6	6	7	ns
$T_{FSINIT}/T_{FSINITH}$	FS[2:0] to INIT_B rising edge Setup and Hold	2	2	2	2	µs
CCLK Output (Master Modes)						
T_{MCCKL}	Master CCLK clock Low time duty cycle	45/55	45/55	45/55	40/60	%, Min/Max
T_{MCCKH}	Master CCLK clock High time duty cycle	45/55	45/55	45/55	40/60	%, Min/Max
CCLK Input (Slave Modes)						
T_{SCCKL}	Slave CCLK clock minimum Low time	2.5	2.5	2.5	2.5	ns, Min
T_{SCCKH}	Slave CCLK clock minimum High time	2.5	2.5	2.5	2.5	ns, Min
Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK						
F_{DCK}	Maximum frequency for DCLK	200	200	200	200	MHz
$T_{MMCMDCK_DADDR}$/ $T_{MMCMCKD_DADDR}$	DADDR Setup/Hold	1.25/ 0.00	1.40/ 0.00	1.63/ 0.00	1.64/ 0.00	ns

Table 67: Clock-Capable Clock Input to Output Delay With MMCM

Symbol	Description	Device	Speed Grade				Units
			-3	-2	-1	-1L	

Virtex-6 Device Pin-to-Pin Input Parameter Guidelines

All devices are 100% functionally tested. The representative values for typical pin locations and normal clock loading are listed in Table 68. Values are expressed in nanoseconds unless otherwise noted.

Table 68: Global Clock Input Setup and Hold Without MMCM

Symbol	Description	Device	Speed Grade -3	-2	-1	-1L	Units
Input Setup and Hold Time Relative to Global Clock Input Signal for LVCMOS25 Standard.[1]							
T_{PSFD}/ T_{PHFD}	Full Delay (Legacy Delay or Default Delay) Global Clock Input and IFF[2] without MMCM	XC6VLX75T	1.33/ 0.03	1.44/ 0.03	1.75/ 0.03	2.18/ –0.22	ns
		XC6VLX130T	1.31/ –0.08	1.54/ –0.08	1.88/ –0.08	2.31/ –0.12	ns
		XC6VLX195T	1.36/ –0.11	1.60/ –0.11	1.97/ –0.11	2.40/ –0.25	ns
		XC6VLX240T	1.36/ –0.11	1.60/ –0.11	1.97/ –0.11	2.40/ –0.25	ns
		XC6VLX365T	1.79/ –0.28	1.87/ –0.28	2.17/ –0.28	2.48/ –0.24	ns
		XC6VLX550T	N/A	2.22/ –0.12	2.36/ –0.12	2.77/ –0.26	ns
		XC6VLX760	N/A	2.19/ –0.24	2.35/ –0.24	2.71/ –0.21	ns
		XC6VSX315T	1.75/ –0.09	1.85/ –0.09	2.06/ –0.09	2.47/ –0.24	ns
		XC6VSX475T	N/A	2.14/ –0.14	2.31/ –0.14	2.71/ –0.30	ns
		XC6VHX250T	1.93/ –0.22	2.04/ –0.22	2.25/ –0.22	N/A	ns
		XC6VHX255T	1.81/ –0.33	2.11/ –0.33	2.56/ –0.33	N/A	ns
		XC6VHX380T	1.93/ –0.11	2.04/ –0.11	2.25/ –0.11	N/A	ns
		XC6VHX565T	N/A	2.20/ –0.12	2.39/ –0.12	N/A	ns
		XQ6VLX130T	N/A	1.54/ –0.08	1.88/ –0.08	2.31/ –0.12	ns
		XQ6VLX240T	N/A	1.60/			

Table 69: **Global Clock Input Setup and Hold With MMCM**

Symbol	Description	Device	Speed Grade				Units
			-3	-2	-1	-1L	
Input Setup and Hold Time Relative to Global Clock Input Signal for LVCMOS25 Standard.(1)							
$T_{PSMMCMGC}$/ $T_{PHMMCMGC}$	No Delay Global Clock Input and IFF(2) with MMCM	XC6VLX75T	1.45/ –0.18	1.57/ –0.18	1.72/ –0.18	1.78/ –0.08	ns
		XC6VLX130T	1.53/ –0.18	1.65/ –0.18	1.81/ –0.18	1.87/ –0.07	ns
		XC6VLX195T	1.54/ –0.17	1.66/ –0.17	1.82/ –0.17	1.87/ –0.08	ns
		XC6VLX240T	1.54/ –0.17	1.66/ –0.17	1.82/ –0.17	1.87/ –0.08	ns
		XC6VLX365T	1.55/ –0.18	1.67/ –0.18	1.83/ –0.18	1.87/ –0.07	ns
		XC6VLX550T	N/A	1.84/ –0.17	2.02/ –0.17	2.06/ –0.06	ns
		XC6VLX760	N/A	2.26/ –0.13	2.49/ –0.13	2.06/ –0.03	ns
		XC6VSX315T	1.56/ –0.18	1.68/ –0.18	1.84/ –0.18	1.89/ –0.08	ns
		XC6VSX475T	N/A	1.85/ –0.23	2.03/ –0.23	2.07/ –0.13	ns
		XC6VHX250T	1.52/ –0.17	1.64/ –0.17	1.80/ –0.17	N/A	ns
		XC6VHX255T	1.52/ –0.12	1.64/ –0.12	1.85/ –0.12	N/A	ns
		XC6VHX380T	1.68/ –0.16	1.81/ –0.16	1.99/ –0.16	N/A	ns
		XC6VHX565T	N/A	1.81/ –0.01	1.99/ –0.01	N/A	ns
		XQ6VLX130T	N/A	1.65/ –0.18	1.81/ –0.18	1.87/ –0.07	ns
		XQ6VLX240T	N/A	1.66/ –0.17	1.82/ –0.17	1.87/ –0.08	ns
		XQ6VLX550T	N/A	N/A	2.02/ –0.17	2.06/ –0.06	ns
		XQ6VSX315T	N/A	1.68/ –0.18	1.84/ –0.18	1.89/ –0.08	ns
		XQ6VSX475T	N/A	N/A	2.03/ –0.23	2.07/ –0.13	ns

Notes:

1. Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the Global Clock input signal using the slowest process, highest temperature, and lowest voltage. Hold time is measured relative to the Global Clock input signal using the fastest process, lowest temperature, and highest voltage.
2. IFF = Input Flip-Flop or Latch
3. Use IBIS to determine any duty-cycle distortion incurred using various standards.

Table 70: Clock-Capable Clock Input Setup and Hold With MMCM

Symbol	Description	Device	Speed Grade -3	Speed Grade -2	Speed Grade -1	Speed Grade -1L	Units
Input Setup and Hold Time Relative to Clock-capable Clock Input Signal for LVCMOS25 Standard.[1]							
$T_{PSMMCMCC}$/ $T_{PHMMCMCC}$	No Delay Clock-capable Clock Input and IFF[2] with MMCM	XC6VLX75T	1.56/ –0.25	1.69/ –0.25	1.86/ –0.25	1.91/ –0.15	ns
		XC6VLX130T	1.64/ –0.25	1.78/ –0.25	1.95/ –0.25	2.00/ –0.14	ns
		XC6VLX195T	1.65/ –0.24	1.79/ –0.24	1.96/ –0.24	2.01/ –0.15	ns
		XC6VLX240T	1.65/ –0.24	1.79/ –0.24	1.96/ –0.24	2.01/ –0.15	ns
		XC6VLX365T	1.66/ –0.25	1.79/ –0.25	1.97/ –0.25	2.02/ –0.15	ns
		XC6VLX550T	N/A	1.97/ –0.24	2.16/ –0.24	2.19/ –0.14	ns
		XC6VLX760	N/A	2.39/ –0.20	2.63/ –0.20	2.21/ –0.10	ns
		XC6VSX315T	1.67/ –0.25	1.80/ –0.25	1.98/ –0.25	2.03/ –0.16	ns
		XC6VSX475T	N/A	1.98/ –0.29	2.17/ –0.29	2.21/ –0.20	ns
		XC6VHX250T	1.63/ –0.24	1.76/ –0.24	1.94/ –0.24	N/A	ns
		XC6VHX255T	1.63/ –0.19	1.76/ –0.19	1.99/ –0.19	N/A	ns
		XC6VHX380T	1.80/ –0.23	1.94/ –0.23	2.13/ –0.23	N/A	ns
		XC6VHX565T	N/A	1.94/ –0.08	2.13/ –0.08	N/A	ns
		XQ6VLX130T	N/A	1.78/ –0.25	1.95/ –0.25	2.00/ –0.14	ns
		XQ6VLX240T	N/A	1.79/ –0.24	1.96/ –0.24	2.01/ –0.15	ns
		XQ6VLX550T	N/A	N/A	2.16/ –0.24	2.19/ –0.14	ns
		XQ6VSX315T	N/A	1.80/ –0.25	1.98/ –0.25	2.03/ –0.16	ns
		XQ6VSX475T	N/A	N/A	2.17/ –0.29	2.21/ –0.20	ns

Notes:

1. Setup and Hold times are measured over worst case conditions (process, voltage, temperature). Setup time is measured relative to the

Date	Version	Description of Revisions
02/08/11	2.12	Removed note 1 from Table 4 as the larger devices (XC6VLX550T, XC6VLX760, XC6VSX475T, and XC6VHX565T) are now offered in -2I. Updated Table 4 and Table 5 with data for the XC6VHX380T in the FF(G)1154 package. In Table 41, updated -1L specification for DDR3. Added Note 1 to Table 42. Moved the XC6VHX380Tdevices in the FF(G)1154 package to production release in Table 43 using ISE 12.4 software with current speed specifications. Updated description for F_{INDUTY} in Table 64.
02/25/11	3.0	Designated the data sheet as Preliminary for all devices not already labeled production in Table 42. Changed the XC6VHX380T devices in all packages to production status in Table 42 and Table 43. Removed note 1 from Table 42. Added maximum specifications to Table 25. Updated $T_{HAVCC2HAVCCRX}$ in Table 27. Updated the typical values and notes in Table 28 and Table 29. Added values to Table 30 and Table 31. In Table 34, added values for T_{LOCK} and T_{PHASE}. Updated the values in Table 36 and added note 3. Updated Table 37 and added note 4.
03/21/11	3.1	Updated Table 2 including Note 7. In Table 4, added Note 3 and -2E, extended temperature range to the XC6VLX550T, XC6VLX760, XC6VSX475T, and XC6VHX380T devices, and added Note 5 for the XC6VHX565T. Updated Table 28 typical values. Updated the description for $F_{IDELAYCTRL_REF}$ in Table 53. Updated F_{MCCK} in Table 59.
04/01/11	3.2	Added Tj values for C, E, and I temperature ranges to Table 2. Updated the I_{CCQ} values in Table 4. Updated F_{GCLK} in Table 34. Designated the data sheet as Production for all devices not already labeled production in Table 42. Changed the XC6VHX255T and XC6VHX565T devices in all packages to production status in Table 42 and Table 43. This included updates to the Virtex-6 Device Pin-to-Pin Output Parameter Guidelines and Virtex-6 Device Pin-to-Pin Input Parameter Guidelines for these devices. Production speed specifications for these devices are available using the speed specification v1.14 in the ISE 13.1 software update. Updated and added package skew values to Table 72; these values are correct with regards to previous production released speed specifications in software. Updated copyright page 1 and Notice of Disclaimer.
12/08/11	3.3	Production release of the Defense-grade XQ devices in Table 42 and Table 43 using ISE v13.3 v1.17 Patch for -2 and -1 speed specifications; and v1.10 for -1L speed specifications. Added the XQ6VLX130T, XQ6VLX240T, XQ6VLX550T, XQ6VSX315T, and XQ6VSX475T to the data sheet which included adding Table 45. Updated T_j in Table 2. In Table 40, updated T_j for most specifications and added Note 4. Added Note 4 to Table 41. Added -1(XQ) speed specification columns only to Table 50, Table 51, Table 52, and Table 58. Updated V_{OD} in Table 8, V_{OCM} in Table 9, and V_{OCM} and V_{DIFF} in Table 10. Updated the Power-On Power Supply Requirements section. In Table 27, updated maximum specification for $T_{HAVCC2HAVCCRX}$ and added Note 3. Updated Tj in Table 40. In Table 41, increased the DDR LVDS receiver (SPI-4.2) -1 speed grade performance value from 1.0 Gb/s to 1.1 Gb/s. In Table 60, updated the F_{MAX} to add a separate row for the LX760 device values. The speed specifications in the software tools have always matched these values for the LX760, the data sheet is now correct. Updated the notes for $T_{OUTJITTER}$ in Table 64.
01/12/12	3.4	Added the temperature range -2E to Note 5 in Table 4.