



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                    |
| Number of LABs/CLBs            | -                                                                                                                                                           |
| Number of Logic Elements/Cells | -                                                                                                                                                           |
| Total RAM Bits                 | 110592                                                                                                                                                      |
| Number of I/O                  | 154                                                                                                                                                         |
| Number of Gates                | 600000                                                                                                                                                      |
| Voltage - Supply               | 1.425V ~ 1.575V                                                                                                                                             |
| Mounting Type                  | Surface Mount                                                                                                                                               |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                                             |
| Package / Case                 | 208-BFQFP                                                                                                                                                   |
| Supplier Device Package        | 208-PQFP (28x28)                                                                                                                                            |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/microchip-technology/a3p600-pq208">https://www.e-xfl.com/product-detail/microchip-technology/a3p600-pq208</a> |

The CCC block has these key features:

- Wide input frequency range ( $f_{IN\_CCC}$ ) = 1.5 MHz to 350 MHz
- Output frequency range ( $f_{OUT\_CCC}$ ) = 0.75 MHz to 350 MHz
- Clock delay adjustment via programmable and fixed delays from –7.56 ns to +11.12 ns
- 2 programmable delay types for clock skew minimization
- Clock frequency synthesis (for PLL only)

Additional CCC specifications:

- Internal phase shift = 0°, 90°, 180°, and 270°. Output phase shift depends on the output divider configuration (for PLL only).
- Output duty cycle = 50% ± 1.5% or better (for PLL only)
- Low output jitter: worst case < 2.5% × clock period peak-to-peak period jitter when single global network used (for PLL only)
- Maximum acquisition time = 300 μs (for PLL only)
- Low power consumption of 5 mW
- Exceptional tolerance to input period jitter— allowable input jitter is up to 1.5 ns (for PLL only)
- Four precise phases; maximum misalignment between adjacent phases of 40 ps × (350 MHz /  $f_{OUT\_CCC}$ ) (for PLL only)


### **Global Clocking**

ProASIC3 devices have extensive support for multiple clocking domains. In addition to the CCC and PLL support described above, there is a comprehensive global clock distribution network.

Each VersaTile input and output port has access to nine VersaNets: six chip (main) and three quadrant global networks. The VersaNets can be driven by the CCC or directly accessed from the core via multiplexers (MUXes). The VersaNets can be used to distribute low-skew clock signals or for rapid distribution of high fanout nets.

## User I/O Characteristics

### Timing Model

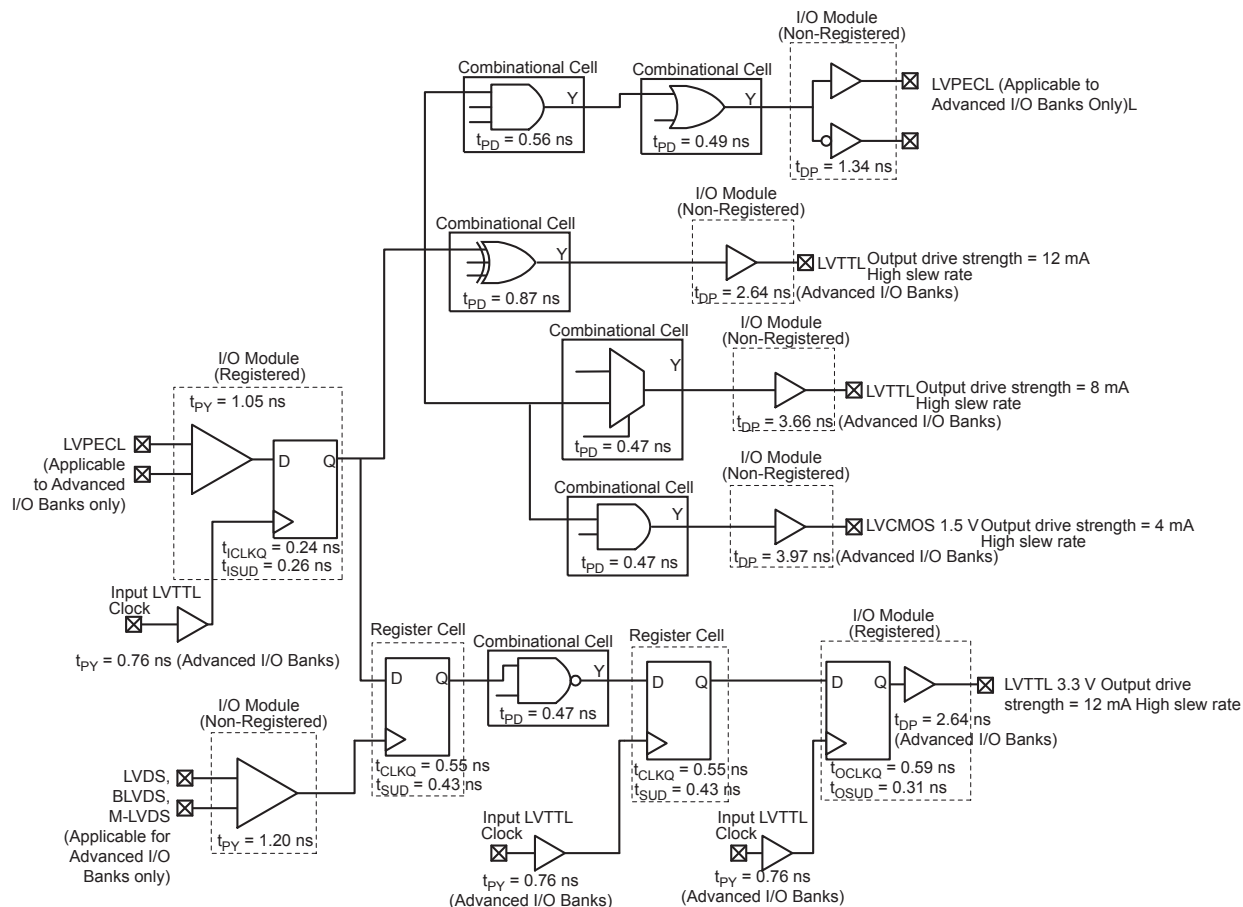

**Figure 2-3 • Timing Model**

**Operating Conditions: –2 Speed, Commercial Temperature Range ( $T_J = 70^\circ\text{C}$ ), Worst Case  $V_{CC} = 1.425$  V**

## Timing Characteristics

**Table 2-41 • 3.3 V LVTTTL / 3.3 V LVCMOS High Slew**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 3.0\text{ V}$   
 Applicable to Advanced I/O Banks

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | $t_{ZLS}$ | $t_{ZHS}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-----------|-----------|-------|
| 2 mA           | Std.        | 0.66       | 7.66     | 0.04      | 1.02     | 0.43       | 7.80     | 6.59     | 2.65     | 2.61     | 10.03     | 8.82      | ns    |
|                | –1          | 0.56       | 6.51     | 0.04      | 0.86     | 0.36       | 6.63     | 5.60     | 2.25     | 2.22     | 8.54      | 7.51      | ns    |
|                | –2          | 0.49       | 5.72     | 0.03      | 0.76     | 0.32       | 5.82     | 4.92     | 1.98     | 1.95     | 7.49      | 6.59      | ns    |
| 4 mA           | Std.        | 0.66       | 7.66     | 0.04      | 1.02     | 0.43       | 7.80     | 6.59     | 2.65     | 2.61     | 10.03     | 8.82      | ns    |
|                | –1          | 0.56       | 6.51     | 0.04      | 0.86     | 0.36       | 6.63     | 5.60     | 2.25     | 2.22     | 8.54      | 7.51      | ns    |
|                | –2          | 0.49       | 5.72     | 0.03      | 0.76     | 0.32       | 5.82     | 4.92     | 1.98     | 1.95     | 7.49      | 6.59      | ns    |
| 6 mA           | Std.        | 0.66       | 4.91     | 0.04      | 1.02     | 0.43       | 5.00     | 4.07     | 2.99     | 3.20     | 7.23      | 6.31      | ns    |
|                | –1          | 0.56       | 4.17     | 0.04      | 0.86     | 0.36       | 4.25     | 3.46     | 2.54     | 2.73     | 6.15      | 5.36      | ns    |
|                | –2          | 0.49       | 3.66     | 0.03      | 0.76     | 0.32       | 3.73     | 3.04     | 2.23     | 2.39     | 5.40      | 4.71      | ns    |
| 8 mA           | Std.        | 0.66       | 4.91     | 0.04      | 1.02     | 0.43       | 5.00     | 4.07     | 2.99     | 3.20     | 7.23      | 6.31      | ns    |
|                | –1          | 0.56       | 4.17     | 0.04      | 0.86     | 0.36       | 4.25     | 3.46     | 2.54     | 2.73     | 6.15      | 5.36      | ns    |
|                | –2          | 0.49       | 3.66     | 0.03      | 0.76     | 0.32       | 3.73     | 3.04     | 2.23     | 2.39     | 5.40      | 4.71      | ns    |
| 12 mA          | Std.        | 0.66       | 3.53     | 0.04      | 1.02     | 0.43       | 3.60     | 2.82     | 3.21     | 3.58     | 5.83      | 5.06      | ns    |
|                | –1          | 0.56       | 3.00     | 0.04      | 0.86     | 0.36       | 3.06     | 2.40     | 2.73     | 3.05     | 4.96      | 4.30      | ns    |
|                | –2          | 0.49       | 2.64     | 0.03      | 0.76     | 0.32       | 2.69     | 2.11     | 2.40     | 2.68     | 4.36      | 3.78      | ns    |
| 16 mA          | Std.        | 0.66       | 3.33     | 0.04      | 1.02     | 0.43       | 3.39     | 2.56     | 3.26     | 3.68     | 5.63      | 4.80      | ns    |
|                | –1          | 0.56       | 2.83     | 0.04      | 0.86     | 0.36       | 2.89     | 2.18     | 2.77     | 3.13     | 4.79      | 4.08      | ns    |
|                | –2          | 0.49       | 2.49     | 0.03      | 0.76     | 0.32       | 2.53     | 1.91     | 2.44     | 2.75     | 4.20      | 3.58      | ns    |
| 24 mA          | Std.        | 0.66       | 3.08     | 0.04      | 1.02     | 0.43       | 3.13     | 2.12     | 3.32     | 4.06     | 5.37      | 4.35      | ns    |
|                | –1          | 0.56       | 2.62     | 0.04      | 0.86     | 0.36       | 2.66     | 1.80     | 2.83     | 3.45     | 4.57      | 3.70      | ns    |
|                | –2          | 0.49       | 2.30     | 0.03      | 0.76     | 0.32       | 2.34     | 1.58     | 2.48     | 3.03     | 4.01      | 3.25      | ns    |

**Notes:**

1. Software default selection highlighted in gray.
2. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-44 • 3.3 V LVTTTL / 3.3 V LVCMOS Low Slew****Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 3.0\text{ V}$** **Applicable to Standard Plus I/O Banks**

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | $t_{ZLS}$ | $t_{ZHS}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-----------|-----------|-------|
| 2 mA           | Std.        | 0.66       | 9.68     | 0.04      | 1.00     | 0.43       | 9.86     | 8.42     | 2.28     | 2.21     | 12.09     | 10.66     | ns    |
|                | –1          | 0.56       | 8.23     | 0.04      | 0.85     | 0.36       | 8.39     | 7.17     | 1.94     | 1.88     | 10.29     | 9.07      | ns    |
|                | –2          | 0.49       | 7.23     | 0.03      | 0.75     | 0.32       | 7.36     | 6.29     | 1.70     | 1.65     | 9.03      | 7.96      | ns    |
| 4 mA           | Std.        | 0.66       | 9.68     | 0.04      | 1.00     | 0.43       | 9.86     | 8.42     | 2.28     | 2.21     | 12.09     | 10.66     | ns    |
|                | –1          | 0.56       | 8.23     | 0.04      | 0.85     | 0.36       | 8.39     | 7.17     | 1.94     | 1.88     | 10.29     | 9.07      | ns    |
|                | –2          | 0.49       | 7.23     | 0.03      | 0.75     | 0.32       | 7.36     | 6.29     | 1.70     | 1.65     | 9.03      | 7.96      | ns    |
| 6 mA           | Std.        | 0.66       | 6.70     | 0.04      | 1.00     | 0.43       | 6.82     | 5.89     | 2.58     | 2.74     | 9.06      | 8.12      | ns    |
|                | –1          | 0.56       | 5.70     | 0.04      | 0.85     | 0.36       | 5.80     | 5.01     | 2.20     | 2.33     | 7.71      | 6.91      | ns    |
|                | –2          | 0.49       | 5.00     | 0.03      | 0.75     | 0.32       | 5.10     | 4.40     | 1.93     | 2.05     | 6.76      | 6.06      | ns    |
| 8 mA           | Std.        | 0.66       | 6.70     | 0.04      | 1.00     | 0.43       | 6.82     | 5.89     | 2.58     | 2.74     | 9.06      | 8.12      | ns    |
|                | –1          | 0.56       | 5.70     | 0.04      | 0.85     | 0.36       | 5.80     | 5.01     | 2.20     | 2.33     | 7.71      | 6.91      | ns    |
|                | –2          | 0.49       | 5.00     | 0.03      | 0.75     | 0.32       | 5.10     | 4.40     | 1.93     | 2.05     | 6.76      | 6.06      | ns    |
| 12 mA          | Std.        | 0.66       | 5.05     | 0.04      | 1.00     | 0.43       | 5.14     | 4.51     | 2.79     | 3.08     | 7.38      | 6.75      | ns    |
|                | –1          | 0.56       | 4.29     | 0.04      | 0.85     | 0.36       | 4.37     | 3.84     | 2.38     | 2.62     | 6.28      | 5.74      | ns    |
|                | –2          | 0.49       | 3.77     | 0.03      | 0.75     | 0.32       | 3.84     | 3.37     | 2.09     | 2.30     | 5.51      | 5.04      | ns    |
| 16 mA          | Std.        | 0.66       | 5.05     | 0.04      | 1.00     | 0.43       | 5.14     | 4.51     | 2.79     | 3.08     | 7.38      | 6.75      | ns    |
|                | –1          | 0.56       | 4.29     | 0.04      | 0.85     | 0.36       | 4.37     | 3.84     | 2.38     | 2.62     | 6.28      | 5.74      | ns    |
|                | –2          | 0.49       | 3.77     | 0.03      | 0.75     | 0.32       | 3.84     | 3.37     | 2.09     | 2.30     | 5.51      | 5.04      | ns    |

*Note:* For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.**Table 2-45 • 3.3 V LVTTTL / 3.3 V LVCMOS High Slew****Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 3.0\text{ V}$** **Applicable to Standard I/O Banks**

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-------|
| 2 mA           | Std.        | 0.66       | 7.07     | 0.04      | 1.00     | 0.43       | 7.20     | 6.23     | 2.07     | 2.15     | ns    |
|                | –1          | 0.56       | 6.01     | 0.04      | 0.85     | 0.36       | 6.12     | 5.30     | 1.76     | 1.83     | ns    |
|                | –2          | 0.49       | 5.28     | 0.03      | 0.75     | 0.32       | 5.37     | 4.65     | 1.55     | 1.60     | ns    |
| 4 mA           | Std.        | 0.66       | 7.07     | 0.04      | 1.00     | 0.43       | 7.20     | 6.23     | 2.07     | 2.15     | ns    |
|                | –1          | 0.56       | 6.01     | 0.04      | 0.85     | 0.36       | 6.12     | 5.30     | 1.76     | 1.83     | ns    |
|                | –2          | 0.49       | 5.28     | 0.03      | 0.75     | 0.32       | 5.37     | 4.65     | 1.55     | 1.60     | ns    |
| 6 mA           | Std.        | 0.66       | 4.41     | 0.04      | 1.00     | 0.43       | 4.49     | 3.75     | 2.39     | 2.69     | ns    |
|                | –1          | 0.56       | 3.75     | 0.04      | 0.85     | 0.36       | 3.82     | 3.19     | 2.04     | 2.29     | ns    |
|                | –2          | 0.49       | 3.29     | 0.03      | 0.75     | 0.32       | 3.36     | 2.80     | 1.79     | 2.01     | ns    |
| 8 mA           | Std.        | 0.66       | 4.41     | 0.04      | 1.00     | 0.43       | 4.49     | 3.75     | 2.39     | 2.69     | ns    |
|                | –1          | 0.56       | 3.75     | 0.04      | 0.85     | 0.36       | 3.82     | 3.19     | 2.04     | 2.29     | ns    |

## Timing Characteristics

**Table 2-60 • 2.5 V LVC MOS High Slew**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 2.3\text{ V}$   
 Applicable to Advanced I/O Banks

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | $t_{ZLS}$ | $t_{ZHS}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-----------|-----------|-------|
| 4 mA           | Std.        | 0.60       | 8.66     | 0.04      | 1.31     | 0.43       | 7.83     | 8.66     | 2.68     | 2.30     | 10.07     | 10.90     | ns    |
|                | –1          | 0.51       | 7.37     | 0.04      | 1.11     | 0.36       | 6.66     | 7.37     | 2.28     | 1.96     | 8.56      | 9.27      | ns    |
|                | –2          | 0.45       | 6.47     | 0.03      | 0.98     | 0.32       | 5.85     | 6.47     | 2.00     | 1.72     | 7.52      | 8.14      | ns    |
| 6 mA           | Std.        | 0.60       | 5.17     | 0.04      | 1.31     | 0.43       | 5.04     | 5.17     | 3.05     | 3.00     | 7.27      | 7.40      | ns    |
|                | –1          | 0.51       | 4.39     | 0.04      | 1.11     | 0.36       | 4.28     | 4.39     | 2.59     | 2.55     | 6.19      | 6.30      | ns    |
|                | –2          | 0.45       | 3.86     | 0.03      | 0.98     | 0.32       | 3.76     | 3.86     | 2.28     | 2.24     | 5.43      | 5.53      | ns    |
| 8 mA           | Std.        | 0.60       | 5.17     | 0.04      | 1.31     | 0.43       | 5.04     | 5.17     | 3.05     | 3.00     | 7.27      | 7.40      | ns    |
|                | –1          | 0.51       | 4.39     | 0.04      | 1.11     | 0.36       | 4.28     | 4.39     | 2.59     | 2.55     | 6.19      | 6.30      | ns    |
|                | –2          | 0.45       | 3.86     | 0.03      | 0.98     | 0.32       | 3.76     | 3.86     | 2.28     | 2.24     | 5.43      | 5.53      | ns    |
| 12 mA          | Std.        | 0.60       | 3.56     | 0.04      | 1.31     | 0.43       | 3.63     | 3.43     | 3.30     | 3.44     | 5.86      | 5.67      | ns    |
|                | –1          | 0.51       | 3.03     | 0.04      | 1.11     | 0.36       | 3.08     | 2.92     | 2.81     | 2.92     | 4.99      | 4.82      | ns    |
|                | –2          | 0.45       | 2.66     | 0.03      | 0.98     | 0.32       | 2.71     | 2.56     | 2.47     | 2.57     | 4.38      | 4.23      | ns    |
| 16 mA          | Std.        | 0.60       | 3.35     | 0.04      | 1.31     | 0.43       | 3.41     | 3.06     | 3.36     | 3.55     | 5.65      | 5.30      | ns    |
|                | –1          | 0.51       | 2.85     | 0.04      | 1.11     | 0.36       | 2.90     | 2.60     | 2.86     | 3.02     | 4.81      | 4.51      | ns    |
|                | –2          | 0.45       | 2.50     | 0.03      | 0.98     | 0.32       | 2.55     | 2.29     | 2.51     | 2.65     | 4.22      | 3.96      | ns    |
| 24 mA          | Std.        | 0.60       | 3.09     | 0.04      | 1.31     | 0.43       | 3.15     | 2.44     | 3.44     | 4.00     | 5.38      | 4.68      | ns    |
|                | –1          | 0.51       | 2.63     | 0.04      | 1.11     | 0.36       | 2.68     | 2.08     | 2.92     | 3.40     | 4.58      | 3.98      | ns    |
|                | –2          | 0.45       | 2.31     | 0.03      | 0.98     | 0.32       | 2.35     | 1.82     | 2.57     | 2.98     | 4.02      | 3.49      | ns    |

### Notes:

1. Software default selection highlighted in gray.
2. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-61 • 2.5 V LVCMOS Low Slew**

 Commercial-Case Conditions:  $T_J = 70^{\circ}\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$ , Worst-Case  $V_{CCI} = 2.3\text{ V}$ 

Applicable to Advanced I/O Banks

| Drive Strength | Speed Grade | $t_{DOUT}$ | $t_{DP}$ | $t_{DIN}$ | $t_{PY}$ | $t_{EOUT}$ | $t_{ZL}$ | $t_{ZH}$ | $t_{LZ}$ | $t_{HZ}$ | $t_{ZLS}$ | $t_{ZHS}$ | Units |
|----------------|-------------|------------|----------|-----------|----------|------------|----------|----------|----------|----------|-----------|-----------|-------|
| 4 mA           | Std.        | 0.60       | 11.40    | 0.04      | 1.31     | 0.43       | 11.22    | 11.40    | 2.68     | 2.20     | 13.45     | 13.63     | ns    |
|                | –1          | 0.51       | 9.69     | 0.04      | 1.11     | 0.36       | 9.54     | 9.69     | 2.28     | 1.88     | 11.44     | 11.60     | ns    |
|                | –2          | 0.45       | 8.51     | 0.03      | 0.98     | 0.32       | 8.38     | 8.51     | 2.00     | 1.65     | 10.05     | 10.18     | ns    |
| 6 mA           | Std.        | 0.60       | 7.96     | 0.04      | 1.31     | 0.43       | 8.11     | 7.81     | 3.05     | 2.89     | 10.34     | 10.05     | ns    |
|                | –1          | 0.51       | 6.77     | 0.04      | 1.11     | 0.36       | 6.90     | 6.65     | 2.59     | 2.46     | 8.80      | 8.55      | ns    |
|                | –2          | 0.45       | 5.94     | 0.03      | 0.98     | 0.32       | 6.05     | 5.84     | 2.28     | 2.16     | 7.72      | 7.50      | ns    |
| 8 mA           | Std.        | 0.60       | 7.96     | 0.04      | 1.31     | 0.43       | 8.11     | 7.81     | 3.05     | 2.89     | 10.34     | 10.05     | ns    |
|                | –1          | 0.51       | 6.77     | 0.04      | 1.11     | 0.36       | 6.90     | 6.65     | 2.59     | 2.46     | 8.80      | 8.55      | ns    |
|                | –2          | 0.45       | 5.94     | 0.03      | 0.98     | 0.32       | 6.05     | 5.84     | 2.28     | 2.16     | 7.72      | 7.50      | ns    |
| 12 mA          | Std.        | 0.60       | 6.18     | 0.04      | 1.31     | 0.43       | 6.29     | 5.92     | 3.30     | 3.32     | 8.53      | 8.15      | ns    |
|                | –1          | 0.51       | 5.26     | 0.04      | 1.11     | 0.36       | 5.35     | 5.03     | 2.81     | 2.83     | 7.26      | 6.94      | ns    |
|                | –2          | 0.45       | 4.61     | 0.03      | 0.98     | 0.32       | 4.70     | 4.42     | 2.47     | 2.48     | 6.37      | 6.09      | ns    |
| 16 mA          | Std.        | 0.60       | 5.76     | 0.04      | 1.31     | 0.43       | 5.87     | 5.53     | 3.36     | 3.44     | 8.11      | 7.76      | ns    |
|                | –1          | 0.51       | 4.90     | 0.04      | 1.11     | 0.36       | 4.99     | 4.70     | 2.86     | 2.92     | 6.90      | 6.60      | ns    |
|                | –2          | 0.45       | 4.30     | 0.03      | 0.98     | 0.32       | 4.38     | 4.13     | 2.51     | 2.57     | 6.05      | 5.80      | ns    |
| 24 mA          | Std.        | 0.60       | 5.51     | 0.04      | 1.31     | 0.43       | 5.50     | 5.51     | 3.43     | 3.87     | 7.74      | 7.74      | ns    |
|                | –1          | 0.51       | 4.68     | 0.04      | 1.11     | 0.36       | 4.68     | 4.68     | 2.92     | 3.29     | 6.58      | 6.59      | ns    |
|                | –2          | 0.45       | 4.11     | 0.03      | 0.98     | 0.32       | 4.11     | 4.11     | 2.56     | 2.89     | 5.78      | 5.78      | ns    |

**Note:** For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

### 3.3 V PCI, 3.3 V PCI-X

Peripheral Component Interface for 3.3 V standard specifies support for 33 MHz and 66 MHz PCI Bus applications.


**Table 2-86 • Minimum and Maximum DC Input and Output Levels**

| 3.3 V PCI/PCI-X       | VIL            |           | VIH       |           | VOL        | VOH       | IOL | IOH | IOSL                    | IOSH                    | IIL             | IIH             |
|-----------------------|----------------|-----------|-----------|-----------|------------|-----------|-----|-----|-------------------------|-------------------------|-----------------|-----------------|
| Drive Strength        | Min.<br>V      | Max.<br>V | Min.<br>V | Max.<br>V | Max.,<br>V | Min.<br>V | mA  | mA  | Max.<br>mA <sup>1</sup> | Max.<br>mA <sup>1</sup> | μA <sup>2</sup> | μA <sup>2</sup> |
| Per PCI specification | Per PCI curves |           |           |           |            |           |     |     |                         |                         | 10              | 10              |

**Notes:**

1. Currents are measured at high temperature (100°C junction temperature) and maximum voltage.
2. Currents are measured at 85°C junction temperature.

AC loadings are defined per the PCI/PCI-X specifications for the datapath; Microsemi loadings for enable path characterization are described in [Figure 2-11](#).

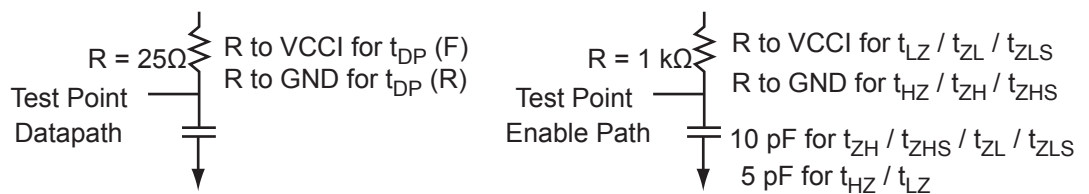

**Figure 2-11 • AC Loading**

AC loadings are defined per PCI/PCI-X specifications for the datapath; Microsemi loading for tristate is described in [Table 2-87](#).

**Table 2-87 • AC Waveforms, Measuring Points, and Capacitive Loads**

| Input Low (V) | Input High (V) | Measuring Point* (V)                                                                 | C <sub>LOAD</sub> (pF) |
|---------------|----------------|--------------------------------------------------------------------------------------|------------------------|
| 0             | 3.3            | 0.285 * V <sub>CCI</sub> for $t_{DP(R)}$<br>0.615 * V <sub>CCI</sub> for $t_{DP(F)}$ | 10                     |

**Note:** \*Measuring point =  $V_{trip}$ . See [Table 2-22 on page 2-22](#) for a complete table of trip points.



**Table 2-97 • Parameter Definition and Measuring Nodes**

| Parameter Name | Parameter Definition                                            | Measuring Nodes (from, to)* |
|----------------|-----------------------------------------------------------------|-----------------------------|
| $t_{OCLKQ}$    | Clock-to-Q of the Output Data Register                          | HH, DOUT                    |
| $t_{OSUD}$     | Data Setup Time for the Output Data Register                    | FF, HH                      |
| $t_{OHD}$      | Data Hold Time for the Output Data Register                     | FF, HH                      |
| $t_{OSUE}$     | Enable Setup Time for the Output Data Register                  | GG, HH                      |
| $t_{OHE}$      | Enable Hold Time for the Output Data Register                   | GG, HH                      |
| $t_{OCLR2Q}$   | Asynchronous Clear-to-Q of the Output Data Register             | LL, DOUT                    |
| $t_{OREMCLR}$  | Asynchronous Clear Removal Time for the Output Data Register    | LL, HH                      |
| $t_{ORECCLR}$  | Asynchronous Clear Recovery Time for the Output Data Register   | LL, HH                      |
| $t_{OECLKQ}$   | Clock-to-Q of the Output Enable Register                        | HH, EOUT                    |
| $t_{OESUD}$    | Data Setup Time for the Output Enable Register                  | JJ, HH                      |
| $t_{OEHD}$     | Data Hold Time for the Output Enable Register                   | JJ, HH                      |
| $t_{OESUE}$    | Enable Setup Time for the Output Enable Register                | KK, HH                      |
| $t_{OEHE}$     | Enable Hold Time for the Output Enable Register                 | KK, HH                      |
| $t_{OECLR2Q}$  | Asynchronous Clear-to-Q of the Output Enable Register           | II, EOUT                    |
| $t_{OEREMCLR}$ | Asynchronous Clear Removal Time for the Output Enable Register  | II, HH                      |
| $t_{OERECCLR}$ | Asynchronous Clear Recovery Time for the Output Enable Register | II, HH                      |
| $t_{ICLKQ}$    | Clock-to-Q of the Input Data Register                           | AA, EE                      |
| $t_{ISUD}$     | Data Setup Time for the Input Data Register                     | CC, AA                      |
| $t_{IHD}$      | Data Hold Time for the Input Data Register                      | CC, AA                      |
| $t_{ISUE}$     | Enable Setup Time for the Input Data Register                   | BB, AA                      |
| $t_{IHE}$      | Enable Hold Time for the Input Data Register                    | BB, AA                      |
| $t_{ICLR2Q}$   | Asynchronous Clear-to-Q of the Input Data Register              | DD, EE                      |
| $t_{IREMCLR}$  | Asynchronous Clear Removal Time for the Input Data Register     | DD, AA                      |
| $t_{IRECCLR}$  | Asynchronous Clear Recovery Time for the Input Data Register    | DD, AA                      |

**Note:** \*See Figure 2-16 on page 2-71 for more information.

## Timing Characteristics


**Table 2-100 • Output Enable Register Propagation Delays**  
 Commercial-Case Conditions:  $T_J = 70^{\circ}\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$

| Parameter      | Description                                                            | -2   | -1   | Std. | Units |
|----------------|------------------------------------------------------------------------|------|------|------|-------|
| $t_{OECLKQ}$   | Clock-to-Q of the Output Enable Register                               | 0.59 | 0.67 | 0.79 | ns    |
| $t_{OESUD}$    | Data Setup Time for the Output Enable Register                         | 0.31 | 0.36 | 0.42 | ns    |
| $t_{OEHD}$     | Data Hold Time for the Output Enable Register                          | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OESUE}$    | Enable Setup Time for the Output Enable Register                       | 0.44 | 0.50 | 0.58 | ns    |
| $t_{OEHE}$     | Enable Hold Time for the Output Enable Register                        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OECLR2Q}$  | Asynchronous Clear-to-Q of the Output Enable Register                  | 0.67 | 0.76 | 0.89 | ns    |
| $t_{OEPRE2Q}$  | Asynchronous Preset-to-Q of the Output Enable Register                 | 0.67 | 0.76 | 0.89 | ns    |
| $t_{OEREMCLR}$ | Asynchronous Clear Removal Time for the Output Enable Register         | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OERECCLR}$ | Asynchronous Clear Recovery Time for the Output Enable Register        | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OEREMPRE}$ | Asynchronous Preset Removal Time for the Output Enable Register        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{OERECPRE}$ | Asynchronous Preset Recovery Time for the Output Enable Register       | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OEWCCLR}$  | Asynchronous Clear Minimum Pulse Width for the Output Enable Register  | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OEWPPE}$   | Asynchronous Preset Minimum Pulse Width for the Output Enable Register | 0.22 | 0.25 | 0.30 | ns    |
| $t_{OECKMPWH}$ | Clock Minimum Pulse Width High for the Output Enable Register          | 0.36 | 0.41 | 0.48 | ns    |
| $t_{OECKMPWL}$ | Clock Minimum Pulse Width Low for the Output Enable Register           | 0.32 | 0.37 | 0.43 | ns    |

**Note:** For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

## DDR Module Specifications


### Input DDR Module

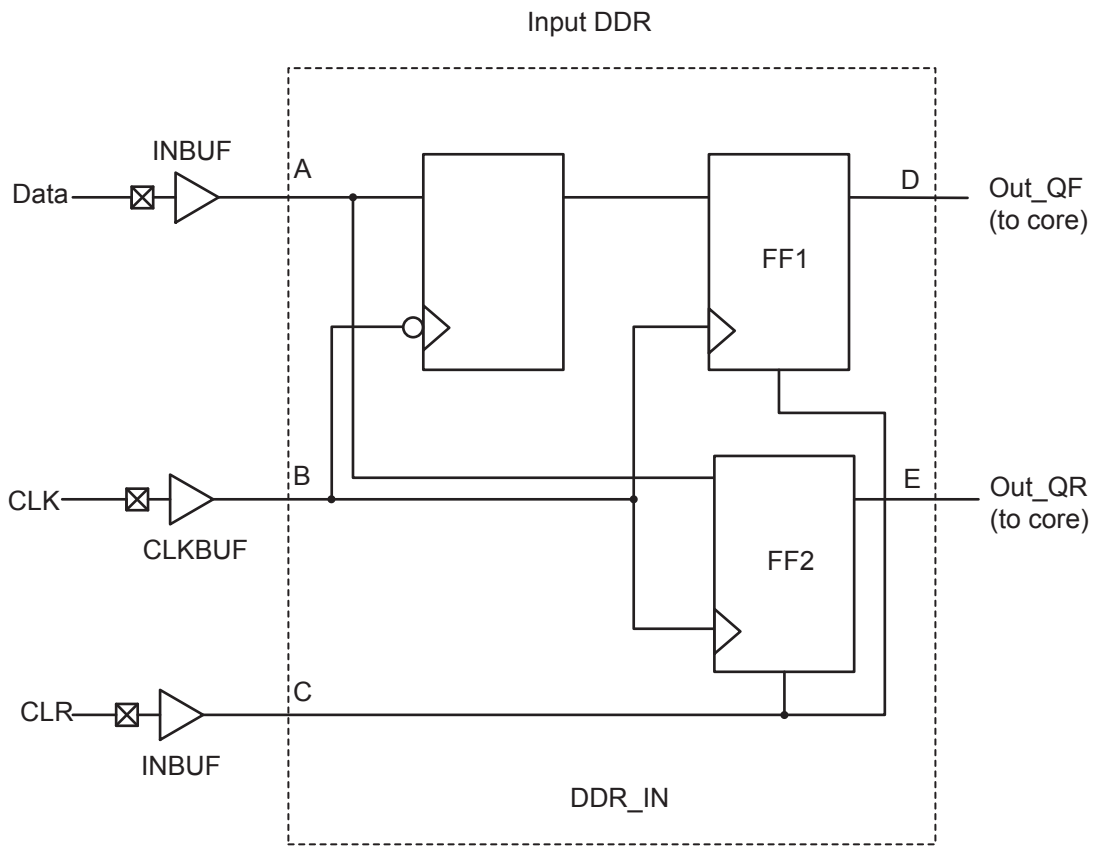

**Figure 2-20 • Input DDR Timing Model**

**Table 2-101 • Parameter Definitions**

| Parameter Name   | Parameter Definition         | Measuring Nodes (from, to) |
|------------------|------------------------------|----------------------------|
| $t_{DDRCLKQ1}$   | Clock-to-Out Out_QR          | B, D                       |
| $t_{DDRCLKQ2}$   | Clock-to-Out Out_QF          | B, E                       |
| $t_{DDRISUD}$    | Data Setup Time of DDR input | A, B                       |
| $t_{DDR IHD}$    | Data Hold Time of DDR input  | A, B                       |
| $t_{DDRICLR2Q1}$ | Clear-to-Out Out_QR          | C, D                       |
| $t_{DDRICLR2Q2}$ | Clear-to-Out Out_QF          | C, E                       |
| $t_{DDRIREMCLR}$ | Clear Removal                | C, B                       |
| $t_{DDRIRECCLR}$ | Clear Recovery               | C, B                       |

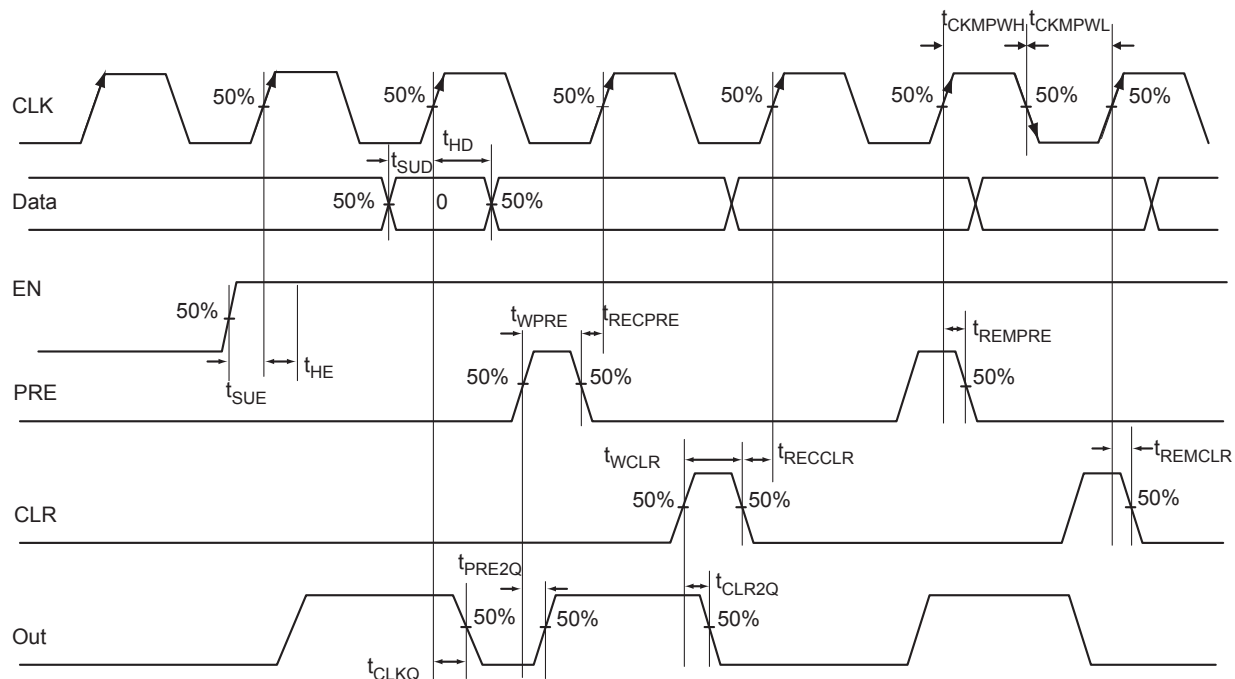

**Figure 2-27 • Timing Model and Waveforms**

### Timing Characteristics

**Table 2-106 • Register Delays**

Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$

| Parameter    | Description                                                   | -2   | -1   | Std. | Units |
|--------------|---------------------------------------------------------------|------|------|------|-------|
| $t_{CLKQ}$   | Clock-to-Q of the Core Register                               | 0.55 | 0.63 | 0.74 | ns    |
| $t_{SUD}$    | Data Setup Time for the Core Register                         | 0.43 | 0.49 | 0.57 | ns    |
| $t_{HD}$     | Data Hold Time for the Core Register                          | 0.00 | 0.00 | 0.00 | ns    |
| $t_{SUE}$    | Enable Setup Time for the Core Register                       | 0.45 | 0.52 | 0.61 | ns    |
| $t_{HE}$     | Enable Hold Time for the Core Register                        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{CLR2Q}$  | Asynchronous Clear-to-Q of the Core Register                  | 0.40 | 0.45 | 0.53 | ns    |
| $t_{PRE2Q}$  | Asynchronous Preset-to-Q of the Core Register                 | 0.40 | 0.45 | 0.53 | ns    |
| $t_{REMCLR}$ | Asynchronous Clear Removal Time for the Core Register         | 0.00 | 0.00 | 0.00 | ns    |
| $t_{RECCLR}$ | Asynchronous Clear Recovery Time for the Core Register        | 0.22 | 0.25 | 0.30 | ns    |
| $t_{REMPRE}$ | Asynchronous Preset Removal Time for the Core Register        | 0.00 | 0.00 | 0.00 | ns    |
| $t_{RECPRE}$ | Asynchronous Preset Recovery Time for the Core Register       | 0.22 | 0.25 | 0.30 | ns    |
| $t_{WCLR}$   | Asynchronous Clear Minimum Pulse Width for the Core Register  | 0.22 | 0.25 | 0.30 | ns    |
| $t_{WPRE}$   | Asynchronous Preset Minimum Pulse Width for the Core Register | 0.22 | 0.25 | 0.30 | ns    |
| $t_{CKMPWH}$ | Clock Minimum Pulse Width High for the Core Register          | 0.32 | 0.37 | 0.43 | ns    |
| $t_{CKMPWL}$ | Clock Minimum Pulse Width Low for the Core Register           | 0.36 | 0.41 | 0.48 | ns    |

**Note:** For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-113 • A3P600 Global Resource**  
**Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ ,  $V_{CC} = 1.425\text{ V}$**

| Parameter     | Description                               | -2                |                   | -1                |                   | Std.              |                   | Units |
|---------------|-------------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------|
|               |                                           | Min. <sup>1</sup> | Max. <sup>2</sup> | Min. <sup>1</sup> | Max. <sup>2</sup> | Min. <sup>1</sup> | Max. <sup>2</sup> |       |
| $t_{RCKL}$    | Input Low Delay for Global Clock          | 0.87              | 1.09              | 0.99              | 1.24              | 1.17              | 1.46              | ns    |
| $t_{RCKH}$    | Input High Delay for Global Clock         | 0.86              | 1.11              | 0.98              | 1.27              | 1.15              | 1.49              | ns    |
| $t_{RCKMPWH}$ | Minimum Pulse Width High for Global Clock | 0.75              |                   | 0.85              |                   | 1.00              |                   | ns    |
| $t_{RCKMPWL}$ | Minimum Pulse Width Low for Global Clock  | 0.85              |                   | 0.96              |                   | 1.13              |                   | ns    |
| $t_{RCKSW}$   | Maximum Skew for Global Clock             |                   | 0.26              |                   | 0.29              |                   | 0.34              | ns    |

**Notes:**

1. Value reflects minimum load. The delay is measured from the CCC output to the clock pin of a sequential element, located in a lightly loaded row (single element is connected to the global net).
2. Value reflects maximum load. The delay is measured on the clock pin of the farthest sequential element, located in a fully loaded row (all available flip-flops are connected to the global net in the row).
3. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

**Table 2-114 • A3P1000 Global Resource**  
**Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ ,  $V_{CC} = 1.425\text{ V}$**

| Parameter     | Description                               | -2                |                   | -1                |                   | Std.              |                   | Units |
|---------------|-------------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------|
|               |                                           | Min. <sup>1</sup> | Max. <sup>2</sup> | Min. <sup>1</sup> | Max. <sup>2</sup> | Min. <sup>1</sup> | Max. <sup>2</sup> |       |
| $t_{RCKL}$    | Input Low Delay for Global Clock          | 0.94              | 1.16              | 1.07              | 1.32              | 1.26              | 1.55              | ns    |
| $t_{RCKH}$    | Input High Delay for Global Clock         | 0.93              | 1.19              | 1.06              | 1.35              | 1.24              | 1.59              | ns    |
| $t_{RCKMPWH}$ | Minimum Pulse Width High for Global Clock | 0.75              |                   | 0.85              |                   | 1.00              |                   | ns    |
| $t_{RCKMPWL}$ | Minimum Pulse Width Low for Global Clock  | 0.85              |                   | 0.96              |                   | 1.13              |                   | ns    |
| $t_{RCKSW}$   | Maximum Skew for Global Clock             |                   | 0.26              |                   | 0.29              |                   | 0.35              | ns    |

**Notes:**

1. Value reflects minimum load. The delay is measured from the CCC output to the clock pin of a sequential element, located in a lightly loaded row (single element is connected to the global net).
2. Value reflects maximum load. The delay is measured on the clock pin of the farthest sequential element, located in a fully loaded row (all available flip-flops are connected to the global net in the row).
3. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

## Clock Conditioning Circuits

### CCC Electrical Specifications

#### Timing Characteristics

**Table 2-115 • ProASIC3 CCC/PLL Specification**

| Parameter                                                      | Minimum                        | Typical          | Maximum                | Units |
|----------------------------------------------------------------|--------------------------------|------------------|------------------------|-------|
| Clock Conditioning Circuitry Input Frequency $f_{IN\_CCC}$     | 1.5                            |                  | 350                    | MHz   |
| Clock Conditioning Circuitry Output Frequency $f_{OUT\_CCC}$   | 0.75                           |                  | 350                    | MHz   |
| Serial Clock (SCLK) for Dynamic PLL <sup>1</sup>               |                                |                  | 125                    | MHz   |
| Delay Increments in Programmable Delay Blocks <sup>2, 3</sup>  |                                | 200 <sup>4</sup> |                        | ps    |
| Number of Programmable Values in Each Programmable Delay Block |                                |                  | 32                     |       |
| Input Period Jitter                                            |                                |                  | 1.5                    | ns    |
| CCC Output Peak-to-Peak Period Jitter $F_{CCC\_OUT}$           | Max Peak-to-Peak Period Jitter |                  |                        |       |
|                                                                | 1 Global Network Used          |                  | 3 Global Networks Used |       |
| 0.75 MHz to 24 MHz                                             | 0.50%                          |                  | 0.70%                  |       |
| 24 MHz to 100 MHz                                              | 1.00%                          |                  | 1.20%                  |       |
| 100 MHz to 250 MHz                                             | 1.75%                          |                  | 2.00%                  |       |
| 250 MHz to 350 MHz                                             | 2.50%                          |                  | 5.60%                  |       |
| Acquisition Time                                               |                                |                  |                        |       |
| (A3P250 and A3P1000 only) LockControl = 0                      |                                |                  | 300                    | μs    |
| LockControl = 1                                                |                                |                  | 300                    | μs    |
| (all other dies) LockControl = 0                               |                                |                  | 300                    | μs    |
| LockControl = 1                                                |                                |                  | 6.0                    | ms    |
| Tracking Jitter <sup>5</sup>                                   |                                |                  |                        |       |
| (A3P250 and A3P1000 only) LockControl = 0                      |                                |                  | 1.6                    | ns    |
| LockControl = 1                                                |                                |                  | 1.6                    | ns    |
| (all other dies) LockControl = 0                               |                                |                  | 1.6                    | ns    |
| LockControl = 1                                                |                                |                  | 0.8                    | ns    |
| Output Duty Cycle                                              | 48.5                           |                  | 51.5                   | %     |
| Delay Range in Block: Programmable Delay <sup>1, 2, 3</sup>    | 0.6                            |                  | 5.56                   | ns    |
| Delay Range in Block: Programmable Delay <sup>2, 3</sup>       | 0.225                          |                  | 5.56                   | ns    |
| Delay Range in Block: Fixed Delay <sup>2, 3</sup>              |                                | 2.2              |                        | ns    |

**Notes:**

- Maximum value obtained for a –2 speed-grade device in worst-case commercial conditions. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.
- This delay is a function of voltage and temperature. See [Table 2-6 on page 2-6](#) for deratings.
- $T_J = 25^\circ\text{C}$ ,  $V_{CC} = 1.5\text{ V}$
- When the CCC/PLL core is generated by Microsemi core generator software, not all delay values of the specified delay increments are available. Refer to the Libero SoC Online Help for more information.
- Tracking jitter is defined as the variation in clock edge position of PLL outputs with reference to the PLL input clock edge. Tracking jitter does not measure the variation in PLL output period, which is covered by the period jitter parameter.
- The A3P030 device does not contain a PLL.

**Table 2-117 • RAM512X18****Commercial-Case Conditions:  $T_J = 70^\circ\text{C}$ , Worst-Case  $V_{CC} = 1.425\text{ V}$** 

| Parameter      | Description                                                                                                        | -2   | -1   | Std. | Units |
|----------------|--------------------------------------------------------------------------------------------------------------------|------|------|------|-------|
| $t_{AS}$       | Address setup time                                                                                                 | 0.25 | 0.28 | 0.33 | ns    |
| $t_{AH}$       | Address hold time                                                                                                  | 0.00 | 0.00 | 0.00 | ns    |
| $t_{ENS}$      | REN, WEN setup time                                                                                                | 0.13 | 0.15 | 0.17 | ns    |
| $t_{ENH}$      | REN, WEN hold time                                                                                                 | 0.10 | 0.11 | 0.13 | ns    |
| $t_{DS}$       | Input data (WD) setup time                                                                                         | 0.18 | 0.21 | 0.25 | ns    |
| $t_{DH}$       | Input data (WD) hold time                                                                                          | 0.00 | 0.00 | 0.00 | ns    |
| $t_{CKQ1}$     | Clock High to new data valid on RD (output retained)                                                               | 2.16 | 2.46 | 2.89 | ns    |
| $t_{CKQ2}$     | Clock High to new data valid on RD (pipelined)                                                                     | 0.90 | 1.02 | 1.20 | ns    |
| $t_{C2CRWH}^1$ | Address collision clk-to-clk delay for reliable read access after write on same address—Applicable to Opening Edge | 0.50 | 0.43 | 0.38 | ns    |
| $t_{C2CWRH}^1$ | Address collision clk-to-clk delay for reliable write access after read on same address—Applicable to Opening Edge | 0.59 | 0.50 | 0.44 | ns    |
| $t_{RSTBQ}$    | RESET Low to data out Low on RD (flow-through)                                                                     | 0.92 | 1.05 | 1.23 | ns    |
|                | RESET Low to data out Low on RD (pipelined)                                                                        | 0.92 | 1.05 | 1.23 | ns    |
| $t_{REMRSTB}$  | RESET removal                                                                                                      | 0.29 | 0.33 | 0.38 | ns    |
| $t_{RECRSTB}$  | RESET recovery                                                                                                     | 1.50 | 1.71 | 2.01 | ns    |
| $t_{MPWRSTB}$  | RESET minimum pulse width                                                                                          | 0.21 | 0.24 | 0.29 | ns    |
| $t_{CYC}$      | Clock cycle time                                                                                                   | 3.23 | 3.68 | 4.32 | ns    |
| $F_{MAX}$      | Maximum frequency                                                                                                  | 310  | 272  | 231  | MHz   |

**Notes:**

1. For more information, refer to the application note [Simultaneous Read-Write Operations in Dual-Port SRAM for Flash-Based cSoCs and FPGAs](#).
2. For specific junction temperature and voltage supply levels, refer to [Table 2-6 on page 2-6](#) for derating values.

In critical applications, an upset in the JTAG circuit could allow entrance to an undesired JTAG state. In such cases, Microsemi recommends tying off TRST to GND through a resistor placed close to the FPGA pin.

Note that to operate at all VJTAG voltages, 500  $\Omega$  to 1 k $\Omega$  will satisfy the requirements.

## Special Function Pins

### **NC**                      **No Connect**

This pin is not connected to circuitry within the device. These pins can be driven to any voltage or can be left floating with no effect on the operation of the device.

### **DC**                      **Do Not Connect**

This pin should not be connected to any signals on the PCB. These pins should be left unconnected.

## Related Documents

### User's Guides

*ProASIC FPGA Fabric User's Guide*

[http://www.microsemi.com/soc/documents/PA3\\_UG.pdf](http://www.microsemi.com/soc/documents/PA3_UG.pdf)

### Packaging

The following documents provide packaging information and device selection for low power flash devices.

#### **Product Catalog**

[http://www.microsemi.com/soc/documents/ProdCat\\_PIB.pdf](http://www.microsemi.com/soc/documents/ProdCat_PIB.pdf)

Lists devices currently recommended for new designs and the packages available for each member of the family. Use this document or the datasheet tables to determine the best package for your design, and which package drawing to use.

#### **Package Mechanical Drawings**

<http://www.microsemi.com/soc/documents/PckgMechDrwns.pdf>


This document contains the package mechanical drawings for all packages currently or previously supplied by Actel. Use the bookmarks to navigate to the package mechanical drawings.

Additional packaging materials are at <http://www.microsemi.com/products/solutions/package/docs.aspx>.



## QN68 – Bottom View

---

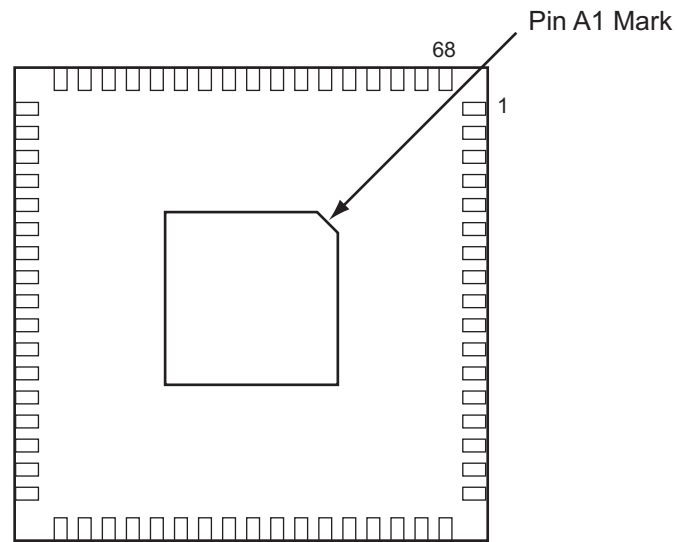

**Note:** The die attach paddle center of the package is tied to ground (GND).

---

### **Note**

For more information on package drawings, see [PD3068: Package Mechanical Drawings](#).

| TQ144      |                 |
|------------|-----------------|
| Pin Number | A3P060 Function |
| 109        | NC              |
| 110        | NC              |
| 111        | GBA1/IO24RSB0   |
| 112        | GBA0/IO23RSB0   |
| 113        | GBB1/IO22RSB0   |
| 114        | GBB0/IO21RSB0   |
| 115        | GBC1/IO20RSB0   |
| 116        | GBC0/IO19RSB0   |
| 117        | VCCIB0          |
| 118        | GND             |
| 119        | VCC             |
| 120        | IO18RSB0        |
| 121        | IO17RSB0        |
| 122        | IO16RSB0        |
| 123        | IO15RSB0        |
| 124        | IO14RSB0        |
| 125        | IO13RSB0        |
| 126        | IO12RSB0        |
| 127        | IO11RSB0        |
| 128        | NC              |
| 129        | IO10RSB0        |
| 130        | IO09RSB0        |
| 131        | IO08RSB0        |
| 132        | GAC1/IO07RSB0   |
| 133        | GAC0/IO06RSB0   |
| 134        | NC              |
| 135        | GND             |
| 136        | NC              |
| 137        | GAB1/IO05RSB0   |
| 138        | GAB0/IO04RSB0   |
| 139        | GAA1/IO03RSB0   |
| 140        | GAA0/IO02RSB0   |
| 141        | IO01RSB0        |
| 142        | IO00RSB0        |
| 143        | GNDQ            |
| 144        | VMV0            |

| PQ208      |                  |
|------------|------------------|
| Pin Number | A3P1000 Function |
| 109        | TRST             |
| 110        | VJTAG            |
| 111        | GDA0/IO113NDB1   |
| 112        | GDA1/IO113PDB1   |
| 113        | GDB0/IO112NDB1   |
| 114        | GDB1/IO112PDB1   |
| 115        | GDC0/IO111NDB1   |
| 116        | GDC1/IO111PDB1   |
| 117        | IO109NDB1        |
| 118        | IO109PDB1        |
| 119        | IO106NDB1        |
| 120        | IO106PDB1        |
| 121        | IO104PSB1        |
| 122        | GND              |
| 123        | VCCIB1           |
| 124        | IO99NDB1         |
| 125        | IO99PDB1         |
| 126        | NC               |
| 127        | IO96NDB1         |
| 128        | GCC2/IO96PDB1    |
| 129        | GCB2/IO95PSB1    |
| 130        | GND              |
| 131        | GCA2/IO94PSB1    |
| 132        | GCA1/IO93PDB1    |
| 133        | GCA0/IO93NDB1    |
| 134        | GCB0/IO92NDB1    |
| 135        | GCB1/IO92PDB1    |
| 136        | GCC0/IO91NDB1    |
| 137        | GCC1/IO91PDB1    |
| 138        | IO88NDB1         |
| 139        | IO88PDB1         |
| 140        | VCCIB1           |
| 141        | GND              |
| 142        | VCC              |
| 143        | IO86PSB1         |
| 144        | IO84NDB1         |

| PQ208      |                  |
|------------|------------------|
| Pin Number | A3P1000 Function |
| 145        | IO84PDB1         |
| 146        | IO82NDB1         |
| 147        | IO82PDB1         |
| 148        | IO80NDB1         |
| 149        | GBC2/IO80PDB1    |
| 150        | IO79NDB1         |
| 151        | GBB2/IO79PDB1    |
| 152        | IO78NDB1         |
| 153        | GBA2/IO78PDB1    |
| 154        | VMV1             |
| 155        | GNDQ             |
| 156        | GND              |
| 157        | VMV0             |
| 158        | GBA1/IO77RSB0    |
| 159        | GBA0/IO76RSB0    |
| 160        | GBB1/IO75RSB0    |
| 161        | GBB0/IO74RSB0    |
| 162        | GND              |
| 163        | GBC1/IO73RSB0    |
| 164        | GBC0/IO72RSB0    |
| 165        | IO70RSB0         |
| 166        | IO67RSB0         |
| 167        | IO63RSB0         |
| 168        | IO60RSB0         |
| 169        | IO57RSB0         |
| 170        | VCCIB0           |
| 171        | VCC              |
| 172        | IO54RSB0         |
| 173        | IO51RSB0         |
| 174        | IO48RSB0         |
| 175        | IO45RSB0         |
| 176        | IO42RSB0         |
| 177        | IO40RSB0         |
| 178        | GND              |
| 179        | IO38RSB0         |
| 180        | IO35RSB0         |

| PQ208      |                  |
|------------|------------------|
| Pin Number | A3P1000 Function |
| 181        | IO33RSB0         |
| 182        | IO31RSB0         |
| 183        | IO29RSB0         |
| 184        | IO27RSB0         |
| 185        | IO25RSB0         |
| 186        | VCCIB0           |
| 187        | VCC              |
| 188        | IO22RSB0         |
| 189        | IO20RSB0         |
| 190        | IO18RSB0         |
| 191        | IO16RSB0         |
| 192        | IO15RSB0         |
| 193        | IO14RSB0         |
| 194        | IO13RSB0         |
| 195        | GND              |
| 196        | IO12RSB0         |
| 197        | IO11RSB0         |
| 198        | IO10RSB0         |
| 199        | IO09RSB0         |
| 200        | VCCIB0           |
| 201        | GAC1/IO05RSB0    |
| 202        | GAC0/IO04RSB0    |
| 203        | GAB1/IO03RSB0    |
| 204        | GAB0/IO02RSB0    |
| 205        | GAA1/IO01RSB0    |
| 206        | GAA0/IO00RSB0    |
| 207        | GNDQ             |
| 208        | VMV0             |

| FG144      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| A1         | GNDQ            |
| A2         | VMV0            |
| A3         | GAB0/IO02RSB0   |
| A4         | GAB1/IO03RSB0   |
| A5         | IO10RSB0        |
| A6         | GND             |
| A7         | IO34RSB0        |
| A8         | VCC             |
| A9         | IO50RSB0        |
| A10        | GBA0/IO58RSB0   |
| A11        | GBA1/IO59RSB0   |
| A12        | GNDQ            |
| B1         | GAB2/IO173PDB3  |
| B2         | GND             |
| B3         | GAA0/IO00RSB0   |
| B4         | GAA1/IO01RSB0   |
| B5         | IO13RSB0        |
| B6         | IO19RSB0        |
| B7         | IO31RSB0        |
| B8         | IO39RSB0        |
| B9         | GBB0/IO56RSB0   |
| B10        | GBB1/IO57RSB0   |
| B11        | GND             |
| B12        | VMV1            |
| C1         | IO173NDB3       |
| C2         | GFA2/IO161PPB3  |
| C3         | GAC2/IO172PDB3  |
| C4         | VCC             |
| C5         | IO16RSB0        |
| C6         | IO25RSB0        |
| C7         | IO28RSB0        |
| C8         | IO42RSB0        |
| C9         | IO45RSB0        |
| C10        | GBA2/IO60PDB1   |
| C11        | IO60NDB1        |
| C12        | GBC2/IO62PPB1   |

| FG144      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| D1         | IO169PDB3       |
| D2         | IO169NDB3       |
| D3         | IO172NDB3       |
| D4         | GAA2/IO174PPB3  |
| D5         | GAC0/IO04RSB0   |
| D6         | GAC1/IO05RSB0   |
| D7         | GBC0/IO54RSB0   |
| D8         | GBC1/IO55RSB0   |
| D9         | GBB2/IO61PDB1   |
| D10        | IO61NDB1        |
| D11        | IO62NPB1        |
| D12        | GCB1/IO70PPB1   |
| E1         | VCC             |
| E2         | GFC0/IO164NDB3  |
| E3         | GFC1/IO164PDB3  |
| E4         | VCCIB3          |
| E5         | IO174NPB3       |
| E6         | VCCIB0          |
| E7         | VCCIB0          |
| E8         | GCC1/IO69PDB1   |
| E9         | VCCIB1          |
| E10        | VCC             |
| E11        | GCA0/IO71NDB1   |
| E12        | IO72NDB1        |
| F1         | GFB0/IO163NPB3  |
| F2         | VCOMPLF         |
| F3         | GFB1/IO163PPB3  |
| F4         | IO161NPB3       |
| F5         | GND             |
| F6         | GND             |
| F7         | GND             |
| F8         | GCC0/IO69NDB1   |
| F9         | GCB0/IO70NPB1   |
| F10        | GND             |
| F11        | GCA1/IO71PDB1   |
| F12        | GCA2/IO72PDB1   |

| FG144      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| G1         | GFA1/IO162PPB3  |
| G2         | GND             |
| G3         | VCCPLF          |
| G4         | GFA0/IO162NPB3  |
| G5         | GND             |
| G6         | GND             |
| G7         | GND             |
| G8         | GDC1/IO86PPB1   |
| G9         | IO74NDB1        |
| G10        | GCC2/IO74PDB1   |
| G11        | IO73NDB1        |
| G12        | GCB2/IO73PDB1   |
| H1         | VCC             |
| H2         | GFB2/IO160PDB3  |
| H3         | GFC2/IO159PSB3  |
| H4         | GEC1/IO146PDB3  |
| H5         | VCC             |
| H6         | IO80PDB1        |
| H7         | IO80NDB1        |
| H8         | GDB2/IO90RSB2   |
| H9         | GDC0/IO86NPB1   |
| H10        | VCCIB1          |
| H11        | IO84PSB1        |
| H12        | VCC             |
| J1         | GEB1/IO145PDB3  |
| J2         | IO160NDB3       |
| J3         | VCCIB3          |
| J4         | GEC0/IO146NDB3  |
| J5         | IO129RSB2       |
| J6         | IO131RSB2       |
| J7         | VCC             |
| J8         | TCK             |
| J9         | GDA2/IO89RSB2   |
| J10        | TDO             |
| J11        | GDA1/IO88PDB1   |
| J12        | GDB1/IO87PDB1   |

| FG484      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| R17        | GDB1/IO87PPB1   |
| R18        | GDC1/IO86PDB1   |
| R19        | IO84NDB1        |
| R20        | VCC             |
| R21        | IO81NDB1        |
| R22        | IO82PDB1        |
| T1         | IO152PDB3       |
| T2         | IO152NDB3       |
| T3         | NC              |
| T4         | IO150NDB3       |
| T5         | IO147PPB3       |
| T6         | GEC1/IO146PPB3  |
| T7         | IO140RSB2       |
| T8         | GNDQ            |
| T9         | GEA2/IO143RSB2  |
| T10        | IO126RSB2       |
| T11        | IO120RSB2       |
| T12        | IO108RSB2       |
| T13        | IO103RSB2       |
| T14        | IO99RSB2        |
| T15        | GNDQ            |
| T16        | IO92RSB2        |
| T17        | VJTAG           |
| T18        | GDC0/IO86NDB1   |
| T19        | GDA1/IO88PDB1   |
| T20        | NC              |
| T21        | IO83PDB1        |
| T22        | IO82NDB1        |
| U1         | IO149PDB3       |
| U2         | IO149NDB3       |
| U3         | NC              |
| U4         | GEB1/IO145PDB3  |
| U5         | GEB0/IO145NDB3  |
| U6         | VMV2            |
| U7         | IO138RSB2       |
| U8         | IO136RSB2       |

| FG484      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| U9         | IO131RSB2       |
| U10        | IO124RSB2       |
| U11        | IO119RSB2       |
| U12        | IO107RSB2       |
| U13        | IO104RSB2       |
| U14        | IO97RSB2        |
| U15        | VMV1            |
| U16        | TCK             |
| U17        | VPUMP           |
| U18        | TRST            |
| U19        | GDA0/IO88NDB1   |
| U20        | NC              |
| U21        | IO83NDB1        |
| U22        | NC              |
| V1         | NC              |
| V2         | NC              |
| V3         | GND             |
| V4         | GEA1/IO144PDB3  |
| V5         | GEA0/IO144NDB3  |
| V6         | IO139RSB2       |
| V7         | GEC2/IO141RSB2  |
| V8         | IO132RSB2       |
| V9         | IO127RSB2       |
| V10        | IO121RSB2       |
| V11        | IO114RSB2       |
| V12        | IO109RSB2       |
| V13        | IO105RSB2       |
| V14        | IO98RSB2        |
| V15        | IO96RSB2        |
| V16        | GDB2/IO90RSB2   |
| V17        | TDI             |
| V18        | GNDQ            |
| V19        | TDO             |
| V20        | GND             |
| V21        | NC              |
| V22        | NC              |

| FG484      |                 |
|------------|-----------------|
| Pin Number | A3P600 Function |
| W1         | NC              |
| W2         | IO148PDB3       |
| W3         | NC              |
| W4         | GND             |
| W5         | IO137RSB2       |
| W6         | GEB2/IO142RSB2  |
| W7         | IO134RSB2       |
| W8         | IO125RSB2       |
| W9         | IO123RSB2       |
| W10        | IO118RSB2       |
| W11        | IO115RSB2       |
| W12        | IO111RSB2       |
| W13        | IO106RSB2       |
| W14        | IO102RSB2       |
| W15        | GDC2/IO91RSB2   |
| W16        | IO93RSB2        |
| W17        | GDA2/IO89RSB2   |
| W18        | TMS             |
| W19        | GND             |
| W20        | NC              |
| W21        | NC              |
| W22        | NC              |
| Y1         | VCCIB3          |
| Y2         | IO148NDB3       |
| Y3         | NC              |
| Y4         | NC              |
| Y5         | GND             |
| Y6         | NC              |
| Y7         | NC              |
| Y8         | VCC             |
| Y9         | VCC             |
| Y10        | NC              |
| Y11        | NC              |
| Y12        | NC              |
| Y13        | NC              |
| Y14        | VCC             |