



Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

Product Status	Obsolete
Core Processor	FR81S
Core Size	32-Bit Single-Core
Speed	80MHz
Connectivity	CANbus, CSIO, I <sup>2</sup> C, LINbus, SPI, UART/USART
Peripherals	DMA, LVD, POR, PWM, WDT
Number of I/O	56
Program Memory Size	320KB (320K x 8)
Program Memory Type	FLASH
EEPROM Size	64K x 8
RAM Size	56K x 8
Voltage - Supply (Vcc/Vdd)	2.7V ~ 5.5V
Data Converters	A/D 32x12b; D/A 1x8b
Oscillator Type	External
Operating Temperature	-40°C ~ 105°C (TA)
Mounting Type	Surface Mount
Package / Case	80-LQFP
Supplier Device Package	80-LQFP (12x12)
Purchase URL	<a href="https://www.e-xfl.com/product-detail/infineon-technologies/mb91f522dscpmc-gse1">https://www.e-xfl.com/product-detail/infineon-technologies/mb91f522dscpmc-gse1</a>

## Product lineup comparison 120 pins

	MB91F522J	MB91F523J	MB91F524J	MB91F525J	MB91F526J
System Clock	On chip PLL Clock multiple method				
Minimum instruction execution time	12.5ns (80MHz)				
Flash Capacity (Program)	(256+64)KB	(384+64)KB	(512+64)KB	(768+64)KB	(1024+64)KB
Flash Capacity (Data)	64KB				
RAM Capacity	(48+8)KB	(64+8)KB	(96+8)KB	(128+8)KB	
External BUS I/F (22address/16data/4cs)	None				
DMA Transfer	16ch				
16-bit Base Timer	2ch				
Free-run Timer	16bit×3ch, 32bit×3ch				
Input capture	16bit×4ch, 32bit×6ch				
Output Compare	16bit×6ch, 32bit×6ch				
16-bit Reload Timer	8ch				
PPG	16bit×38ch				
Up/down Counter	2ch				
Clock Supervisor	Yes				
External Interrupt	8ch×2units				
A/D converter	12bit×26ch (1unit), 12bit×16ch (1unit)				
D/A converter (8bit)	2ch				
Multi-Function Serial Interface	12ch <sup>*1</sup>				
CAN	64msg×2ch/128msg×1ch				
Hardware Watchdog Timer	Yes				
CRC Formation	Yes				
Low-voltage detection reset	Yes				
Flash Security	Yes				
ECC Flash/WorkFlash	Yes				
ECC RAM	Yes				
Memory Protection Function (MPU)	Yes				
Floating point arithmetic (FPU)	Yes				
Real Time Clock (RTC)	Yes				
General-purpose port (#GPIOs)	96 ports				
SSCG	Yes				
Sub clock	Yes				
CR oscillator	Yes				
NMI request function	Yes				
OCD (On Chip Debug)	Yes				
TPU (Timing Protection Unit)	Yes				
Key code register	Yes				
Waveform generator	6ch				
Operation guaranteed temperature (T <sub>A</sub> )	-40°C to +125°C				
Power supply	2.7V to 5.5V <sup>*2</sup>				
Package	LQM120				

\*1: Only channel 3 and channel 4 support the I<sup>2</sup>C (fast mode/standard mode).

Only channel 5, channel 6, channel 7, channel 8 and channel 11 support the I<sup>2</sup>C (standard mode).

\*2: The initial detection voltage of the external low voltage detection is 2.8V±8% (2.576V to 3.024V). This LVD setting and internal LVD cannot be used to reliably generate a reset before voltage dips below minimum guaranteed operation voltage, as these detection levels are below the minimum guaranteed MCU operation voltage. Below the minimum guaranteed MCU operation voltage, MCU operations are not guaranteed with the exception of LVD.

Pin no.						Pin Name	Polarity	I/O circuit types*8	Function*9
64	80	100	120	144	176				
-	-	-	28*1	31	39	P050	-	A	General-purpose I/O port
						A18*5	-		External bus/Address bit18 output
						TRG5_1	-		PPG trigger 5 input (1)
						PPG33_0	-		PPG ch.33 output (0)
-	-	-	-	32	40	P051	-	A	General-purpose I/O port
						A19	-		External bus/Address bit19 output
						TRG9_0	-		PPG trigger 9 input (0)
-	-	-	-	33	41	P052	-	A	General-purpose I/O port
						A20	-		External bus/Address bit20 output
						PPG34_0	-		PPG ch.34 output (0)
						INT14_0	-		INT14 External interrupt input (0)
16*1	19*1	24*1	29*1	34	42	P053	-	B	General-purpose I/O port
						A21*2,*3,*4,*5	-		External bus/Address bit21 output
						AN44	-		ADC analog 44 input
						PPG35_0	-		PPG ch.35 output (0)
						INT14_1	-		INT14 External interrupt input (1)
						SCK0_1	-		Multi-function serial ch.0 clock I/O (1)
-	-	-	-	35	43	P054	-	A	General-purpose I/O port
						SYSCLK	-		External bus/System clock output
						PPG36_0	-		PPG ch.36 output (0)
17*1	22*1	27*1	32*1	38	46	P055	-	G	General-purpose I/O port
						CS2X*2,*3,*4,*5	-		External bus chip select 2 output
						SIN10_0	-		Multi-function serial ch.10 serial data input (0)
						AN43	-		ADC analog 43 input
						PPG37_0	-		PPG ch.37 output (0)
						TIN4_1	-		Reload timer ch.4 event input (1)
-	-	-	-	-	47	P180	-	A	General-purpose I/O port
						PPG40_0	-		PPG ch.40 output (0)
-	-	-	-	-	48	P181	-	A	General-purpose I/O port
						PPG41_0	-		PPG ch.41 output (0)
-	-	-	33*1	39	49	P056	-	A	General-purpose I/O port
						CS3X*5	-		External bus chip select 3 output
						ICU9_0	-		Input capture ch.9 input (0)
						PPG0_1	-		PPG ch.0 output (1)
						ICU0_1	-		Input capture ch.0 input (1)
						TIN5_1	-		Reload timer ch.5 event input (1)
						DTTI_2	-		Waveform generator ch.0-ch.5 input pin (2)

Pin no.						Pin Name	Polarity	I/O circuit types*8	Function*9
64	80	100	120	144	176				
23	28	34	40	48	59	P062	-	B	General-purpose I/O port
						SCS10_1	-		Serial chip select 10 I/O (1)
						SCS40_0	-		Serial chip select 40 I/O (0)
						AN40	-		ADC analog 40 input
						PPG4_1	-		PPG ch.4 output (1)
						FRCK0_0	-		Free-run timer 0 clock input (0)
						TOT7_1	-		Reload timer ch.7 output (1)
						ZIN1_1	-		U/D counter ch.1 ZIN input (1)
-	29	35	41	49	60	P063	-	B	General-purpose I/O port
						SCS41_0	-		Serial chip select 41 output (0)
						AN39	-		ADC analog 39 input
						PPG5_1	-		PPG ch.5 output (1)
						FRCK1_0	-		Free-run timer 1 clock input (0)
						BIN1_1	-		U/D counter ch.1 BIN input (1)
-	-	-	-	-	61	P183	-	A	General-purpose I/O port
						PPG43_0	-		PPG ch.43 output (0)
24	30	36	42	50	62	P064	-	B	General-purpose I/O port
						SCS42_0	-		Serial chip select 42 output (0)
						AN38	-		ADC analog 38 input
						FRCK2_0	-		Free-run timer 2 clock input (0)
						AIN1_1	-		U/D counter ch.1 AIN input (1)
						PPG43_1	-		PPG ch.43 output (1)
-	-	37	43	51	63	P065	-	A	General-purpose I/O port
						SCS43_0	-		Serial chip select 43 output (0)
						FRCK3_0	-		Free-run timer 3 clock input (0)
						ZIN0_1	-		U/D counter ch.0 ZIN input (1)
						PPG44_1	-		PPG ch.44 output (1)
-	-	-	-	-	64	P184	-	A	General-purpose I/O port
						PPG44_0	-		PPG ch.44 output (0)
-	-	-	-	-	65	P185	-	A	General-purpose I/O port
						PPG45_0	-		PPG ch.45 output (0)
25	31	38	44	52	66	P066	-	B	General-purpose I/O port
						SOT4_2	-		Multi-function serial ch.4 serial data output (2)
						SCS3_0	-		Serial chip select 3 I/O (0)
						AN37	-		ADC analog 37 input
						FRCK4_0	-		Free-run timer 4 clock input (0)
						BIN0_1	-		U/D counter ch.0 BIN input (1)
-	32	39	45	53	67	P067	-	B	General-purpose I/O port
						AN36	-		ADC analog 36 input
						FRCK5_0	-		Free-run timer 5 clock input (0)
						AIN0_1	-		U/D counter ch.0 AIN input (1)

## 5. Handling Precautions

Any semiconductor devices have inherently a certain rate of failure. The possibility of failure is greatly affected by the conditions in which they are used (circuit conditions, environmental conditions, etc.). This page describes precautions that must be observed to minimize the chance of failure and to obtain higher reliability from your Cypress semiconductor devices.

### 1. Precautions for Product Design

This section describes precautions when designing electronic equipment using semiconductor devices.

#### ■ Absolute Maximum Ratings

Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of certain established limits, called absolute maximum ratings. Do not exceed these ratings.

#### ■ Recommended Operating Conditions

Recommended operating conditions are normal operating ranges for the semiconductor device. All the device's electrical characteristics are warranted when operated within these ranges.

Always use semiconductor devices within the recommended operating conditions. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their sales representative beforehand.

#### ■ Processing and Protection of Pins

These precautions must be followed when handling the pins which connect semiconductor devices to power supply and input/output functions.

##### (1) Preventing Over-Voltage and Over-Current Conditions

Exposure to voltage or current levels in excess of maximum ratings at any pin is likely to cause deterioration within the device, and in extreme cases leads to permanent damage of the device. Try to prevent such overvoltage or over-current conditions at the design stage.

##### (2) Protection of Output Pins

Shorting of output pins to supply pins or other output pins, or connection to large capacitance can cause large current flows. Such conditions if present for extended periods of time can damage the device. Therefore, avoid this type of connection.

##### (3) Handling of Unused Input Pins

Unconnected input pins with very high impedance levels can adversely affect stability of operation. Such pins should be connected through an appropriate resistance to a power supply pin or ground pin.

#### ■ Latch-up

Semiconductor devices are constructed by the formation of P-type and N-type areas on a substrate. When subjected to abnormally high voltages, internal parasitic PNP junctions (called thyristor structures) may be formed, causing large current levels in excess of several hundred mA to flow continuously at the power supply pin. This condition is called latch-up.

**CAUTION:** The occurrence of latch-up not only causes loss of reliability in the semiconductor device, but can cause injury or damage from high heat, smoke or flame. To prevent this from happening, do the following:

- (1) Be sure that voltages applied to pins do not exceed the absolute maximum ratings. This should include attention to abnormal noise, surge levels, etc.
- (2) Be sure that abnormal current flows do not occur during the power-on sequence.

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
000C4C <sub>H</sub>	DDAR4 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				DMA Controller [S]
000C50 <sub>H</sub>	DCCR5 [R/W] W 0----000 --00--00 00000000 0-000000				
000C54 <sub>H</sub>	DCSR5 [R/W] H 0----- ----000		DTCR5 [R/W] H 00000000 00000000		
000C58 <sub>H</sub>	DSAR5 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C5C <sub>H</sub>	DDAR5 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C60 <sub>H</sub>	DCCR6 [R/W] W 0----000 --00--00 00000000 0-000000				
000C64 <sub>H</sub>	DCSR6 [R/W] H 0----- ----000		DTCR6 [R/W] H 00000000 00000000		
000C68 <sub>H</sub>	DSAR6 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C6C <sub>H</sub>	DDAR6 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C70 <sub>H</sub>	DCCR7 [R/W] W 0----000 --00--00 00000000 0-000000				
000C74 <sub>H</sub>	DCSR7 [R/W] H 0----- ----000		DTCR7 [R/W] H 00000000 00000000		
000C78 <sub>H</sub>	DSAR7 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C7C <sub>H</sub>	DDAR7 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C80 <sub>H</sub>	DCCR8 [R/W] W 0----000 --00--00 00000000 0-000000				
000C84 <sub>H</sub>	DCSR8 [R/W] H 0----- ----000		DTCR8 [R/W] H 00000000 00000000		
000C88 <sub>H</sub>	DSAR8 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C8C <sub>H</sub>	DDAR8 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C90 <sub>H</sub>	DCCR9 [R/W] W 0----000 --00--00 00000000 0-000000				
000C94 <sub>H</sub>	DCSR9 [R/W] H 0----- ----000		DTCR9 [R/W] H 00000000 00000000		
000C98 <sub>H</sub>	DSAR9 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000C9C <sub>H</sub>	DDAR9 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
000F70 <sub>H</sub>	RCRH0 [W] H,W XXXXXXXX	RCRL0 [W] B,H,W XXXXXXXX	UDCRH0 [R] H,W 00000000	UDCRL0 [R] B,H,W 00000000	Up/Down Counter 0
000F74 <sub>H</sub>	CCR0 [R/W] B,H 00000000 -0001000		—	CSR0 [R/W] B 00000000	
000F78 <sub>H</sub> to 000F7C <sub>H</sub>	—	—	—	—	Reserved
000F80 <sub>H</sub>	RCRH1 [W] H,W XXXXXXXX	RCRL1 [W] B,H,W XXXXXXXX	UDCRH1 [R] H,W 00000000	UDCRL1 [R] B,H,W 00000000	Up/Down Counter 1
000F84 <sub>H</sub>	CCR1 [R/W] B,H 00000000 -0001000		—	CSR1 [R/W] B 00000000	
000F88 <sub>H</sub>	—	—	MSCH45 [R] B,H,W 00000000	MSCL45 [R/W] B,H,W -----00	Input Capture 4,5 32-bit ICU Cycle and pulse width measurement control 45
000F8C <sub>H</sub>	—	—	MSCH67 [R] B,H,W 00000000	MSCL67 [R/W] B,H,W -----00	Input Capture 6,7 32-bit ICU Cycle and pulse width measurement control 67
000F90 <sub>H</sub>	OCCP10 [R/W] W 00000000 00000000 00000000 00000000				Output Compare 10,11 32-bit OCU
000F94 <sub>H</sub>	OCCP11 [R/W] W 00000000 00000000 00000000 00000000				
000F98 <sub>H</sub>	—	—	OCSH1011 [R/W] B,H,W ---0--00	OCSL1011 [R/W] B,H,W 0000--00	Output Compare 10,11 32-bit OCU
000F9C <sub>H</sub>	—	—	—	OCLS1011 [R/W] B,H,W ----0000	OCU1011 Output level control register
000FA0 <sub>H</sub>	CPCLR5 [R/W] W 11111111 11111111 11111111 11111111				Free-run Timer 5 32-bit FRT
000FA4 <sub>H</sub>	TCDT5 [R/W] W 00000000 00000000 00000000 00000000				
000FA8 <sub>H</sub>	TCCSH5 [R/W]B,H,W 0-----00	TCCSL5 [R/W]B,H,W -1-00000	—	—	
000FAC <sub>H</sub> to 000FCC <sub>H</sub>	—	—	—	—	Reserved

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
0018F0 <sub>H</sub>	—/(SCSTR310)/ (LAMSR10) [R/W] B,H,W -----*3	—/(SCSTR210)/ (LAMCR10) [R/W] B,H,W -----*3	—/(SCSTR110)/ (SFLR110)[R/W] B,H,W -----*3	—/(SCSTR010)/ (SFLR010)[R/W] B,H,W -----*3	Multi-UART10  *3: Reserved because CSIO mode is not set immediately after reset.  *4: Reserved because LIN2.1 mode is not set immediately after reset.
0018F4 <sub>H</sub>	—	—/(SCSFR210) [R/W] B,H,W -----*3	—/(SCSFR110) [R/W] B,H,W -----*3	—/(SCSFR010) [R/W] B,H,W -----*3	
0018F8 <sub>H</sub>	—/(TBYTE310)/ (LAMESR10) [R/W] B,H,W -----*3	—/(TBYTE210)/ (LAMERT10) [R/W] B,H,W -----*3	—/(TBYTE110)/ (LAMIER10) [R/W] B,H,W -----*3	TBYTE010/(LAMRID10)/(LAMTID10) [R/W] B,H,W 00000000	
0018FC <sub>H</sub>	BGR10[R/W] H, W 00000000 00000000		—/(ISMK10)[R/W] B,H,W -----*2	—/(ISBA10)[R/W] B,H,W -----*2	
001900 <sub>H</sub>	FCR110[R/W] B,H,W ---00100	FCR010[R/W] B,H,W -0000000	FBYTE10[R/W] B,H,W 00000000 00000000		
001904 <sub>H</sub>	FTICR10[R/W] B,H,W 00000000 00000000		—	—	
001908 <sub>H</sub>	SCR11/(IBCR11) [R/W] B,H,W 0--00000	SMR11[R/W] B,H,W 000-00-0	SSR11[R/W] B,H,W 0-000011	ESCR11/(IBSR11) [R/W] B,H,W 00000000	Multi-UART11  *1: Byte access is possible only for access to lower 8 bits.  *2: Reserved because I <sup>2</sup> C mode is not set immediately after reset.  *3: Reserved because CSIO mode is not set immediately after reset.  *4: Reserved because LIN2.1 mode is not set immediately after reset.
00190C <sub>H</sub>	—/(RDR111/(TDR111))[R/W] B,H,W -----*3		RDR011/(TDR011)[R/W] B,H,W -----0 00000000 *1		
001910 <sub>H</sub>	SACSR11[R/W] B,H,W 0----000 00000000		STMR11[R] B,H,W 00000000 00000000		
001914 <sub>H</sub>	STMCR11[R/W] B,H,W 00000000 00000000		—/(SCSCR11/SFUR11)[R/W] B,H,W -----*3 *4		
001918 <sub>H</sub>	—/(SCSTR311)/ (LAMSR11) [R/W] B,H,W -----*3	—/(SCSTR211)/ (LAMCR11) [R/W] B,H,W -----*3	—/(SCSTR111)/ (SFLR111)[R/W] B,H,W -----*3	—/(SCSTR011)/ (SFLR011)[R/W] B,H,W -----*3	
00191C <sub>H</sub>	—	—/(SCSFR211) [R/W] B,H,W -----*3	—/(SCSFR111) [R/W] B,H,W -----*3	—/(SCSFR011) [R/W] B,H,W -----*3	
001920 <sub>H</sub>	—/(TBYTE311)/ (LAMESR11) [R/W] B,H,W -----*3	—/(TBYTE211)/ (LAMERT11) [R/W] B,H,W -----*3	—/(TBYTE111)/ (LAMIER11) [R/W] B,H,W -----*3	TBYTE011/(LAMRID11)/(LAMTID11) [R/W] B,H,W 00000000	
001924 <sub>H</sub>	BGR11[R/W] H, W 00000000 00000000		—/(ISMK11)[R/W] B,H,W -----*2	—/(ISBA11)[R/W] B,H,W -----*2	



Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
001CCC <sub>H</sub>	PTPC37 [R/W] H,W 00000000 00000000		—	—	PPG37
001CD0 <sub>H</sub>	PCN38 [R/W] B,H,W 00000000 000000-0		PCSR38 [W] H,W XXXXXXXXXX XXXXXXXXX		PPG38
001CD4 <sub>H</sub>	PDUT38 [W] H,W XXXXXXXXXX XXXXXXXXX		PTMR38 [R] H,W 11111111 11111111		
001CD8 <sub>H</sub>	PCN238 [R/W] B,H,W --000000 ----110		PSDR38 [R/W] H,W 00000000 00000000		
001CDC <sub>H</sub>	PTPC38 [R/W] H,W 00000000 00000000		—	—	
001CE0 <sub>H</sub>	PCN39 [R/W] B,H,W 00000000 000000-0		PCSR39 [W] H,W XXXXXXXXXX XXXXXXXXX		PPG39
001CE4 <sub>H</sub>	PDUT39 [W] H,W XXXXXXXXXX XXXXXXXXX		PTMR39 [R] H,W 11111111 11111111		PPG39
001CE8 <sub>H</sub>	PCN239 [R/W] B,H,W --000000 ----110		PSDR39 [R/W] H,W 00000000 00000000		
001CEC <sub>H</sub>	PTPC39 [R/W] H,W 00000000 00000000		—	—	
001CF0 <sub>H</sub>	PCN40 [R/W] B,H,W 00000000 000000-0		PCSR40 [W] H,W XXXXXXXXXX XXXXXXXXX		PPG40
001CF4 <sub>H</sub>	PDUT40 [W] H,W XXXXXXXXXX XXXXXXXXX		PTMR40 [R] H,W 11111111 11111111		
001CF8 <sub>H</sub>	PCN240 [R/W] B,H,W --000000 ----110		PSDR40 [R/W] H,W 00000000 00000000		
001CFC <sub>H</sub>	PTPC40 [R/W] H,W 00000000 00000000		—	—	
001D00 <sub>H</sub>	PCN41 [R/W] B,H,W 00000000 000000-0		PCSR41 [W] H,W XXXXXXXXXX XXXXXXXXX		PPG41
001D04 <sub>H</sub>	PDUT41 [W] H,W XXXXXXXXXX XXXXXXXXX		PTMR41 [R] H,W 11111111 11111111		
001D08 <sub>H</sub>	PCN241 [R/W] B,H,W --000000 ----110		PSDR41 [R/W] H,W 00000000 00000000		
001D0C <sub>H</sub>	PTPC41 [R/W] H,W 00000000 00000000		—	—	
001D10 <sub>H</sub>	PCN42 [R/W] B,H,W 00000000 000000-0		PCSR42 [W] H,W XXXXXXXXXX XXXXXXXXX		PPG42
001D14 <sub>H</sub>	PDUT42 [W] H,W XXXXXXXXXX XXXXXXXXX		PTMR42 [R] H,W 11111111 11111111		
001D18 <sub>H</sub>	PCN242 [R/W] B,H,W --000000 ----110		PSDR42 [R/W] H,W 00000000 00000000		
001D1C <sub>H</sub>	PTPC42 [R/W] H,W 00000000 00000000		—	—	

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
002150 <sub>H</sub>	IF2DTA11 [R/W] B,H,W 00000000 00000000		IF2DTA21 [R/W] B,H,W 00000000 00000000		CAN1 (64msb)
002154 <sub>H</sub>	IF2DTB11 [R/W] B,H,W 00000000 00000000		IF2DTB21 [R/W] B,H,W 00000000 00000000		
002158 <sub>H</sub>	—	—	—	—	
00215C <sub>H</sub>	—	—	—	—	
002160 <sub>H</sub> , 002164 <sub>H</sub>	Reserved (IF2 data mirror)				
002168 <sub>H</sub> to 00217C <sub>H</sub>	—				
002180 <sub>H</sub>	TREQR21 [R] B,H,W 00000000 00000000		TREQR11 [R] B,H,W 00000000 00000000		
002184 <sub>H</sub>	TREQR41 [R] B,H,W 00000000 00000000		TREQR31 [R] B,H,W 00000000 00000000		
002188 <sub>H</sub>	—	—	—	—	
00218C <sub>H</sub>	—	—	—	—	
002190 <sub>H</sub>	NEWDT21 [R] B,H,W 00000000 00000000		NEWDT11 [R] B,H,W 00000000 00000000		
002194 <sub>H</sub>	NEWDT41 [R] B,H,W 00000000 00000000		NEWDT31 [R] B,H,W 00000000 00000000		
002198 <sub>H</sub>	—	—	—	—	
00219C <sub>H</sub>	—	—	—	—	
0021A0 <sub>H</sub>	INTPND21 [R] B,H,W 00000000 00000000		INTPND11 [R] B,H,W 00000000 00000000		
0021A4 <sub>H</sub>	INTPND41 [R] B,H,W 00000000 00000000		INTPND31 [R] B,H,W 00000000 00000000		
0021A8 <sub>H</sub>	—	—	—	—	
0021AC <sub>H</sub>	—	—	—	—	
0021B0 <sub>H</sub>	MSGVAL21 [R] B,H,W 00000000 00000000		MSGVAL11 [R] B,H,W 00000000 00000000		
0021B4 <sub>H</sub>	MSGVAL41 [R] B,H,W 00000000 00000000		MSGVAL31 [R] B,H,W 00000000 00000000		
0021B8 <sub>H</sub>	—	—	—	—	
0021BC <sub>H</sub>	—	—	—	—	

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
0021C <sub>0H</sub> to 0021F <sub>C<sub>H</sub></sub>	—				CAN1 (64msb)
00220 <sub>0H</sub>	CTRLR2 [R/W] B,H,W ----- 000-0001		STATR2 [R/W] B,H,W ----- 00000000		CAN2 (64msb)
00220 <sub>4H</sub>	ERRCNT2 [R] B,H,W 00000000 00000000		BTR2 [R/W] B,H,W -0100011 00000001		
00220 <sub>8H</sub>	INTR2 [R] B,H,W 00000000 00000000		TESTR2 [R/W] B,H,W ----- X00000--		
00220 <sub>C<sub>H</sub></sub>	BRPER2 [R/W] B,H,W ----- ----0000		—		
00221 <sub>0H</sub>	IF1CREQ2 [R/W] B,H,W 0----- 00000001		IF1CMSK2 [R/W] B,H,W ----- 00000000		
00221 <sub>4H</sub>	IF1MSK22 [R/W] B,H,W 11-11111 11111111		IF1MSK12 [R/W] B,H,W 11111111 11111111		
00221 <sub>8H</sub>	IF1ARB22 [R/W] B,H,W 00000000 00000000		IF1ARB12 [R/W] B,H,W 00000000 00000000		
00221 <sub>C<sub>H</sub></sub>	IF1MCTR2 [R/W] B,H,W 00000000 0---0000		—		
00222 <sub>0H</sub>	IF1DTA12 [R/W] B,H,W 00000000 00000000		IF1DTA22 [R/W] B,H,W 00000000 00000000		
00222 <sub>4H</sub>	IF1DTB12 [R/W] B,H,W 00000000 00000000		IF1DTB22 [R/W] B,H,W 00000000 00000000		
00222 <sub>8H</sub>	—	—	—	—	
00222 <sub>C<sub>H</sub></sub>	—	—	—	—	
00223 <sub>0H</sub> , 00223 <sub>4H</sub>	Reserved (IF1 data mirror)				
00223 <sub>8H</sub>	—	—	—	—	
00223 <sub>C<sub>H</sub></sub>	—	—	—	—	
00224 <sub>0H</sub>	IF2CREQ2 [R/W] B,H,W 0----- 00000001		IF2CMSK2 [R/W] B,H,W ----- 00000000		
00224 <sub>4H</sub>	IF2MSK22 [R/W] B,H,W 11-11111 11111111		IF2MSK12 [R/W] B,H,W 11111111 11111111		
00224 <sub>8H</sub>	IF2ARB22 [R/W] B,H,W 00000000 00000000		IF2ARB12 [R/W] B,H,W 00000000 00000000		
00224 <sub>C<sub>H</sub></sub>	IF2MCTR2 [R/W] B,H,W 00000000 0---0000		—		
00225 <sub>0H</sub>	IF2DTA12 [R/W] B,H,W 00000000 00000000		IF2DTA22 [R/W] B,H,W 00000000 00000000		

**176 pins**


Interrupt factor	Interrupt number		Interrupt level	Offset	Default address for TBR	RN
	Decimal	Hexadecimal				
Reset	0	0	-	3FC <sub>H</sub>	000FFFFC <sub>H</sub>	-
System reserved	1	1	-	3F8 <sub>H</sub>	000FFFF8 <sub>H</sub>	-
System reserved	2	2	-	3F4 <sub>H</sub>	000FFFF4 <sub>H</sub>	-
System reserved	3	3	-	3F0 <sub>H</sub>	000FFFF0 <sub>H</sub>	-
System reserved	4	4	-	3EC <sub>H</sub>	000FFFE <sub>C</sub>	-
FPU exception	5	5	-	3E8 <sub>H</sub>	000FFFE8 <sub>H</sub>	-
Exception of instruction access protection violation	6	6	-	3E4 <sub>H</sub>	000FFFE4 <sub>H</sub>	-
Exception of data access protection violation	7	7	-	3E0 <sub>H</sub>	000FFFE0 <sub>H</sub>	-
Data access error interrupt	8	8	-	3DC <sub>H</sub>	000FFFD <sub>C</sub>	-
INTE instruction	9	9	-	3D8 <sub>H</sub>	000FFFD8 <sub>H</sub>	-
Instruction break	10	0A	-	3D4 <sub>H</sub>	000FFFD4 <sub>H</sub>	-
System reserved	11	0B	-	3D0 <sub>H</sub>	000FFFD0 <sub>H</sub>	-
System reserved	12	0C	-	3CC <sub>H</sub>	000FFFC <sub>C</sub>	-
System reserved	13	0D	-	3C8 <sub>H</sub>	000FFFC8 <sub>H</sub>	-
Exception of invalid instruction	14	0E	-	3C4 <sub>H</sub>	000FFFC4 <sub>H</sub>	-
NMI request	15	0F	15 (F <sub>H</sub> ) Fixed	3C0 <sub>H</sub>	000FFFC0 <sub>H</sub>	-
Error generation during internal bus diagnosis						
XBS RAM double-bit error generation						
Backup RAM double-bit error generation						
TPU violation	16	10	ICR00	3BC <sub>H</sub>	000FFFB <sub>C</sub>	0
External interrupt 0-7						
External interrupt 8-15						
External low-voltage detection interrupt						
Reload timer 0/1/4/5	17	11	ICR01	3B8 <sub>H</sub>	000FFFB8 <sub>H</sub>	1* <sup>7</sup>
Reload timer 2/3/6/7	18	12	ICR02	3B4 <sub>H</sub>	000FFFB4 <sub>H</sub>	2* <sup>2</sup>
Multi-function serial interface ch.0 (reception completed)	19	13	ICR03	3B0 <sub>H</sub>	000FFFB0 <sub>H</sub>	3* <sup>2</sup>
Multi-function serial interface ch.0 (status)	20	14	ICR04	3AC <sub>H</sub>	000FFFA <sub>C</sub>	4* <sup>1</sup>
Multi-function serial interface ch.0 (transmission completed)	21	15	ICR05	3A8 <sub>H</sub>	000FFFA8 <sub>H</sub>	5* <sup>1</sup>
Multi-function serial interface ch.1 (reception completed)	22	16	ICR06	3A4 <sub>H</sub>	000FFFA4 <sub>H</sub>	6* <sup>1</sup>
Multi-function serial interface ch.1 (status)	23	17	ICR07	3A0 <sub>H</sub>	000FFFA0 <sub>H</sub>	7* <sup>1</sup>
Multi-function serial interface ch.1 (transmission completed)	24	18	ICR08	39C <sub>H</sub>	000FFF9 <sub>C</sub>	8* <sup>1</sup>
Multi-function serial interface ch.2 (reception completed)	25	19	ICR09	398 <sub>H</sub>	000FFF98 <sub>H</sub>	9* <sup>1</sup>
Multi-function serial interface ch.2 (status)	26	1A	ICR10	394 <sub>H</sub>	000FFF94 <sub>H</sub>	10* <sup>1</sup>
Multi-function serial interface ch.3 (reception completed)	26	1A	ICR10	394 <sub>H</sub>	000FFF94 <sub>H</sub>	10* <sup>1</sup>
Multi-function serial interface ch.3 (status)						

\*8: It is a standard when four-layer substrate is used.

\*9: Corresponding pins: General-purpose ports other than those of P103, P104, P105 and P106.

\*10: Corresponding pins: General-purpose ports of P103, P104, P105 and P106.

Sample Recommended Circuit

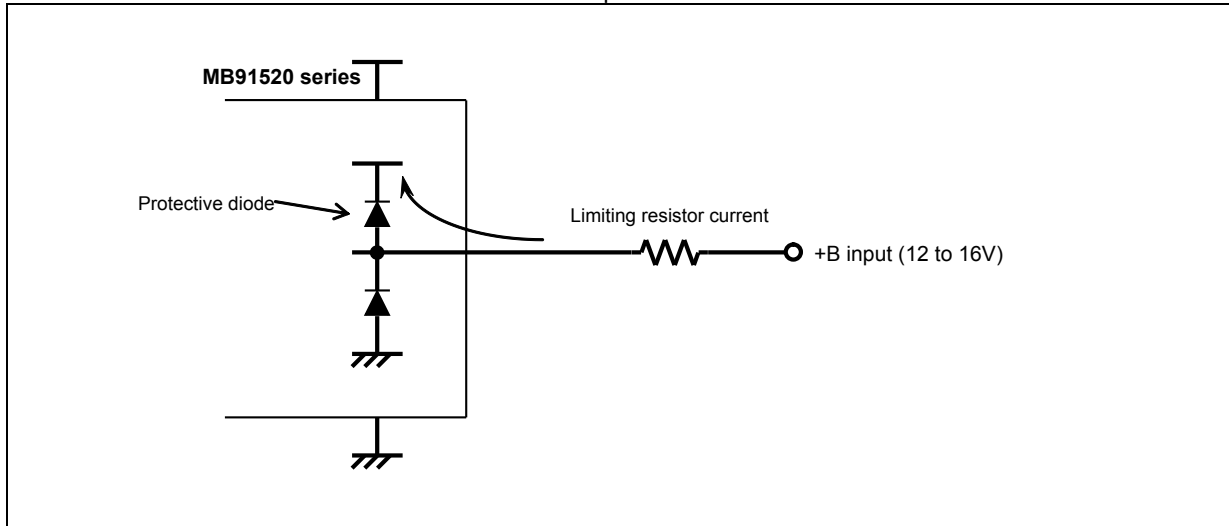

### <WARNING>

Semiconductor devices may be permanently damaged by application of stress (including, without limitation, voltage, current or temperature) in excess of absolute maximum ratings. Do not exceed any of these ratings.

### Recommended operating conditions

(V<sub>SS</sub>=AV<sub>SS</sub>=0.0V)

Parameter	Symbol	Value		Unit	Remarks
		Min	Max		
Power supply voltage	V <sub>CC</sub> , AV <sub>CC</sub>	4.5	5.5	V	Recommended operation guarantee range (When 5.0V is used)
		3.0	3.6	V	Recommended operation guarantee range (When 3.3V is used)
		2.7	5.5	V	Operation guarantee range <sup>*1</sup>
Smoothing capacitor <sup>*2</sup>	C <sub>S</sub>	4.7 (tolerance within ±50%)		μF	Use a ceramic capacitor or a capacitor that has the similar frequency characteristics. Use a capacitor with a capacitance greater than C <sub>S</sub> as the smoothing capacitor on the VCC pin.
Operating temperature	T <sub>A</sub>	-40	+105	°C	
		-40	+125	°C	*3

\*1: When it is used outside recommended operation guarantee range (range of the operation guarantee), contact your sales representative.

The initial detection voltage of the external low voltage detection is 2.8V±8% (2.576V to 3.024V). This LVD setting and internal LVD cannot be used to reliably generate a reset before voltage dips below minimum guaranteed operation voltage, as these detection levels are below the minimum guaranteed MCU operation voltage. Below the

(T<sub>A</sub>: -40°C to +125°C, V<sub>CC</sub>=AV<sub>CC</sub>=5.0V ± 10%/V<sub>CC</sub>=AV<sub>CC</sub>=3.3V±0.3V, V<sub>SS</sub>=AV<sub>SS</sub>=0.0V)

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Input leak current	I <sub>IL</sub>	All input pins	V <sub>CC</sub> =AV <sub>CC</sub> =5.5V V <sub>SS</sub> <V <sub>I</sub> <V <sub>CC</sub>	-5	-	5	μA	
Input capacitance 1	C <sub>IN1</sub>	Other than VCC, VSS, AVCC, AVSS, C	-	-	5	15	pF	
Pull-up resistance	R <sub>UP1</sub>	RSTX, NMIX	V <sub>CC</sub> =5.0V±10%	25	-	100	kΩ	
			V <sub>CC</sub> =3.3V±0.3V	45	-	140		
	R <sub>UP2</sub>	P073,074,076,077	V <sub>CC</sub> =5.0V±10%	25	-	60		
			V <sub>CC</sub> =3.3V±0.3V	33	-	90		
	R <sub>UP3</sub>	Port pin other than P035, 041,073,074, 076,077,093, 122	V <sub>CC</sub> =5.0V±10%	25	-	100	kΩ	
			V <sub>CC</sub> =3.3V±0.3V	45	-	140		
“H” level output voltage	V <sub>OH1</sub>	Normal output pin	V <sub>CC</sub> =4.5V I <sub>OH</sub> =-4.0mA	V <sub>CC</sub> -0.5	-	V <sub>CC</sub>	V	
			V <sub>CC</sub> =3.0V I <sub>OH</sub> =-2.0mA					
	V <sub>OH2</sub>	P073,074,076, 077	V <sub>CC</sub> =4.5V I <sub>OH</sub> =-3.0mA	V <sub>CC</sub> -0.5	-	V <sub>CC</sub>	V	I <sup>2</sup> C pin output
	V <sub>OH3</sub>	P103 to 106	V <sub>CC</sub> =4.5V I <sub>OH</sub> =-12.0mA	V <sub>CC</sub> -0.5	-	V <sub>CC</sub>	V	
			V <sub>CC</sub> =3.0V I <sub>OH</sub> =-8.0mA					
	V <sub>OH3</sub>	P103 to 106	V <sub>CC</sub> =3.0V I <sub>OH</sub> =-8.0mA	-0.5	-	V <sub>CC</sub>	V	
“L” level output voltage	V <sub>OL1</sub>	Normal output pin	V <sub>CC</sub> =4.5V I <sub>OL</sub> =4.0mA	0	-	0.4	V	
			V <sub>CC</sub> =3.0V I <sub>OL</sub> =2.0mA					
	V <sub>OL2</sub>	P073,074,076, 077	V <sub>CC</sub> =4.5V I <sub>OL</sub> =3.0mA	0	-	0.4	V	I <sup>2</sup> C pin output
	V <sub>OL3</sub>	P103 to 106	V <sub>CC</sub> =4.5V I <sub>OL</sub> =12.0mA	0	-	0.4	V	
			V <sub>CC</sub> =3.0V I <sub>OL</sub> =8.0mA					
	V <sub>OL3</sub>	P103 to 106	V <sub>CC</sub> =3.0V I <sub>OL</sub> =8.0mA	-0.5	-	V <sub>CC</sub>	V	

(4-1-5) Bit setting: SMR:MD2=0, SMR:MD1=1, SMR:MD0=0,

When Serial chip select is used : SCSCR:CSSEN=1,

Serial clock output mark level "H" : SMR,SCSFR:SCINV=0,

Serial chip select Inactive level "H" : SCSCR,SCSFR:CSLVL=1

(T<sub>A</sub>: -40°C to +125°C, V<sub>CC</sub>=AV<sub>CC</sub>=5.0V±10%/V<sub>CC</sub>=AV<sub>CC</sub>=3.3V±0.3V, V<sub>SS</sub>=AV<sub>SS</sub>=0.0V)

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
SCS↓→SCK↓ setup time	t <sub>CSSI</sub>	SCK1, SCK2, SCK5 to SCK11 SCS1, SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11	-	t <sub>CSSU</sub> -50 *1	t <sub>CSSU</sub> +0 *1	ns	Internal shift clock mode output pin : C <sub>L</sub> =50pF
		SCK3, SCK4 SCS3, SCS40 to SCS43		t <sub>CSSU</sub> -50 *1	t <sub>CSSU</sub> +300 *1	ns	
SCK↑→SCS↑ hold time	t <sub>CSHI</sub>	SCK1, SCK2, SCK5 to SCK11 SCS1, SCS2, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t <sub>CSHD</sub> -10 *2	t <sub>CSHD</sub> +50 *2	ns	
		SCK3, SCK4 SCS3, SCS40 to SCS43		t <sub>CSHD</sub> -300 *2	t <sub>CSHD</sub> +50 *2	ns	
SCS deselect time	t <sub>CSDI</sub>	SCS1 to SCS3, SCS40 to SCS43, SCS50 to SCS53, SCS60 to SCS63, SCS70 to SCS73, SCS8 to SCS11		t <sub>CSDS</sub> -50 *3	t <sub>CSDS</sub> +50 *3	ns	

## 18. Errata

This section describes the errata for the MB91520 Series. Details include errata trigger conditions, scope of impact, available workarounds, and silicon revision applicability. Contact your local Cypress Sales Representative if you have questions.

### Part Numbers Affected

Part Number
MB91F522B/D/F/J/K/L
MB91F523B/D/F/J/K/L
MB91F524B/D/F/J/K/L
MB91F525B/D/F/J/K/L
MB91F526B/D/F/J/K/L

### MB91F522/3/4/5/6 Qualification Status

Product Status: Production

### Errata Summary

The following table defines the errata applicability to available MB91520 Series devices.

Items	Part Number	Silicon Revision	Fix Status
[1]. Power-on Conditions is not enough in the Datasheet Specification	MB91F522B/D/F/J/K/L MB91F523B/D/F/J/K/L MB91F524B/D/F/J/K/L	B, C	Will be fixed in production silicon version D, E
[2]. Limitation for Watch mode (power off)	MB91F525B/D/F/J/K/L MB91F526B/D/F/J/K/L	B, C, D, E	-

#### 1. Power-on Conditions is not enough in the Datasheet Specification

##### ■ Problem Definition

If the Power-On-Reset and Internal Low Voltage Detection are not generated, some port functions will not be available.

##### ■ Parameters Affected

$t_{OFF}$  for Power off time on Power-on Conditions

VCC Power ramp rate on Power-on Conditions



##### ■ Trigger Condition

When the power supply voltage to the MCU has been turned off but has not reached 0 V when the power supply voltage is turned on again, MCU does not generate an internal power-on-reset signal (Power-On reset or Internal LVD reset). Then, some port functions will not be available.

If below condition (1) or (2) or (3) is satisfied, Power-On Reset (Initialization-Reset signal) is generated and no problem occurs.

- (1) The VCC voltage is less than 200 mV for 50 ms or longer ( $t_{OFF}$ )
- (2) VCC Power ramp rate less than 4 mV/ $\mu$ s (dV/dt) until a voltage level for a safe Power-On detection is reached
- (3) C-pin voltage is below 60 mV when VCC is turned on again

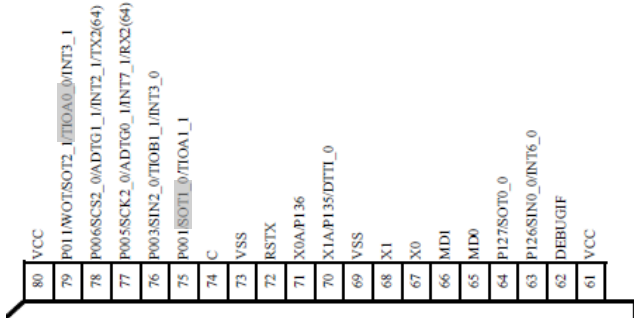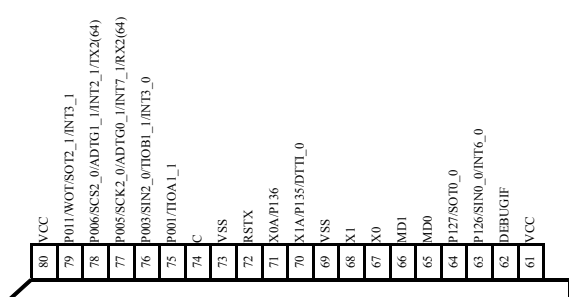

Page	Section	Change Results
14	■ Pin Assignment MB91F52xD	<p>- Top</p>  <p style="text-align: center;">↓</p> 
14	■ Pin Assignment MB91F52xD	<p>The following note added on the bottom left of Figure.</p> <p>* In a single clock product, pin 71 and pin 72 are the general-purpose ports.</p>

Page	Section	Change Results																																																																																																																																																																																																																																																																																																					
34, 35	■PIN Description	A List of "Pin Description" modified.																																																																																																																																																																																																																																																																																																					
		(Error)																																																																																																																																																																																																																																																																																																					
		<table><tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr><tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr><tr><td>-</td><td>-</td><td>-</td><td>113</td><td>133</td><td>161</td><td>P002</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D18</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SCK1_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>TIOB0_1</td></tr><tr><td>-</td><td>76</td><td>96</td><td>114</td><td>134</td><td>162</td><td>P003</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D19</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SIN2_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>TIOB1_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT3_0</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>135</td><td>163</td><td>P004</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SOT2_0</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>164</td><td>P164</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>PPG32_1</td></tr><tr><td>61</td><td>77</td><td>97</td><td>115</td><td>136</td><td>165</td><td>P005</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D21</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SCK2_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>ADTG0_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT7_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>(RX2(64))</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>166</td><td>P165</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>PPG33_1</td></tr><tr><td>62</td><td>78</td><td>98</td><td>116</td><td>137</td><td>167</td><td>P006</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D22</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SCS2_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>ADTG1_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT2_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>(TX2(64))</td></tr><tr><td>-</td><td>-</td><td>-</td><td>117</td><td>138</td><td>168</td><td>P007</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D23</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>169</td><td>P166</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>PPG34_1</td></tr><tr><td>-</td><td>-</td><td>-</td><td>118</td><td>139</td><td>170</td><td>P010</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D24</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>P011</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>WOT</td></tr><tr><td>63</td><td>79</td><td>99</td><td>119</td><td>140</td><td>171</td><td>D25</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SOT2_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>TIOA0_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT3_1</td></tr></table>	Pin no.						Pin Name	64	80	100	120	144	176	-	-	-	113	133	161	P002							D18							SCK1_0							TIOB0_1	-	76	96	114	134	162	P003							D19							SIN2_0							TIOB1_1							INT3_0	-	-	-	-	135	163	P004							D20							SOT2_0	-	-	-	-	-	164	P164							PPG32_1	61	77	97	115	136	165	P005							D21							SCK2_0							ADTG0_1							INT7_1							(RX2(64))	-	-	-	-	-	166	P165							PPG33_1	62	78	98	116	137	167	P006							D22							SCS2_0							ADTG1_1							INT2_1							(TX2(64))	-	-	-	117	138	168	P007							D23	-	-	-	-	-	169	P166							PPG34_1	-	-	-	118	139	170	P010							D24							P011							WOT	63	79	99	119	140	171	D25							SOT2_1							TIOA0_0							INT3_1
		Pin no.						Pin Name																																																																																																																																																																																																																																																																																															
		64	80	100	120	144	176																																																																																																																																																																																																																																																																																																
		-	-	-	113	133	161	P002																																																																																																																																																																																																																																																																																															
								D18																																																																																																																																																																																																																																																																																															
								SCK1_0																																																																																																																																																																																																																																																																																															
								TIOB0_1																																																																																																																																																																																																																																																																																															
		-	76	96	114	134	162	P003																																																																																																																																																																																																																																																																																															
								D19																																																																																																																																																																																																																																																																																															
								SIN2_0																																																																																																																																																																																																																																																																																															
								TIOB1_1																																																																																																																																																																																																																																																																																															
								INT3_0																																																																																																																																																																																																																																																																																															
		-	-	-	-	135	163	P004																																																																																																																																																																																																																																																																																															
								D20																																																																																																																																																																																																																																																																																															
								SOT2_0																																																																																																																																																																																																																																																																																															
		-	-	-	-	-	164	P164																																																																																																																																																																																																																																																																																															
								PPG32_1																																																																																																																																																																																																																																																																																															
		61	77	97	115	136	165	P005																																																																																																																																																																																																																																																																																															
								D21																																																																																																																																																																																																																																																																																															
								SCK2_0																																																																																																																																																																																																																																																																																															
								ADTG0_1																																																																																																																																																																																																																																																																																															
								INT7_1																																																																																																																																																																																																																																																																																															
								(RX2(64))																																																																																																																																																																																																																																																																																															
		-	-	-	-	-	166	P165																																																																																																																																																																																																																																																																																															
								PPG33_1																																																																																																																																																																																																																																																																																															
		62	78	98	116	137	167	P006																																																																																																																																																																																																																																																																																															
								D22																																																																																																																																																																																																																																																																																															
								SCS2_0																																																																																																																																																																																																																																																																																															
								ADTG1_1																																																																																																																																																																																																																																																																																															
								INT2_1																																																																																																																																																																																																																																																																																															
								(TX2(64))																																																																																																																																																																																																																																																																																															
		-	-	-	117	138	168	P007																																																																																																																																																																																																																																																																																															
								D23																																																																																																																																																																																																																																																																																															
		-	-	-	-	-	169	P166																																																																																																																																																																																																																																																																																															
								PPG34_1																																																																																																																																																																																																																																																																																															
		-	-	-	118	139	170	P010																																																																																																																																																																																																																																																																																															
								D24																																																																																																																																																																																																																																																																																															
								P011																																																																																																																																																																																																																																																																																															
								WOT																																																																																																																																																																																																																																																																																															
		63	79	99	119	140	171	D25																																																																																																																																																																																																																																																																																															
								SOT2_1																																																																																																																																																																																																																																																																																															
								TIOA0_0																																																																																																																																																																																																																																																																																															
								INT3_1																																																																																																																																																																																																																																																																																															

Page	Section	Change Results						
34, 35	■PIN Description	(Continued) (Correct)						
		Pin no.						Pin Name
		64	80	100	120	144	176	
		-	-	-	113 <sup>*1</sup>	133	161	P002
								D18 <sup>*5</sup>
								SCK1_0
								TIOB0_1
		-	76 <sup>*1</sup>	96 <sup>*1</sup>	114 <sup>*1</sup>	134	162	P003
								D19 <sup>*3, *4, *5</sup>
								SIN2_0
								TIOB1_1
								INT3_0
		-	-	-	-	135	163	P004
								D20
								SOT2_0
		-	-	-	-	-	164	P164
								PPG32_1
		61 <sup>*1</sup>	77 <sup>*1</sup>	97 <sup>*1</sup>	115 <sup>*1</sup>	136 <sup>*1</sup>	165 <sup>*1</sup>	P005
								D21 <sup>*2, *3, *4, *5</sup>
								SCK2_0 <sup>*2</sup>
								ADTG0_1
								INT7_1
								RX2(64) <sup>*4, *5, *6, *7</sup>
		-	-	-	-	-	166	P165
								PPG33_1
		62 <sup>*1</sup>	78 <sup>*1</sup>	98 <sup>*1</sup>	116 <sup>*1</sup>	137 <sup>*1</sup>	167 <sup>*1</sup>	P006
								D22 <sup>*2, *3, *4, *5</sup>
								SCS2_0 <sup>*2</sup>
								ADTG1_1
								INT2_1
								TX2(64) <sup>*4, *5, *6, *7</sup>
		-	-	-	117 <sup>*1</sup>	138	168	P007
								D23 <sup>*5</sup>
		-	-	-	-	-	169	P166
								PPG34_1
		-	-	-	118 <sup>*1</sup>	139	170	P010
						D24 <sup>*5</sup>		
63 <sup>*1</sup>	79 <sup>*1</sup>	99 <sup>*1</sup>	119 <sup>*1</sup>	140	171	P011		
						WOT		
						D25 <sup>*2, *3, *4, *5</sup>		
						SOT2_1 <sup>*2</sup>		
						TIOA0_0 <sup>*2, *3, *4</sup>		
						INT3_1		

Page	Section	Change Results																				
131	■Interrupt Vector Table	<p>"42" is deleted as shown below from the interrupt factor in Interrupt vector 120pin.</p> <p>(Error)</p> <table><tr><td>PPG2/3/12/13/22 /23/32/33/42/43</td><td rowspan="2">41</td><td rowspan="2">29</td><td rowspan="2">ICR 25</td><td rowspan="2">358 H</td><td rowspan="2">000F FF58 H</td><td rowspan="2">25 *3</td></tr><tr><td>16-bit free-run timer 2 (0 detection) / (compare clear)</td></tr></table> <p>(Correct)</p> <table><tr><td>PPG2/3/12/13/22 /23/32/33/43</td><td rowspan="2">41</td><td rowspan="2">29</td><td rowspan="2">ICR 25</td><td rowspan="2">358 H</td><td rowspan="2">000F FF58 H</td><td rowspan="2">25 *3</td></tr><tr><td>16-bit free-run timer 2 (0 detection) / (compare clear)</td></tr></table>	PPG2/3/12/13/22 /23/32/33/42/43	41	29	ICR 25	358 H	000F FF58 H	25 *3	16-bit free-run timer 2 (0 detection) / (compare clear)	PPG2/3/12/13/22 /23/32/33/43	41	29	ICR 25	358 H	000F FF58 H	25 *3	16-bit free-run timer 2 (0 detection) / (compare clear)				
PPG2/3/12/13/22 /23/32/33/42/43	41	29	ICR 25							358 H	000F FF58 H							25 *3				
16-bit free-run timer 2 (0 detection) / (compare clear)																						
PPG2/3/12/13/22 /23/32/33/43	41	29	ICR 25	358 H	000F FF58 H	25 *3																
16-bit free-run timer 2 (0 detection) / (compare clear)																						
133	■Interrupt Vector Table	<p>The interrupt factor in Interrupt vector 120pin modified as follows:</p> <p>(Error)</p> <table><tr><td>Base timer 1 IRQ0</td><td rowspan="4">61</td><td rowspan="4">3D</td><td rowspan="4">ICR 45</td><td rowspan="4">308 H</td><td rowspan="4">000F FF08 H</td><td rowspan="4">45 *5</td></tr><tr><td>Base timer 1 IRQ1</td></tr><tr><td>—</td></tr><tr><td>—</td></tr></table> <p>(Correct)</p> <table><tr><td>Base timer 1 IRQ0</td><td rowspan="4">61</td><td rowspan="4">3D</td><td rowspan="4">ICR 45</td><td rowspan="4">308 H</td><td rowspan="4">000F FF08 H</td><td rowspan="4">45</td></tr><tr><td>Base timer 1 IRQ1</td></tr><tr><td>—</td></tr><tr><td>—</td></tr></table>	Base timer 1 IRQ0	61	3D	ICR 45	308 H	000F FF08 H	45 *5	Base timer 1 IRQ1	—	—	Base timer 1 IRQ0	61	3D	ICR 45	308 H	000F FF08 H	45	Base timer 1 IRQ1	—	—
Base timer 1 IRQ0	61	3D	ICR 45							308 H	000F FF08 H	45 *5										
Base timer 1 IRQ1																						
—																						
—																						
Base timer 1 IRQ0	61	3D	ICR 45	308 H	000F FF08 H	45																
Base timer 1 IRQ1																						
—																						
—																						
133	■Interrupt Vector Table	<p>The following sentence deleted from Interrupt vector 120pins.</p> <p>(Error)</p> <p>*5: It does not support the DMA transfer by the interrupt because of the RAM ECC bit error.</p>																				

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

#### Products

ARM® Cortex® Microcontrollers [cypress.com/arm](http://cypress.com/arm)

Automotive [cypress.com/automotive](http://cypress.com/automotive)

Clocks & Buffers [cypress.com/clocks](http://cypress.com/clocks)

Interface [cypress.com/interface](http://cypress.com/interface)

Lighting & Power Control [cypress.com/powerpsoc](http://cypress.com/powerpsoc)

Memory [cypress.com/memory](http://cypress.com/memory)

PSoC [cypress.com/psoc](http://cypress.com/psoc)

Touch Sensing [cypress.com/touch](http://cypress.com/touch)

USB Controllers [cypress.com/usb](http://cypress.com/usb)

Wireless/RF [cypress.com/wireless](http://cypress.com/wireless)

#### PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

#### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#) | [Components](#)

#### Technical Support

[cypress.com/support](http://cypress.com/support)

ARM and Cortex are the registered trademarks of ARM Limited in the EU and other countries.

© Cypress Semiconductor Corporation, 2014-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.