



Welcome to [E-XFL.COM](https://www.e-xfl.com)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.


Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Obsolete
Core Processor	FR81S
Core Size	32-Bit Single-Core
Speed	80MHz
Connectivity	CANbus, CSIO, EBI/EMI, I ² C, LINbus, SPI, UART/USART
Peripherals	DMA, LVD, POR, PWM, WDT
Number of I/O	120
Program Memory Size	832KB (832K x 8)
Program Memory Type	FLASH
EEPROM Size	64K x 8
RAM Size	104K x 8
Voltage - Supply (Vcc/Vdd)	2.7V ~ 5.5V
Data Converters	A/D 48x12b; D/A 2x8b
Oscillator Type	External
Operating Temperature	-40°C ~ 105°C (TA)
Mounting Type	Surface Mount
Package / Case	144-LQFP
Supplier Device Package	144-LQFP (20x20)
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/mb91f525ksbpmc1-gse2

MB91F52xL

MB91F522L, MB91F523L, MB91F524L, MB91F525L, MB91F526L

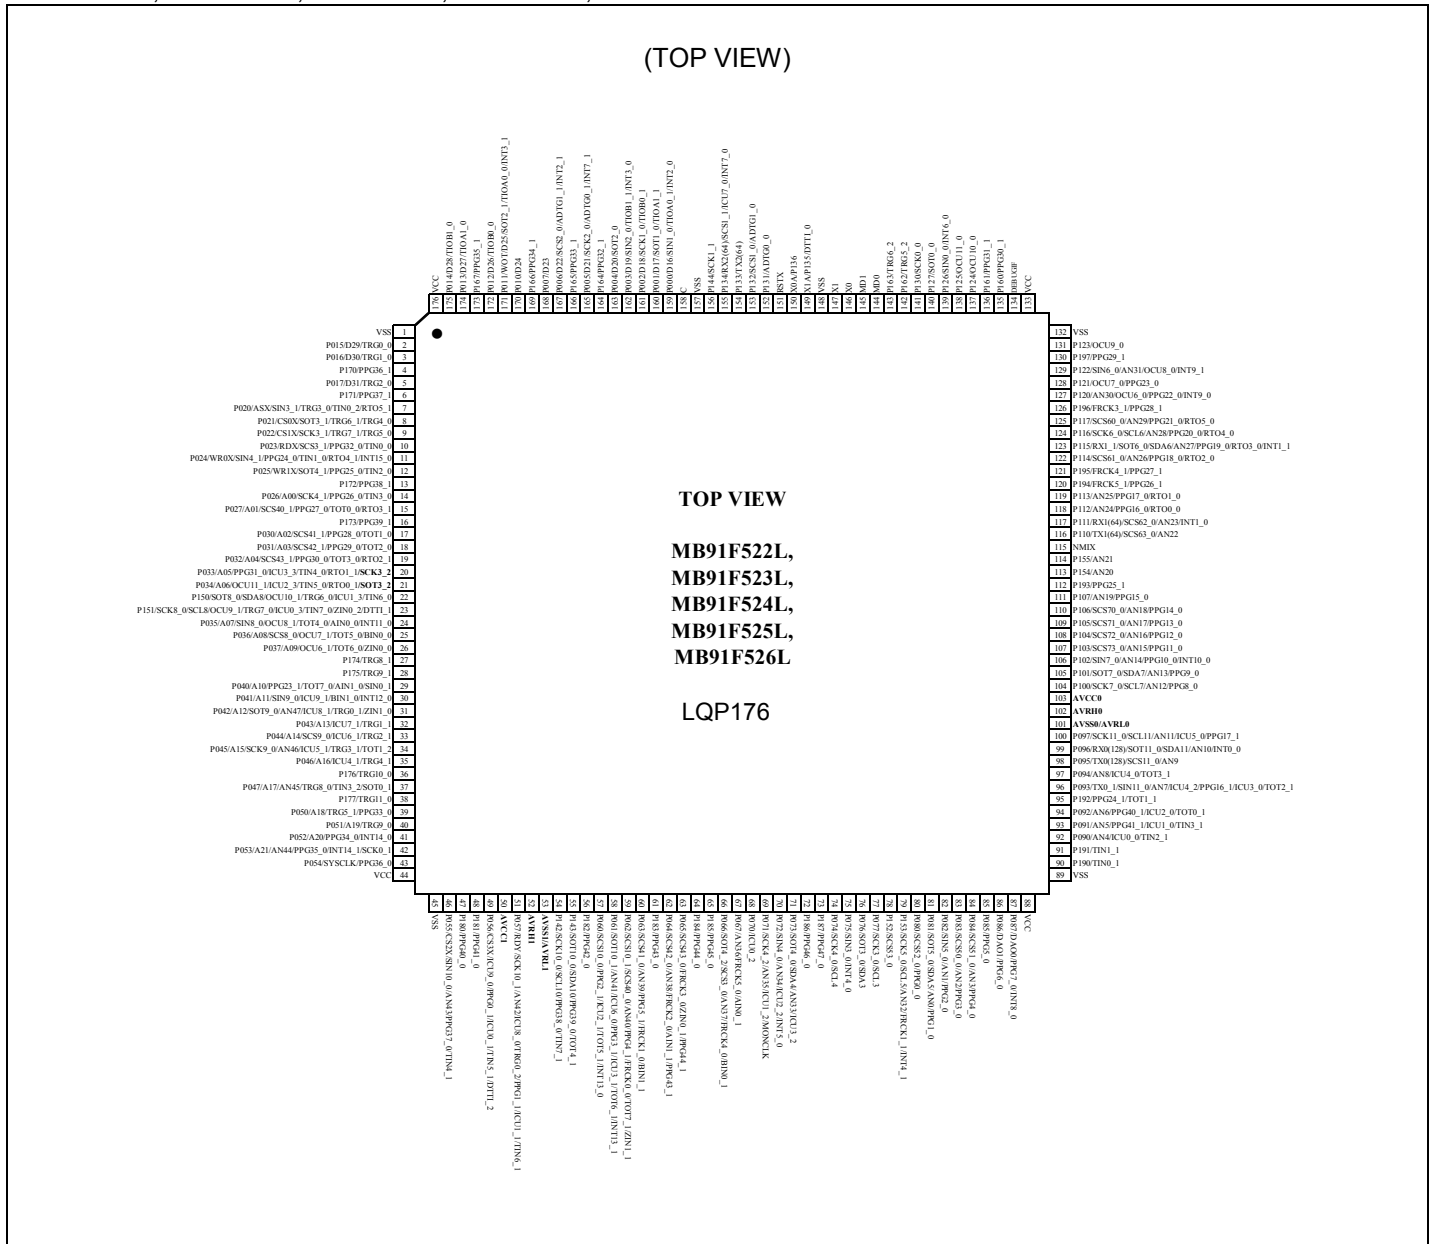

* In a single clock product, pin 149 and pin 150 are the general-purpose ports.

Pin no.						Pin Name	Polarity	I/O circuit types*8	Function*9
64	80	100	120	144	176				
3 ^{*1}	3 ^{*1}	3 ^{*1}	6 ^{*1}	9	11	P024	-	F	General-purpose I/O port
						WR0X ^{*2, *3, *4, *5}	-		External bus/Write strobe 0 output
						SIN4_1	-		Multi-function serial ch.4 serial data input (1)
						PPG24_0	-		PPG ch.24 output (0)
						TIN1_0	-		Reload timer ch.1 event input (0)
						RTO4_1	-		Waveform generator ch.4 output pin (1)
						INT15_0	-		INT15 External interrupt input (0)
-	-	4 ^{*1}	7 ^{*1}	10	12	P025	-	A	General-purpose I/O port
						WR1X ^{*4, *5}	-		External bus/Write strobe 1 output
						SOT4_1	-		Multi-function serial ch.4 serial data output (1)
						PPG25_0	-		PPG ch.25 output (0)
						TIN2_0	-		Reload timer ch.2 event input (0)
-	-	-	-	-	13	P172	-	A	General-purpose I/O port
						PPG38_1	-		PPG ch.38 output (1)
-	4 ^{*1}	5 ^{*1}	8 ^{*1}	11	14	P026	-	F	General-purpose I/O port
						A00 ^{*3, *4, *5}	-		External bus/Address bit0 output (0)
						SCK4_1	-		Multi-function serial ch.4 clock I/O (1)
						PPG26_0	-		PPG ch.26 output (0)
						TIN3_0	-		Reload timer ch.3 event input (0)
4 ^{*1}	5 ^{*1}	6 ^{*1}	9 ^{*1}	12	15	P027	-	A	General-purpose I/O port
						A01 ^{*2, *3, *4, *5}	-		External bus/Address bit1 output (0)
						SCS40_1	-		Serial chip select 40 I/O (1)
						PPG27_0	-		PPG ch.27 output (0)
						TOT0_0	-		Reload timer ch.0 output (0)
						RTO3_1	-		Waveform generator ch.3 output pin (1)
-	-	-	-	-	16	P173	-	A	General-purpose I/O port
						PPG39_1	-		PPG ch.39 output (1)
-	-	7 ^{*1}	10 ^{*1}	13	17	P030	-	A	General-purpose I/O port
						A02 ^{*4, *5}	-		External bus/Address bit2 output (0)
						SCS41_1	-		Serial chip select 41 output (1)
						PPG28_0	-		PPG ch.28 output (0)
						TOT1_0	-		Reload timer ch.1 output (0)
-	6 ^{*1}	8 ^{*1}	11 ^{*1}	14	18	P031	-	A	General-purpose I/O port
						A03 ^{*3, *4, *5}	-		External bus/Address bit3 output (0)
						SCS42_1	-		Serial chip select 42 output (1)
						PPG29_0	-		PPG ch.29 output (0)
						TOT2_0 ^{*3}	-		Reload timer ch.2 output (0)

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
000400 _H	ICSEL0 [R/W] B,H,W ----000	ICSEL1 [R/W] B,H,W ----000	ICSEL2 [R/W] B,H,W -----0	ICSEL3 [R/W] B,H,W -----0	DMA request generation and clear
000404 _H	—	ICSEL5 [R/W] B,H,W ----000	ICSEL6 [R/W] B,H,W ---0000	ICSEL7 [R/W] B,H,W ---0000	
000408 _H	ICSEL8 [R/W] B,H,W -----00	ICSEL9 [R/W] B,H,W -----00	ICSEL10 [R/W] B,H,W -----00	ICSEL11 [R/W] B,H,W -----000	
00040C _H	—	ICSEL13 [R/W] B,H,W -----00	ICSEL14 [R/W] B,H,W -----00	ICSEL15 [R/W] B,H,W -----00	
000410 _H	ICSEL16 [R/W] B,H,W ---0000	ICSEL17 [R/W] B,H,W -----00	ICSEL18 [R/W] B,H,W ---00000	ICSEL19 [R/W] B,H,W -----000	
000414 _H	ICSEL20 [R/W] B,H,W -----000	ICSEL21 [R/W] B,H,W -----00	ICSEL22 [R/W] B,H,W -----00	ICSEL23 [R/W] B,H,W -----00	
000418 _H	IRPR0H [R] B,H,W 00-----	IRPR0L [R] B,H,W 00-----	IRPR1H [R] B,H,W 00-----	IRPR1L [R] B,H,W 00-----	Interrupt Request Batch Reading Register
00041C _H	—	—	IRPR3H [R] B,H,W 000000--	IRPR3L [R] B,H,W 000000--	
000420 _H	IRPR4H [R] B,H,W 0000----	IRPR4L [R] B,H,W 0000----	IRPR5H [R] B,H,W 0000----	IRPR5L [R] B,H,W 000-----	
000424 _H	IRPR6H [R] B,H,W --00----	IRPR6L [R] B,H,W 0000----	IRPR7H [R] B,H,W -0-00--	IRPR7L [R] B,H,W -----00	
000428 _H	IRPR8H [R] B,H,W --0-----	IRPR8L [R] B,H,W -00-----	IRPR9H [R] B,H,W -0-----	IRPR9L [R] B,H,W -0-----	
00042C _H	IRPR10H [R] B,H,W -0-----	IRPR10L [R] B,H,W -0-----	IRPR11H [R] B,H,W 0-----	IRPR11L [R] B,H,W 0-----	
000430 _H	IRPR12H [R] B,H,W --0000--	IRPR12L [R] B,H,W ---00--	IRPR13H [R] B,H,W 00-----	IRPR13L [R] B,H,W 00-----	
000434 _H	IRPR14H [R] B,H,W 00000000	IRPR14L [R] B,H,W 00000000	IRPR15H [R] B,H,W 000-----	IRPR15L [R] B,H,W 0000000-	
000438 _H	ICSEL24 [R/W] B,H,W -----00	ICSEL25 [R/W] B,H,W ---00000	ICSEL26 [R/W] B,H,W -----0	ICSEL27 [R/W] B,H,W -----0	DMA request generation and clear
00043C _H	—	—	—	—	Reserved [S]

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
0012D4 _H	FRS6 [R/W] B,H,W --00--00 --00--00 --00--00 --00--00				16-bit Free-run timer selection A/D activation compare
0012D8 _H	FRS7 [R/W] B,H,W --00--00 --00--00 --00--00 --00--00				
0012DC _H to 0012FC _H	—	—	—	—	Reserved
001300 _H	—				Reserved
001304 _H	ADTSS0[R/W] B,H,W -----0	—	—	—	12-bit A/D converter 1/2 unit
001308 _H	ADTSE0[R/W] B,H,W 00000000 00000000 00000000 00000000				
00130C _H	ADCOMP0/ADCOMPB0[R/W] H,W 00000000 00000000		ADCOMP1/ADCOMPB1[R/W] H,W 00000000 00000000		12-bit A/D converter 1/2 unit
001310 _H	ADCOMP2/ADCOMPB2[R/W] H,W 00000000 00000000		ADCOMP3/ADCOMPB3[R/W] H,W 00000000 00000000		
001314 _H	ADCOMP4/ADCOMPB4[R/W] H,W 00000000 00000000		ADCOMP5/ADCOMPB5[R/W] H,W 00000000 00000000		
001318 _H	ADCOMP6/ADCOMPB6[R/W] H,W 00000000 00000000		ADCOMP7/ADCOMPB7[R/W] H,W 00000000 00000000		
00131C _H	ADCOMP8/ADCOMPB8[R/W] H,W 00000000 00000000		ADCOMP9/ADCOMPB9[R/W] H,W 00000000 00000000		
001320 _H	ADCOMP10/ADCOMPB10[R/W] H,W 00000000 00000000		ADCOMP11/ADCOMPB11[R/W] H,W 00000000 00000000		
001324 _H	ADCOMP12/ADCOMPB12[R/W] H,W 00000000 00000000		ADCOMP13/ADCOMPB13[R/W] H,W 00000000 00000000		
001328 _H	ADCOMP14/ADCOMPB14[R/W] H,W 00000000 00000000		ADCOMP15/ADCOMPB15[R/W] H,W 00000000 00000000		
00132C _H	ADCOMP16/ADCOMPB16[R/W] H,W 00000000 00000000		ADCOMP17/ADCOMPB17[R/W] H,W 00000000 00000000		
001330 _H	ADCOMP18/ADCOMPB18[R/W] H,W 00000000 00000000		ADCOMP19/ADCOMPB19[R/W] H,W 00000000 00000000		
001334 _H	ADCOMP20/ADCOMPB20[R/W] H,W 00000000 00000000		ADCOMP21/ADCOMPB21[R/W] H,W 00000000 00000000		
001338 _H	ADCOMP22/ADCOMPB22[R/W] H,W 00000000 00000000		ADCOMP23/ADCOMPB23[R/W] H,W 00000000 00000000		
00133C _H	ADCOMP24/ADCOMPB24[R/W] H,W 00000000 00000000		ADCOMP25/ADCOMPB25[R/W] H,W 00000000 00000000		
001340 _H	ADCOMP26/ADCOMPB26[R/W] H,W 00000000 00000000		ADCOMP27/ADCOMPB27[R/W] H,W 00000000 00000000		

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
00158 _H	ADRCSS32[R/W] B,H,W 00000000	ADRCSS33[R/W] B,H,W 00000000	ADRCSS34[R/W] B,H,W 00000000	ADRCSS35[R/W] B,H,W 00000000	12-bit A/D converter 2/2 unit
00158 _{C_H}	ADRCSS36[R/W] B,H,W 00000000	ADRCSS37[R/W] B,H,W 00000000	ADRCSS38[R/W] B,H,W 00000000	ADRCSS39[R/W] B,H,W 00000000	
001590 _H	ADRCSS40[R/W] B,H,W 00000000	ADRCSS41[R/W] B,H,W 00000000	ADRCSS42[R/W] B,H,W 00000000	ADRCSS43[R/W] B,H,W 00000000	
001594 _H	ADRCSS44[R/W] B,H,W 00000000	ADRCSS45[R/W] B,H,W 00000000	ADRCSS46[R/W] B,H,W 00000000	ADRCSS47[R/W] B,H,W 00000000	
001598 _H to 0015A4 _H	—	—	—	—	Reserved
0015A8 _H	ADRCOT1 [R] B,H,W ----- 00000000 00000000				12-bit A/D converter 2/2 unit
0015AC _H	ADRCIF1 [R,W] B,H,W ----- 00000000 00000000				
0015B0 _H	ADSCANS1 [R/W] B,H,W 000-----	—	—	—	
0015B4 _H	ADNCS16 [R/W] B,H,W 0-000-00	ADNCS17 [R/W] B,H,W 0-000-00	ADNCS18 [R/W] B,H,W 0-000-00	ADNCS19 [R/W] B,H,W 0-000-00	
0015B8 _H	ADNCS20 [R/W] B,H,W 0-000-00	ADNCS21 [R/W] B,H,W 0-000-00	ADNCS22 [R/W] B,H,W 0-000-00	ADNCS23 [R/W] B,H,W 0-000-00	
0015BC _H	—	—	—	—	
0015C0 _H	—	—	—	—	
0015C4 _H	ADPRTF1 [R] B,H,W ----- 00000000 00000000				12-bit A/D converter 2/2 unit
0015C8 _H	ADEOCF1 [R] B,H,W ----- 11111111 11111111				
0015CC _H	ADCS1 [R] B,H,W 0-----		ADCH1 [R] B,H,W ---00000	ADMD1 [R/W] B,H,W 0---0000	
0015D0 _H	ADSTPCS8 [R/W] B,H,W 00000000	ADSTPCS9 [R/W] B,H,W 00000000	ADSTPCS10 [R/W] B,H,W 00000000	ADSTPCS11 [R/W] B,H,W 00000000	
0015D4 _H to 00174C _H	—	—	—	—	Reserved

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
001804 _H	—	—/(SCSFR24) [R/W] B,H,W ----- ^{*3}	—/(SCSFR14) [R/W] B,H,W ----- ^{*3}	—/(SCSFR04) [R/W] B,H,W ----- ^{*3}	Multi-UART4 *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
001808 _H	—/(TBYTE34)/ (LAMESR4) [R/W] B,H,W ----- ^{*3}	—/(TBYTE24)/ (LAMERT4) [R/W] B,H,W ----- ^{*3}	—/(TBYTE14)/ (LAMIER4) [R/W] B,H,W ----- ^{*3}	TBYTE04/(LAMRID4) / (LAMTID4) [R/W] B,H,W 00000000	
00180C _H	BGR4[R/W] H, W 00000000 00000000		—/(ISMK4)[R/W] B,H,W ----- ^{*2}	—/(ISBA4)[R/W] B,H,W ----- ^{*2}	
001810 _H	FCR14[R/W] B,H,W ---00100	FCR04[R/W] B,H,W -0000000	FBYTE4[R/W] B,H,W 00000000 00000000		
001814 _H	FTICR4[R/W] B,H,W 00000000 00000000		—	—	
001818 _H	SCR5/(IBCR5) [R/W] B,H,W 0--00000	SMR5[R/W] B,H,W 000-00-0	SSR5[R/W] B,H,W 0-000011	ESCR5/(IBSR5)[R/W]] B,H,W 00000000	Multi-UART5 *1: Byte access is possible only for access to lower 8 bits. *2: Reserved because I ² C mode is not set immediately after reset. *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
00181C _H	—/(RDR15/(TDR15))[R/W] B,H,W ----- ^{*3}		RDR05/(TDR05)[R/W] B,H,W -----0 00000000 ^{*1}		
001820 _H	SACSR5[R/W] B,H,W 0----000 00000000		STMR5[R] B,H,W 00000000 00000000		
001824 _H	STMCR5[R/W] B,H,W 00000000 00000000		—/(SCSCR5/SFUR5)[R/W] B,H,W ----- ^{*3} ^{*4}		
001828 _H	—/(SCSTR35)/ (LAMSR5) [R/W] B,H,W ----- ^{*3}	—/(SCSTR25)/ (LAMCR5) [R/W] B,H,W ----- ^{*3}	—/(SCSTR15)/ (SFLR15) [R/W] B,H,W ----- ^{*3}	—/(SCSTR05)/ (SFLR05) [R/W] B,H,W ----- ^{*3}	
00182C _H	—	—/(SCSFR25) [R/W] B,H,W ----- ^{*3}	—/(SCSFR15) [R/W] B,H,W ----- ^{*3}	—/(SCSFR05) [R/W] B,H,W ----- ^{*3}	
001830 _H	—/(TBYTE35)/ (LAMESR5) [R/W] B,H,W ----- ^{*3}	—/(TBYTE25)/ (LAMERT5) [R/W] B,H,W ----- ^{*3}	—/(TBYTE15)/ (LAMIER5) [R/W] B,H,W ----- ^{*3}	TBYTE05/(LAMRID5) / (LAMTID5) [R/W] B,H,W 00000000	
001834 _H	BGR5[R/W] H, W 00000000 00000000		—/(ISMK5)[R/W] B,H,W ----- ^{*2}	—/(ISBA5)[R/W] B,H,W ----- ^{*2}	
001838 _H	FCR15[R/W] B,H,W ---00100	FCR05[R/W] B,H,W -0000000	FBYTE5[R/W] B,H,W 00000000 00000000		
00183C _H	FTICR5[R/W] B,H,W 00000000 00000000		—	—	

^{*3}: Reserved because CSIO mode is not set immediately after reset.

^{*4}: Reserved because LIN2.1 mode is not set immediately after reset.

^{*1}: Byte access is possible only for access to lower 8 bits.

^{*2}: Reserved because I²C mode is not set immediately after reset.

^{*3}: Reserved because CSIO mode is not set immediately after reset.

^{*4}: Reserved because LIN2.1 mode is not set immediately after reset.

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
0018F0 _H	—/(SCSTR310)/ (LAMSR10) [R/W] B,H,W ----- ^{*3}	—/(SCSTR210)/ (LAMCR10) [R/W] B,H,W ----- ^{*3}	—/(SCSTR110)/ (SFLR110)[R/W] B,H,W ----- ^{*3}	—/(SCSTR010)/ (SFLR010)[R/W] B,H,W ----- ^{*3}	Multi-UART10 *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
0018F4 _H	—	—/(SCSFR210) [R/W] B,H,W ----- ^{*3}	—/(SCSFR110) [R/W] B,H,W ----- ^{*3}	—/(SCSFR010) [R/W] B,H,W ----- ^{*3}	
0018F8 _H	—/(TBYTE310)/ (LAMESR10) [R/W] B,H,W ----- ^{*3}	—/(TBYTE210)/ (LAMERT10) [R/W] B,H,W ----- ^{*3}	—/(TBYTE110)/ (LAMIER10) [R/W] B,H,W ----- ^{*3}	TBYTE010/(LAMRID 10)/(LAMTID10) [R/W] B,H,W 00000000	
0018FC _H	BGR10[R/W] H, W 00000000 00000000		—/(ISMK10)[R/W] B,H,W ----- ^{*2}	—/(ISBA10)[R/W] B,H,W ----- ^{*2}	
001900 _H	FCR110[R/W] B,H,W ---00100	FCR010[R/W] B,H,W -0000000	FBYTE10[R/W] B,H,W 00000000 00000000		
001904 _H	FTICR10[R/W] B,H,W 00000000 00000000		—	—	
001908 _H	SCR11/(IBCR11) [R/W] B,H,W 0--00000	SMR11[R/W] B,H,W 000-00-0	SSR11[R/W] B,H,W 0-000011	ESCR11/(IBSR11) [R/W] B,H,W 00000000	Multi-UART11 *1: Byte access is possible only for access to lower 8 bits. *2: Reserved because I ² C mode is not set immediately after reset. *3: Reserved because CSIO mode is not set immediately after reset. *4: Reserved because LIN2.1 mode is not set immediately after reset.
00190C _H	—/(RDR111/(TDR111))[R/W] B,H,W ----- ^{*3}		RDR011/(TDR011)[R/W] B,H,W -----0 00000000 ^{*1}		
001910 _H	SACSR11[R/W] B,H,W 0----000 00000000		STMR11[R] B,H,W 00000000 00000000		
001914 _H	STMCR11[R/W] B,H,W 00000000 00000000		—/(SCSCR11/SFUR11)[R/W] B,H,W ----- ^{*3} *4		
001918 _H	—/(SCSTR311)/ (LAMSR11) [R/W] B,H,W ----- ^{*3}	—/(SCSTR211)/ (LAMCR11) [R/W] B,H,W ----- ^{*3}	—/(SCSTR111)/ (SFLR111)[R/W] B,H,W ----- ^{*3}	—/(SCSTR011)/ (SFLR011)[R/W] B,H,W ----- ^{*3}	
00191C _H	—	—/(SCSFR211) [R/W] B,H,W ----- ^{*3}	—/(SCSFR111) [R/W] B,H,W ----- ^{*3}	—/(SCSFR011) [R/W] B,H,W ----- ^{*3}	
001920 _H	—/(TBYTE311)/ (LAMESR11) [R/W] B,H,W ----- ^{*3}	—/(TBYTE211)/ (LAMERT11) [R/W] B,H,W ----- ^{*3}	—/(TBYTE111)/ (LAMIER11) [R/W] B,H,W ----- ^{*3}	TBYTE011/(LAMRID 11)/(LAMTID11) [R/W] B,H,W 00000000	
001924 _H	BGR11[R/W] H, W 00000000 00000000		—/(ISMK11)[R/W] B,H,W ----- ^{*2}	—/(ISBA11)[R/W] B,H,W ----- ^{*2}	

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
001C78 _H	PCN232 [R/W] B,H,W --000000 -----110		PSDR32 [R/W] H,W 00000000 00000000		PPG32
001C7C _H	PTPC32 [R/W] H,W 00000000 00000000		—	—	
001C80 _H	PCN33 [R/W] B,H,W 00000000 000000-0		PCSR33 [W] H,W XXXXXXXX XXXXXXXX		PPG33
001C84 _H	PDUT33 [W] H,W XXXXXXXX XXXXXXXX		PTMR33 [R] H,W 11111111 11111111		
001C88 _H	PCN233 [R/W] B,H,W --000000 -----110		PSDR33 [R/W] H,W 00000000 00000000		PPG33
001C8C _H	PTPC33 [R/W] H,W 00000000 00000000		—	—	
001C90 _H	PCN34 [R/W] B,H,W 00000000 000000-0		PCSR34 [W] H,W XXXXXXXX XXXXXXXX		PPG34
001C94 _H	PDUT34 [W] H,W XXXXXXXX XXXXXXXX		PTMR34 [R] H,W 11111111 11111111		
001C98 _H	PCN234 [R/W] B,H,W --000000 -----110		PSDR34 [R/W] H,W 00000000 00000000		
001C9C _H	PTPC34 [R/W] H,W 00000000 00000000		—	—	
001CA0 _H	PCN35 [R/W] B,H,W 00000000 000000-0		PCSR35 [W] H,W XXXXXXXX XXXXXXXX		PPG35
001CA4 _H	PDUT35 [W] H,W XXXXXXXX XXXXXXXX		PTMR35 [R] H,W 11111111 11111111		
001CA8 _H	PCN235 [R/W] B,H,W --000000 -----110		PSDR35 [R/W] H,W 00000000 00000000		
001CAC _H	PTPC35 [R/W] H,W 00000000 00000000		—	—	
001CB0 _H	PCN36 [R/W] B,H,W 00000000 000000-0		PCSR36 [W] H,W XXXXXXXX XXXXXXXX		PPG36
001CB4 _H	PDUT36 [W] H,W XXXXXXXX XXXXXXXX		PTMR36 [R] H,W 11111111 11111111		
001CB8 _H	PCN236 [R/W] B,H,W --000000 -----110		PSDR36 [R/W] H,W 00000000 00000000		
001CBC _H	PTPC36 [R/W] H,W 00000000 00000000		—	—	
001CC0 _H	PCN37 [R/W] B,H,W 00000000 000000-0		PCSR37 [W] H,W XXXXXXXX XXXXXXXX		PPG37
001CC4 _H	PDUT37 [W] H,W XXXXXXXX XXXXXXXX		PTMR37 [R] H,W 11111111 11111111		
001CC8 _H	PCN237 [R/W] B,H,W --000000 -----110		PSDR37 [R/W] H,W 00000000 00000000		

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
001D20 _H	PCN43 [R/W] B,H,W 00000000 000000-0		PCSR43 [W] H,W XXXXXXXXXX XXXXXXXXXX		PPG43
001D24 _H	PDUT43 [W] H,W XXXXXXXXXX XXXXXXXXXX		PTMR43 [R] H,W 11111111 11111111		
001D28 _H	PCN243 [R/W] B,H,W --000000 -----110		PSDR43 [R/W] H,W 00000000 00000000		
001D2C _H	PTPC43 [R/W] H,W 00000000 00000000		—	—	
001D30 _H	PCN44 [R/W] B,H,W 00000000 000000-0		PCSR44 [W] H,W XXXXXXXXXX XXXXXXXXXX		PPG44
001D34 _H	PDUT44 [W] H,W XXXXXXXXXX XXXXXXXXXX		PTMR44 [R] H,W 11111111 11111111		
001D38 _H	PCN244 [R/W] B,H,W --000000 -----110		PSDR44 [R/W] H,W 00000000 00000000		
001D3C _H	PTPC44 [R/W] H,W 00000000 00000000		—	—	
001D40 _H	PCN45 [R/W] B,H,W 00000000 000000-0		PCSR45 [W] H,W XXXXXXXXXX XXXXXXXXXX		PPG45
001D44 _H	PDUT45 [W] H,W XXXXXXXXXX XXXXXXXXXX		PTMR45 [R] H,W 11111111 11111111		
001D48 _H	PCN245 [R/W] B,H,W --000000 -----110		PSDR45 [R/W] H,W 00000000 00000000		
001D4C _H	PTPC45 [R/W] H,W 00000000 00000000		—	—	
001D50 _H	PCN46 [R/W] B,H,W 00000000 000000-0		PCSR46 [W] H,W XXXXXXXXXX XXXXXXXXXX		PPG46
001D54 _H	PDUT46 [W] H,W XXXXXXXXXX XXXXXXXXXX		PTMR46 [R] H,W 11111111 11111111		
001D58 _H	PCN246 [R/W] B,H,W --000000 -----110		PSDR46 [R/W] H,W 00000000 00000000		
001D5C _H	PTPC46 [R/W] H,W 00000000 00000000		—	—	
001D60 _H	PCN47 [R/W] B,H,W 00000000 000000-0		PCSR47 [W] H,W XXXXXXXXXX XXXXXXXXXX		PPG47
001D64 _H	PDUT47 [W] H,W XXXXXXXXXX XXXXXXXXXX		PTMR47 [R] H,W 11111111 11111111		
001D68 _H	PCN247 [R/W] B,H,W --000000 -----110		PSDR47 [R/W] H,W 00000000 00000000		
001D6C _H	PTPC47 [R/W] H,W 00000000 00000000		—	—	

Address	Address offset value / Register name				Block
	+0	+1	+2	+3	
002150 _H	IF2DTA11 [R/W] B,H,W 00000000 00000000		IF2DTA21 [R/W] B,H,W 00000000 00000000		CAN1 (64msb)
002154 _H	IF2DTB11 [R/W] B,H,W 00000000 00000000		IF2DTB21 [R/W] B,H,W 00000000 00000000		
002158 _H	—	—	—	—	
00215C _H	—	—	—	—	
002160 _H , 002164 _H	Reserved (IF2 data mirror)				
002168 _H to 00217C _H	—				
002180 _H	TREQR21 [R] B,H,W 00000000 00000000		TREQR11 [R] B,H,W 00000000 00000000		
002184 _H	TREQR41 [R] B,H,W 00000000 00000000		TREQR31 [R] B,H,W 00000000 00000000		
002188 _H	—	—	—	—	
00218C _H	—	—	—	—	
002190 _H	NEWDT21 [R] B,H,W 00000000 00000000		NEWDT11 [R] B,H,W 00000000 00000000		
002194 _H	NEWDT41 [R] B,H,W 00000000 00000000		NEWDT31 [R] B,H,W 00000000 00000000		
002198 _H	—	—	—	—	
00219C _H	—	—	—	—	
0021A0 _H	INTPND21 [R] B,H,W 00000000 00000000		INTPND11 [R] B,H,W 00000000 00000000		
0021A4 _H	INTPND41 [R] B,H,W 00000000 00000000		INTPND31 [R] B,H,W 00000000 00000000		
0021A8 _H	—	—	—	—	
0021AC _H	—	—	—	—	
0021B0 _H	MSGVAL21 [R] B,H,W 00000000 00000000		MSGVAL11 [R] B,H,W 00000000 00000000		
0021B4 _H	MSGVAL41 [R] B,H,W 00000000 00000000		MSGVAL31 [R] B,H,W 00000000 00000000		
0021B8 _H	—	—	—	—	
0021BC _H	—	—	—	—	

100 pins

Interrupt factor	Interrupt number		Interrupt level	Offset	Default address for TBR	RN
	Decimal	Hexadecimal				
Reset	0	0	-	3FC _H	000FFFFC _H	-
System reserved	1	1	-	3F8 _H	000FFFF8 _H	-
System reserved	2	2	-	3F4 _H	000FFFF4 _H	-
System reserved	3	3	-	3F0 _H	000FFFF0 _H	-
System reserved	4	4	-	3EC _H	000FFFE4 _H	-
FPU exception	5	5	-	3E8 _H	000FFFE8 _H	-
Exception of instruction access protection violation	6	6	-	3E4 _H	000FFFE4 _H	-
Exception of data access protection violation	7	7	-	3E0 _H	000FFFE0 _H	-
Data access error interrupt	8	8	-	3DC _H	000FFFD4 _H	-
INTE instruction	9	9	-	3D8 _H	000FFFD8 _H	-
Instruction break	10	0A	-	3D4 _H	000FFFD4 _H	-
System reserved	11	0B	-	3D0 _H	000FFFD0 _H	-
System reserved	12	0C	-	3CC _H	000FFFC4 _H	-
System reserved	13	0D	-	3C8 _H	000FFFC8 _H	-
Exception of invalid instruction	14	0E	-	3C4 _H	000FFFC4 _H	-
NMI request	15	0F	15 (F _H) Fixed	3C0 _H	000FFFC0 _H	-
Error generation during internal bus diagnosis						
XBS RAM double-bit error generation						
Backup RAM double-bit error generation						
TPU violation	16	10	ICR00	3BC _H	000FFFB4 _H	0
External interrupt 0-7						
External interrupt 8-15						
External low-voltage detection interrupt						
Reload timer 0/1/4/5	17	11	ICR01	3B8 _H	000FFFB8 _H	1* ⁷
Reload timer 2/3/6/7	18	12	ICR02	3B4 _H	000FFFB4 _H	2* ²
Multi-function serial interface ch.0 (reception completed)	19	13	ICR03	3B0 _H	000FFFB0 _H	3* ²
Multi-function serial interface ch.0 (status)	20	14	ICR04	3AC _H	000FFFA4 _H	4* ¹
Multi-function serial interface ch.0 (transmission completed)	21	15	ICR05	3A8 _H	000FFFA8 _H	5* ¹
Multi-function serial interface ch.1 (reception completed)	22	16	ICR06	3A4 _H	000FFFA4 _H	6* ¹
Multi-function serial interface ch.1 (status)	23	17	ICR07	3A0 _H	000FFFA0 _H	7* ¹
Multi-function serial interface ch.1 (transmission completed)	24	18	ICR08	39C _H	000FFF9C _H	8* ¹
Multi-function serial interface ch.2 (reception completed)	25	19	ICR09	398 _H	000FFF98 _H	9* ¹
Multi-function serial interface ch.2 (status)	26	1A	ICR10	394 _H	000FFF94 _H	10* ¹
Multi-function serial interface ch.3 (reception completed)	26	1A	ICR10	394 _H	000FFF94 _H	10* ¹
Multi-function serial interface ch.3 (status)						

Interrupt factor	Interrupt number		Interrupt level	Offset	Default address for TBR	RN
	Decimal	Hexa decimal				
32-bit ICU5 (fetching/measurement)	57	39	ICR41	318 _H	000FFF18 _H	41
A/D converter 32/33/34/35/36/37/38/39/40/41/42/43/44/45/46/47						
32-bit OCU 6/7/10/11 (match)	58	3A	ICR42	314 _H	000FFF14 _H	42
32-bit OCU8/9 (match)	59	3B	ICR43	310 _H	000FFF10 _H	43
Base timer 0 IRQ0	60	3C	ICR44	30C _H	000FFF0C _H	44
Base timer 0 IRQ1						
Base timer 1 IRQ0	61	3D	ICR45	308 _H	000FFF08 _H	45
Base timer 1 IRQ1						
-						
-	62	3E	ICR46	304 _H	000FFF04 _H	-
DMAC 0/1/2/3/4/5/6/7/8/9/10/11/12/13/14/15						
Delay interrupt	63	3F	ICR47	300 _H	000FFF00 _H	-
System reserved (Used for REALOS)	64	40	-	2FC _H	000FFEFC _H	-
System reserved (Used for REALOS)	65	41	-	2F8 _H	000FEF8 _H	-
Used with the INT instruction	66	42	-	2F4 _H	000FEF4 _H	-
	 255	 FF		 000 _H	 000FFC00 _H	

Note: It does not support a DMA transfer request caused by an interrupt generated from a peripheral to which no RN (Resource Number) is assigned.

*1: It does not support a DMA transfer by the status of the multi-function serial interface and I²C reception.

*2: Reload timer ch.4 to ch.7 do not support a DMA transfer by the interrupt.

*3: PPG ch.24 to ch.47 do not support a DMA transfer by the interrupt.

*4: The clock calibration unit does not support a DMA transfer by the interrupt.


*5: 32-bit Free-run timer ch.3, ch.4 and ch.5 do not support a DMA transfer by the interrupt.

*6: There is no resource corresponding to the interrupt level.

*7: It does not support a DMA transfer by the external low-voltage detection interrupt.

• CAN PLL jitter

Deviation time from the ideal clock is assured per cycle out of 20,000 cycles.

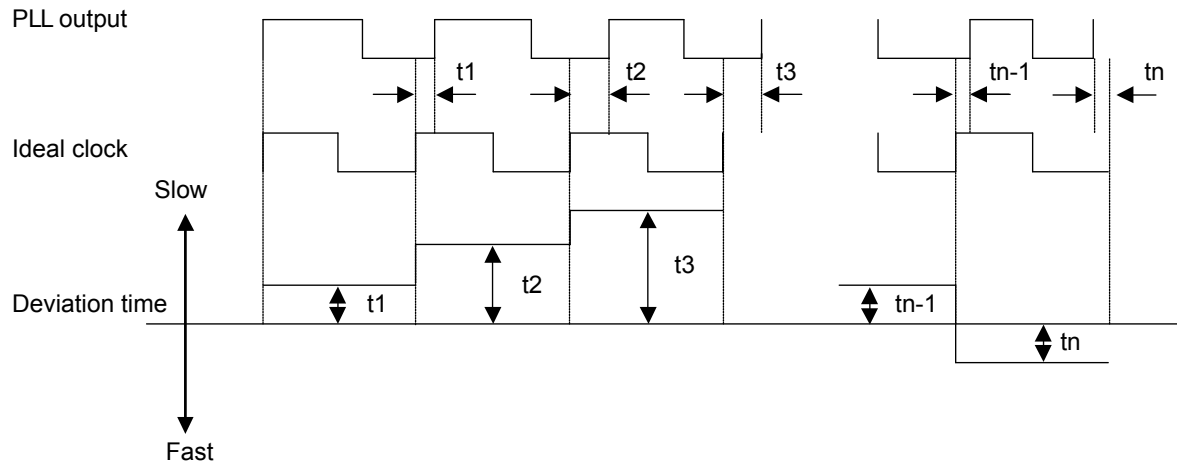

(3) Power-on Conditions

(3-1) [MB9152xxxB/MB9152xxxC/MB9152xxxD]

(T_A: -40°C to +125°C, V_{SS}=0.0V)

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Level detection voltage	—	V _{CC}	—	2.024	2.2	2.376	V	
Level detection hysteresis width	—	V _{CC}	—	—	100	—	mV	
Level detection time	—	—	—	—	—	30	μs	*1
Power off time	t _{OFF}	V _{CC}	—	50	—	—	ms	*2
Power ramp rate	dV/dt	V _{CC}	V _{CC} : 0.2V to 2.376V	—	—	4	mV/μs	*3
C pin voltage at Power-on	—	C	—	—	—	60	mV	*4

*1: This spec is at 4mV/μs of power ramp rate. If the power ramp rate is faster than 4mV/μs, there is the possibility to generate or release after the power supply voltage has exceeded the detection voltage range.

*2: V_{CC} must be held below 0.2V for a minimum period of t_{OFF}.


*3: Power-on can detect by satisfying power ramp rate when power off time is not satisfied.

*4: C-pin voltage is below 60 mV when V_{CC} is turned on again.

Note:

When using MB91F52xxxB/C, either *2 or *3 or *4 must be satisfied. When neither *2 nor *3 nor *4 can be satisfied, use MB91F52xxxD and assert external reset (RSTX) at power-up and at any brownout event.

• Power off time, Power ramp rate, C pin voltage at Power-on

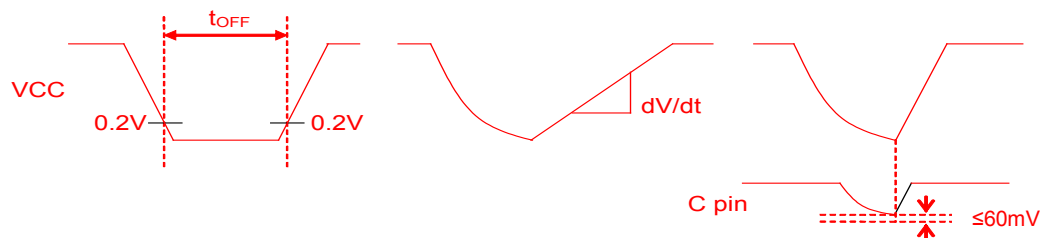

(4-1-3) Bit setting: SMR : MD2=0, SMR:MD1=1, SMR : MD0=0, SMR:SCINV=0, SCR:SPI=1

(TA:-40°C to +125°C, V_{CC}=AV_{CC}=5.0V±10%/V_{CC}=AV_{CC}=3.3V±0.3V, V_{SS}=AV_{SS}=0.0V)

Parameter	Symbol	Pin name	Conditions	Value		Unit	Remarks
				Min	Max		
Serial clock cycle time	t _{SCYC}	SCK0 to SCK11	-	4t _{CPP}	-	ns	Internal shift clock mode output pin : C _L =50pF
SCK ↑ → SOT delay time	t _{SHOVI}	SCK0 to SCK2, SCK5 to SCK11 SOT0 to SOT2, SOT5 to SOT11		-30	30	ns	
		SCK3 , SCK4 SOT3 , SOT4		-300	300	ns	
Valid SIN → SCK ↓ setup time	t _{IVSLI}	SCK0 to SCK2, SCK5 to SCK11 SIN0 to SIN2, SIN5 to SIN11		34	-	ns	
		SCK3 , SCK4 SIN3 , SIN4		300	-	ns	
SCK ↓ → Valid SIN hold time	t _{SLIXI}	SCK0 to SCK11 SIN0 to SIN11		0	-	ns	
SOT→SCK↓ delay time	t _{SOVLI}	SCK0 to SCK11 SOT0 to SOT11		2t _{CPP} -30	-	ns	
Serial clock "H"pulse width	t _{SHSL}	SCK0 to SCK11	-	t _{CPP} + 10	-	ns	External shift clock mode output pin: C _L =50pF
Serial clock "L" pulse width	t _{SLSH}			2t _{CPP} -10	-	ns	
SCK ↑ → SOT delay time	t _{SHOVE}	SCK0 to SCK2, SCK5 to SCK11 SOT0 to SOT2, SOT5 to SOT11		-	33	ns	
		SCK3 , SCK4 SOT3 , SOT4		-	300	ns	
Valid SIN → SCK ↓ setup time	t _{IVSHE}	SCK0 to SCK11 SIN0 to SIN11		10	-	ns	
SCK ↓ → Valid SIN hold time	t _{SLIXE}			20	-	ns	
SCK fall time	t _F	SCK0 to SCK11		-	5	ns	
SCK rise time	t _R	SCK0 to SCK11		-	5	ns	


Notes:

AC characteristic in CLK synchronized mode.


C_L is the load capacitance applied to pins during testing.

The maximum baud rate is limited by internal operation clock used and other parameters. Please use ch.3 and ch.4 with maximum baud rate 400kbps or less.

See Hardware Manual for details.

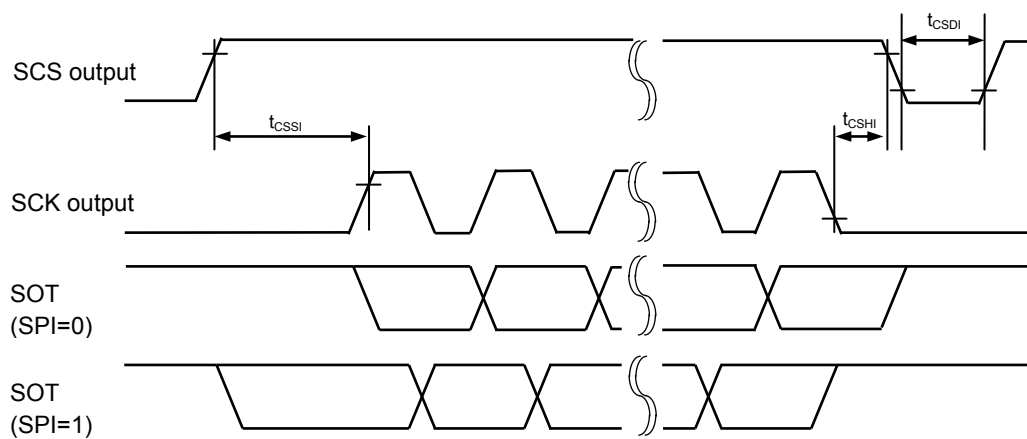

When Serial chip select is used , Serial clock output mark level "L",
Serial chip select Inactive level "L"
Master mode

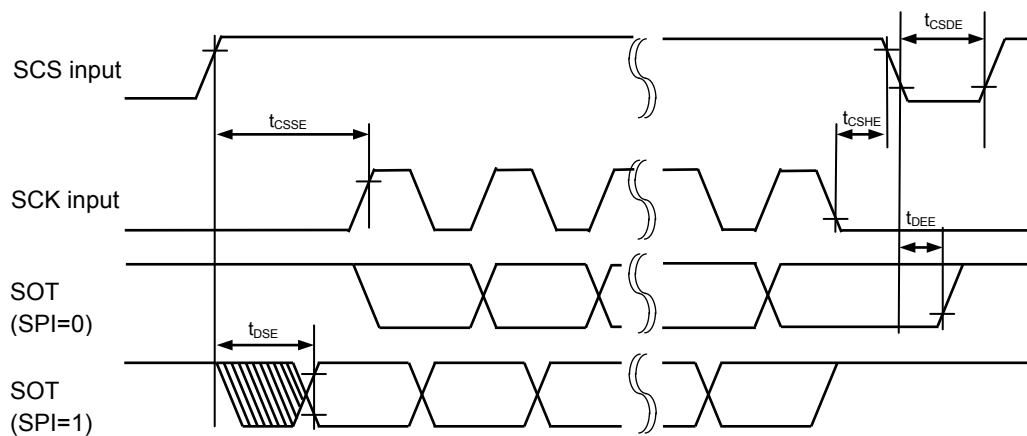

When Serial chip select is used , Serial clock output mark level "L",
Serial chip select Inactive level "L"
Slave mode


■ Workaround

It is necessary to satisfy the below both conditions of (1) and (2).

- (1) Interrupt levels that are used as sources for recovering from the watch mode (power off) are '31', before CPU state changes to the watch mode (power off)
- (2) Don't use NMIX pin as source for recovering from the watch mode (power off)

■ Fix Status

Will not be planned

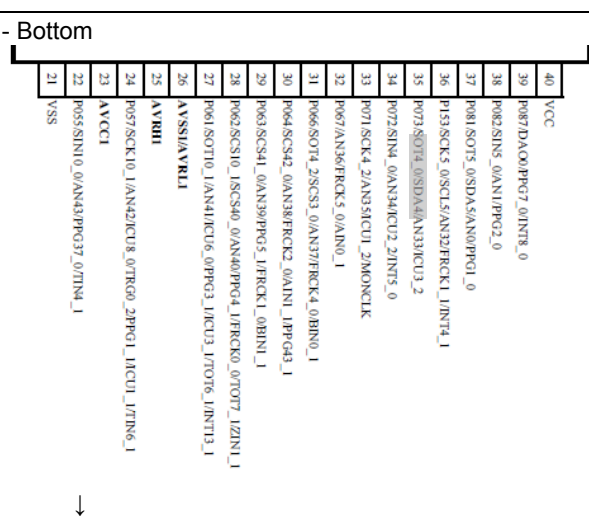Page	Section	Change Results
14	■ Pin Assignment MB91F52xD	- Bottom 

Page	Section	Change Results																																																																																																																																																																																																																																																																																																					
34, 35	■PIN Description	A List of "Pin Description" modified.																																																																																																																																																																																																																																																																																																					
		(Error)																																																																																																																																																																																																																																																																																																					
		<table><tr><th colspan="6">Pin no.</th><th rowspan="2">Pin Name</th></tr><tr><th>64</th><th>80</th><th>100</th><th>120</th><th>144</th><th>176</th></tr><tr><td>-</td><td>-</td><td>-</td><td>113</td><td>133</td><td>161</td><td>P002</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D18</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SCK1_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>TIOB0_1</td></tr><tr><td>-</td><td>76</td><td>96</td><td>114</td><td>134</td><td>162</td><td>P003</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D19</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SIN2_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>TIOB1_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT3_0</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>135</td><td>163</td><td>P004</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D20</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SOT2_0</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>164</td><td>P164</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>PPG32_1</td></tr><tr><td>61</td><td>77</td><td>97</td><td>115</td><td>136</td><td>165</td><td>P005</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D21</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SCK2_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>ADTG0_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT7_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>(RX2(64))</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>166</td><td>P165</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>PPG33_1</td></tr><tr><td>62</td><td>78</td><td>98</td><td>116</td><td>137</td><td>167</td><td>P006</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D22</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SCS2_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>ADTG1_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT2_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>(TX2(64))</td></tr><tr><td>-</td><td>-</td><td>-</td><td>117</td><td>138</td><td>168</td><td>P007</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D23</td></tr><tr><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>169</td><td>P166</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>PPG34_1</td></tr><tr><td>-</td><td>-</td><td>-</td><td>118</td><td>139</td><td>170</td><td>P010</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D24</td></tr><tr><td>63</td><td>79</td><td>99</td><td>119</td><td>140</td><td>171</td><td>P011</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>WOT</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>D25</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>SOT2_1</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>TIOA0_0</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>INT3_1</td></tr></table>	Pin no.						Pin Name	64	80	100	120	144	176	-	-	-	113	133	161	P002							D18							SCK1_0							TIOB0_1	-	76	96	114	134	162	P003							D19							SIN2_0							TIOB1_1							INT3_0	-	-	-	-	135	163	P004							D20							SOT2_0	-	-	-	-	-	164	P164							PPG32_1	61	77	97	115	136	165	P005							D21							SCK2_0							ADTG0_1							INT7_1							(RX2(64))	-	-	-	-	-	166	P165							PPG33_1	62	78	98	116	137	167	P006							D22							SCS2_0							ADTG1_1							INT2_1							(TX2(64))	-	-	-	117	138	168	P007							D23	-	-	-	-	-	169	P166							PPG34_1	-	-	-	118	139	170	P010							D24	63	79	99	119	140	171	P011							WOT							D25							SOT2_1							TIOA0_0							INT3_1
		Pin no.						Pin Name																																																																																																																																																																																																																																																																																															
		64	80	100	120	144	176																																																																																																																																																																																																																																																																																																
		-	-	-	113	133	161	P002																																																																																																																																																																																																																																																																																															
								D18																																																																																																																																																																																																																																																																																															
								SCK1_0																																																																																																																																																																																																																																																																																															
								TIOB0_1																																																																																																																																																																																																																																																																																															
		-	76	96	114	134	162	P003																																																																																																																																																																																																																																																																																															
								D19																																																																																																																																																																																																																																																																																															
								SIN2_0																																																																																																																																																																																																																																																																																															
								TIOB1_1																																																																																																																																																																																																																																																																																															
								INT3_0																																																																																																																																																																																																																																																																																															
		-	-	-	-	135	163	P004																																																																																																																																																																																																																																																																																															
								D20																																																																																																																																																																																																																																																																																															
								SOT2_0																																																																																																																																																																																																																																																																																															
		-	-	-	-	-	164	P164																																																																																																																																																																																																																																																																																															
								PPG32_1																																																																																																																																																																																																																																																																																															
		61	77	97	115	136	165	P005																																																																																																																																																																																																																																																																																															
								D21																																																																																																																																																																																																																																																																																															
								SCK2_0																																																																																																																																																																																																																																																																																															
								ADTG0_1																																																																																																																																																																																																																																																																																															
								INT7_1																																																																																																																																																																																																																																																																																															
								(RX2(64))																																																																																																																																																																																																																																																																																															
		-	-	-	-	-	166	P165																																																																																																																																																																																																																																																																																															
								PPG33_1																																																																																																																																																																																																																																																																																															
		62	78	98	116	137	167	P006																																																																																																																																																																																																																																																																																															
								D22																																																																																																																																																																																																																																																																																															
								SCS2_0																																																																																																																																																																																																																																																																																															
								ADTG1_1																																																																																																																																																																																																																																																																																															
								INT2_1																																																																																																																																																																																																																																																																																															
								(TX2(64))																																																																																																																																																																																																																																																																																															
		-	-	-	117	138	168	P007																																																																																																																																																																																																																																																																																															
								D23																																																																																																																																																																																																																																																																																															
		-	-	-	-	-	169	P166																																																																																																																																																																																																																																																																																															
								PPG34_1																																																																																																																																																																																																																																																																																															
		-	-	-	118	139	170	P010																																																																																																																																																																																																																																																																																															
								D24																																																																																																																																																																																																																																																																																															
		63	79	99	119	140	171	P011																																																																																																																																																																																																																																																																																															
								WOT																																																																																																																																																																																																																																																																																															
								D25																																																																																																																																																																																																																																																																																															
								SOT2_1																																																																																																																																																																																																																																																																																															
								TIOA0_0																																																																																																																																																																																																																																																																																															
								INT3_1																																																																																																																																																																																																																																																																																															

Revision	ECN	Orig. of Change	Submission Date	Description of Change
				Package ↓ Package*² Added the following description. *¹: It is only supported for customers who have already adopted it now. We do not recommend adopting new products. Corrected the following description. For details of the package, see "■ PACKAGE DIMENSIONS". ↓ *²: For details of the package, see "■ PACKAGE DIMENSIONS". Added the following description. • ORDERING INFORMATION MB91F52xxxC Company name and layout design change
*A	4999456	JHMU	11/13/2015	Updated to Cypress template. Added the following note to the remarks of ""L" level average output current" and ""H" level average output current" in "Absolute Maximum Ratings" of "ELECTRICAL CHARACTERISTICS". *⁹: Corresponding pins: General-purpose ports other than those of P103, P104, P105 and P106. *¹⁰: Corresponding pins: General-purpose ports of P103, P104, P105 and P106. Added Errata section.
*B	5112138	KUME	01/28/2016	Fixed some clerical errors. For details, please see the chapter 18. Major Changes.
*C	5196285	KUME	04/28/2016	For details, please see the chapter 19. Major Changes.
*D	5318862	KUME	06/23/2016	For details, please see the chapter 19. Major Changes.