



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - Microprocessors](#)

Embedded microprocessors are specialized computing chips designed to perform specific tasks within an embedded system. Unlike general-purpose microprocessors found in personal computers, embedded microprocessors are tailored for dedicated functions within larger systems, offering optimized performance, efficiency, and reliability. These microprocessors are integral to the operation of countless electronic devices, providing the computational power necessary for controlling processes, handling data, and managing communications.

### Applications of [Embedded - Microprocessors](#)

Embedded microprocessors are utilized across a broad spectrum of applications, making them indispensable in

#### Details

|                                 |                                                                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                  | Obsolete                                                                                                                                                  |
| Core Processor                  | EC000                                                                                                                                                     |
| Number of Cores/Bus Width       | 1 Core, 32-Bit                                                                                                                                            |
| Speed                           | 12MHz                                                                                                                                                     |
| Co-Processors/DSP               | -                                                                                                                                                         |
| RAM Controllers                 | -                                                                                                                                                         |
| Graphics Acceleration           | No                                                                                                                                                        |
| Display & Interface Controllers | -                                                                                                                                                         |
| Ethernet                        | -                                                                                                                                                         |
| SATA                            | -                                                                                                                                                         |
| USB                             | -                                                                                                                                                         |
| Voltage - I/O                   | 5.0V                                                                                                                                                      |
| Operating Temperature           | 0°C ~ 70°C (TA)                                                                                                                                           |
| Security Features               | -                                                                                                                                                         |
| Package / Case                  | 68-LCC (J-Lead)                                                                                                                                           |
| Supplier Device Package         | 68-PLCC (24.21x24.21)                                                                                                                                     |
| Purchase URL                    | <a href="https://www.e-xfl.com/product-detail/nxp-semiconductors/mc68ec000ei12">https://www.e-xfl.com/product-detail/nxp-semiconductors/mc68ec000ei12</a> |

### 1.3 MC68SEC000


The MC68SEC000 is a cost-effective static embedded processor engineered for low-power applications. In addition to providing the substantial cost and performance benefits of the MC68EC000, the low-power mode of the MC68SEC000 provides significant advantages in power consumption and power management. The typical current consumption of the MC68SEC000 is only 0.5 $\mu$ A in static standby mode and 15.0mA in normal 3.3V operation. The MC68SEC000 operates in either 3.3V or 5.0V systems. The remarkably low power consumption, small footprint packages, and static implementation are combined in the MC68SEC000 for low-power applications such as portable measuring equipment, electronic games, and battery-operated hand-held consumer products.

The HCMOS MC68SEC000's static architecture is a direct replacement for the MC68EC000, which offers the lowest cost entry point to 32-bit processing. The internal 32-bit architecture provides fast and efficient processing that satisfies the requirements of sophisticated applications based on high-level languages.

All of the existing third-party developer tools widely available for the MC68EC000 will directly support the MC68SEC000. You can find detailed descriptions of these tools in the *High Performance Embedded Systems Source Catalog*.

## 2.0 SIGNAL DESCRIPTION

Change Figure 3-3 on Page 3-2.

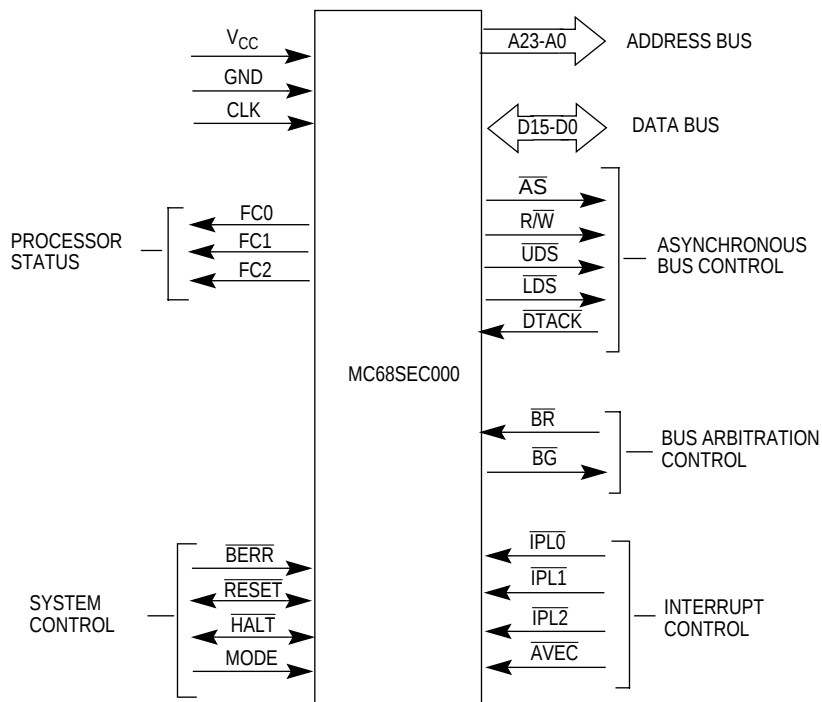

**Figure 1. Input and Output Signals (MC68EC000 and MC68SEC000)**

### 2.1 Data Bus (D15-D0)

In Section 3.2 on page 3-4, replace “The MC68EC000 and MC68HC001 use D7-D0 in 8-bit mode, and D15-D8 are undefined.” with “Using the MC68HC001, MC68EC000, and MC68SEC000 mode pin, you can statically select either 8- or 16-bit modes for data transfer. The MC68EC000, MC68SEC000, and MC68HC001 use D7-D0 in 8-bit mode. D15-D8 are undefined.”

### 2.2 Bus Arbitration Control

In Section 3.4 on page 3-5, the sentence “In the 48-pin version of the MC68008 and MC68EC000, no pin is available for the bus grant acknowledge signal; this microprocessor uses a two-wire bus arbitration scheme.” should read “In the 64-pin MC68EC000 and MC68SEC000, no pin is available for the bus grant acknowledge signal. These microprocessors use a two-wire bus arbitration scheme.”

### 2.3 System Control

The Mode subsection heading of Section 3.6 on page 3-7 should read “Mode (MODE) (MC68HC001/68EC000/68SEC000).”

### 2.4 MC68SEC000 Low-Power Mode


Add the following to Sections 4 and 5, Bus Operation.

The MC68SEC000 has been redesigned to provide fully static- and low-power operation. This section describes the recommended method for placing the MC68SEC000 into a low-power mode to reduce the


power consumption to its quiescent value<sup>1</sup> while maintaining the internal state of the processor. The low-power mode described below will be routinely tested as part of the MC68SEC000 test vectors provided by Motorola.

To successfully enter the low-power mode, the MC68SEC000 must first be in the supervisor mode. A recommended method for entering the low-power mode is to use the TRAP instruction, which causes the processor to begin exception processing, thus entering the supervisor mode. External circuitry should accomplish the following steps during the trap routine:

1. Externally detect a write to the low-power address. You select this address which can be any address in the 16 Mbyte addressing range of the MC68SEC000. A write to the low-power address can be detected by polling A23–A0, R/W, and FC2–FC0. When the low-power address is detected, R/W is a logic low, and the function codes have a five (101) on their output, the processor is writing to the low-power address in supervisor mode and user-designed circuitry should assert the ADDRESS\_MATCH signal shown in Figure 2 and Figure 3.

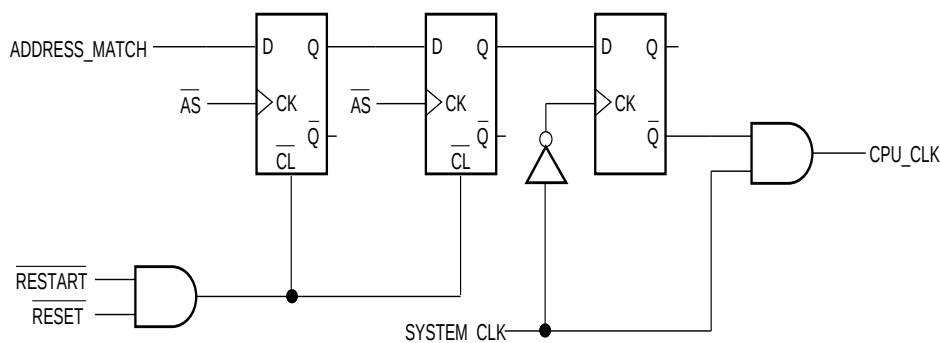

**Figure 2. MC68SEC000 Low-Power Circuitry for 16-Bit Data Bus**

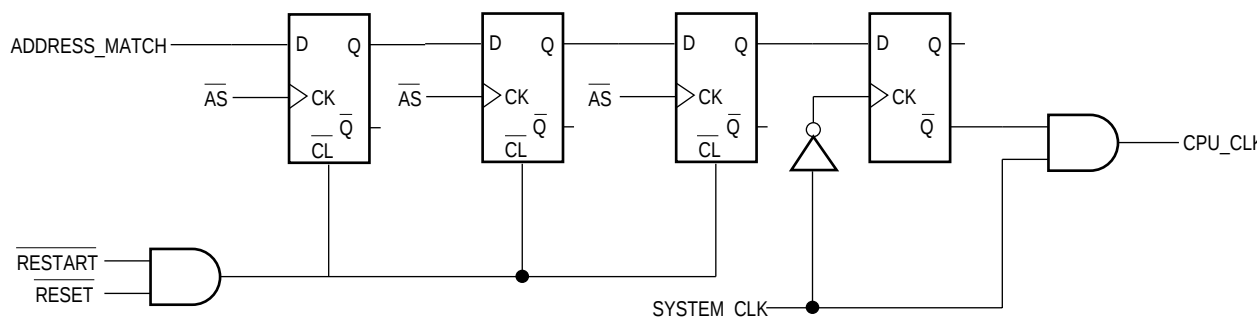

**Figure 3. MC68SEC000 Low-Power Circuitry for 8-Bit Data Bus**

2. Execute the STOP instruction. The external circuitry shown in Figure 2 and Figure 3 will count the number of bus cycles starting with the write to the low-power address and will stop the processor clock on the first falling edge of the system clock after the bus cycle that reads the immediate data of the STOP instruction. Figure 3 has one more flip-flop than Figure 2 because the MC68SEC000 in

<sup>1</sup>. The preliminary specification for the MC68SEC000's current drain while in the low-power mode is  $I_{dd} < 2\mu A$  for 3.3V operation and  $I_{dd} < 5\mu A$  for 5.0V operation.

8-bit mode requires two bus cycles to fetch the immediate data of the STOP instruction. After the processor clock is disabled, it is often necessary to disable the clock to other sections of your circuit. This can be done, but be careful that runt clocks and spurious glitches are not presented to the MC68SEC000. A timing diagram is shown in Figure 4.

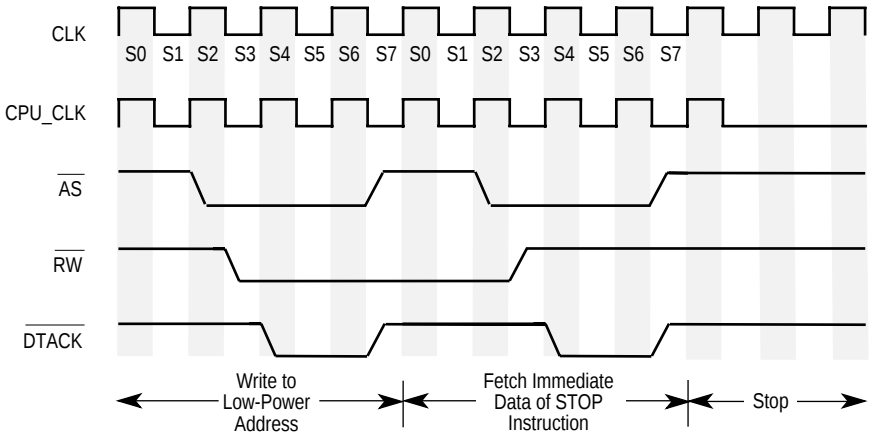


Figure 4. MC68SEC000 Clock Stop Timing for 16-Bit Data Bus

**Note:** While the MC68SEC000 is in the low-power mode, all inputs must be driven to  $V_{DD}$  or  $V_{SS}$ , or have a pull-up or pull-down resistor.

- 3. This step is optional depending on whether your applications require the MC68SEC000 signals with three-state capability to be placed into a high-impedance state. To place the MC68SEC000 into a three-state condition, the proper method for arbitrating the bus (as described in **5.2 Bus Arbitration** in the *M68000 User's Manual, Rev 8*) should be completed during the fetch of the status register data for the STOP instruction. A timing diagram with the bus arbitration sequence is shown in Figure 5.

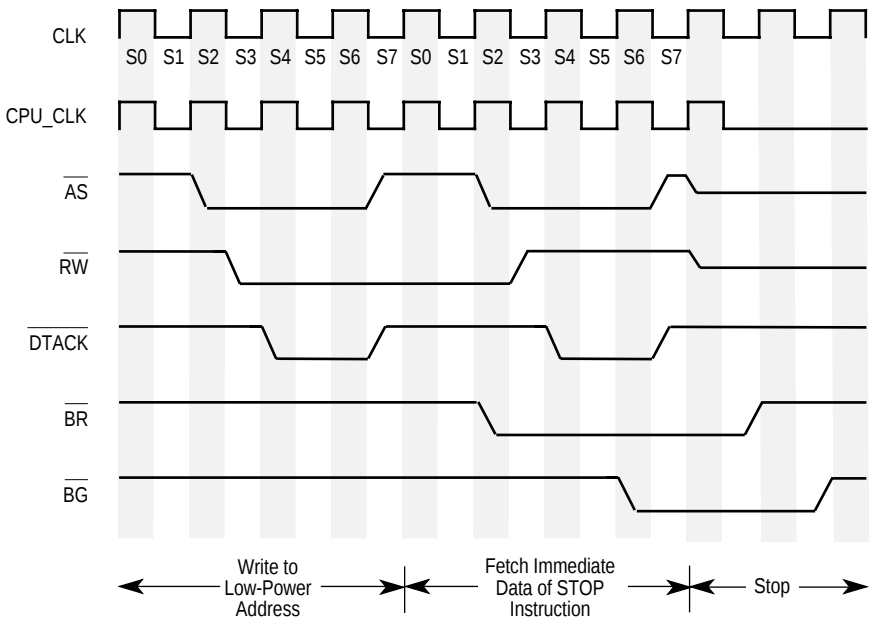


Figure 5. MC68SEC000 Clock Stop Timing with Bus Arbitration for 16-Bit Data Bus

After the previous steps are completed, the MC68SEC000 will remain in the low-power mode until it recognizes the appropriate interrupt. External logic will also have to poll IPLB2–IPLB0 to detect the proper interrupt. When the correct interrupt level is received, the following steps will bring the processor out of the low-power mode:

1. Restart the system clock if it was stopped.
2. Wait for the system clock to become stable.
3. Assert the  $\overline{\text{RESTART}}$  signal. This will cause the processor's clock to start on the next falling edge of the system clock. Figure 6 shows the timing for bringing the processor out of the low-power mode. Both the  $\overline{\text{RESTART}}$  and  $\overline{\text{RESET}}$  signals are subject to the asynchronous setup time as specified in the Electrical Characteristics section of this addendum.

## WARNING

The system clock must be stable before the  $\overline{\text{RESTART}}$  signal is asserted to prevent glitches in the clock. An unstable clock can cause unpredictable results in the MC68SEC000.

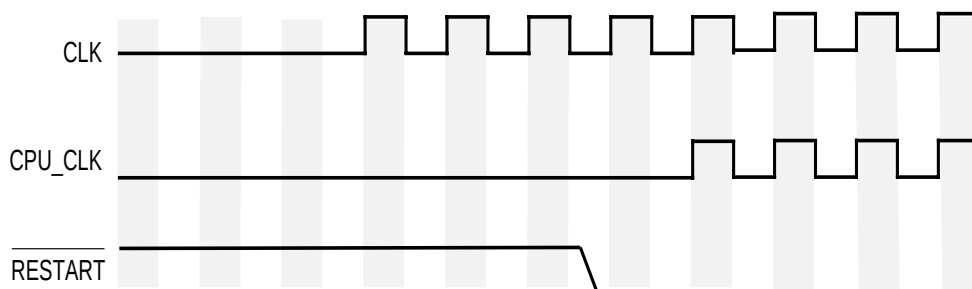


Figure 6. MC68SEC000 Clock Start Timing

4. If the MC68SEC000 was placed in a three-state condition, the  $\overline{\text{BR}}$  signal must be negated before the processor can begin executing instructions.

An example trap routine is as follows:

```
TRAP_x  MOVE.B #0,$low_power_address    /* Write that causes ADDRESS_MATCH to assert */
        STOP #$2000                    /* STOP instruction with desired interrupt mask */
        RTE                             /* Return from the exception */
```

The first instruction (MOVE.B #0,\$low\_power\_address) writes a byte to the low-power address that will cause the external circuitry to begin the sequence that will stop the processor's clock. The second instruction (STOP #\$2000) loads the SR with the immediate data. This lets you set the interrupt that will cause the processor to come out of the low-power mode. The final instruction (RTE) tells the processor to return from the exception and resume normal processing.

3.0 MC68SEC000 ELECTRICAL SPECIFICATIONS

Add to the following table to Section 10.1.

3.1 MC68SEC000 MAXIMUM RATINGS

| RATING                                                               | SYMBOL           | VALUE                                                    | UNIT |
|----------------------------------------------------------------------|------------------|----------------------------------------------------------|------|
| Supply Voltage                                                       | V <sub>CC</sub>  | −0.3 to 6.5                                              | V    |
| Input Voltage                                                        | V <sub>in</sub>  | −0.5 to 6.5                                              | V    |
| Maximum Operating Temperature Range<br>Commercial Extended "C" Grade | T <sub>A</sub>   | T <sub>L</sub> to T <sub>H</sub><br>0 to 70<br>−40 to 85 | °C   |
| Storage Temperature                                                  | T <sub>stg</sub> | −55 to 150                                               | °C   |


3.2 CMOS CONSIDERATIONS

The following change should be made to Section 10.4, CMOS Considerations.

“Although the MC68HC000 and MC68EC000 is implemented with input protection diodes, care should be exercised to ensure that the maximum input voltage specification is not exceeded.” should read “Although the MC68HC000, MC68EC000, and MC68SEC000 are implemented with input protection diodes, be careful not to exceed the maximum input voltage specification.”

## 4.0 MC68SEC000 AC ELECTRICAL SPECIFICATIONS

Replace Figure 10-2 on page 10-6 with Figure 7.

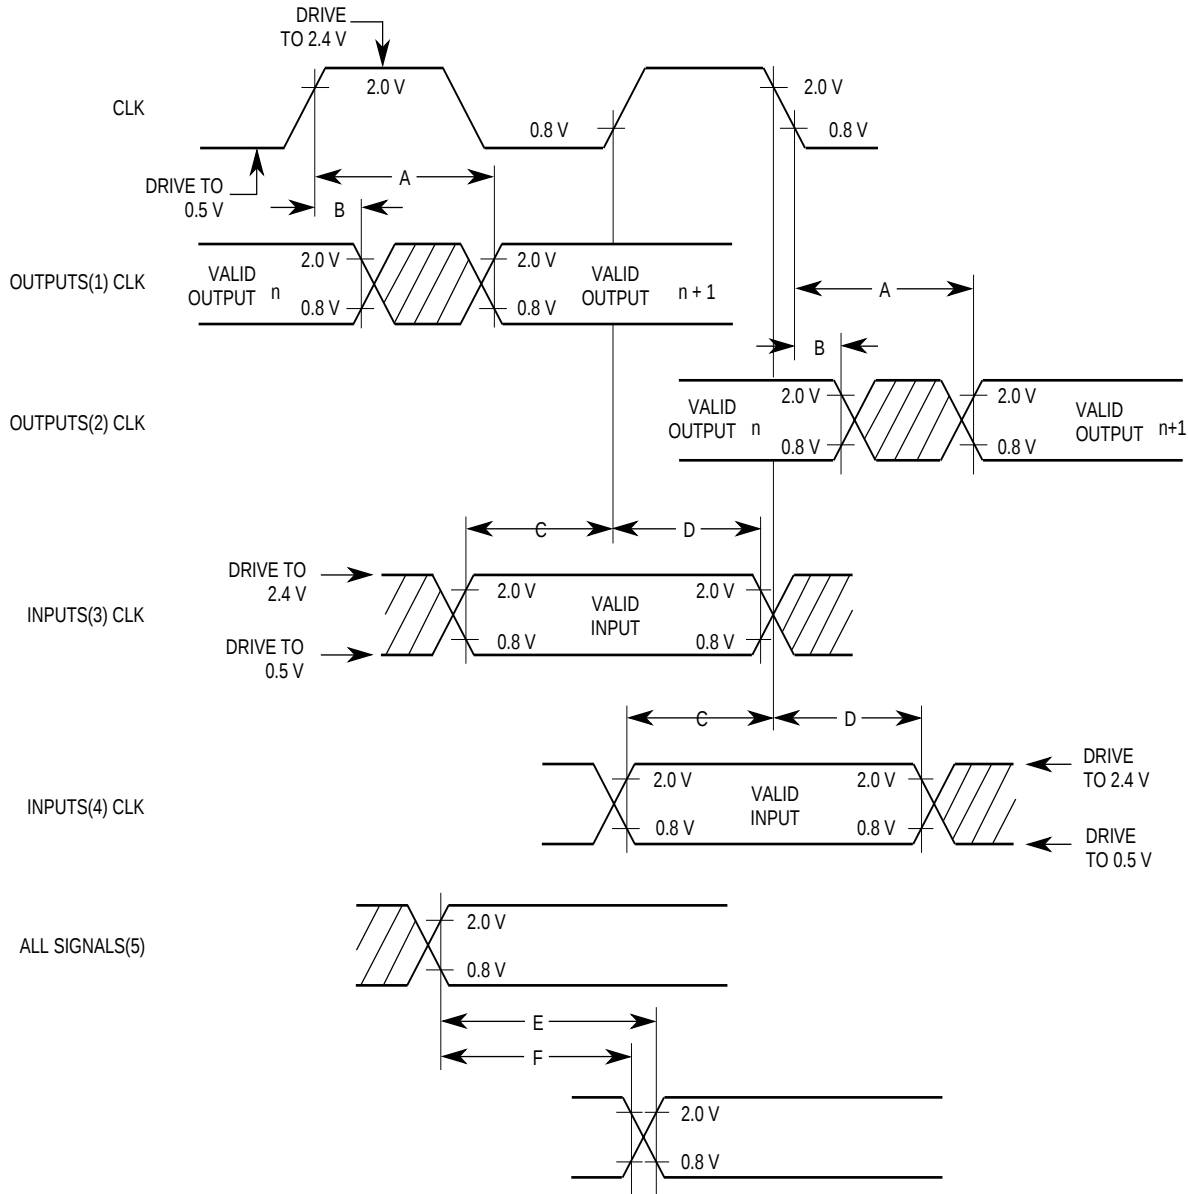

### NOTES:

1. This output timing is applicable to all parameters specified relative to the rising edge of the clock.
2. This output timing is applicable to all parameters specified relative to the falling edge of the clock.
3. This input timing is applicable to all parameters specified relative to the rising edge of the clock.
4. This input timing is applicable to all parameters specified relative to the falling edge of the clock.
5. This timing is applicable to all parameters specified relative to the assertion/negation of another signal.

### LEGEND:

- A. Maximum output delay specification.
- B. Minimum output hold time.
- C. Minimum input setup time specification.
- D. Minimum input hold time specification.
- E. Signal valid to signal valid specification (maximum or minimum).
- F. Signal valid to signal invalid specification (maximum or minimum).

**Figure 7. Drive Levels and Test Points for AC Specifications - applies to all parts**

## 7.0 MC68SEC000 AC ELECTRICAL SPECIFICATIONS — READ AND WRITE CYCLES

Add the following table and Figures 9 and 10 to Section 10.16.

Applies to 3.3V and 5V.

(GND = 0 V;  $T_A = T_L$  to  $T_H$ ; see Figures 3 and 4)


| NUM                | CHARACTERISTIC                                                                                                           | 10MHz |     | 16MHz |     | 20MHz |     | UNIT |
|--------------------|--------------------------------------------------------------------------------------------------------------------------|-------|-----|-------|-----|-------|-----|------|
|                    |                                                                                                                          | MIN   | MAX | MIN   | MAX | MIN   | MAX |      |
| 6                  | Clock Low to Address Valid                                                                                               | —     | 35  | —     | 30  | —     | 25  | ns   |
| 6A                 | Clock High to FC Valid                                                                                                   | 0     | 35  | 0     | 30  | 0     | 25  | ns   |
| 7                  | Clock High to Address, Data Bus High Impedance (Maximum) (Write)                                                         | —     | 55  | —     | 50  | —     | 42  | ns   |
| 8                  | Clock High to Address, FC Invalid (Minimum)                                                                              | 0     | —   | 0     | —   | 0     | —   | ns   |
| 9 <sup>1</sup>     | Clock High to $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Asserted                                             | 3     | 35  | 3     | 30  | 3     | 25  | ns   |
| 11 <sup>2</sup>    | Address Valid to $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Asserted (Read)/ $\overline{AS}$ Asserted (Write) | 20    | —   | 15    | —   | 10    | —   | ns   |
| 11A <sup>2</sup>   | FC Valid to $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Asserted (Read)/ $\overline{AS}$ Asserted (Write)      | 45    | —   | 45    | —   | 40    | —   | ns   |
| 12 <sup>1</sup>    | Clock Low to $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated                                               | 3     | 35  | 3     | 30  | 3     | 25  | ns   |
| 13 <sup>2</sup>    | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to Address, FC Invalid                                     | 15    | —   | 15    | —   | 10    | —   | ns   |
| 14 <sup>2</sup>    | $\overline{AS}$ (and $\overline{LDS}$ , $\overline{UDS}$ Read) Width Asserted                                            | 195   | —   | 120   | —   | 100   | —   | ns   |
| 14A <sup>2</sup>   | $\overline{LDS}$ , $\overline{UDS}$ Width Asserted (Write)                                                               | 95    | —   | 60    | —   | 50    | —   | ns   |
| 15 <sup>2</sup>    | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Width Negated                                                      | 105   | —   | 60    | —   | 50    | —   | ns   |
| 16                 | Clock High to Control Bus High Impedance                                                                                 | —     | 55  | —     | 50  | —     | 42  | ns   |
| 17 <sup>2</sup>    | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to $R/\overline{W}$ Invalid                                | 15    | —   | 15    | —   | 10    | —   | ns   |
| 18 <sup>1</sup>    | Clock High to $R/\overline{W}$ High (Read)                                                                               | 0     | 35  | 0     | 30  | 0     | 25  | ns   |
| 20 <sup>1</sup>    | Clock High to $R/\overline{W}$ Low (Write)                                                                               | 0     | 35  | 0     | 30  | 0     | 25  | ns   |
| 20A <sup>2,6</sup> | $\overline{AS}$ Asserted to $R/\overline{W}$ Low (Write)                                                                 | —     | 10  | —     | 10  | —     | 10  | ns   |
| 21 <sup>2</sup>    | Address Valid to $R/\overline{W}$ Low (Write)                                                                            | 0     | —   | 0     | —   | 0     | —   | ns   |
| 21A <sup>2</sup>   | FC Valid to $R/\overline{W}$ Low (Write)                                                                                 | 50    | —   | 30    | —   | 25    | —   | ns   |
| 22 <sup>2</sup>    | $R/\overline{W}$ Low to $\overline{DS}$ Asserted (Write)                                                                 | 50    | —   | 30    | —   | 25    | —   | ns   |
| 23                 | Clock Low to Data-Out Valid (Write)                                                                                      | —     | 35  | —     | 30  | —     | 25  | ns   |
| 25 <sup>2</sup>    | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to Data-Out Invalid (Write)                                | 30    | —   | 15    | —   | 10    | —   | ns   |
| 26 <sup>2</sup>    | Data-Out Valid to $\overline{LDS}$ , $\overline{UDS}$ Asserted (Write)                                                   | 30    | —   | 15    | —   | 10    | —   | ns   |
| 27 <sup>5</sup>    | Data-In Valid to Clock Low (Setup Time on Read)                                                                          | 5     | —   | 5     | —   | 5     | —   | ns   |
| 28 <sup>2</sup>    | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to $\overline{DTACK}$ Negated (Asynchronous Hold)          | 0     | 110 | 0     | 110 | 0     | 95  | ns   |
| 28A                | Clock High to $\overline{DTACK}$ Negated                                                                                 | 0     | 110 | 0     | 110 | 0     | 95  | ns   |

## AC ELECTRICAL SPECIFICATIONS — READ AND WRITE CYCLES (Continued)

| NUM               | CHARACTERISTIC                                                                                             | 10MHz |     | 16MHz |     | 20MHz |     | UNIT |
|-------------------|------------------------------------------------------------------------------------------------------------|-------|-----|-------|-----|-------|-----|------|
|                   |                                                                                                            | MIN   | MAX | MIN   | MAX | MIN   | MAX |      |
| 29                | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to Data-In Invalid (Hold Time on Read)       | 0     | —   | 0     | —   | 0     | —   | ns   |
| 29A               | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to Data-In High Impedance (Read)             | —     | 150 | —     | 90  | —     | 75  | ns   |
| 30                | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to $\overline{BERR}$ Negated                 | 0     | —   | 0     | —   | 0     | —   | ns   |
| 31 <sup>2,5</sup> | $\overline{DTACK}$ Asserted to Data-In Valid (Setup Time on Read)                                          | —     | 65  | —     | 50  | —     | 42  | ns   |
| 32                | $\overline{HALT}$ and $\overline{RESET}$ Input Transition Time                                             | 0     | 150 | 0     | 150 | 0     | 150 | ns   |
| 33                | Clock High to $\overline{BG}$ Asserted                                                                     | —     | 35  | —     | 30  | —     | 25  | ns   |
| 34                | Clock High to $\overline{BG}$ Negated                                                                      | —     | 35  | —     | 30  | —     | 25  | ns   |
| 35                | $\overline{BR}$ Asserted to $\overline{BG}$ Asserted                                                       | 1.5   | 3.5 | 1.5   | 3.5 | 1.5   | 3.5 | Clks |
| 36 <sup>7</sup>   | $\overline{BR}$ Negated to $\overline{BG}$ Negated                                                         | 1.5   | 3.5 | 1.5   | 3.5 | 1.5   | 3.5 | Clks |
| 38                | $\overline{BG}$ Asserted to Control, Address, Data Bus High Impedance ( $\overline{AS}$ Negated)           | —     | 55  | —     | 50  | —     | 42  | ns   |
| 39                | $\overline{BG}$ Width Negated                                                                              | 1.5   | —   | 1.5   | —   | 1.5   | —   | Clks |
| 44                | $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ Negated to $\overline{AVEC}$ Negated                 | 0     | 55  | 0     | 50  | 0     | 42  | ns   |
| 47 <sup>5</sup>   | Asynchronous Input Setup Time                                                                              | 5     | —   | 5     | —   | 5     | —   | ns   |
| 48 <sup>2,3</sup> | $\overline{BERR}$ Asserted to $\overline{DTACK}$ Asserted                                                  | 20    | —   | 10    | —   | 10    | —   | ns   |
| 52                | Data-In Hold from Clock High                                                                               | 0     | —   | 0     | —   | 0     | —   | ns   |
| 53                | Data-Out Hold from Clock High (Write)                                                                      | 0     | —   | 0     | —   | 0     | —   | ns   |
| 55                | $\overline{R/W}$ Asserted to Data Bus Impedance Change (Write)                                             | 20    | —   | 10    | —   | 0     | —   | ns   |
| 56 <sup>4</sup>   | $\overline{HALT}$ , $\overline{RESET}$ Pulse Width                                                         | 10    | —   | 10    | —   | 10    | —   | Clks |
| 58 <sup>7</sup>   | $\overline{BR}$ Negated to $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ , $\overline{R/W}$ Driven | 1.5   | —   | 1.5   | —   | 1.5   | —   | Clks |
| 58A <sup>7</sup>  | $\overline{BR}$ Negated to FC Driven                                                                       | 1     | —   | 1     | —   | 1     | —   | Clks |

## Applies to 3.3V and 5V.


- NOTES: 1. For a loading capacitance of less than or equal to 50 pF, subtract 5 ns from the value given in the maximum columns.
2. Actual value depends on clock period.
3. If #47 is satisfied for both  $\overline{DTACK}$  and  $\overline{BERR}$ , #48 may be ignored. In the absence of  $\overline{DTACK}$ ,  $\overline{BERR}$  is an asynchronous input using the asynchronous input setup time (#47).
4. For power-up, the MC68SEC000 must be held in the reset state for 100 ms to allow stabilization of on-chip circuitry. After the system is powered up, #56 refers to the minimum pulse width required to reset the controller.
5. If the asynchronous input setup time (#47) requirement is satisfied for  $\overline{DTACK}$ , the  $\overline{DTACK}$  asserted to data setup time (#31) requirement can be ignored. The data must only satisfy the data-in to clock low setup time (#27) for the following clock cycle.
6. When  $\overline{AS}$  and  $\overline{R/W}$  are equally loaded ( $\pm 20\%$ ), subtract 5 ns from the values given in these columns.
7. The minimum value must be met to guarantee proper operation. If the maximum value is exceeded,  $\overline{BG}$  may be reasserted.

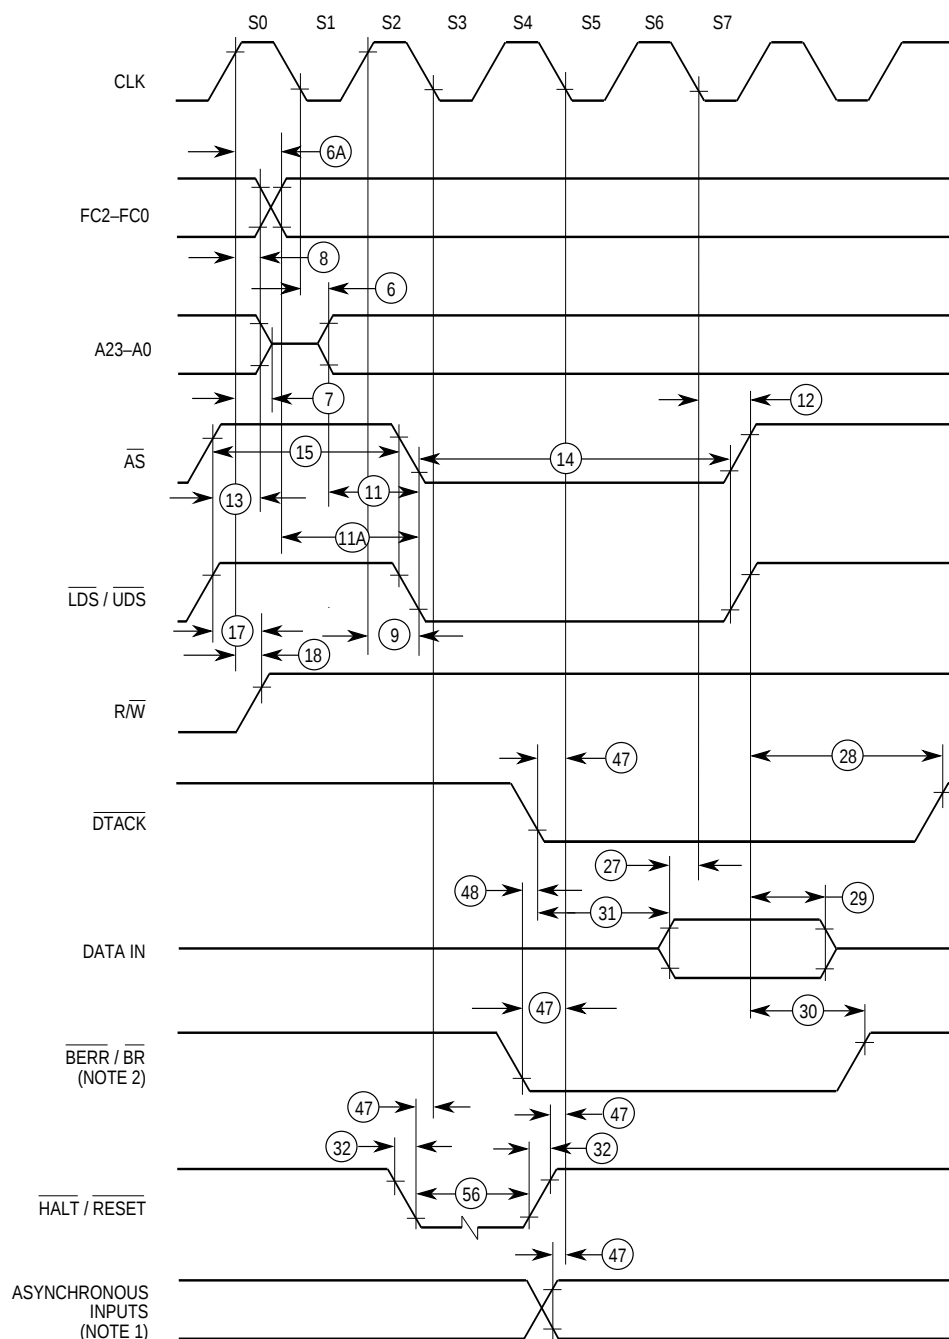

## NOTES:

1. Setup time for the asynchronous inputs  $\overline{\text{IPL2}}\text{--}\overline{\text{IPL0}}$  and  $\overline{\text{AVEC}}$  (#47) guarantees their recognition at the next falling edge of the clock.
2.  $\overline{\text{BR}}$  need fall at this time only to insure being recognized at the end of the bus cycle.
3. Timing measurements are referenced to and from a low voltage of 0.8 V and a high voltage of 2.0 V, unless otherwise noted. The voltage swing through this range should start outside and pass through the range such that the rise or fall is linear between 0.8 V and 2.0 V.

**Figure 9. MC68SEC000 Read Cycle Timing Diagram**

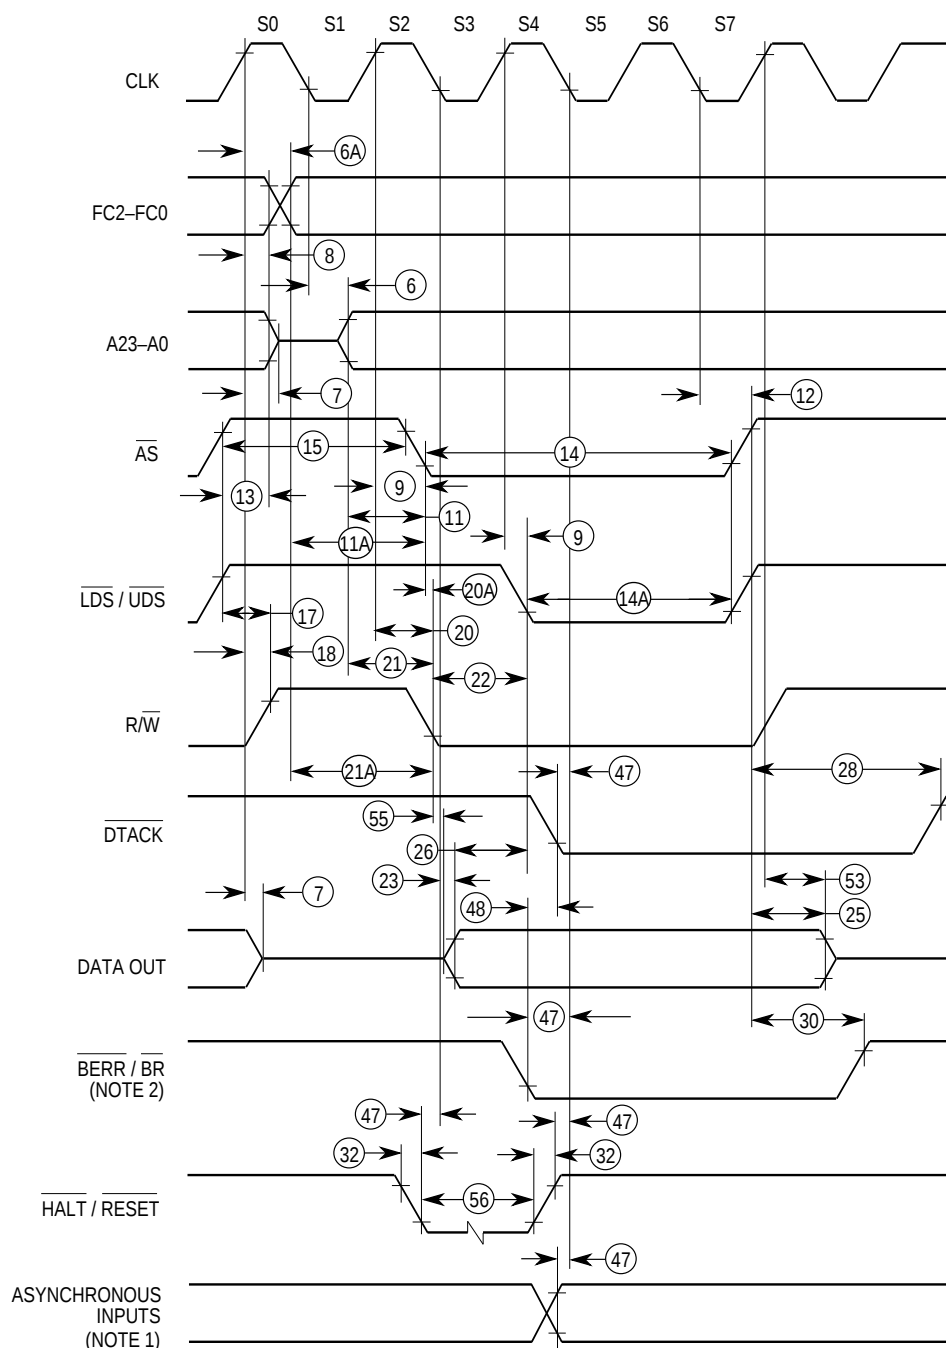

## NOTES:

1. Timing measurements are referenced to and from a low voltage of 0.8 V and a high voltage of 2.0 V, unless otherwise noted. The voltage swing through this range should start outside and pass through the range such that the rise or fall is linear between 0.8 V and 2.0 V.
2. Because of loading variations, R/W may be valid after AS even though both are initiated by the rising edge of S2 (specification #20A).

**Figure 10. MC68SEC000 Write Cycle Timing Diagram**

## 8.0 MC68SEC000 AC ELECTRICAL SPECIFICATIONS — BUS ARBITRATION


Add the following table and Figure 11 to Section 10.17.

(GND = 0 Vdc;  $T_A = T_L$  to  $T_H$ ; refer to Figure 13)

| NUM              | CHARACTERISTIC <sup>p</sup>                                                                      | 10MHz |     | 16MHz |     | 20MHz |     | UNIT |
|------------------|--------------------------------------------------------------------------------------------------|-------|-----|-------|-----|-------|-----|------|
|                  |                                                                                                  | MIN   | MAX | MIN   | MAX | MIN   | MAX |      |
| 7                | Clock High to Address, Data Bus High Impedance (Maximum)                                         | —     | 55  | —     | 50  | —     | 42  | ns   |
| 16               | Clock High to Control Bus High Impedance                                                         | —     | 55  | —     | 50  | —     | 42  | ns   |
| 33               | Clock High to $\overline{BG}$ Asserted                                                           | 0     | 35  | 0     | 30  | 0     | 25  | ns   |
| 34               | Clock High to $\overline{BG}$ Negated                                                            | 0     | 35  | 0     | 30  | 0     | 25  | ns   |
| 35               | $\overline{BR}$ Asserted to $\overline{BG}$ Asserted                                             | 1.5   | 3.5 | 1.5   | 3.5 | 1.5   | 3.5 | Clks |
| 36               | $\overline{BR}$ Negated to $\overline{BG}$ Negated                                               | 1.5   | 3.5 | 1.5   | 3.5 | 1.5   | 3.5 | Clks |
| 38               | $\overline{BG}$ Asserted to Control, Address, Data Bus High Impedance ( $\overline{AS}$ Negated) | —     | 55  | —     | 50  | —     | 42  | ns   |
| 39               | $\overline{BG}$ Width Negated                                                                    | 1.5   | —   | 1.5   | —   | 1.5   | —   | Clks |
| 47               | Asynchronous Input Setup Time                                                                    | 5     | —   | 5     | —   | 5     | —   | ns   |
| 58 <sup>1</sup>  | $\overline{BR}$ Negated to $\overline{AS}$ , $\overline{LDS}$ , $\overline{UDS}$ , R/W Driven    | 1.5   | —   | 1.5   | —   | 1.5   | —   | Clks |
| 58A <sup>1</sup> | $\overline{BR}$ Negated to FC Driven                                                             | 1     | —   | 1     | —   | 1     | —   | Clks |


Applies to 3.3V and 5V.

1. The minimum value must be met to guarantee proper operation. If the maximum value is exceeded,  $\overline{BG}$  may be reasserted.

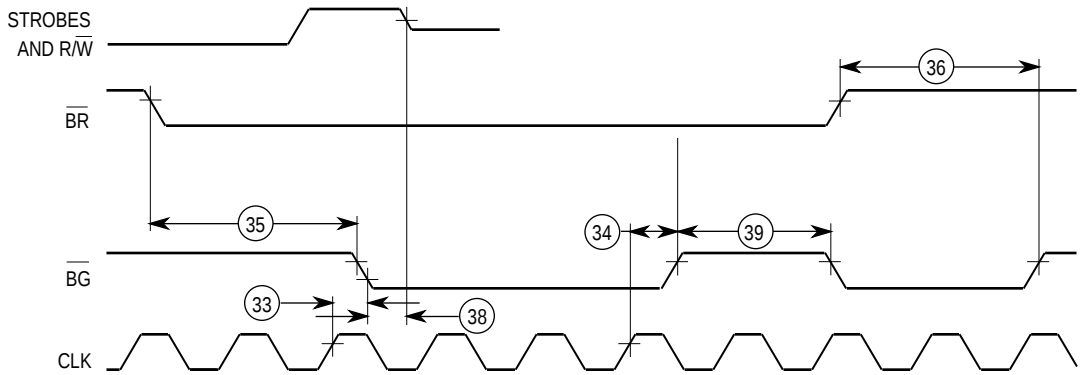


NOTE: Setup time to the clock (#47) for the asynchronous inputs  $\overline{BERR}$ ,  $\overline{BR}$ ,  $\overline{DTACK}$ ,  $\overline{IPL2-IPL0}$ , and  $\overline{VPA}$  guarantees their recognition at the next falling edge of the clock.

Figure 11. Bus Arbitration Timing

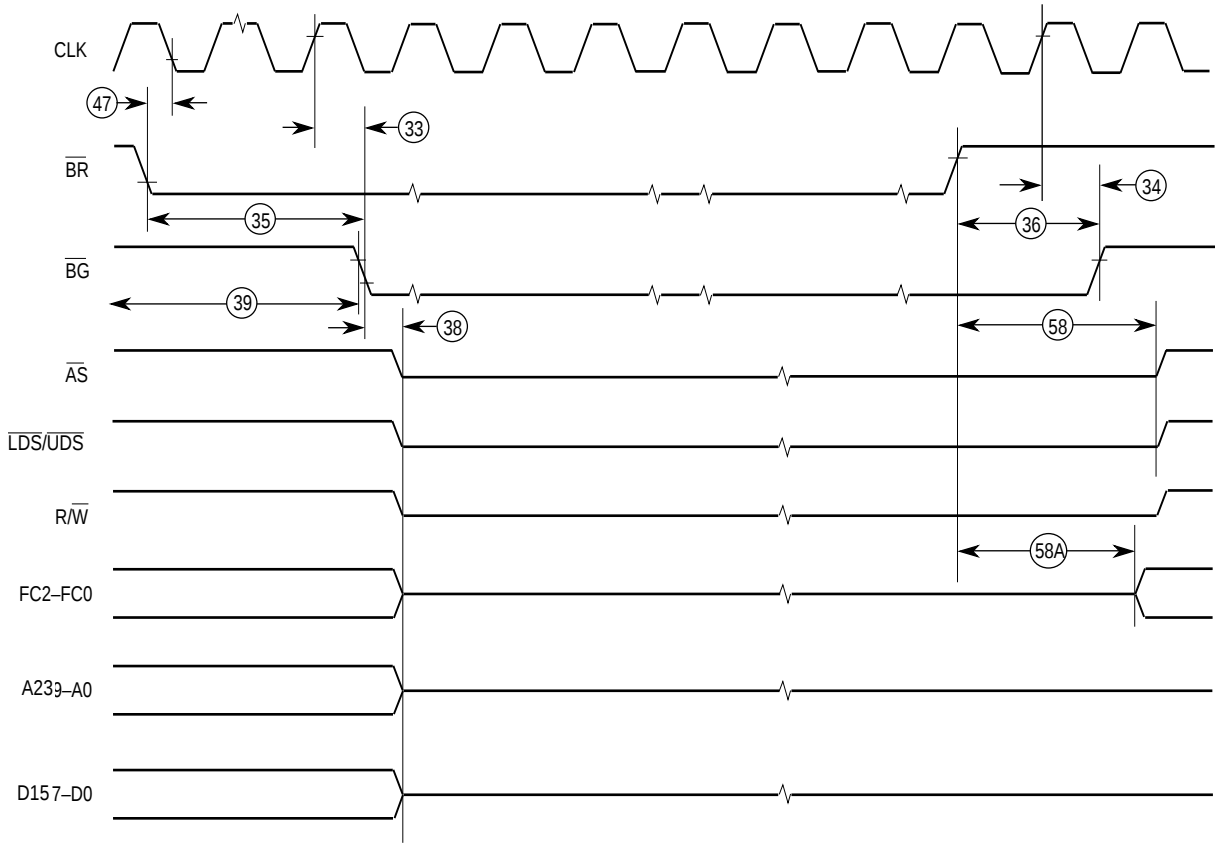


NOTE: Waveform measurements for all inputs and outputs are specified at: logic high 2.0 V, logic low = 0.8 V.

Figure 12. MC68SEC000 Bus Arbitration Timing Diagram

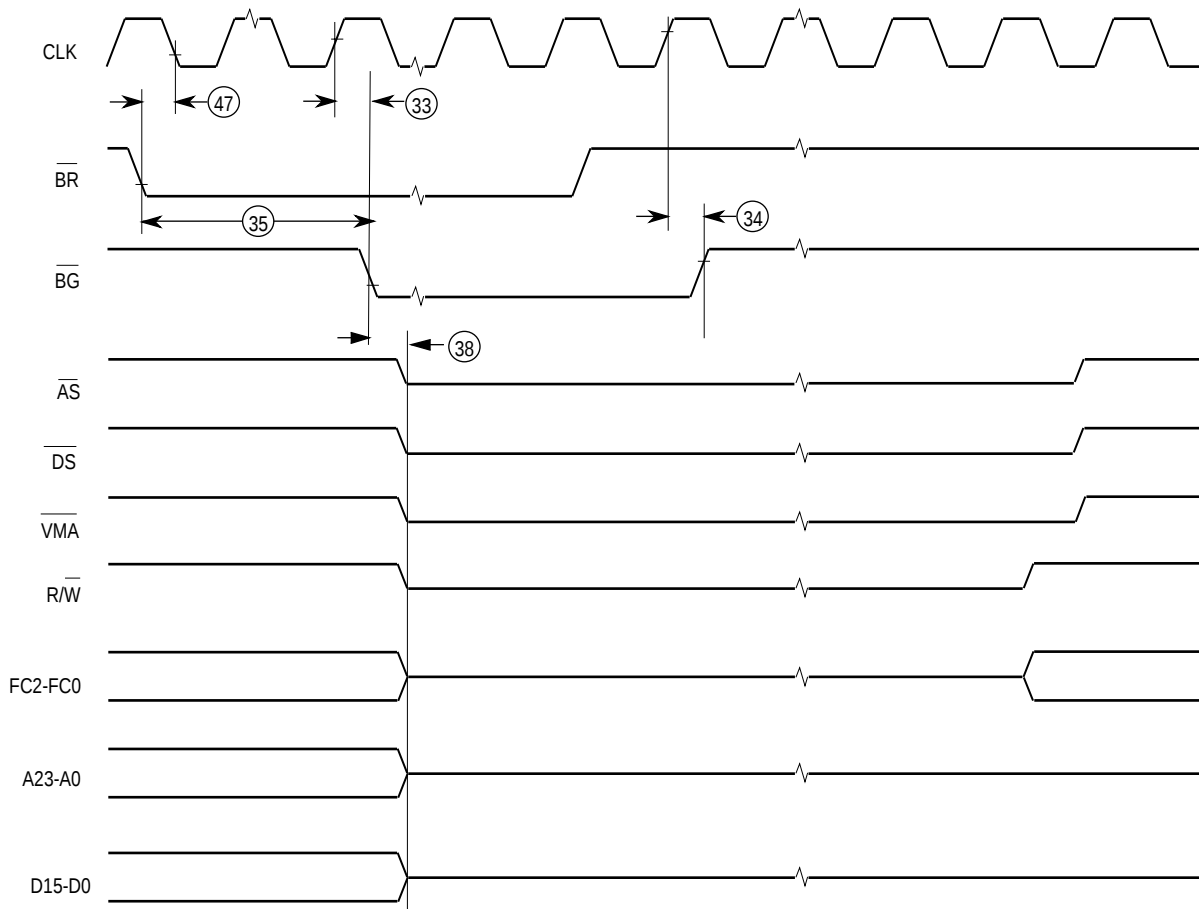


NOTES: Waveform measurements for all inputs and outputs are specified at: logic high 2.0 V, logic low = 0.8 V. This diagram also applies to the 68EC000.

**Figure 13. Bus Arbitration Timing—Idle Bus Case**

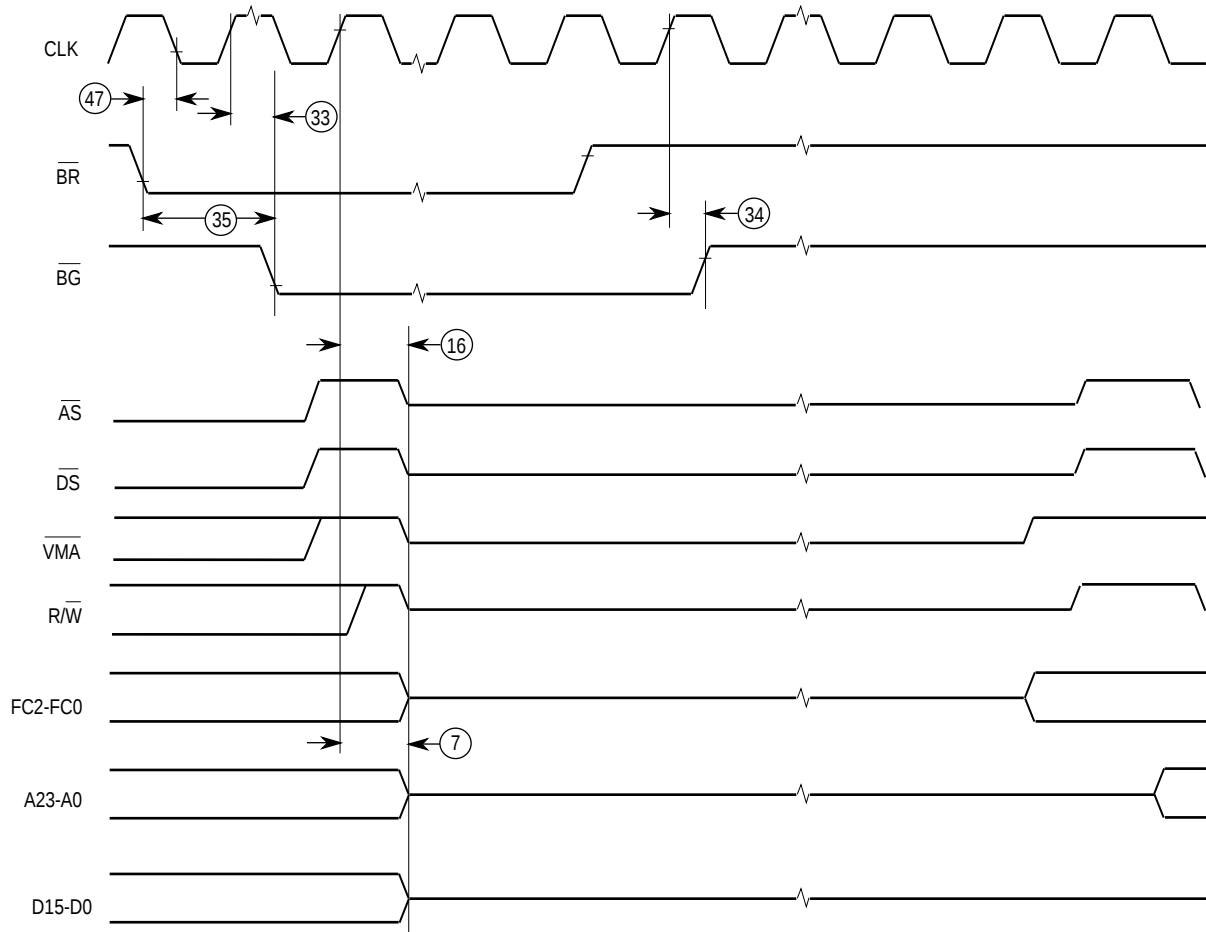

NOTE: Waveform measurements for all inputs and outputs are specified at: logic high 2.0 V, logic low = 0.8 V.  
This diagram also applies to the 68EC000.

**Figure 14. Bus Arbitration Timing - Active Bus Case**

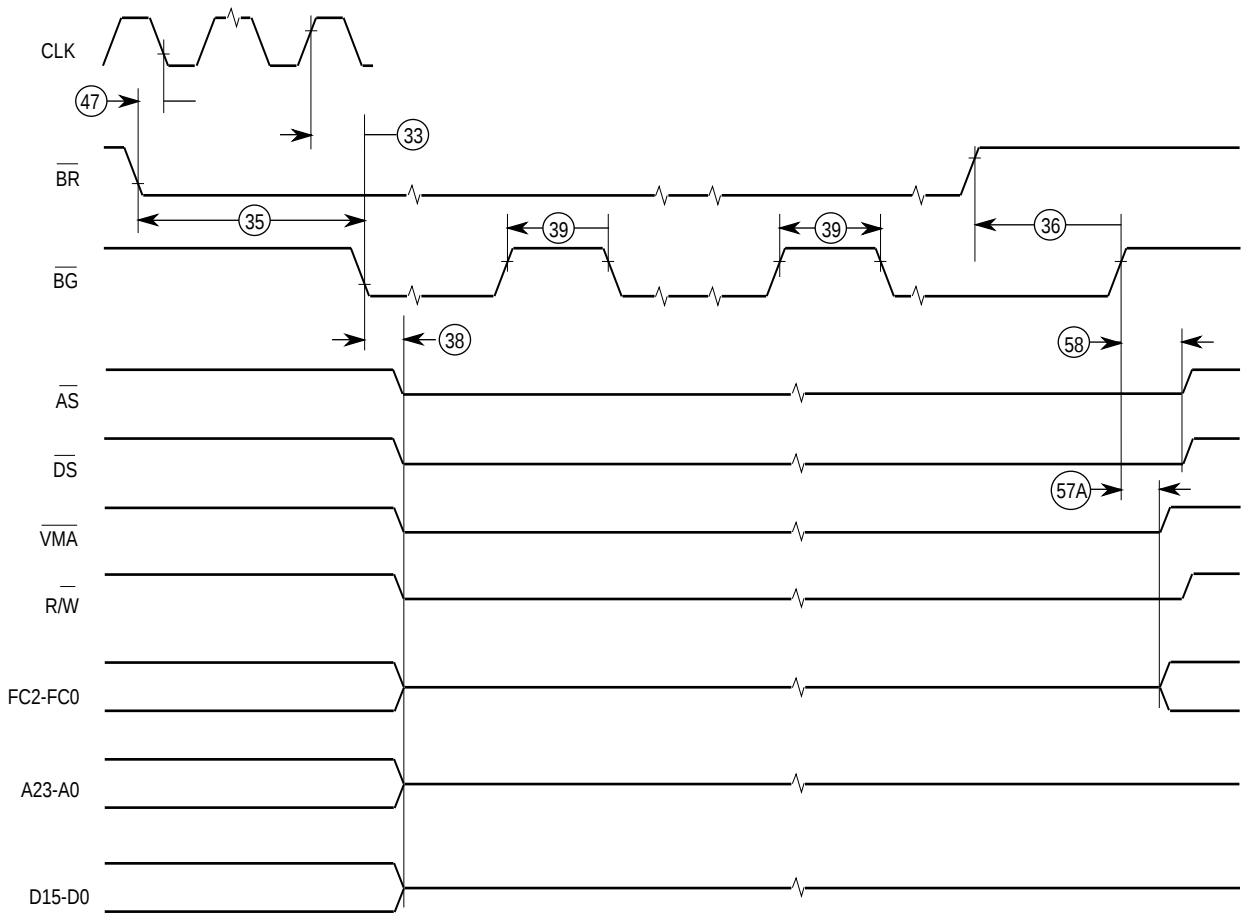

NOTES: Waveform measurements for all inputs and outputs are specified at: logic high 2.0 V, logic low = 0.8 V.  
This diagram also applies to the 68EC000.

Figure 15. Bus Arbitration - Multiple Bus Request

9.0 MECHANICAL DATA

9.1 PIN ASSIGNMENTS

Add Figure 12 to Section 11.1.

The following defines the pin assignment and the package dimensions of the 64 lead QFP (FU package) and 64 lead TQFP (PB package) for the MC68SEC000. Note that it is pin-to-pin compatible with the MC68EC000.

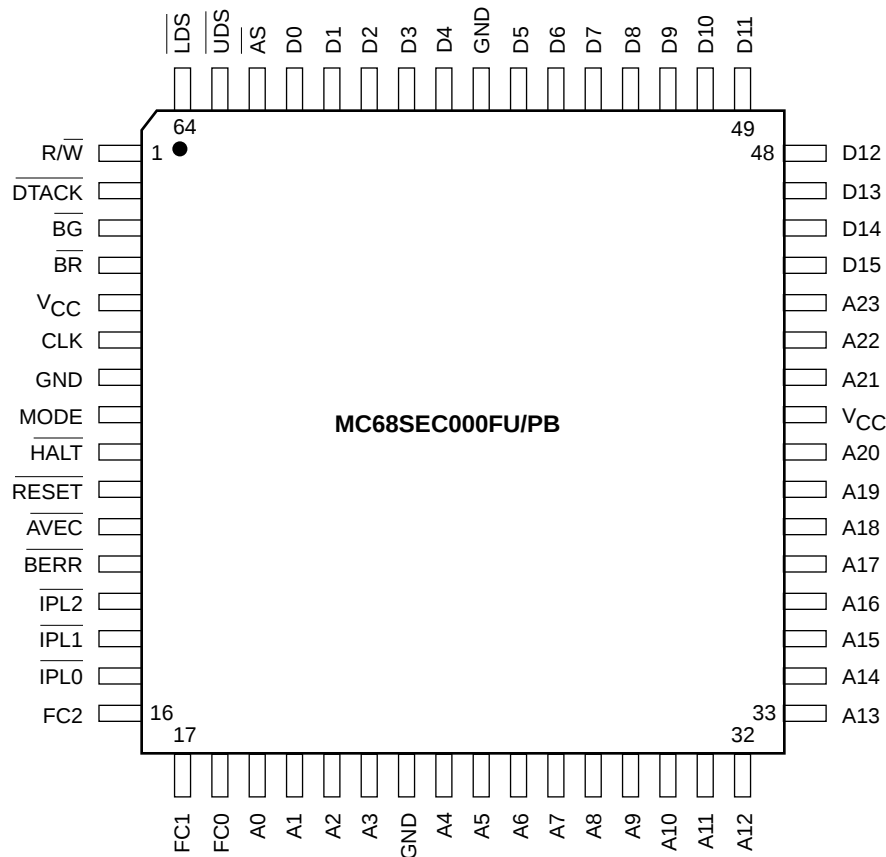


Figure 16. 64-Lead Quad Flat Pack and 64-Lead Thin Quad Flat Pack

## 12.0 PACKAGE/FREQUENCY AVAILABILITY

Replaces Section 11.1

The following tables identify the packages and operating frequencies available for the MC68HC000, MC68HC001, MC68EC000, and the MC68SEC000.

| MC68SEC000<br>PACKAGE    | FREQUENCY | VOLTAGE |     |
|--------------------------|-----------|---------|-----|
|                          |           | 3.3 V   | 5 V |
| Quad Flat Pack (FU)      | 10 MHz    | ✓       | ✓   |
|                          | 16 MHz    | ✓       | ✓   |
|                          | 20MHz     | ✓       | ✓   |
| Thin Quad Flat Pack (PB) | 10 MHz    | ✓       | ✓   |
|                          | 16 MHz    | ✓       | ✓   |
|                          | 20MHz     | ✓       | ✓   |
|                          |           |         |     |

| MC68HC000<br>PACKAGE                 | FREQUENCY         | VOLTAGE<br>5V |
|--------------------------------------|-------------------|---------------|
| Plastic DIP                          | 8,10,12,16,20 MHz | 3             |
| Plastic Quad Pack (PLCC)             | 8,10,12,16,20 MHz | 3             |
| Plastic Quad (Gull Wing)**           | 8,10,12,16,20 MHz | 3             |
| Pin Grid Array, Solder Lead Finish** | 8,10,12,16,20 MHz | 3             |
| Pin Grid Array, Gold Lead Finish**   | 8,10,12,16,20 MHz | 3             |
| Plastic Quad Pack (PLCC)             | 8,10,12,16,20 MHz | 3             |

| MC68HC001**<br>PACKAGE           | FREQUENCY      | VOLTAGE<br>5V |
|----------------------------------|----------------|---------------|
| Plastic Quad Pack (PLCC)         | 8,10,12,16 MHz | ✓             |
| Plastic Quad (Gull Wing)         | 8,10,12,16 MHz | ✓             |
| Pin Grid Array, Gold Lead Finish | 8,10,12,16 MHz | ✓             |
|                                  | 8,10,12,16 MHz | ✓             |

| MC68EC000<br>PACKAGE     | FREQUENCY | VOLTAGE<br>5V |
|--------------------------|-----------|---------------|
| Plastic Quad Pack (PLCC) | 8 MHz     | ✓             |
| Plastic Quad Flat Pack   | 10 MHz    | ✓             |
|                          | 12 MHz    | ✓             |
|                          | 16 MHz    | ✓             |
|                          | 20 MHz    | ✓             |

NOTE : \*\* not recommended for new designs

## ORDERING INFORMATION

Add the following to Section 11.

The following tables contains the ordering information for the MC68SEC000.

**MC68SEC000 Ordering Information**

| PACKAGE | BODY SIZE        | LEAD SPACING | SPEED (IN MH Z) | VOLTAGE      | SUFFIX | TEMPERATURE RANGE |
|---------|------------------|--------------|-----------------|--------------|--------|-------------------|
| QFP     | 14.0 mm X 14.0mm | 0.8mm        | 10/16/20 MHz    | 3.3V or 5.0V | FU     | 0C to +70C        |
|         |                  |              |                 |              | CFU    | -40C to +85C      |
| TQFP    | 10.0mm x 10.0mm  | 0.5mm        |                 |              | PB     | 0C to +70C        |
|         |                  |              |                 |              | CPB    | -40C to +85C      |

**MC68HC000 Ordering Information**

| PACKAGE | BODY SIZE         | LEAD SPACING | SPEED (IN MHZ)    | VOLTAGE | SUFFIX | TEMPERATURE RANGE |
|---------|-------------------|--------------|-------------------|---------|--------|-------------------|
| DIP     | 81.91mm X 20.57mm | 2.54mm       | 8, 10, 12, 16     | 5.0V    | P      | 0C to +70C        |
| PLCC    | 25.57mm X 25.27mm | 1.27mm       | 8, 10, 12, 16, 20 |         | FN     | 0C to +70C        |
|         |                   |              | 8, 10, 12, 16     |         | CFN    | -40C to +85C      |

**MC68EC000 Ordering Information**

| PACKAGE | BODY SIZE         | LEAD SPACING | SPEED (IN MHZ)   | VOLTAGE | SUFFIX | TEMPERATURE RANGE |
|---------|-------------------|--------------|------------------|---------|--------|-------------------|
| PLCC    | 25.57mm X 25.27mm | 1.27mm       | 8, 10,12, 16, 20 | 5.0V    | FN     | 0C to +70C        |
| PQFP    | 14.1mm X 14.1mm   | 0.8mm        | 8, 10,12, 16, 20 |         | FU     |                   |

## DOCUMENTATION

Add to Section 11.

The documents listed in the following table contain detailed information that pertain to the MC68SEC000 processor. You can obtain these documents from the Literature Distribution Centers listed on the last page of this document.

**MC68SEC000 Documentation**

| MC68SEC000 DOCUMENTATION                         | DOCUMENT NUMBER |
|--------------------------------------------------|-----------------|
| M68000 Family Programmer's Reference Manual      | M68000PM/AD     |
| M68000 User's Manual                             | M68000UM/AD     |
| High Performance Embedded Systems Source Catalog | BR729/D         |
| MC68EC000 Product Brief                          | MC68EC000/D     |
| MC68SEC000 Product Brief                         | MC68SEC000/D    |



Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### Literature Distribution Centers:

USA/EUROPE: Motorola Literature Distribution; P.O. Box 20912, Arizona 85036.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

## SEMICONDUCTOR PRODUCT INFORMATION

**For More Information On This Product,  
Go to: [www.freescale.com](http://www.freescale.com)**