


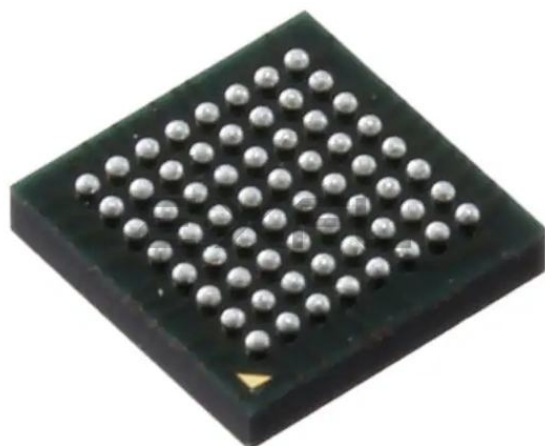

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                               |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Obsolete                                                                                                                                                                      |
| Core Processor             | RL78                                                                                                                                                                          |
| Core Size                  | 16-Bit                                                                                                                                                                        |
| Speed                      | 32MHz                                                                                                                                                                         |
| Connectivity               | CSI, I <sup>2</sup> C, LINbus, UART/USART                                                                                                                                     |
| Peripherals                | DMA, LVD, POR, PWM, WDT                                                                                                                                                       |
| Number of I/O              | 48                                                                                                                                                                            |
| Program Memory Size        | 64KB (64K x 8)                                                                                                                                                                |
| Program Memory Type        | FLASH                                                                                                                                                                         |
| EEPROM Size                | 4K x 8                                                                                                                                                                        |
| RAM Size                   | 4K x 8                                                                                                                                                                        |
| Voltage - Supply (Vcc/Vdd) | 1.6V ~ 5.5V                                                                                                                                                                   |
| Data Converters            | A/D 12x8/10b                                                                                                                                                                  |
| Oscillator Type            | Internal                                                                                                                                                                      |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                             |
| Mounting Type              | Surface Mount                                                                                                                                                                 |
| Package / Case             | 64-VFBGA                                                                                                                                                                      |
| Supplier Device Package    | 64-VFBGA (4x4)                                                                                                                                                                |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/renesas-electronics-america/r5f100leabg-v0">https://www.e-xfl.com/product-detail/renesas-electronics-america/r5f100leabg-v0</a> |

## ○ ROM, RAM capacities

| Flash ROM | Data flash | RAM          | RL78/G13 |          |          |          |          |          |
|-----------|------------|--------------|----------|----------|----------|----------|----------|----------|
|           |            |              | 20 pins  | 24 pins  | 25 pins  | 30 pins  | 32 pins  | 36 pins  |
| 128 KB    | 8 KB       | 12 KB        | —        | —        | —        | R5F100AG | R5F100BG | R5F100CG |
|           | —          |              | —        | —        | —        | R5F101AG | R5F101BG | R5F101CG |
| 96 KB     | 8 KB       | 8 KB         | —        | —        | —        | R5F100AF | R5F100BF | R5F100CF |
|           | —          |              | —        | —        | —        | R5F101AF | R5F101BF | R5F101CF |
| 64 KB     | 4 KB       | 4 KB<br>Note | R5F1006E | R5F1007E | R5F1008E | R5F100AE | R5F100BE | R5F100CE |
|           | —          |              | R5F1016E | R5F1017E | R5F1018E | R5F101AE | R5F101BE | R5F101CE |
| 48 KB     | 4 KB       | 3 KB<br>Note | R5F1006D | R5F1007D | R5F1008D | R5F100AD | R5F100BD | R5F100CD |
|           | —          |              | R5F1016D | R5F1017D | R5F1018D | R5F101AD | R5F101BD | R5F101CD |
| 32 KB     | 4 KB       | 2 KB         | R5F1006C | R5F1007C | R5F1008C | R5F100AC | R5F100BC | R5F100CC |
|           | —          |              | R5F1016C | R5F1017C | R5F1018C | R5F101AC | R5F101BC | R5F101CC |
| 16 KB     | 4 KB       | 2 KB         | R5F1006A | R5F1007A | R5F1008A | R5F100AA | R5F100BA | R5F100CA |
|           | —          |              | R5F1016A | R5F1017A | R5F1018A | R5F101AA | R5F101BA | R5F101CA |

| Flash ROM | Data flash | RAM           | RL78/G13 |          |          |          |          |          |          |          |
|-----------|------------|---------------|----------|----------|----------|----------|----------|----------|----------|----------|
|           |            |               | 40 pins  | 44 pins  | 48 pins  | 52 pins  | 64 pins  | 80 pins  | 100 pins | 128 pins |
| 512 KB    | 8 KB       | 32 KB<br>Note | —        | R5F100FL | R5F100GL | R5F100JL | R5F100LL | R5F100ML | R5F100PL | R5F100SL |
|           | —          |               | —        | R5F101FL | R5F101GL | R5F101JL | R5F101LL | R5F101ML | R5F101PL | R5F101SL |
| 384 KB    | 8 KB       | 24 KB         | —        | R5F100FK | R5F100GK | R5F100JK | R5F100LK | R5F100MK | R5F100PK | R5F100SK |
|           | —          |               | —        | R5F101FK | R5F101GK | R5F101JK | R5F101LK | R5F101MK | R5F101PK | R5F101SK |
| 256 KB    | 8 KB       | 20 KB<br>Note | —        | R5F100FJ | R5F100GJ | R5F100JJ | R5F100LJ | R5F100MJ | R5F100PJ | R5F100SJ |
|           | —          |               | —        | R5F101FJ | R5F101GJ | R5F101JJ | R5F101LJ | R5F101MJ | R5F101PJ | R5F101SJ |
| 192 KB    | 8 KB       | 16 KB         | R5F100EH | R5F100FH | R5F100GH | R5F100JH | R5F100LH | R5F100MH | R5F100PH | R5F100SH |
|           | —          |               | R5F101EH | R5F101FH | R5F101GH | R5F101JH | R5F101LH | R5F101MH | R5F101PH | R5F101SH |
| 128 KB    | 8 KB       | 12 KB         | R5F100EG | R5F100FG | R5F100GG | R5F100JG | R5F100LG | R5F100MG | R5F100PG | —        |
|           | —          |               | R5F101EG | R5F101FG | R5F101GG | R5F101JG | R5F101LG | R5F101MG | R5F101PG | —        |
| 96 KB     | 8 KB       | 8 KB          | R5F100EF | R5F100FF | R5F100GF | R5F100JF | R5F100LF | R5F100MF | R5F100PF | —        |
|           | —          |               | R5F101EF | R5F101FF | R5F101GF | R5F101JF | R5F101LF | R5F101MF | R5F101PF | —        |
| 64 KB     | 4 KB       | 4 KB<br>Note  | R5F100EE | R5F100FE | R5F100GE | R5F100JE | R5F100LE | —        | —        | —        |
|           | —          |               | R5F101EE | R5F101FE | R5F101GE | R5F101JE | R5F101LE | —        | —        | —        |
| 48 KB     | 4 KB       | 3 KB<br>Note  | R5F100ED | R5F100FD | R5F100GD | R5F100JD | R5F100LD | —        | —        | —        |
|           | —          |               | R5F101ED | R5F101FD | R5F101GD | R5F101JD | R5F101LD | —        | —        | —        |
| 32 KB     | 4 KB       | 2 KB          | R5F100EC | R5F100FC | R5F100GC | R5F100JC | R5F100LC | —        | —        | —        |
|           | —          |               | R5F101EC | R5F101FC | R5F101GC | R5F101JC | R5F101LC | —        | —        | —        |
| 16 KB     | 4 KB       | 2 KB          | R5F100EA | R5F100FA | R5F100GA | —        | —        | —        | —        | —        |
|           | —          |               | R5F101EA | R5F101FA | R5F101GA | —        | —        | —        | —        | —        |

**Note** The flash library uses RAM in self-programming and rewriting of the data flash memory.

The target products and start address of the RAM areas used by the flash library are shown below.

R5F100xD, R5F101xD (x = 6 to 8, A to C, E to G, J, L): Start address FF300H

R5F100xE, R5F101xE (x = 6 to 8, A to C, E to G, J, L): Start address FEF00H


R5F100xJ, R5F101xJ (x = F, G, J, L, M, P): Start address FAF00H

R5F100xL, R5F101xL (x = F, G, J, L, M, P, S): Start address F7F00H

For the RAM areas used by the flash library, see **Self RAM list of Flash Self-Programming Library for RL78 Family (R20UT2944)**.

## 1.3.9 48-pin products

- 48-pin plastic LQFP (7 × 7 mm, 0.5 mm pitch)

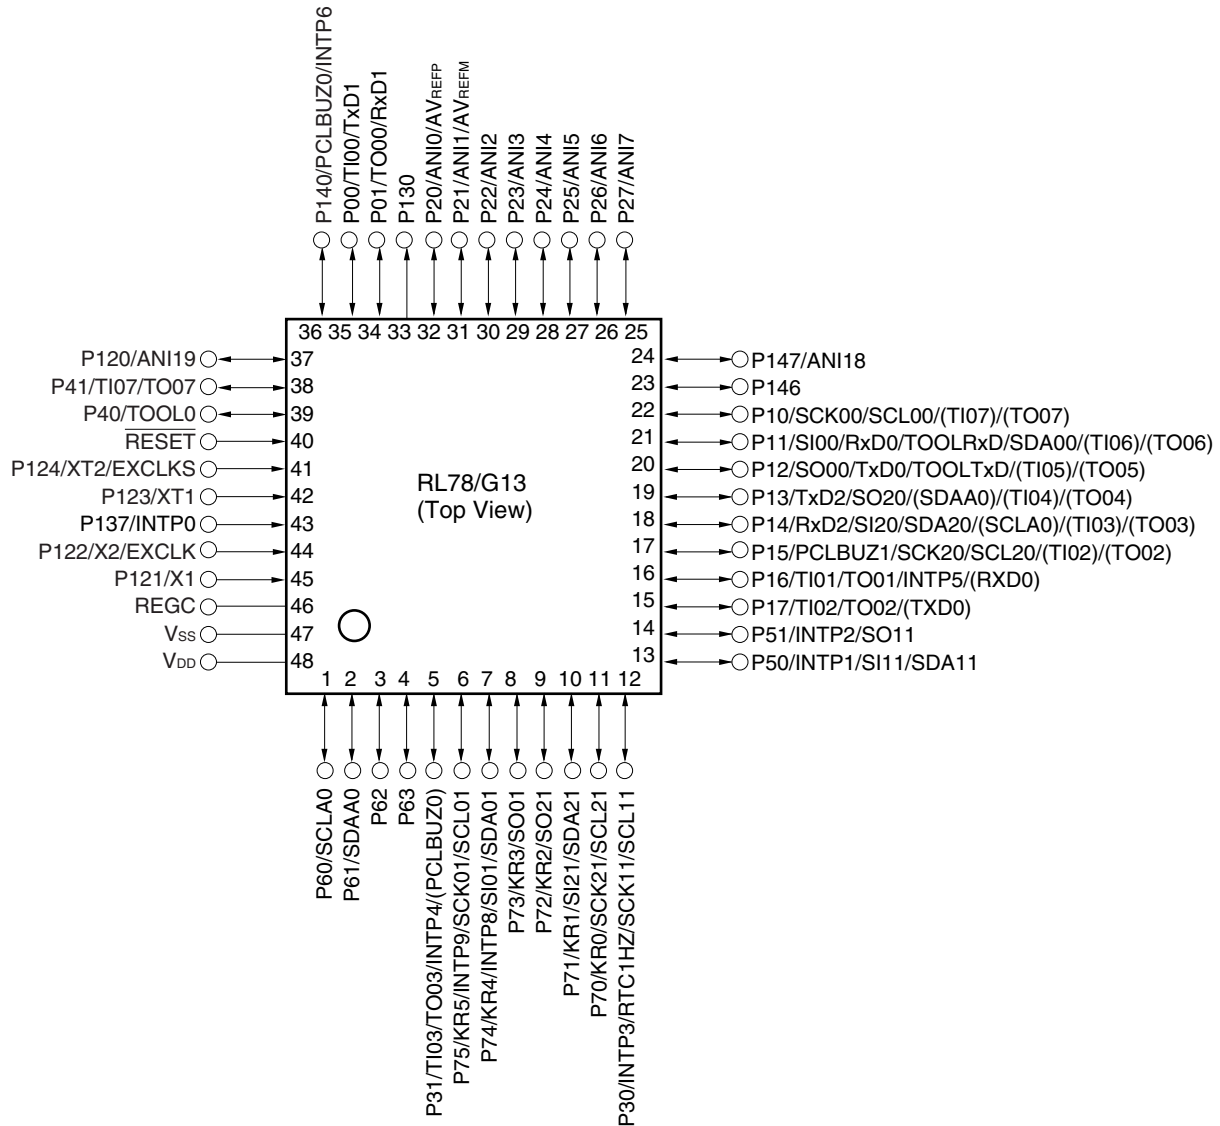


**Caution** Connect the REGC pin to V<sub>SS</sub> via a capacitor (0.47 to 1  $\mu$ F).

**Remarks 1.** For pin identification, see 1.4 Pin Identification.

- Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR). Refer to **Figure 4-8 Format of Peripheral I/O Redirection Register (PIOR)** in the RL78/G13 User's Manual.

- 64-pin plastic VFBGA (4 × 4 mm, 0.4 mm pitch)

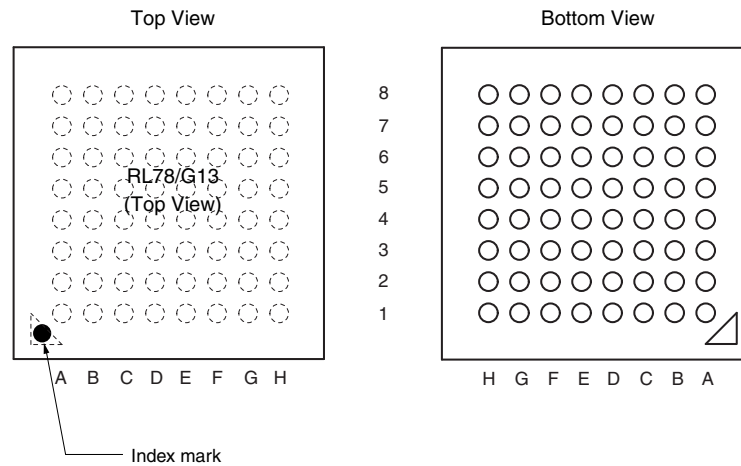

| Pin No. | Name                          | Pin No. | Name                        | Pin No. | Name                                        | Pin No. | Name                        |
|---------|-------------------------------|---------|-----------------------------|---------|---------------------------------------------|---------|-----------------------------|
| A1      | P05/TI05/TO05                 | C1      | P51/INTP2/SO11              | E1      | P13/TxD2/SO20/(SDAA0)/(TI04)/(TO04)         | G1      | P146                        |
| A2      | P30/INTP3/RTC1HZ/SCK11/SCL11  | C2      | P71/KR1/SI21/SDA21          | E2      | P14/RxD2/SI20/SDA20/(SCLA0)/(TI03)/(TO03)   | G2      | P25/ANI5                    |
| A3      | P70/KR0/SCK21/SCL21           | C3      | P74/KR4/INTP8/SI01/SDA01    | E3      | P15/SCK20/SCL20/(TI02)/(TO02)               | G3      | P24/ANI4                    |
| A4      | P75/KR5/INTP9/SCK01/SCL01     | C4      | P52/(INTP10)                | E4      | P16/TI01/TO01/INTP5/(SI00)/(RxD0)           | G4      | P22/ANI2                    |
| A5      | P77/KR7/INTP11/(TxD2)         | C5      | P53/(INTP11)                | E5      | P03/ANI16/SI10/RxD1/SDA10                   | G5      | P130                        |
| A6      | P61/SDAA0                     | C6      | P63                         | E6      | P41/TI07/TO07                               | G6      | P02/ANI17/SO10/TxD1         |
| A7      | P60/SCLA0                     | C7      | V <sub>SS</sub>             | E7      | RESET                                       | G7      | P00/TI00                    |
| A8      | EV <sub>DD0</sub>             | C8      | P121/X1                     | E8      | P137/INTP0                                  | G8      | P124/XT2/EXCLKS             |
| B1      | P50/INTP1/SI11/SDA11          | D1      | P55/(PCLBUZ1)/(SCK00)       | F1      | P10/SCK00/SCL00/(TI07)/(TO07)               | H1      | P147/ANI18                  |
| B2      | P72/KR2/SO21                  | D2      | P06/TI06/TO06               | F2      | P11/SI00/RxD0/TOOLRxD/SDA00/(TI06)/(TO06)   | H2      | P27/ANI7                    |
| B3      | P73/KR3/SO01                  | D3      | P17/TI02/TO02/(SO00)/(TxD0) | F3      | P12/SO00/TxD0/TOOLTxD/(INTP5)/(TI05)/(TO05) | H3      | P26/ANI6                    |
| B4      | P76/KR6/INTP10/(RxD2)         | D4      | P54                         | F4      | P21/ANI1/AV <sub>REFM</sub>                 | H4      | P23/ANI3                    |
| B5      | P31/TI03/TO03/INTP4/(PCLBUZ0) | D5      | P42/TI04/TO04               | F5      | P04/SCK10/SCL10                             | H5      | P20/ANI0/AV <sub>REFP</sub> |
| B6      | P62                           | D6      | P40/TOOL0                   | F6      | P43                                         | H6      | P141/PCLBUZ1/INTP7          |
| B7      | V <sub>DD</sub>               | D7      | REGC                        | F7      | P01/TO00                                    | H7      | P140/PCLBUZ0/INTP6          |
| B8      | EV <sub>SS0</sub>             | D8      | P122/X2/EXCLK               | F8      | P123/XT1                                    | H8      | P120/ANI19                  |

**Cautions** 1. Make EV<sub>SS0</sub> pin the same potential as V<sub>SS</sub> pin.

2. Make V<sub>DD</sub> pin the potential that is higher than EV<sub>DD0</sub> pin.


3. Connect the REGC pin to V<sub>SS</sub> via a capacitor (0.47 to 1  $\mu$ F).

**Remarks** 1. For pin identification, see 1.4 Pin Identification.

2. When using the microcontroller for an application where the noise generated inside the microcontroller must be reduced, it is recommended to supply separate powers to the V<sub>DD</sub> and EV<sub>DD0</sub> pins and connect the V<sub>SS</sub> and EV<sub>SS0</sub> pins to separate ground lines.


3. Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR). Refer to **Figure 4-8 Format of Peripheral I/O Redirection Register (PIOR)** in the RL78/G13 User's Manual.

## 1.5.4 30-pin products

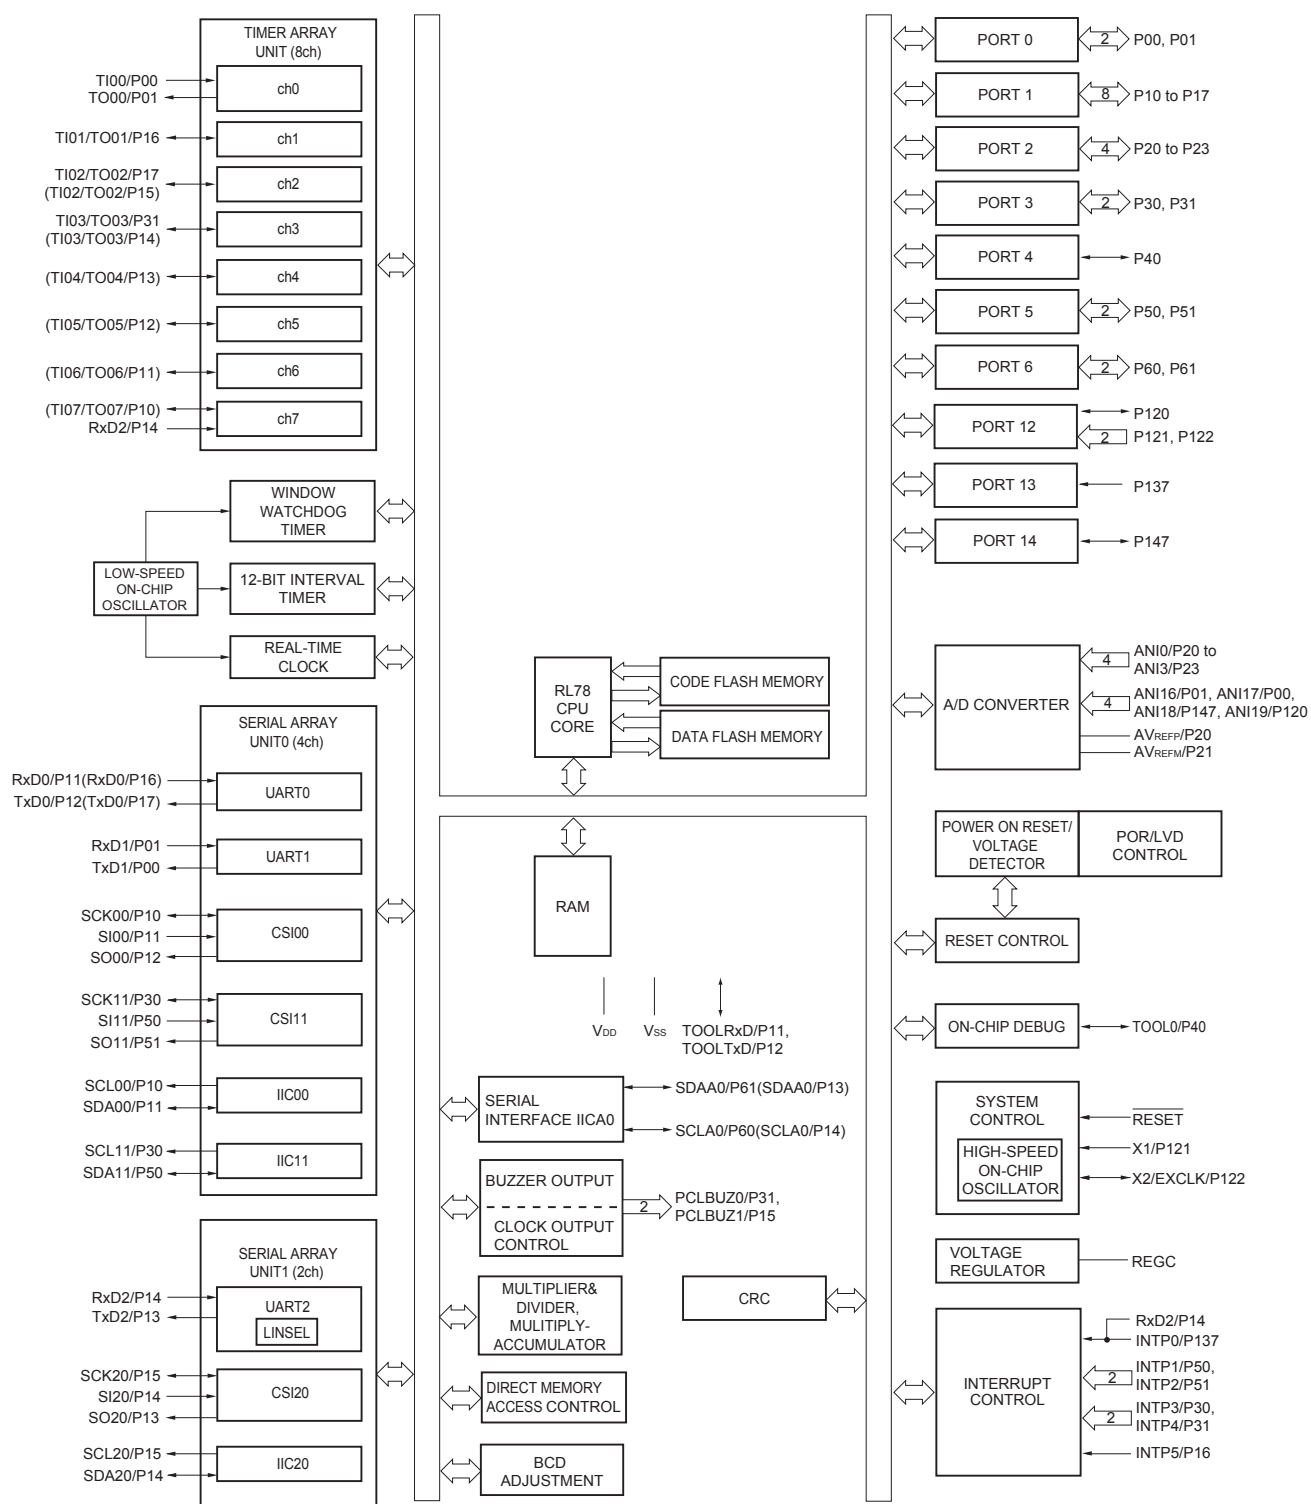


**Remark** Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR). Refer to **Figure 4-8 Format of Peripheral I/O Redirection Register (PIOR)** in the RL78/G13 User's Manual.

## 1.5.10 52-pin products

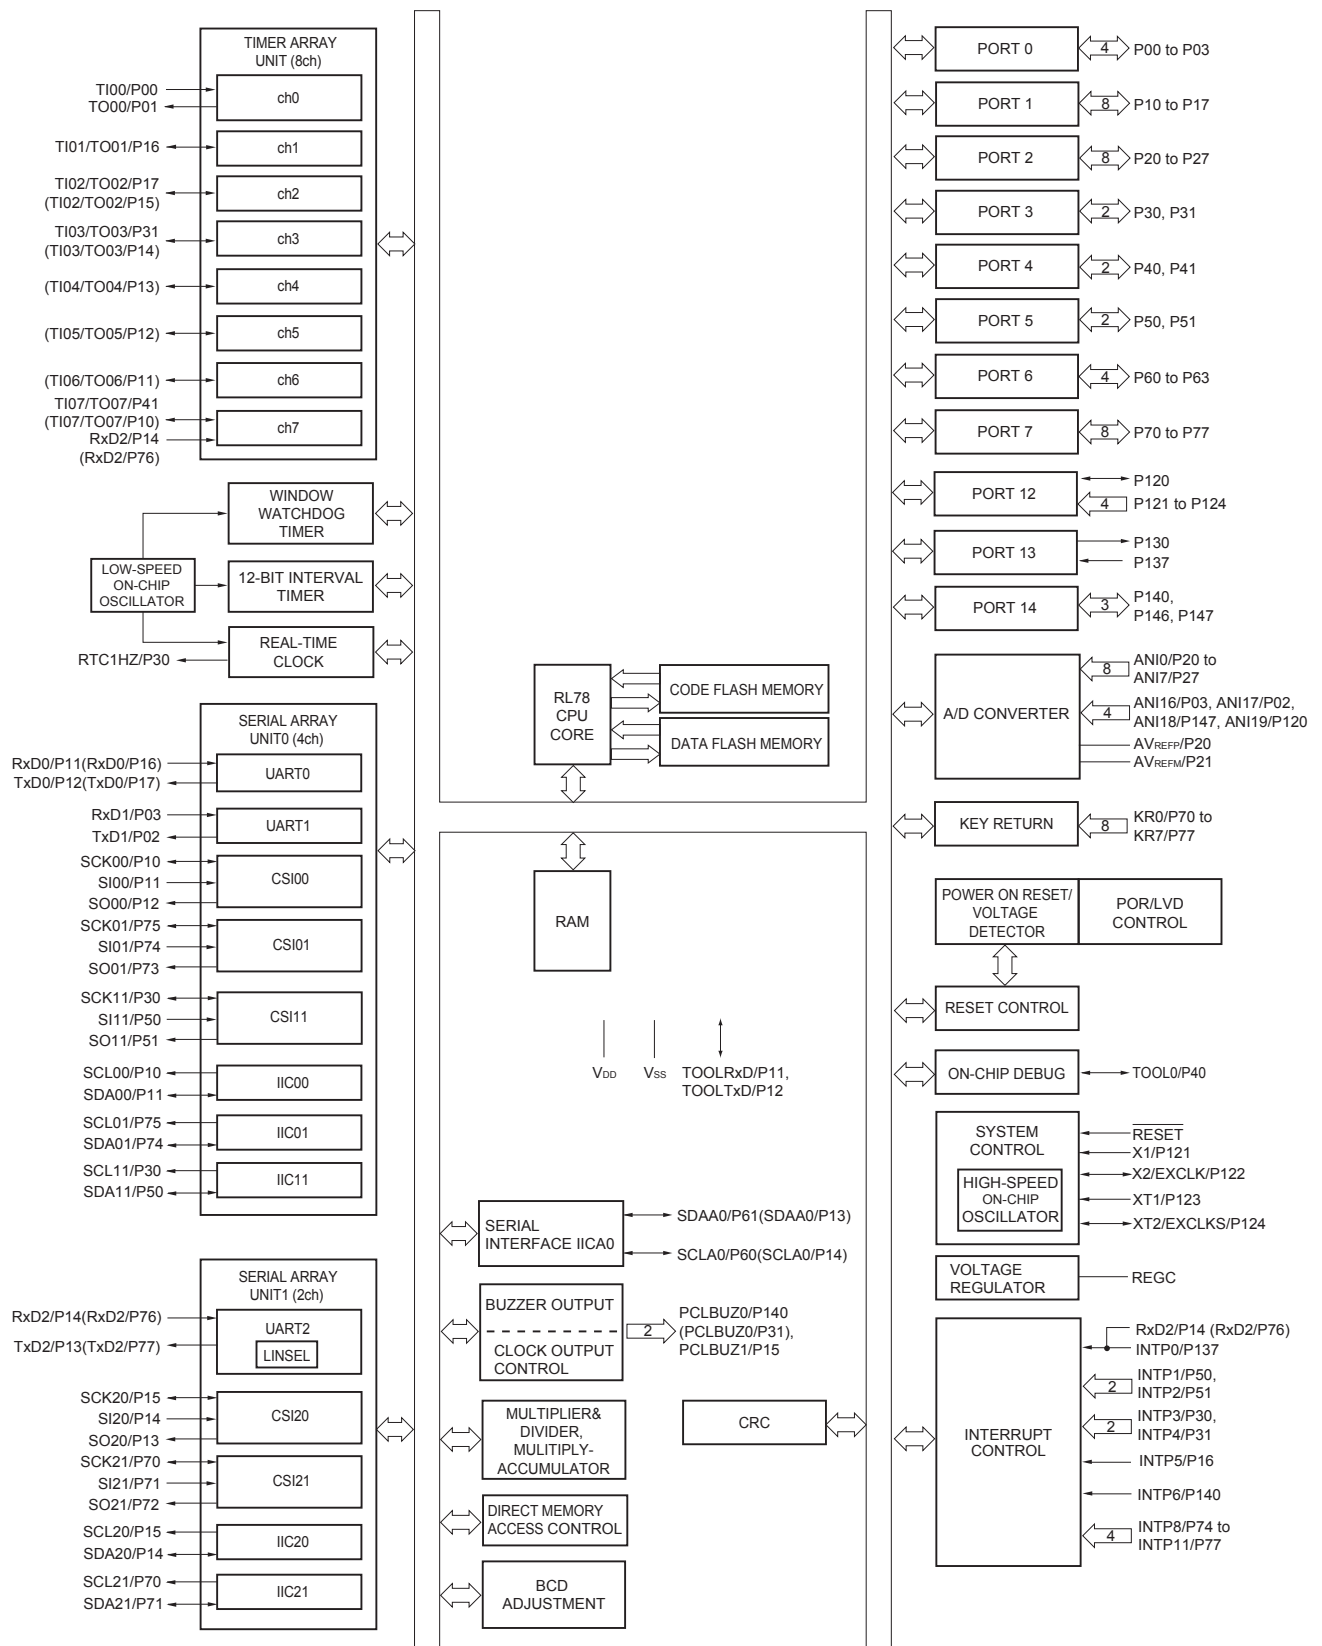

**Remark** Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR). Refer to **Figure 4-8 Format of Peripheral I/O Redirection Register (PIOR)** in the RL78/G13 User's Manual.

## 1.5.14 128-pin products

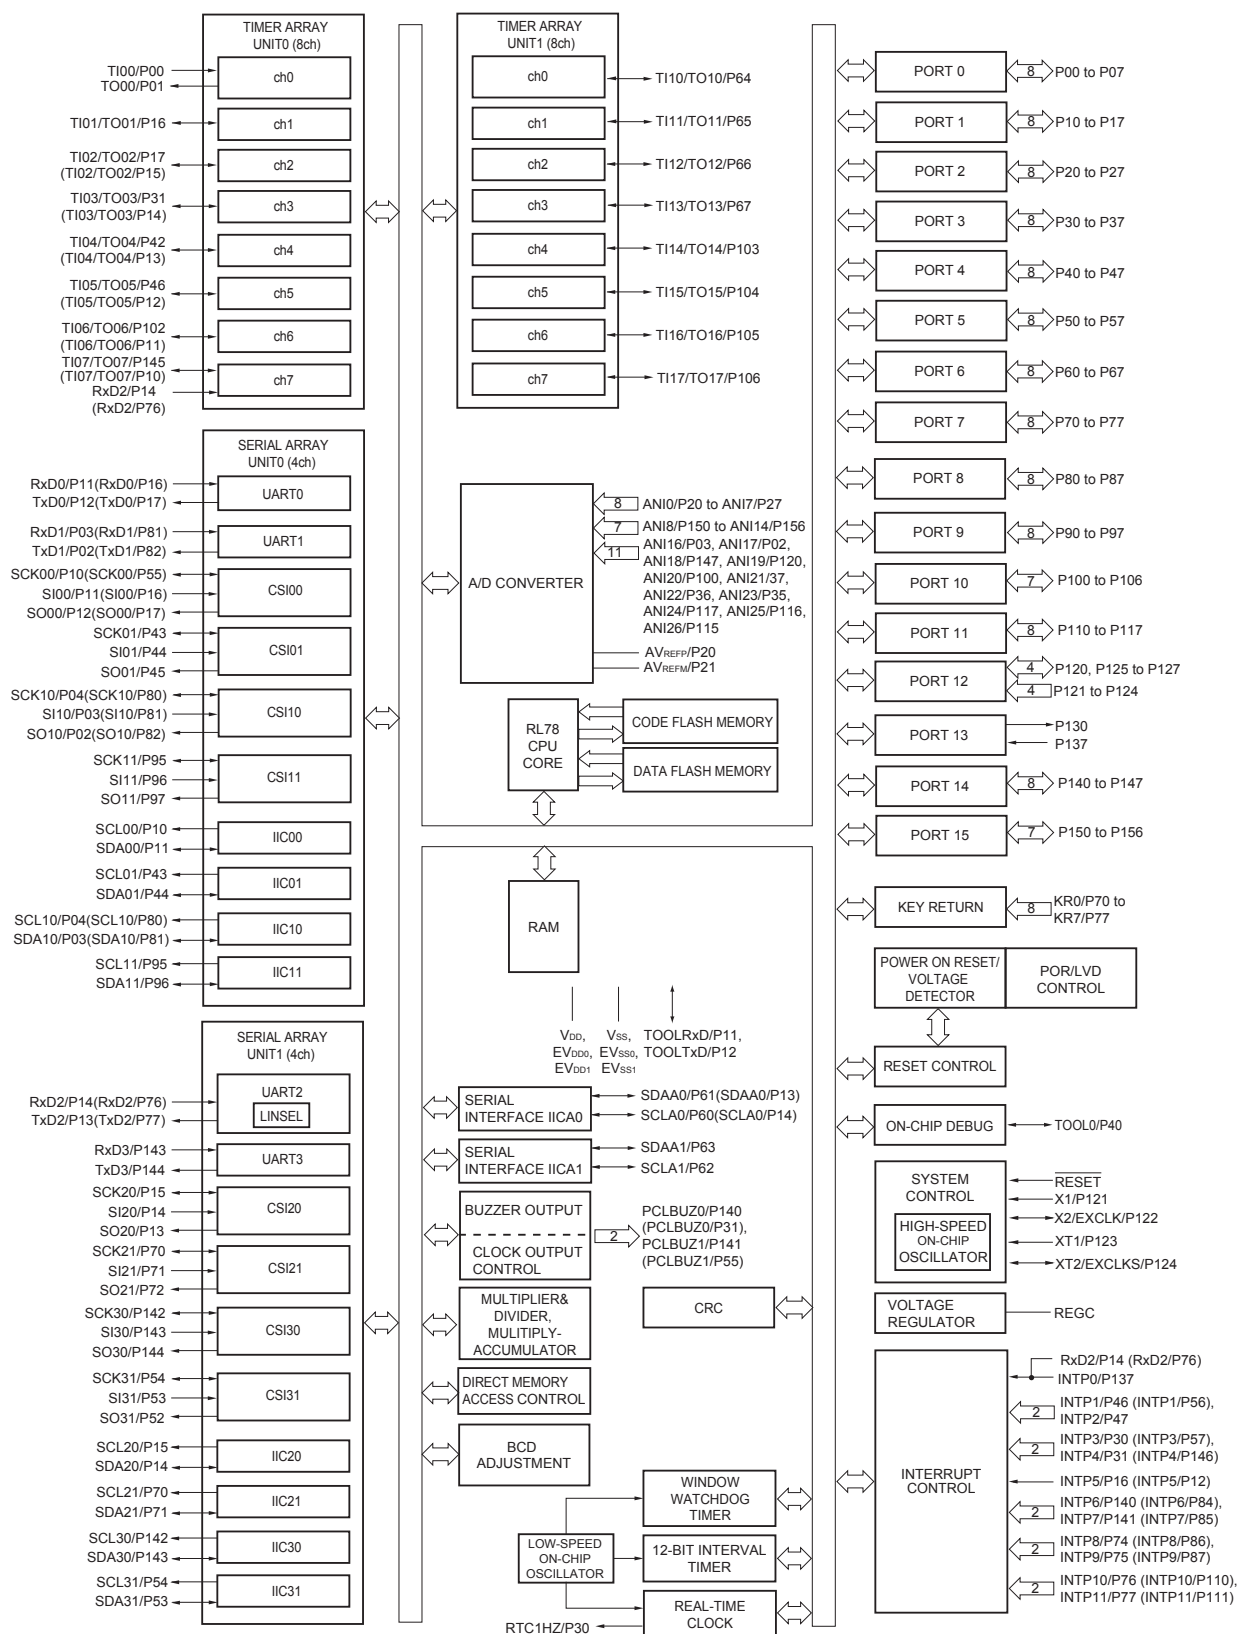

**Remark** Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR). Refer to **Figure 4-8 Format of Peripheral I/O Redirection Register (PIOR)** in the RL78/G13 User's Manual.

3. The number of PWM outputs varies depending on the setting of channels in use (the number of masters and slaves) (see **6.9.3 Operation as multiple PWM output function** in the RL78/G13 User's Manual).
4. When setting to PIOR = 1

(2/2)

| Item                                        | 20-pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          | 24-pin     |          | 25-pin     |          | 30-pin     |          | 32-pin     |          | 36-pin     |          |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------|----------|------------|----------|------------|----------|------------|----------|------------|----------|
|                                             | R5F1006x                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | R5F1016x | R5F1007x   | R5F1017x | R5F1008x   | R5F1018x | R5F100Ax   | R5F101Ax | R5F100Bx   | R5F101Bx | R5F100Cx   | R5F101Cx |
| Clock output/buzzer output                  | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          | 1          |          | 1          |          | 2          |          | 2          |          | 2          |          |
|                                             | • 2.44 kHz, 4.88 kHz, 9.76 kHz, 1.25 MHz, 2.5 MHz, 5 MHz, 10 MHz<br>(Main system clock: f <sub>MAIN</sub> = 20 MHz operation)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |            |          |            |          |            |          |            |          |            |          |
| 8/10-bit resolution A/D converter           | 6 channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          | 6 channels |          | 6 channels |          | 8 channels |          | 8 channels |          | 8 channels |          |
| Serial interface                            | [20-pin, 24-pin, 25-pin products]<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART: 1 channel<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART: 1 channel<br>[30-pin, 32-pin products]<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART: 1 channel<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART: 1 channel<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART (UART supporting LIN-bus): 1 channel<br>[36-pin products]<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART: 1 channel<br>• CSI: 1 channel/simplified I <sup>2</sup> C: 1 channel/UART: 1 channel<br>• CSI: 2 channels/simplified I <sup>2</sup> C: 2 channels/UART (UART supporting LIN-bus): 1 channel |          |            |          |            |          |            |          |            |          |            |          |
|                                             | I <sup>2</sup> C bus                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | —        | 1 channel  |          | 1 channel  |          | 1 channel  |          | 1 channel  |          | 1 channel  |          |
| Multiplier and divider/multiply-accumulator | • 16 bits × 16 bits = 32 bits (Unsigned or signed)<br>• 32 bits ÷ 32 bits = 32 bits (Unsigned)<br>• 16 bits × 16 bits + 32 bits = 32 bits (Unsigned or signed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |            |          |            |          |            |          |            |          |            |          |
| DMA controller                              | 2 channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          |            |          |            |          |            |          |            |          |            |          |
| Vectored interrupt sources                  | Internal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 23       | 24         |          | 24         |          | 27         |          | 27         |          | 27         |          |
|                                             | External                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 3        | 5          |          | 5          |          | 6          |          | 6          |          | 6          |          |
| Key interrupt                               | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |            |          |            |          |            |          |            |          |            |          |
| Reset                                       | • Reset by $\overline{\text{RESET}}$ pin<br>• Internal reset by watchdog timer<br>• Internal reset by power-on-reset<br>• Internal reset by voltage detector<br>• Internal reset by illegal instruction execution <sup>Note</sup><br>• Internal reset by RAM parity error<br>• Internal reset by illegal-memory access                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |            |          |            |          |            |          |            |          |            |          |
| Power-on-reset circuit                      | • Power-on-reset: 1.51 V (TYP.)<br>• Power-down-reset: 1.50 V (TYP.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |          |            |          |            |          |            |          |            |          |            |          |
| Voltage detector                            | • Rising edge : 1.67 V to 4.06 V (14 stages)<br>• Falling edge : 1.63 V to 3.98 V (14 stages)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |            |          |            |          |            |          |            |          |            |          |
| On-chip debug function                      | Provided                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |          |            |          |            |          |            |          |            |          |            |          |
| Power supply voltage                        | V <sub>DD</sub> = 1.6 to 5.5 V (T <sub>A</sub> = -40 to +85°C)<br>V <sub>DD</sub> = 2.4 to 5.5 V (T <sub>A</sub> = -40 to +105°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |            |          |            |          |            |          |            |          |            |          |
| Operating ambient temperature               | T <sub>A</sub> = 40 to +85°C (A: Consumer applications, D: Industrial applications )<br>T <sub>A</sub> = 40 to +105°C (G: Industrial applications)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |            |          |            |          |            |          |            |          |            |          |

**Note** The illegal instruction is generated when instruction code FFH is executed.

Reset by the illegal instruction execution not issued by emulation with the in-circuit emulator or on-chip debug emulator.

(T<sub>A</sub> = -40 to +85°C, 1.6 V ≤ E<sub>VDD0</sub> = E<sub>VDD1</sub> ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = E<sub>VSS0</sub> = E<sub>VSS1</sub> = 0 V) (5/5)

| Items                       | Symbol            | Conditions                                                                                                                                                               |                                                    | MIN.                                  | TYP. | MAX. | Unit |    |
|-----------------------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------|------|------|------|----|
| Input leakage current, high | I <sub>LIH1</sub> | P00 to P07, P10 to P17, P30 to P37, P40 to P47, P50 to P57, P60 to P67, P70 to P77, P80 to P87, P90 to P97, P100 to P106, P110 to P117, P120, P125 to P127, P140 to P147 | V <sub>I</sub> = EV <sub>DD0</sub>                 |                                       |      | 1    | μA   |    |
|                             | I <sub>LIH2</sub> | P20 to P27, P137, P150 to P156, RESET                                                                                                                                    | V <sub>I</sub> = V <sub>DD</sub>                   |                                       |      | 1    | μA   |    |
|                             | I <sub>LIH3</sub> | P121 to P124 (X1, X2, XT1, XT2, EXCLK, EXCLKS)                                                                                                                           | V <sub>I</sub> = V <sub>DD</sub>                   | In input port or external clock input |      | 1    | μA   |    |
|                             |                   |                                                                                                                                                                          |                                                    | In resonator connection               |      | 10   | μA   |    |
| Input leakage current, low  | I <sub>LIL1</sub> | P00 to P07, P10 to P17, P30 to P37, P40 to P47, P50 to P57, P60 to P67, P70 to P77, P80 to P87, P90 to P97, P100 to P106, P110 to P117, P120, P125 to P127, P140 to P147 | V <sub>I</sub> = EV <sub>SS0</sub>                 |                                       |      | −1   | μA   |    |
|                             | I <sub>LIL2</sub> | P20 to P27, P137, P150 to P156, RESET                                                                                                                                    | V <sub>I</sub> = V <sub>SS</sub>                   |                                       |      | −1   | μA   |    |
|                             | I <sub>LIL3</sub> | P121 to P124 (X1, X2, XT1, XT2, EXCLK, EXCLKS)                                                                                                                           | V <sub>I</sub> = V <sub>SS</sub>                   | In input port or external clock input |      | −1   | μA   |    |
|                             |                   |                                                                                                                                                                          |                                                    | In resonator connection               |      | −10  | μA   |    |
| On-chip pll-up resistance   | R <sub>U</sub>    | P00 to P07, P10 to P17, P30 to P37, P40 to P47, P50 to P57, P64 to P67, P70 to P77, P80 to P87, P90 to P97, P100 to P106, P110 to P117, P120, P125 to P127, P140 to P147 | V <sub>I</sub> = EV <sub>SS0</sub> , In input port |                                       | 10   | 20   | 100  | kΩ |

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(5) During communication at same potential (simplified I<sup>2</sup>C mode) (1/2)(T<sub>A</sub> = -40 to +85°C, 1.6 V ≤ EV<sub>DD0</sub> = EV<sub>DD1</sub> ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = EV<sub>SS0</sub> = EV<sub>SS1</sub> = 0 V)

| Parameter                 | Symbol            | Conditions                                                                            | HS (high-speed main) Mode |                | LS (low-speed main) Mode |               | LV (low-voltage main) Mode |               | Unit |
|---------------------------|-------------------|---------------------------------------------------------------------------------------|---------------------------|----------------|--------------------------|---------------|----------------------------|---------------|------|
|                           |                   |                                                                                       | MIN.                      | MAX.           | MIN.                     | MAX.          | MIN.                       | MAX.          |      |
| SCLr clock frequency      | f <sub>SCL</sub>  | 2.7 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>C <sub>b</sub> = 50 pF, R <sub>b</sub> = 2.7 kΩ |                           | 1000<br>Note 1 |                          | 400<br>Note 1 |                            | 400<br>Note 1 | kHz  |
|                           |                   | 1.8 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 3 kΩ  |                           | 400<br>Note 1  |                          | 400<br>Note 1 |                            | 400<br>Note 1 | kHz  |
|                           |                   | 1.8 V ≤ EV <sub>DD0</sub> < 2.7 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  |                           | 300<br>Note 1  |                          | 300<br>Note 1 |                            | 300<br>Note 1 | kHz  |
|                           |                   | 1.7 V ≤ EV <sub>DD0</sub> < 1.8 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  |                           | 250<br>Note 1  |                          | 250<br>Note 1 |                            | 250<br>Note 1 | kHz  |
|                           |                   | 1.6 V ≤ EV <sub>DD0</sub> < 1.8 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  |                           | —              |                          | 250<br>Note 1 |                            | 250<br>Note 1 | kHz  |
| Hold time when SCLr = "L" | t <sub>LOW</sub>  | 2.7 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>C <sub>b</sub> = 50 pF, R <sub>b</sub> = 2.7 kΩ | 475                       |                | 1150                     |               | 1150                       |               | ns   |
|                           |                   | 1.8 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 3 kΩ  | 1150                      |                | 1150                     |               | 1150                       |               | ns   |
|                           |                   | 1.8 V ≤ EV <sub>DD0</sub> < 2.7 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  | 1550                      |                | 1550                     |               | 1550                       |               | ns   |
|                           |                   | 1.7 V ≤ EV <sub>DD0</sub> < 1.8 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  | 1850                      |                | 1850                     |               | 1850                       |               | ns   |
|                           |                   | 1.6 V ≤ EV <sub>DD0</sub> < 1.8 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  | —                         |                | 1850                     |               | 1850                       |               | ns   |
| Hold time when SCLr = "H" | t <sub>HIGH</sub> | 2.7 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>C <sub>b</sub> = 50 pF, R <sub>b</sub> = 2.7 kΩ | 475                       |                | 1150                     |               | 1150                       |               | ns   |
|                           |                   | 1.8 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 3 kΩ  | 1150                      |                | 1150                     |               | 1150                       |               | ns   |
|                           |                   | 1.8 V ≤ EV <sub>DD0</sub> < 2.7 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  | 1550                      |                | 1550                     |               | 1550                       |               | ns   |
|                           |                   | 1.7 V ≤ EV <sub>DD0</sub> < 1.8 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  | 1850                      |                | 1850                     |               | 1850                       |               | ns   |
|                           |                   | 1.6 V ≤ EV <sub>DD0</sub> < 1.8 V,<br>C <sub>b</sub> = 100 pF, R <sub>b</sub> = 5 kΩ  | —                         |                | 1850                     |               | 1850                       |               | ns   |

(Notes and Caution are listed on the next page, and Remarks are listed on the page after the next page.)

**(8) Communication at different potential (1.8 V, 2.5 V, 3 V) (CSI mode) (master mode, SCKp... internal clock output)**  
**(2/3)**

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ EV<sub>DD0</sub> = EV<sub>DD1</sub> ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = EV<sub>SS0</sub> = EV<sub>SS1</sub> = 0 V)

| Parameter                                                | Symbol            | Conditions                                                                                                                                  | HS (high-speed main) Mode |      | LS (low-speed main) Mode |      | LV (low-voltage main) Mode |      | Unit |
|----------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------|--------------------------|------|----------------------------|------|------|
|                                                          |                   |                                                                                                                                             | MIN.                      | MAX. | MIN.                     | MAX. | MIN.                       | MAX. |      |
| Slp setup time<br>(to SCKp↑) <sup>Note 1</sup>           | t <sub>SIK1</sub> | 4.0 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>2.7 V ≤ V <sub>b</sub> ≤ 4.0 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 1.4 kΩ                    | 81                        |      | 479                      |      | 479                        |      | ns   |
|                                                          |                   | 2.7 V ≤ EV <sub>DD0</sub> < 4.0 V,<br>2.3 V ≤ V <sub>b</sub> ≤ 2.7 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 2.7 kΩ                    | 177                       |      | 479                      |      | 479                        |      | ns   |
|                                                          |                   | 1.8 V ≤ EV <sub>DD0</sub> < 3.3 V,<br>1.6 V ≤ V <sub>b</sub> ≤ 2.0 V <sup>Note 2</sup> ,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 5.5 kΩ | 479                       |      | 479                      |      | 479                        |      | ns   |
| Slp hold time<br>(from SCKp↑) <sup>Note 1</sup>          | t <sub>KSH1</sub> | 4.0 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>2.7 V ≤ V <sub>b</sub> ≤ 4.0 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 1.4 kΩ                    | 19                        |      | 19                       |      | 19                         |      | ns   |
|                                                          |                   | 2.7 V ≤ EV <sub>DD0</sub> < 4.0 V,<br>2.3 V ≤ V <sub>b</sub> ≤ 2.7 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 2.7 kΩ                    | 19                        |      | 19                       |      | 19                         |      | ns   |
|                                                          |                   | 1.8 V ≤ EV <sub>DD0</sub> < 3.3 V,<br>1.6 V ≤ V <sub>b</sub> ≤ 2.0 V <sup>Note 2</sup> ,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 5.5 kΩ | 19                        |      | 19                       |      | 19                         |      | ns   |
| Delay time from SCKp↓<br>to SOp output <sup>Note 1</sup> | t <sub>KSO1</sub> | 4.0 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>2.7 V ≤ V <sub>b</sub> ≤ 4.0 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 1.4 kΩ                    |                           | 100  |                          | 100  |                            | 100  | ns   |
|                                                          |                   | 2.7 V ≤ EV <sub>DD0</sub> < 4.0 V,<br>2.3 V ≤ V <sub>b</sub> ≤ 2.7 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 2.7 kΩ                    |                           | 195  |                          | 195  |                            | 195  | ns   |
|                                                          |                   | 1.8 V ≤ EV <sub>DD0</sub> < 3.3 V,<br>1.6 V ≤ V <sub>b</sub> ≤ 2.0 V <sup>Note 2</sup> ,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 5.5 kΩ |                           | 483  |                          | 483  |                            | 483  | ns   |

- Notes**
1. When DAP<sub>mn</sub> = 0 and CKP<sub>mn</sub> = 0, or DAP<sub>mn</sub> = 1 and CKP<sub>mn</sub> = 1.
  2. Use it with EV<sub>DD0</sub> ≥ V<sub>b</sub>.

**Caution** Select the TTL input buffer for the Slp pin and the N-ch open drain output (V<sub>DD</sub> tolerance (When 20- to 52-pin products)/EV<sub>DD</sub> tolerance (When 64- to 128-pin products)) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V<sub>IH</sub> and V<sub>IL</sub>, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the page after the next page.)

**(8) Communication at different potential (1.8 V, 2.5 V, 3 V) (CSI mode) (master mode, SCKp... internal clock output)**  
**(3/3)**

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ EV<sub>DD0</sub> = EV<sub>DD1</sub> ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = EV<sub>SS0</sub> = EV<sub>SS1</sub> = 0 V)

| Parameter                                                | Symbol            | Conditions                                                                                                                                  | HS (high-speed main) Mode |      | LS (low-speed main) Mode |      | LV (low-voltage main) Mode |      | Unit |
|----------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------|--------------------------|------|----------------------------|------|------|
|                                                          |                   |                                                                                                                                             | MIN.                      | MAX. | MIN.                     | MAX. | MIN.                       | MAX. |      |
| Slp setup time<br>(to SCKp↓) <sup>Note 1</sup>           | t <sub>SIK1</sub> | 4.0 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>2.7 V ≤ V <sub>b</sub> ≤ 4.0 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 1.4 kΩ                    | 44                        |      | 110                      |      | 110                        |      | ns   |
|                                                          |                   | 2.7 V ≤ EV <sub>DD0</sub> < 4.0 V,<br>2.3 V ≤ V <sub>b</sub> ≤ 2.7 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 2.7 kΩ                    | 44                        |      | 110                      |      | 110                        |      | ns   |
|                                                          |                   | 1.8 V ≤ EV <sub>DD0</sub> < 3.3 V,<br>1.6 V ≤ V <sub>b</sub> ≤ 2.0 V <sup>Note 2</sup> ,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 5.5 kΩ | 110                       |      | 110                      |      | 110                        |      | ns   |
| Slp hold time<br>(from SCKp↓) <sup>Note 1</sup>          | t <sub>KSH1</sub> | 4.0 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>2.7 V ≤ V <sub>b</sub> ≤ 4.0 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 1.4 kΩ                    | 19                        |      | 19                       |      | 19                         |      | ns   |
|                                                          |                   | 2.7 V ≤ EV <sub>DD0</sub> < 4.0 V,<br>2.3 V ≤ V <sub>b</sub> ≤ 2.7 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 2.7 kΩ                    | 19                        |      | 19                       |      | 19                         |      | ns   |
|                                                          |                   | 1.8 V ≤ EV <sub>DD0</sub> < 3.3 V,<br>1.6 V ≤ V <sub>b</sub> ≤ 2.0 V <sup>Note 2</sup> ,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 5.5 kΩ | 19                        |      | 19                       |      | 19                         |      | ns   |
| Delay time from SCKp↑<br>to SOp output <sup>Note 1</sup> | t <sub>KSO1</sub> | 4.0 V ≤ EV <sub>DD0</sub> ≤ 5.5 V,<br>2.7 V ≤ V <sub>b</sub> ≤ 4.0 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 1.4 kΩ                    |                           | 25   |                          | 25   |                            | 25   | ns   |
|                                                          |                   | 2.7 V ≤ EV <sub>DD0</sub> < 4.0 V,<br>2.3 V ≤ V <sub>b</sub> ≤ 2.7 V,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 2.7 kΩ                    |                           | 25   |                          | 25   |                            | 25   | ns   |
|                                                          |                   | 1.8 V ≤ EV <sub>DD0</sub> < 3.3 V,<br>1.6 V ≤ V <sub>b</sub> ≤ 2.0 V <sup>Note 2</sup> ,<br>C <sub>b</sub> = 30 pF, R <sub>b</sub> = 5.5 kΩ |                           | 25   |                          | 25   |                            | 25   | ns   |

- Notes**
1. When DAP<sub>mn</sub> = 0 and CKP<sub>mn</sub> = 1, or DAP<sub>mn</sub> = 1 and CKP<sub>mn</sub> = 0.
  2. Use it with EV<sub>DD0</sub> ≥ V<sub>b</sub>.


**Caution** Select the TTL input buffer for the Slp pin and the N-ch open drain output (V<sub>DD</sub> tolerance (When 20- to 52-pin products)/EV<sub>DD</sub> tolerance (When 64- to 128-pin products)) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V<sub>IH</sub> and V<sub>IL</sub>, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the next page.)

## 2.10 Timing of Entry to Flash Memory Programming Modes

(T<sub>A</sub> = -40 to +85°C, 1.8 V ≤ EV<sub>DD0</sub> = EV<sub>DD1</sub> ≤ V<sub>DD</sub> ≤ 5.5 V, V<sub>SS</sub> = EV<sub>SS0</sub> = EV<sub>SS1</sub> = 0 V)

| Parameter                                                                                                                                                    | Symbol              | Conditions                                                                | MIN. | TYP. | MAX. | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------|------|------|------|------|
| Time to complete the communication for the initial setting after the external reset is released                                                              | t <sub>SUINIT</sub> | POR and LVD reset must be released before the external reset is released. |      |      | 100  | ms   |
| Time to release the external reset after the TOOL0 pin is set to the low level                                                                               | t <sub>SU</sub>     | POR and LVD reset must be released before the external reset is released. | 10   |      |      | μs   |
| Time to hold the TOOL0 pin at the low level after the external reset is released (excluding the processing time of the firmware to control the flash memory) | t <sub>HD</sub>     | POR and LVD reset must be released before the external reset is released. | 1    |      |      | ms   |

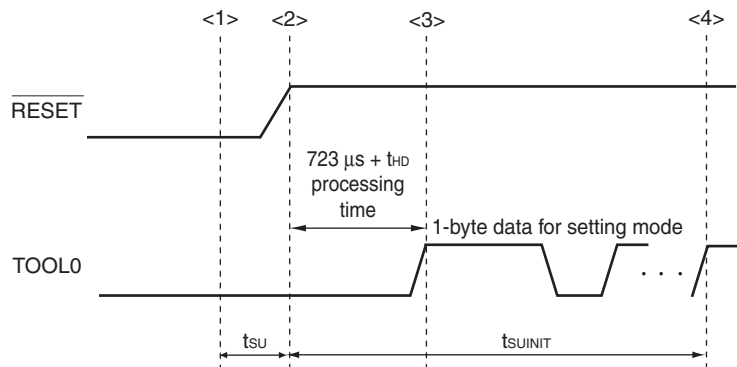

- <1> The low level is input to the TOOL0 pin.
- <2> The external reset is released (POR and LVD reset must be released before the external reset is released.).
- <3> The TOOL0 pin is set to the high level.
- <4> Setting of the flash memory programming mode by UART reception and complete the baud rate setting.

**Remark** t<sub>SUINIT</sub>: Communication for the initial setting must be completed within 100 ms after the external reset is released during this period.

t<sub>SU</sub>: Time to release the external reset after the TOOL0 pin is set to the low level

t<sub>HD</sub>: Time to hold the TOOL0 pin at the low level after the external reset is released (excluding the processing time of the firmware to control the flash memory)

**( $T_A = -40$  to  $+105^\circ\text{C}$ ,  $2.4\text{ V} \leq \text{EV}_{\text{DD0}} = \text{EV}_{\text{DD1}} \leq \text{V}_{\text{DD}} \leq 5.5\text{ V}$ ,  $\text{V}_{\text{SS}} = \text{EV}_{\text{SS0}} = \text{EV}_{\text{SS1}} = 0\text{ V}$ ) (4/5)**

| Items                | Symbol                  | Conditions                                                                                                                                                                     | MIN.                                                                                                              | TYP.                           | MAX. | Unit |
|----------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------|------|------|
| Output voltage, high | $\text{V}_{\text{OH1}}$ | P00 to P07, P10 to P17, P30 to P37, P40 to P47, P50 to P57, P64 to P67, P70 to P77, P80 to P87, P90 to P97, P100 to P106, P110 to P117, P120, P125 to P127, P130, P140 to P147 | $4.0\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OH1}} = -3.0\text{ mA}$        | $\text{EV}_{\text{DD0}} - 0.7$ |      | V    |
|                      |                         |                                                                                                                                                                                | $2.7\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OH1}} = -2.0\text{ mA}$        | $\text{EV}_{\text{DD0}} - 0.6$ |      | V    |
|                      |                         |                                                                                                                                                                                | $2.4\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OH1}} = -1.5\text{ mA}$        | $\text{EV}_{\text{DD0}} - 0.5$ |      | V    |
|                      | $\text{V}_{\text{OH2}}$ | P20 to P27, P150 to P156                                                                                                                                                       | $2.4\text{ V} \leq \text{V}_{\text{DD}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OH2}} = -100\text{ }\mu\text{A}$ | $\text{V}_{\text{DD}} - 0.5$   |      | V    |
| Output voltage, low  | $\text{V}_{\text{OL1}}$ | P00 to P07, P10 to P17, P30 to P37, P40 to P47, P50 to P57, P64 to P67, P70 to P77, P80 to P87, P90 to P97, P100 to P106, P110 to P117, P120, P125 to P127, P130, P140 to P147 | $4.0\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL1}} = 8.5\text{ mA}$         |                                | 0.7  | V    |
|                      |                         |                                                                                                                                                                                | $4.0\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL1}} = 3.0\text{ mA}$         |                                | 0.6  | V    |
|                      |                         |                                                                                                                                                                                | $2.7\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL1}} = 1.5\text{ mA}$         |                                | 0.4  | V    |
|                      |                         |                                                                                                                                                                                | $2.4\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL1}} = 0.6\text{ mA}$         |                                | 0.4  | V    |
|                      | $\text{V}_{\text{OL2}}$ | P20 to P27, P150 to P156                                                                                                                                                       | $2.4\text{ V} \leq \text{V}_{\text{DD}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL2}} = 400\text{ }\mu\text{A}$  |                                | 0.4  | V    |
|                      | $\text{V}_{\text{OL3}}$ | P60 to P63                                                                                                                                                                     | $4.0\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL3}} = 15.0\text{ mA}$        |                                | 2.0  | V    |
|                      |                         |                                                                                                                                                                                | $4.0\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL3}} = 5.0\text{ mA}$         |                                | 0.4  | V    |
|                      |                         |                                                                                                                                                                                | $2.7\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL3}} = 3.0\text{ mA}$         |                                | 0.4  | V    |
|                      |                         |                                                                                                                                                                                | $2.4\text{ V} \leq \text{EV}_{\text{DD0}} \leq 5.5\text{ V}$ ,<br>$\text{I}_{\text{OL3}} = 2.0\text{ mA}$         |                                | 0.4  | V    |

**Caution** P00, P02 to P04, P10 to P15, P17, P43 to P45, P50, P52 to P55, P71, P74, P80 to P82, P96, and P142 to P144 do not output high level in N-ch open-drain mode.

**Remark** Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

**(4) During communication at same potential (simplified I<sup>2</sup>C mode)****( $T_A = -40$  to  $+105^\circ\text{C}$ ,  $2.4\text{ V} \leq \text{EV}_{\text{DD}0} = \text{EV}_{\text{DD}1} \leq \text{V}_{\text{DD}} \leq 5.5\text{ V}$ ,  $\text{V}_{\text{SS}} = \text{EV}_{\text{SS}0} = \text{EV}_{\text{SS}1} = 0\text{ V}$ )**

| Parameter                     | Symbol              | Conditions                                                                                                          | HS (high-speed main) Mode                    |                      | Unit |
|-------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------|------|
|                               |                     |                                                                                                                     | MIN.                                         | MAX.                 |      |
| SCLr clock frequency          | $f_{\text{SCL}}$    | $2.7\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$ |                                              | 400 <sup>Note1</sup> | kHz  |
|                               |                     | $2.4\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 3\text{ k}\Omega$  |                                              | 100 <sup>Note1</sup> |      |
| Hold time when SCLr = "L"     | $t_{\text{LOW}}$    | $2.7\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$ | 1200                                         |                      | ns   |
|                               |                     | $2.4\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 3\text{ k}\Omega$  | 4600                                         |                      | ns   |
| Hold time when SCLr = "H"     | $t_{\text{HIGH}}$   | $2.7\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$ | 1200                                         |                      | ns   |
|                               |                     | $2.4\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 3\text{ k}\Omega$  | 4600                                         |                      | ns   |
| Data setup time (reception)   | $t_{\text{SU:DAT}}$ | $2.7\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$ | $1/f_{\text{MCK}} + 220$<br><sup>Note2</sup> |                      | ns   |
|                               |                     | $2.4\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 3\text{ k}\Omega$  | $1/f_{\text{MCK}} + 580$<br><sup>Note2</sup> |                      | ns   |
| Data hold time (transmission) | $t_{\text{HD:DAT}}$ | $2.7\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$ | 0                                            | 770                  | ns   |
|                               |                     | $2.4\text{ V} \leq \text{EV}_{\text{DD}0} \leq 5.5\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 3\text{ k}\Omega$  | 0                                            | 1420                 | ns   |

**Notes** 1. The value must also be equal to or less than  $f_{\text{MCK}}/4$ .2. Set the  $f_{\text{MCK}}$  value to keep the hold time of SCLr = "L" and SCLr = "H".

**Caution** Select the normal input buffer and the N-ch open drain output ( $\text{V}_{\text{DD}}$  tolerance (for the 20- to 52-pin products)/ $\text{EV}_{\text{DD}}$  tolerance (for the 64- to 100-pin products)) mode for the SDAr pin and the normal output mode for the SCLr pin by using port input mode register g (PIMg) and port output mode register h (POMh).

(Remarks are listed on the next page.)

**(8) Communication at different potential (1.8 V, 2.5 V, 3 V) (simplified I<sup>2</sup>C mode) (1/2)****( $T_A = -40$  to  $+105^\circ\text{C}$ ,  $2.4\text{ V} \leq EV_{DD0} = EV_{DD1} \leq V_{DD} \leq 5.5\text{ V}$ ,  $V_{SS} = EV_{SS0} = EV_{SS1} = 0\text{ V}$ )**

| Parameter                 | Symbol     | Conditions                                                                                                                                            | HS (high-speed main) Mode |                       | Unit |
|---------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------|------|
|                           |            |                                                                                                                                                       | MIN.                      | MAX.                  |      |
| SCLr clock frequency      | $f_{SCL}$  | $4.0\text{ V} \leq EV_{DD0} \leq 5.5\text{ V}$ ,<br>$2.7\text{ V} \leq V_b \leq 4.0\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$  |                           | 400 <sup>Note 1</sup> | kHz  |
|                           |            | $2.7\text{ V} \leq EV_{DD0} < 4.0\text{ V}$ ,<br>$2.3\text{ V} \leq V_b \leq 2.7\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$     |                           | 400 <sup>Note 1</sup> | kHz  |
|                           |            | $4.0\text{ V} \leq EV_{DD0} \leq 5.5\text{ V}$ ,<br>$2.7\text{ V} \leq V_b \leq 4.0\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 2.8\text{ k}\Omega$ |                           | 100 <sup>Note 1</sup> | kHz  |
|                           |            | $2.7\text{ V} \leq EV_{DD0} < 4.0\text{ V}$ ,<br>$2.3\text{ V} \leq V_b \leq 2.7\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$    |                           | 100 <sup>Note 1</sup> | kHz  |
|                           |            | $2.4\text{ V} \leq EV_{DD0} < 3.3\text{ V}$ ,<br>$1.6\text{ V} \leq V_b \leq 2.0\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 5.5\text{ k}\Omega$    |                           | 100 <sup>Note 1</sup> | kHz  |
| Hold time when SCLr = "L" | $t_{LOW}$  | $4.0\text{ V} \leq EV_{DD0} \leq 5.5\text{ V}$ ,<br>$2.7\text{ V} \leq V_b \leq 4.0\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$  | 1200                      |                       | ns   |
|                           |            | $2.7\text{ V} \leq EV_{DD0} < 4.0\text{ V}$ ,<br>$2.3\text{ V} \leq V_b \leq 2.7\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$     | 1200                      |                       | ns   |
|                           |            | $4.0\text{ V} \leq EV_{DD0} \leq 5.5\text{ V}$ ,<br>$2.7\text{ V} \leq V_b \leq 4.0\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 2.8\text{ k}\Omega$ | 4600                      |                       | ns   |
|                           |            | $2.7\text{ V} \leq EV_{DD0} < 4.0\text{ V}$ ,<br>$2.3\text{ V} \leq V_b \leq 2.7\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$    | 4600                      |                       | ns   |
|                           |            | $2.4\text{ V} \leq EV_{DD0} < 3.3\text{ V}$ ,<br>$1.6\text{ V} \leq V_b \leq 2.0\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 5.5\text{ k}\Omega$    | 4650                      |                       | ns   |
| Hold time when SCLr = "H" | $t_{HIGH}$ | $4.0\text{ V} \leq EV_{DD0} \leq 5.5\text{ V}$ ,<br>$2.7\text{ V} \leq V_b \leq 4.0\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$  | 620                       |                       | ns   |
|                           |            | $2.7\text{ V} \leq EV_{DD0} < 4.0\text{ V}$ ,<br>$2.3\text{ V} \leq V_b \leq 2.7\text{ V}$ ,<br>$C_b = 50\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$     | 500                       |                       | ns   |
|                           |            | $4.0\text{ V} \leq EV_{DD0} \leq 5.5\text{ V}$ ,<br>$2.7\text{ V} \leq V_b \leq 4.0\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 2.8\text{ k}\Omega$ | 2700                      |                       | ns   |
|                           |            | $2.7\text{ V} \leq EV_{DD0} < 4.0\text{ V}$ ,<br>$2.3\text{ V} \leq V_b \leq 2.7\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 2.7\text{ k}\Omega$    | 2400                      |                       | ns   |
|                           |            | $2.4\text{ V} \leq EV_{DD0} < 3.3\text{ V}$ ,<br>$1.6\text{ V} \leq V_b \leq 2.0\text{ V}$ ,<br>$C_b = 100\text{ pF}$ , $R_b = 5.5\text{ k}\Omega$    | 1830                      |                       | ns   |

(Notes and Caution are listed on the next page, and Remarks are listed on the page after the next page.)

## 3.6.5 Power supply voltage rising slope characteristics

 $(T_A = -40$  to  $+105^\circ\text{C}$ ,  $V_{SS} = 0$  V)

| Parameter                         | Symbol    | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|-----------|------------|------|------|------|------|
| Power supply voltage rising slope | $S_{VDD}$ |            |      |      | 54   | V/ms |


**Caution** Make sure to keep the internal reset state by the LVD circuit or an external reset until  $V_{DD}$  reaches the operating voltage range shown in 3.4 AC Characteristics.

## 3.7 RAM Data Retention Characteristics

 $(T_A = -40$  to  $+105^\circ\text{C}$ ,  $V_{SS} = 0$  V)

| Parameter                     | Symbol     | Conditions | MIN.                 | TYP. | MAX. | Unit |
|-------------------------------|------------|------------|----------------------|------|------|------|
| Data retention supply voltage | $V_{DDDR}$ |            | 1.44 <sup>Note</sup> |      | 5.5  | V    |

**Note** This depends on the POR detection voltage. For a falling voltage, data in RAM are retained until the voltage reaches the level that triggers a POR reset but not once it reaches the level at which a POR reset is generated.

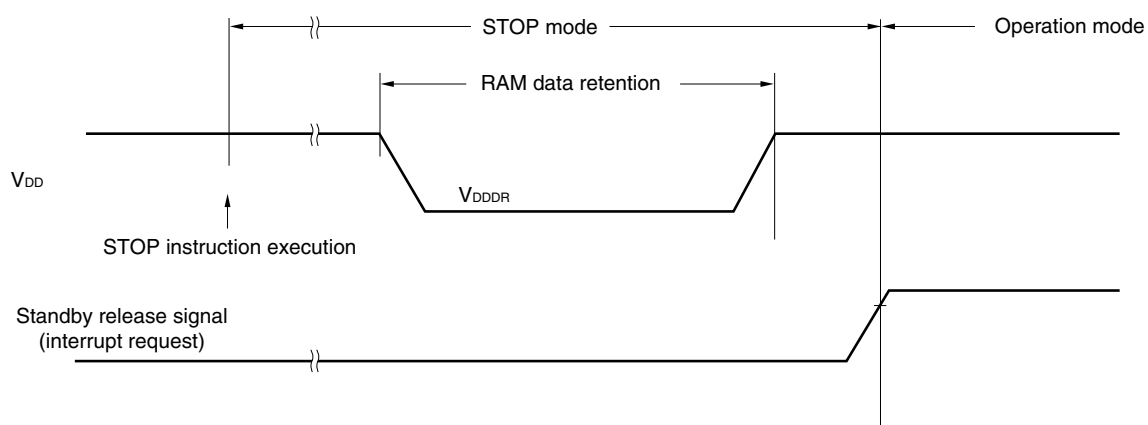


## 4. PACKAGE DRAWINGS

### 4.1 20-pin Products

R5F1006AASP, R5F1006CASP, R5F1006DASP, R5F1006EASP  
 R5F1016AASP, R5F1016CASP, R5F1016DASP, R5F1016EASP  
 R5F1006ADSP, R5F1006CDSP, R5F1006DDSP, R5F1006EDSP  
 R5F1016ADSP, R5F1016CDSP, R5F1016DDSP, R5F1016EDSP  
 R5F1006AGSP, R5F1006CGSP, R5F1006DGSP, R5F1006EGSP

| JEITA Package Code  | RENESAS Code | Previous Code  | MASS (TYP.) [g] |
|---------------------|--------------|----------------|-----------------|
| P-LSSOP20-0300-0.65 | PLSP0020JC-A | S20MC-65-5A4-3 | 0.12            |


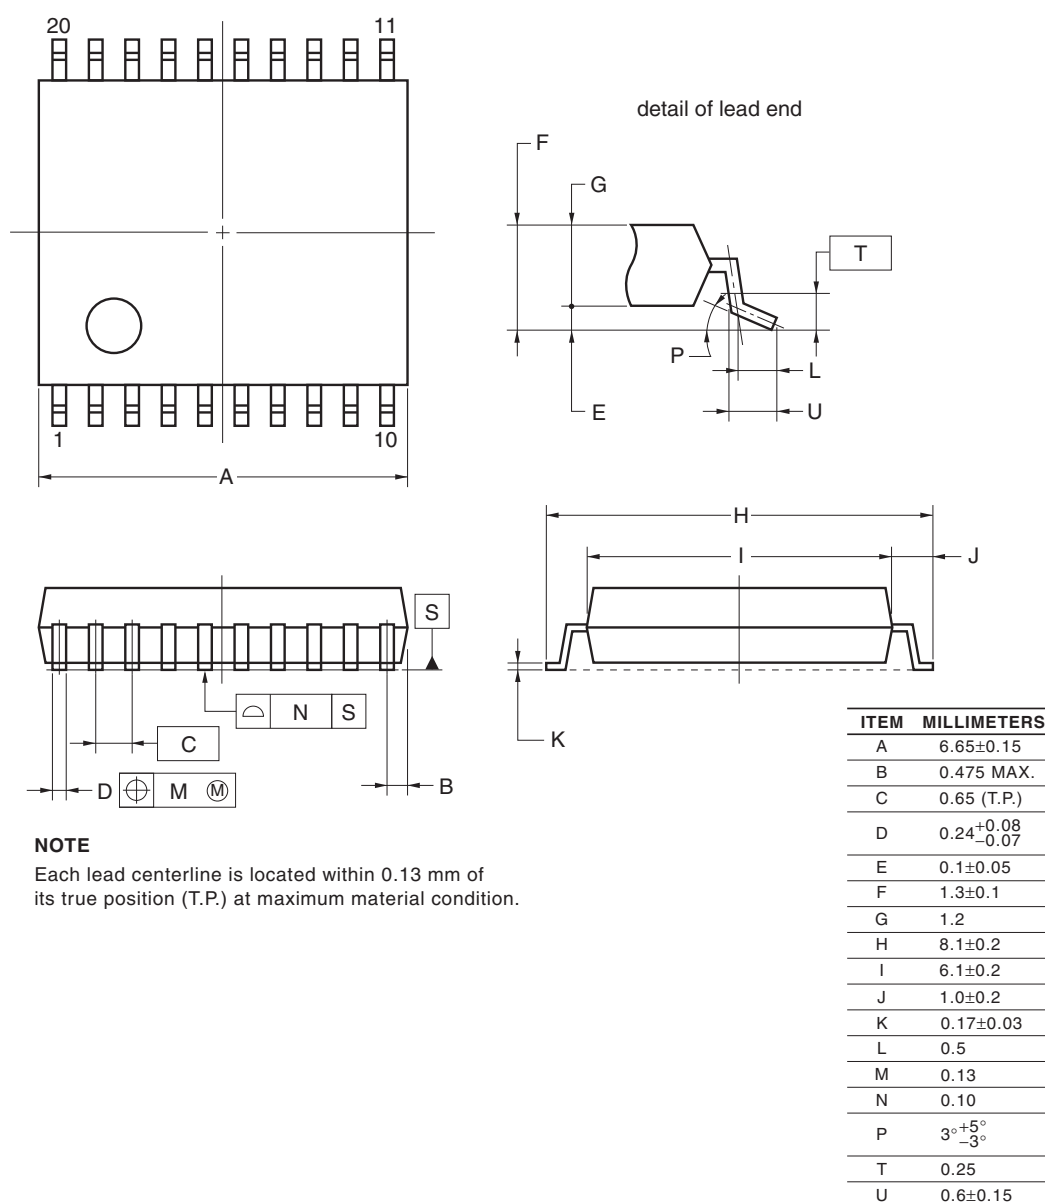


©2012 Renesas Electronics Corporation. All rights reserved.

## 4.6 36-pin Products

R5F100CAALA, R5F100CCALA, R5F100CDALA, R5F100CEALA, R5F100CFALA, R5F100CGALA  
 R5F101CAALA, R5F101CCALA, R5F101CDALA, R5F101CEALA, R5F101CFALA, R5F101CGALA  
 R5F100CAGLA, R5F100CCGLA, R5F100CDGLA, R5F100CEGLA, R5F100CFGLA, R5F100CGGLA

| JEITA Package Code | RENESAS Code | Previous Code  | MASS (TYP.) [g] |
|--------------------|--------------|----------------|-----------------|
| P-WFLGA36-4x4-0.50 | PWLG0036KA-A | P36FC-50-AA4-2 | 0.023           |

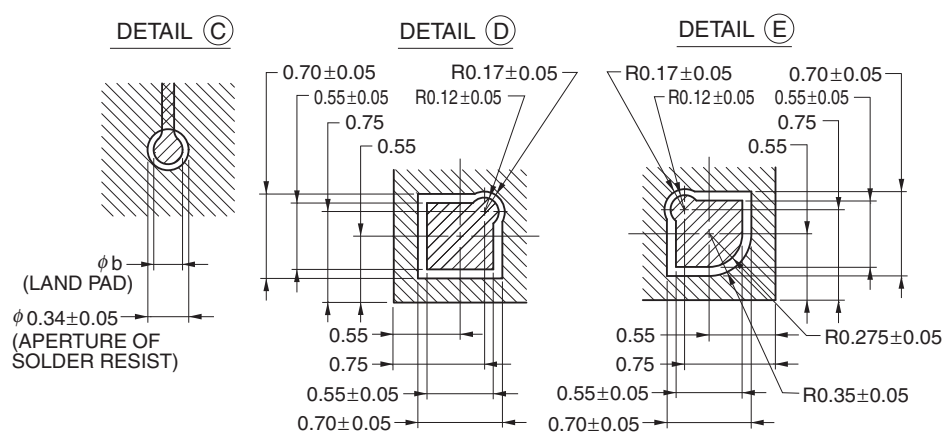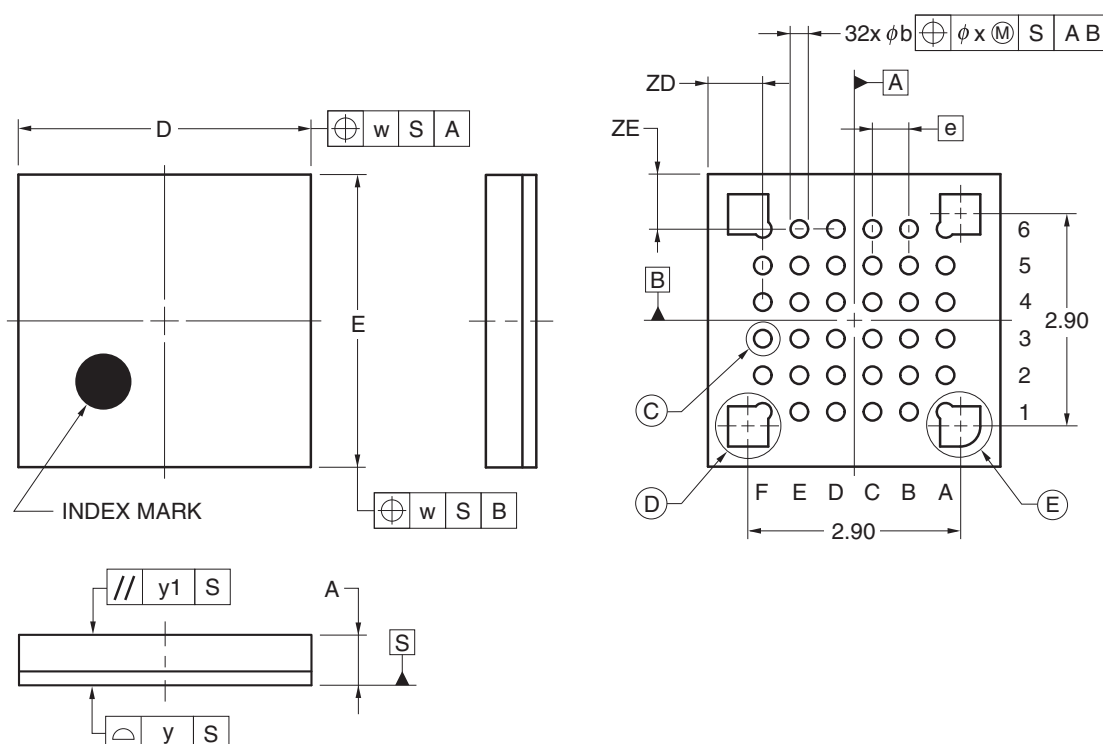

(UNIT:mm)


| ITEM | DIMENSIONS |
|------|------------|
| D    | 4.00±0.10  |
| E    | 4.00±0.10  |
| w    | 0.20       |
| e    | 0.50       |
| A    | 0.69±0.07  |
| b    | 0.24±0.05  |
| x    | 0.05       |
| y    | 0.08       |
| y1   | 0.20       |
| ZD   | 0.75       |
| ZE   | 0.75       |

© 2012 Renesas Electronics Corporation. All rights reserved.

## 4.13 100-pin Products

R5F100PFAFB, R5F100PGAFA, R5F100PHAFA, R5F100PJAFB, R5F100PKAFB, R5F100PLAFB  
 R5F101PFAFB, R5F101PGAFA, R5F101PHAFA, R5F101PJAFB, R5F101PKAFB, R5F101PLAFB  
 R5F100PFDFA, R5F100PGDFA, R5F100PHDFA, R5F100PJDFB, R5F100PKDFA, R5F100PLDFA  
 R5F101PFDFA, R5F101PGDFA, R5F101PHDFA, R5F101PJDFB, R5F101PKDFA, R5F101PLDFA  
 R5F100PFGFB, R5F100PGGFB, R5F100PHGFB, R5F100PJGFB

| JEITA Package Code    | RENESAS Code | Previous Code   | MASS (TYP.) [g] |
|-----------------------|--------------|-----------------|-----------------|
| P-LFQFP100-14x14-0.50 | PLQP0100KE-A | P100GC-50-GBR-1 | 0.69            |

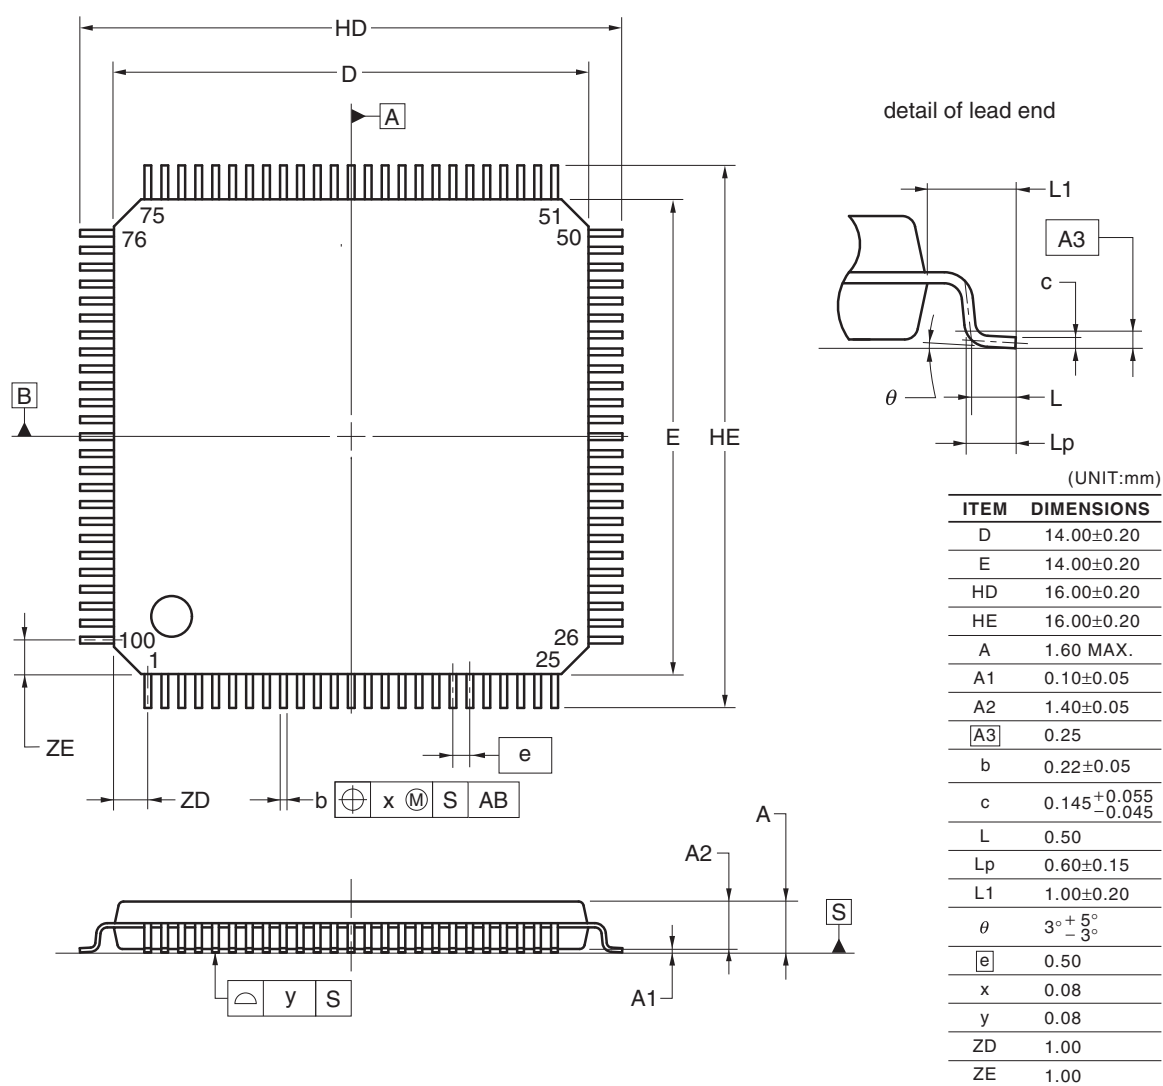


© 2012 Renesas Electronics Corporation. All rights reserved.

## 4.14 128-pin Products

R5F100SHAFB, R5F100SJAFB, R5F100SKAFB, R5F100SLAFB  
 R5F101SHAFB, R5F101SJAFB, R5F101SKAFB, R5F101SLAFB  
 R5F100SHDFB, R5F100SJDFB, R5F100SKDFB, R5F100SLDFB  
 R5F101SHDFB, R5F101SJDFB, R5F101SKDFB, R5F101SLDFB

| JEITA Package Code    | RENESAS Code | Previous Code   | MASS (TYP.) [g] |
|-----------------------|--------------|-----------------|-----------------|
| P-LFQFP128-14x20-0.50 | PLQP0128KD-A | P128GF-50-GBP-1 | 0.92            |

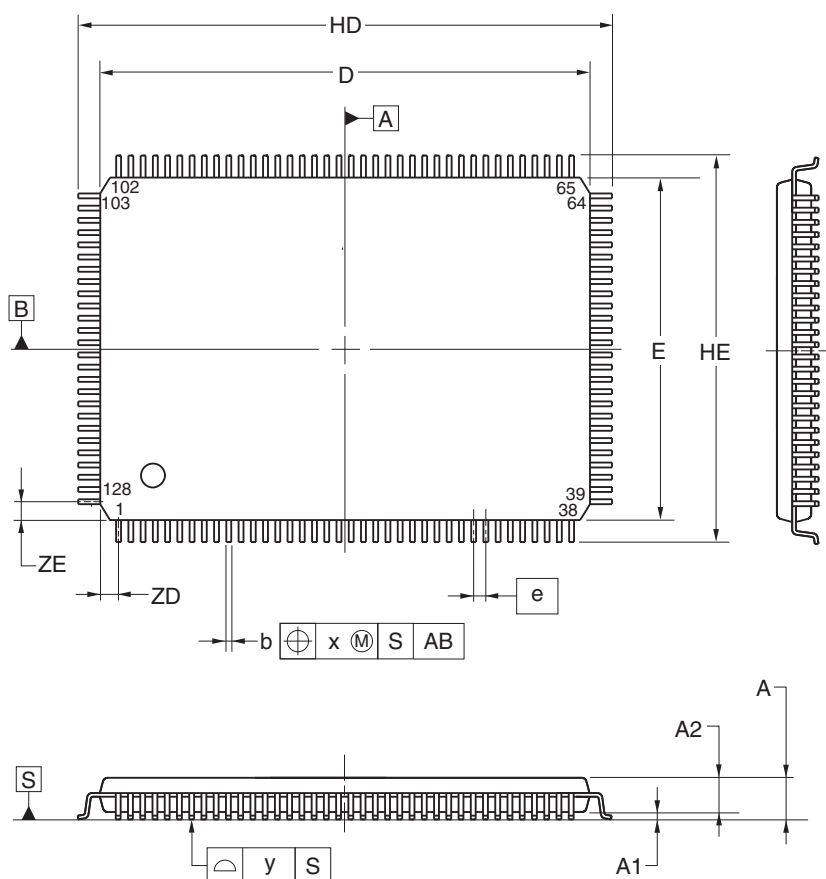

detail of lead end



(UNIT:mm)

| ITEM | DIMENSIONS                                |
|------|-------------------------------------------|
| D    | 20.00±0.20                                |
| E    | 14.00±0.20                                |
| HD   | 22.00±0.20                                |
| HE   | 16.00±0.20                                |
| A    | 1.60 MAX.                                 |
| A1   | 0.10±0.05                                 |
| A2   | 1.40±0.05                                 |
| A3   | 0.25                                      |
| b    | 0.22±0.05                                 |
| c    | 0.145 <sup>+0.055</sup> <sub>-0.045</sub> |
| L    | 0.50                                      |
| Lp   | 0.60±0.15                                 |
| L1   | 1.00±0.20                                 |
| θ    | 3° <sup>+5°</sup> <sub>-3°</sub>          |
| e    | 0.50                                      |
| x    | 0.08                                      |
| y    | 0.08                                      |
| ZD   | 0.75                                      |
| ZE   | 0.75                                      |