



Welcome to [E-XFL.COM](https://www.e-xfl.com)

What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

Applications of "[Embedded - Microcontrollers](#)"

Details

Product Status	Active
Core Processor	ARM® Cortex®-M4F
Core Size	32-Bit Single-Core
Speed	180MHz
Connectivity	CANbus, CSIO, EBI/EMI, Ethernet, I ² C, LINbus, SmartCard, SPI, UART/USART, USB
Peripherals	DMA, I ² S, LVD, POR, PWM, WDT
Number of I/O	121
Program Memory Size	1MB (1M x 8)
Program Memory Type	FLASH
EEPROM Size	-
RAM Size	192K x 8
Voltage - Supply (Vcc/Vdd)	2.7V ~ 5.5V
Data Converters	A/D 24x12b
Oscillator Type	Internal
Operating Temperature	-40°C ~ 125°C (TA)
Mounting Type	Surface Mount
Package / Case	144-LQFP
Supplier Device Package	144-LQFP (20x20)
Purchase URL	https://www.e-xfl.com/product-detail/infineon-technologies/s6e2g28h0agv2000a

2. Product Lineup

Memory Size

Memory Type		Product Name	
		S6E2GM6 S6E2GK6 S6E2GH6 S6E2G36 S6E2G26	S6E2GM8 S6E2GK8 S6E2GH8 S6E2G38 S6E2G28
On-chip flash memory		512 Kbytes	1024 Kbytes
On-chip	SRAM	128 Kbytes	192 Kbytes
	SRAM0	64 Kbytes	128 Kbytes
	SRAM1	32 Kbytes	32 Kbytes
	SRAM2	32 Kbytes	32 Kbytes

Function Availability by Part

Description		Product Name				
		S6E2GM6 S6E2GM8	S6E2GK6 S6E2GK8	S6E2GH6 S6E2GH8	S6E2G36 S6E2G38	S6E2G26 S6E2G28
CPU		Cortex-M4F, MPU, NVIC 128 ch				
		180 MHz				
Power supply voltage range		2.7 V to 5.5 V				
USB2.0 (Device/Host)		2 ch				
Ethernet-MAC		1 ch. (Max) MII: 1 ch / RMII: 1 ch (Max)	N/A			1ch. (Max) MII: 1 ch / RMII: 1 ch (Max)
CAN		1 ch (Max)	N/A	1 ch (Max)	N/A	
SD card interface		1 unit			N/A	
DMAC		8 ch				
DSTC		256 ch				
External bus interface		Addr: 25-bit (Max), Data: 8-/16-bit CS: 9 (Max), SRAM, NOR flash NAND flash SDRAM				
Multi-function serial interface (UART/CSIO(SPI)/LIN/I ² C/I ² S)		10ch (Max) ch 1, ch 4 to ch 7: FIFO, ch 0, ch 2, ch3, ch 8 to ch 15: No FIFO ch 1: I ² S				

■ Resets

- Reset requests from INITX pin
- Power on reset
- Software reset
- Watchdog timer reset
- Low-voltage detector reset
- Clock supervisor reset

Clock Supervisor (CSV)

Clocks generated by internal CR oscillators are used to supervise abnormality of the external clocks.

- External OSC clock failure (clock stop) is detected, reset is asserted.
- External OSC frequency anomaly is detected, interrupt or reset is asserted.

Low-Voltage Detector (LVD)

This Series include two-stage monitoring of voltage on the VCC pins. When the voltage falls below the voltage that has been set, the low-voltage detector function generates an interrupt or reset.

- LVD1: error reporting via interrupt
- LVD2: auto-reset operation

Low-power Consumption Mode

Six low power consumption modes are supported.

- Sleep
- Timer
- RTC
- Stop
- Deep standby RTC (selectable from with/without RAM retention)
- Deep standby stop (selectable from with/without RAM retention)

Peripheral Clock Gating

The system can reduce the current consumption of the total system with gating the operation clocks of peripheral functions not used.

Crypto Assist Function

These features are enabled for the crypto assist function.

The dedicated middleware is necessary for this calculator operation.

■ PKA (Public Key Accelerator)

- PKA (Public Key Accelerator) is modular exponentiation calculation accelerator used of RSA Public Key crypto and so on.
- Available bit length: Up to 2048-bit

■ AES calculator

- AES (Advanced Encryption Standard) calculator is a AES common key crypto accelerator which is compliant with FIPS (Federal Information Processing Standard Publication)197.
- Available key length: 128/192/256-bit
- CBC mode and ECB mode support

■ External Bus Data Scramble

- It enables to scramble input/output data of External Bus Interface.

Debug

- Serial wire JTAG debug port (SWJ-DP)
- Embedded trace macrocells (ETM) provide comprehensive debug and trace facilities.
- AHB trace macrocells (HTM)

Unique ID

Unique value of the device (41-bit) is set.

Power Supply

■ Four power supplies

- Wide range voltage: VCC = 2.7 V to 5.5 V
- Power supply for USB ch 0 I/O: USBVCC0 = 3.0 V to 3.6 V (when USB is used) = 2.7 V to 5.5 V (when GPIO is used)
- Power supply for USB ch 1 I/O: USBVCC1 = 3.0 V to 3.6 V (when USB is used) = 2.7 V to 5.5 V (when GPIO is used)
- Power supply for Ethernet-MAC I/O: ETHVCC = 3.0 V to 5.5 V (when Ethernet is used.)

Pin Number		Pin Name	I/O Circuit Type	Pin State Type
LQFP-176	LQFP-144			
8	8	PA6	E	K
		DTTIOX_1		
		INT00_2		
		MADATA06_0		
9	9	PA7	E	K
		IC00_1		
		INT02_2		
		MADATA07_0		
		RTCCO_1		
		SUBOUT_1		
10	-	P50	E	I
		SCS72_0		
		IC01_1		
		TIOA8_2		
11	-	P51	E	I
		SCS73_0		
		IC02_1		
		TIOB8_2		
12	-	P52	E	I
		IC03_1		
		TIOA9_2		
13	10	PA8	I	Q
		SIN7_0		
		FRCK0_1		
		INT02_0		
		WKUP1		
		MADATA08_0		
14	11	PA9	N	I
		SOT7_0 (SDA7_0)		
		AIN1_1		
		MADATA09_0		
15	12	PAA	N	I
		SCK7_0 (SCL7_0)		
		BIN1_1		
		MADATA10_0		
16	13	PAB	E	K
		SCS70_0		
		ZIN1_1		
		INT03_0		
		MADATA11_0		
17	14	PAC	E	I
		SCS71_0		
		TIOB8_0		
		MADATA12_0		

Pin Number		Pin Name	I/O Circuit Type	Pin State Type
LQFP-176	LQFP-144			
141	-	P92	E	K
		SOT5_1 (SDA5_1)		
		RTO12_1 (PPG12_1)		
		TIOB2_1		
		INT14_1		
		IC0_VPEN_1		
142	-	P93	E	K
		SCK5_1 (SCL5_1)		
		RTO13_1 (PPG13_1)		
		TIOB3_1		
		INT15_1		
		IC0_RST_1		
143	-	P94	E	I
		CTS5_1		
		RTO14_1 (PPG14_1)		
		TIOB4_1		
		IC0_DATA_1		
144	-	P95	E	I
		RTS5_1		
		RTO15_1 (PPG15_1)		
		TIOB5_1		
		IC0_CIN_1		
145	115	PC0	K	V
		E_RXER		
146	116	PC1	K	V
		TIOB6_0		
		E_RX03		
147	117	PC2	K	V
		TIOA6_0		
		E_RX02		
148	118	PC3	K	V
		TIOB7_0		
		E_RX01		
149	119	PC4	K	V
		TIOA7_0		
		E_RX00		
150	120	PC5	K	V
		TIOB14_0		
		E_RXDV		

Module	Pin Name	Function	Pin Number	
			LQFP 176	LQFP 144
GPIO	P30	General-purpose I/O port 3	24	-
	P31		25	-
	P32		26	21
	P33		27	22
	P34		28	23
	P35		31	26
	P36		32	27
	P37		33	28
	P38		34	29
	P39		35	30
	P3A		36	31
	P3B		37	32
	P3C		38	33
	P3D		39	34
	P3E		40	35
	P40	General-purpose I/O port 4	46	38
	P41		47	39
	P42		48	40
	P43		49	41
	P44		50	42
	P45		51	43
	P46		55	47
	P47		56	48
	P48		60	50
	P49		61	51
	P4A		62	52
	P4B		63	53
	P4C		64	54
	P4D		65	55
	P4E		66	56
	P50	General-purpose I/O port 5	10	-
	P51		11	-
	P52		12	-
	P5D		41	-
	P5E		42	-
	P5F		43	-
	P60	General-purpose I/O port 6	172	140
	P61		171	139
	P62		170	138
	P63		169	137
	P64		168	-
	P65		167	-
	P6E		166	136


Module	Pin Name	Function	Pin Number	
			LQFP 176	LQFP 144
Multi-Function Timer 1	DTT1X_0	Input signal controlling waveform generator outputs RTO10 to RTO15 of Multi-Function Timer 1.	60	50
	DTT1X_1		78	-
	FRCK1_0	16-bit free-run timer ch 1 external clock input pin	65	55
	FRCK1_1		79	-
	IC10_0	16-bit input capture input pin of Multi-Function Timer 1. ICxx describes channel number.	61	51
	IC10_1		80	-
	IC11_0		62	52
	IC11_1		81	-
	IC12_0		63	53
	IC12_1		82	-
	IC13_0		64	54
	IC13_1		83	-
	RTO10_0 (PPG10_0)	Waveform generator output pin of Multi-Function Timer 1.	46	38
	RTO10_1 (PPG10_1)	This pin operates as PPG10 when it is used in PPG1 output modes.	139	-
	RTO11_0 (PPG10_0)	Waveform generator output pin of Multi-Function Timer 1.	47	39
	RTO11_1 (PPG10_1)	This pin operates as PPG10 when it is used in PPG1 output modes.	140	-
	RTO12_0 (PPG12_0)	Waveform generator output pin of Multi-Function Timer 1.	48	40
	RTO12_1 (PPG12_1)	This pin operates as PPG12 when it is used in PPG1 output modes.	141	-
	RTO13_0 (PPG12_0)	Waveform generator output pin of Multi-Function Timer 1.	49	41
	RTO13_1 (PPG12_1)	This pin operates as PPG12 when it is used in PPG1 output modes.	142	-
	RTO14_0 (PPG14_0)	Waveform generator output pin of Multi-Function Timer 1.	50	42
	RTO14_1 (PPG14_1)	This pin operates as PPG14 when it is used in PPG1 output modes.	143	-
	RTO15_0 (PPG14_0)	Waveform generator output pin of Multi-Function Timer 1.	51	43
	RTO15_1 (PPG14_1)	This pin operates as PPG14 when it is used in PPG1 output modes.	144	-

Module	Pin Name	Function	Pin Number	
			LQFP 176	LQFP 144
Smartcard0	IC0_VCC_0	Smartcard ch 0 power enable output pin	6	6
	IC0_VCC_1		140	-
	IC0_VPEN_0	Smartcard ch 0 programming output pin	5	5
	IC0_VPEN_1		141	-
	IC0_RST_0	Smartcard ch 0 reset output pin	4	4
	IC0_RST_1		142	-
	IC0_CIN_0	Smartcard ch 0 insert detection input pin	2	2
	IC0_CIN_1		144	-
	IC0_CLK_0	Smartcard ch 0 serial interface clock output pin	7	7
	IC0_CLK_1		139	-
	IC0_DATA_0	Smartcard ch 0 serial interface data I/O pin	3	3
	IC0_DATA_1		143	-
Smartcard1	IC1_VCC_0	Smartcard ch 1 power enable output pin	95	79
	IC1_VCC_1		79	-
	IC1_VPEN_0	Smartcard ch 1 programming output pin	96	80
	IC1_VPEN_1		80	-
	IC1_RST_0	Smartcard ch 1 reset output pin	97	81
	IC1_RST_1		81	-
	IC1_CIN_0	Smartcard ch 1 insert detection input pin	99	83
	IC1_CIN_1		83	-
	IC1_CLK_0	Smartcard ch 1 serial interface clock output pin	94	78
	IC1_CLK_1		78	-
	IC1_DATA_0	Smartcard ch 1 serial interface data I/O pin	98	82
	IC1_DATA_1		82	-

Module	Pin Name	Function	Pin Number	
			LQFP 176	LQFP 144
Reset	INITX	External reset Input pin A reset is valid when INITX = L.	57	49
Mode	MD1	Mode 1 pin During serial programming to flash memory, MD1 = L must be input.	84	68
	MD0	Mode 0 pin During normal operation, MD0 = L must be input. During serial programming to flash memory, MD0 = H must be input.	85	69
Power	VCC	Power supply pin	1	1
			29	24
			45	37
			54	46
			89	73
			133	109
	USBVCC0	3.3V power supply port for USB I/O	173	141
	USBVCC1		129	105
	ETHVCC	Power supply pin for Ethernet I/O	156	126
GND	VSS	GND pin	30	25
			44	36
			53	45
			88	72
			132	108
			157	127
			176	144
Clock	X0	Main clock (oscillation) input pin	86	70
	X1	Main clock (oscillation) I/O pin	87	71
	X0A	Sub clock (oscillation) input pin	55	47
	X1A	Sub clock (oscillation) I/O pin	56	48
	CROUT_0	Built-in high-speed CR-oscillation clock output port	127	103
	CROUT_1		152	122
Analog power	AVCC	A/D converter and D/A converter analog power-supply pin	90	74
	AVRL	A/D converter analog reference voltage input pin	92	76
	AVRH	A/D converter analog reference voltage input pin	93	77
Analog GND	AVSS	A/D converter and D/A converter GND pin	91	75
C pin	C	Power supply stabilization capacity pin	52	44

Note:

- While this device contains a Test Access Port (TAP) based on the IEEE 1149.1-2001 JTAG standard, it is not fully compliant to all requirements of that standard. This device may contain a 32-bit device ID that is the same as the 32-bit device ID in other devices with different functionality. The TAP pins may also be configurable for purposes other than access to the TAP controller.

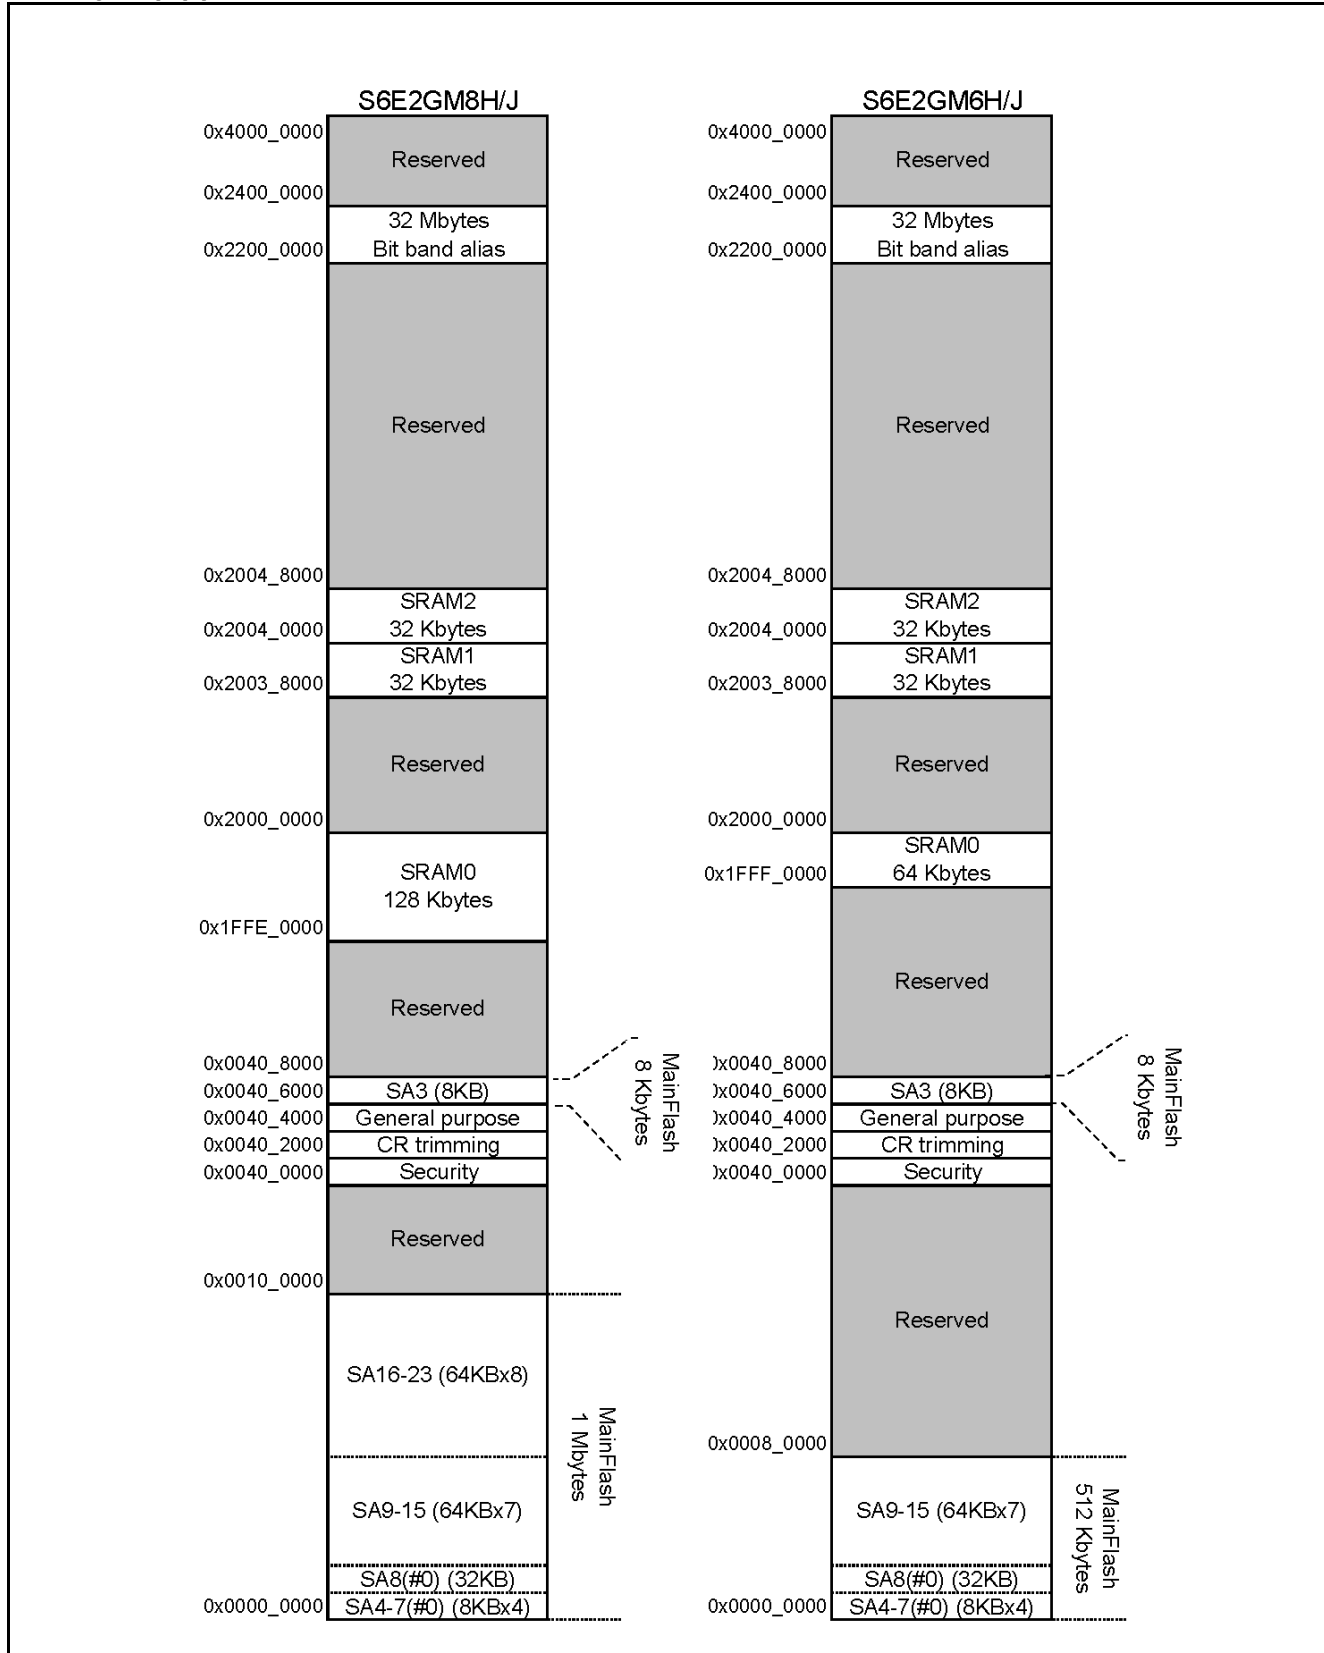Memory Map (2)


*: See S6E2GM/GK/GH/G3/G2 Series Flash Programming Manual to confirm the detail of flash Memory.

Pin Status Type	Function Group	Power-On Reset or Low-Voltage Detection State	INITX Input State	Device Internal Reset State	Run mode or Sleep mode State	Timer mode, RTC mode, or Stop mode State		Deep Standby RTC mode or Deep Standby Stop mode State		Return from Deep Standby mode State
		Power Supply Unstable	Power Supply Stable		Power Supply Stable	Power Supply Stable		Power Supply Stable		Power Supply Stable
		-	INITX=0	INITX=1	INITX=1	INITX=1		INITX=1		INITX=1
		-	-	-	-	SPL=0	SPL=1	SPL=0	SPL=1	-
O	Analog input selected	Hi-Z	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled
	Trace selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Trace output	GPIO selected, internal input fixed at 0	Hi-Z/internal input fixed at 0	GPIO selected
	External interrupt enable selected						Maintain previous state			
	Resource other than above selected						Hi-Z/internal input fixed at 0			
	GPIO selected									
P	Analog input selected	Hi-Z	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled	Hi-Z/ internal input fixed at 0/ analog input enabled
	WKUP enabled	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Maintain previous state	WKUP input enabled	Hi-Z/ WKUP input enabled	GPIO selected
	Resource other than above selected						Hi-Z/internal input fixed at 0	GPIO selected, internal input fixed at 0	Hi-Z/internal input fixed at 0	
	GPIO selected									

Pin Status Type	Function Group	Power-On Reset or Low-Voltage Detection State	INITX Input State	Device Internal Reset State	Run mode or Sleep mode State	Timer mode, RTC mode, or Stop mode State		Deep Standby RTC mode or Deep Standby Stop mode State		Return from Deep Standby mode State
		Power Supply Unstable	Power Supply Stable		Power Supply Stable	Power Supply Stable		Power Supply Stable		Power Supply Stable
		-	INITX=0	INITX=1	INITX=1	INITX=1		INITX=1		INITX=1
		-	-	-	-	SPL=0	SPL=1	SPL=0	SPL=1	-
W	Ethernet input/output selected ^{*4}	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Maintain previous state	GPIO selected, internal input fixed at 0	Hi-Z/internal input fixed at 0	GPIO selected
	External interrupt enable selected									
	Resource other than above selected	Hi-Z	Hi-Z/ input enabled	Hi-Z/ input enabled						
	GPIO selected									
S	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z/internal input fixed at 0	GPIO selected, internal input fixed at 0	Hi-Z/internal input fixed at 0	GPIO selected
	Sub crystal oscillator input pin/ external main clock input selected	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input enabled	Input Enabled
T	GPIO selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z/internal input fixed at 0	GPIO selected, internal input fixed at 0	Hi-Z/internal input fixed at 0	GPIO selected
	External main clock input selected	Setting disabled	Setting disabled	Setting disabled	Maintain previous state	Maintain previous state	Hi-Z/internal input fixed at 0	Maintain previous state	Hi-Z/internal input fixed at 0	Maintain previous State
	Sub crystal oscillator output pin	Hi-Z/ internal input fixed at 0/ or input enabled	Hi-Z/ internal input fixed at 0	Hi-Z/ internal input fixed at 0	Maintain previous state while oscillator active/ When oscillation stops ^{*5} , it will be Hi-Z/ Internal input fixed at 0					

Table 12-2 Typical and Maximum Current Consumption in Normal Operation (PLL), Code with Data Accessing Running from Flash Memory (Flash Accelerator Mode and Trace Buffer Function Disabled)

Parameter	Symbol	Pin Name	Conditions		Frequency* ⁴	Value		Unit	Remarks
						Typ* ¹	Max* ²		
Power supply current	I _{CC}	VCC	Normal operation * ⁷ ,* ⁸ (PLL)	* ⁵	180 MHz	82	140	mA	* ³ When all peripheral clocks are on
				* ⁶	160 MHz	74	132	mA	
					144 MHz	68	126	mA	
					120 MHz	58	116	mA	
					100 MHz	49	107	mA	
					80 MHz	40	98	mA	
					60 MHz	31	89	mA	
					40 MHz	22	80	mA	
					20 MHz	13	71	mA	
					8 MHz	7.5	65	mA	
					4 MHz	5.6	63	mA	
				* ⁵	180 MHz	48	106	mA	* ³ When all peripheral clocks are off
				* ⁶	160 MHz	44	102	mA	
					144 MHz	41	99	mA	
					120 MHz	35	93	mA	
					100 MHz	30	88	mA	
					80 MHz	25	83	mA	
					60 MHz	20	78	mA	
					40 MHz	14	72	mA	
					20 MHz	8.7	66	mA	
					8 MHz	5.6	63	mA	
					4 MHz	4.5	62	mA	

1: T_A = +25 °C, V_{CC} = 3.3 V

2: T_J = +125 °C, V_{CC} = 5.5 V

3: When all ports are input and are fixed at 0

4: Frequency is a value of HCLK when PCLK0 = PCLK1 = PCLK2 = HCLK

5: When stopping flash accelerator mode and trace buffer function (FRWTR.RWT = 11, FBFCR.BE = 0)

6: When stopping flash accelerator mode and trace buffer function (FRWTR.RWT = 10, FBFCR.BE = 0)

7: With data access to a MainFlash memory.

8: When using the crystal oscillator of 4 MHz (including the current consumption of the oscillation circuit)

12.4 AC Characteristics


12.4.1 Main Clock Input Characteristics


($V_{CC} = AV_{CC} = 2.7V$ to $5.5V$, $V_{SS} = AV_{SS} = 0V$, $T_A = -40^{\circ}C$ to $+105^{\circ}C$)

Parameter	Symbol	Pin Name	Conditions	Value		Unit	Remarks
				Min	Max		
Input frequency	f _{CH}	X0, X1	V _{CC} ≥ 4.5 V	4	48	MHz	When crystal oscillator is connected
			V _{CC} < 4.5 V	4	20		
			V _{CC} ≥ 4.5 V	4	48	MHz	When using external clock
			V _{CC} < 4.5 V	4	20		
Input clock cycle	t _{CYLH}		V _{CC} ≥ 4.5 V	20.83	250	ns	When using external clock
			V _{CC} < 4.5 V	50	250		
Input clock pulse width	-		P _{WH} /t _{CYLH} , P _{WL} /t _{CYLH}	45	55	%	When using external clock
Input clock rise time and fall time	t _{CF} , t _{CR}		-	-	5	ns	When using external clock
Internal operating clock * ¹ frequency	f _{CC}	-	-	-	180	MHz	Base clock (HCLK/FCLK)
	f _{CP0}	-	-	-	90	MHz	APB0bus clock * ²
	f _{CP1}	-	-	-	180	MHz	APB1bus clock * ²
	f _{CP2}	-	-	-	90	MHz	APB2bus clock * ²
Internal operating clock * ¹ cycle time	t _{CYCC}	-	-	5.56	-	ns	Base clock (HCLK/FCLK)
	t _{CYCP0}	-	-	11.1	-	ns	APB0bus clock * ²
	t _{CYCP1}	-	-	5.56	-	ns	APB1bus clock * ²
	t _{CYCP2}	-	-	11.1	-	ns	APB2bus clock * ²

1: For more information about each internal operating clock, see Chapter 2-1: Clock in FM4 Family Peripheral Manual Main Part (002-04856).

2: For more about each APB bus to which each peripheral is connected, see 1. S6E2G Series Block Diagram in this data sheet.

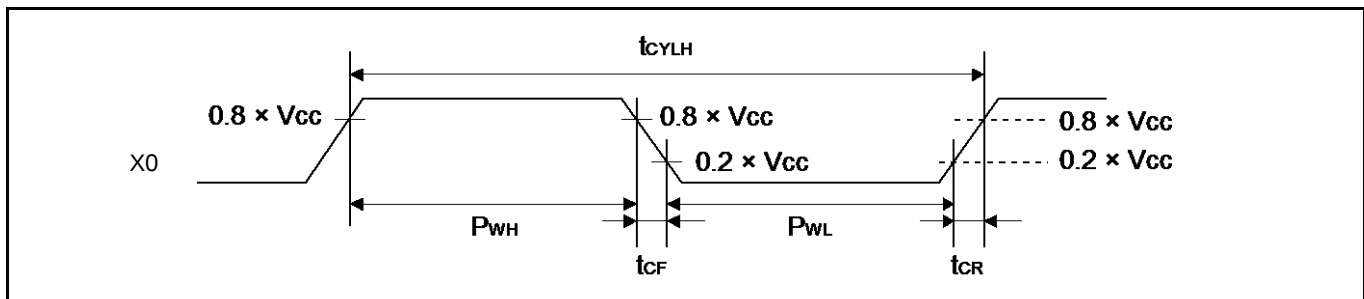

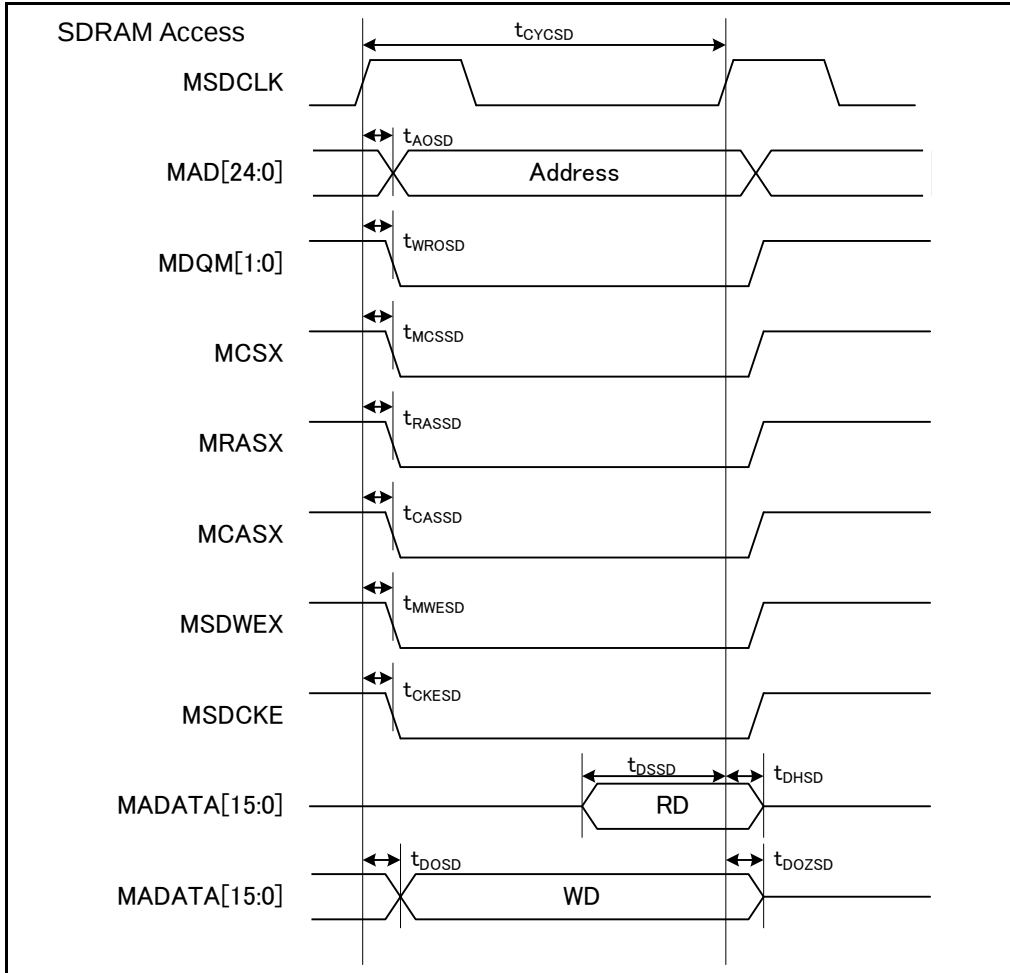


12.4.11 Base Timer Input Timing

Timer Input Timing

($V_{CC} = 2.7V$ to $5.5V$, $V_{SS} = 0V$)


Parameter	Symbol	Pin Name	Condi tions	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TIWH} , t_{TIWL}	TIOAn/TIOBn (when using as ECK, TIN)	-	$2t_{CYCP}$	-	ns	

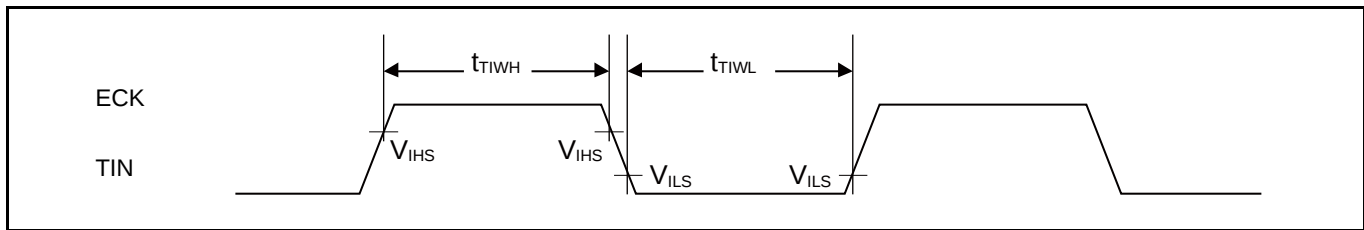

Trigger Input Timing



($V_{CC} = 2.7V$ to $5.5V$, $V_{SS} = 0V$)

Parameter	Symbol	Pin Name	Condi tions	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TRGH} , t_{TRGL}	TIOAn/TIOBn (when using as TGIN)	-	$2t_{CYCP}$	-	ns	

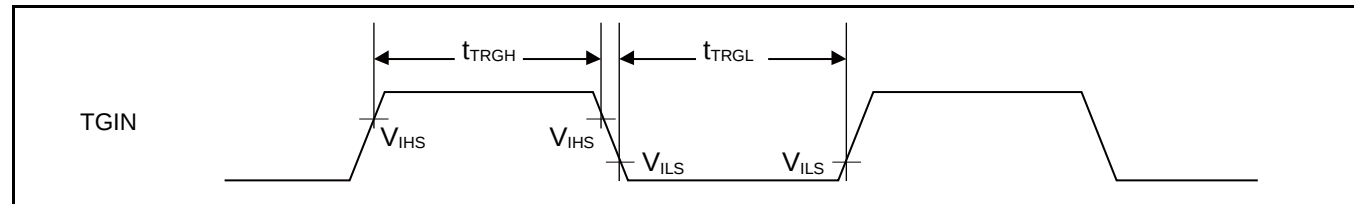

Note:

- t_{CYCP} indicates the APB bus clock cycle time. For more information about the APB bus number to which the base timer is connected, see 1. S6E2G Series Block Diagram in this data sheet.

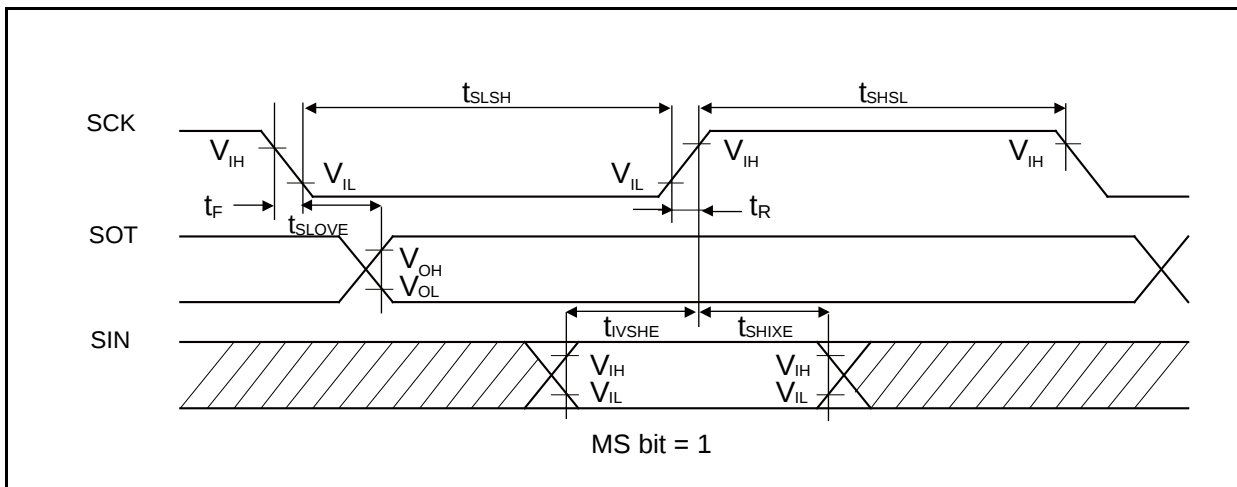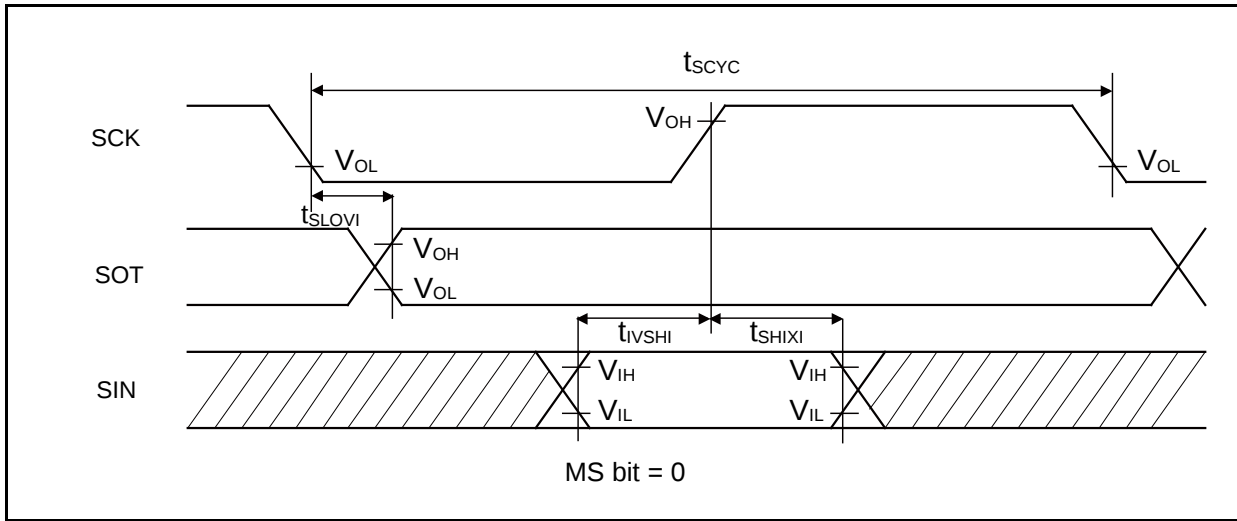



High-Speed Synchronous Serial (SPI = 1, SCINV = 0)

 (V_{CC} = 2.7V to 5.5V, V_{SS} = 0V)

Parameter	Symbol	Pin Name	Conditions	V _{CC} < 4.5 V		V _{CC} ≥ 4.5 V		Unit
				Min	Max	Min	Max	
Serial clock cycle time	t _{SCYC}	SCKx	Internal shift clock operation	4t _{CYCP}	-	4t _{CYCP}	-	ns
SCK↑→SOT delay time	t _{SHOVI}	SCKx, SOTx		- 10	+ 10	- 10	+ 10	ns
SIN→SCK↓ setup time	t _{IVSLI}	SCKx, SINx		14	-	12.5	-	ns
				12.5*				
SCK↓→SIN hold time	t _{SLIXI}	SCKx, SINx		5	-	5	-	ns
SOT→SCK↓ delay time	t _{SOVLI}	SCKx, SOTx		2t _{CYCP} - 10	-	2t _{CYCP} - 10	-	ns
Serial clock L pulse width	t _{LSH}	SCKx	External shift clock operation	2t _{CYCP} - 5	-	2t _{CYCP} - 5	-	ns
Serial clock H pulse width	t _{HSL}	SCKx		t _{CYCP} + 10	-	t _{CYCP} + 10	-	ns
SCK↑→SOT delay time	t _{SHOVE}	SCKx, SOTx		-	15	-	15	ns
SIN→SCK↓ setup time	t _{IVSLE}	SCKx, SINx		5	-	5	-	ns
SCK↓→SIN hold time	t _{SLIXE}	SCKx, SINx		5	-	5	-	ns
SCK fall time	t _F	SCKx		-	5	-	5	ns
SCK rise time	t _R	SCKx		-	5	-	5	ns

Notes:

- The above characteristics apply to CLK synchronous mode.
- t_{CYCP} indicates the APB bus clock cycle time. For more information about the APB bus number to which the multi-function serial is connected, see 1. S6E2G Series Block Diagram in this data sheet.
- These characteristics only guarantee the following pins:
 No chip select: SIN4_0, SOT4_0, SCK4_0
 Chip select: SIN6_0, SOT6_0, SCK6_0, SCS60_0, SCS61_0, SCS62_0, SCS63_0
- When the external load capacitance C_L = 30 pF. (for *, when C_L = 10 pF)

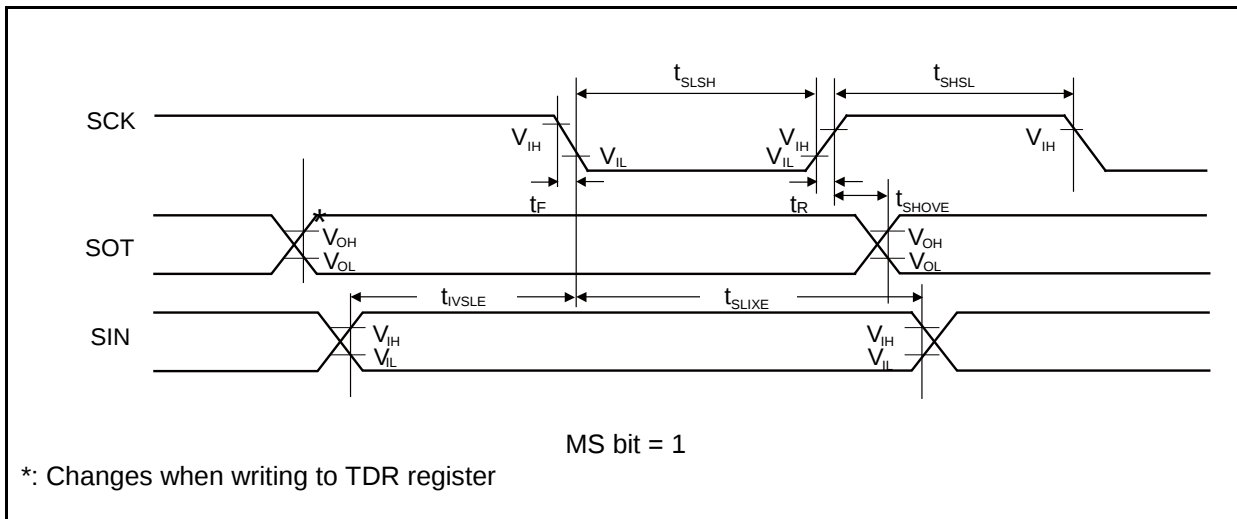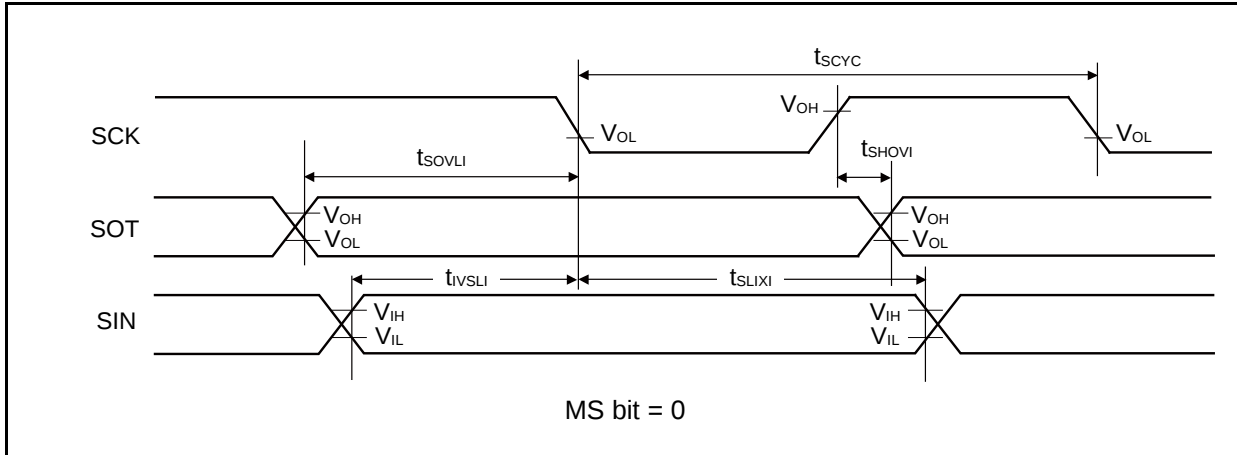

When Using High-Speed Synchronous Serial Chip Select (SCINV = 1, CSLVL = 1)

 (V_{CC} = 2.7V to 5.5V, V_{SS} = 0V)

Parameter	Symbol	Conditions	V _{CC} < 4.5 V		V _{CC} ≥ 4.5 V		Unit
			Min	Min	Min	Max	
SCS↓→SCK↓ setup time	t _{CSSI}	Internal shift clock operation	(*1)-20	(*1)+0	(*1)-20	(*1)+0	ns
SCK↑→SCS↑ hold time	t _{CSHI}		(*2)+0	(*2)+20	(*2)+0	(*2)+20	ns
SCS deselect time	t _{CSDI}		(*3)-20 +5t _{CYCP}	(*3)+20 +5t _{CYCP}	(*3)-20 +5t _{CYCP}	(*3)+20 +5t _{CYCP}	ns
SCS↓→SCK↑ setup time	t _{CSSE}	External shift clock operation	3t _{CYCP} +15	-	3t _{CYCP} +15	-	ns
SCK↑→SCS↑ hold time	t _{CSHE}		0	-	0	-	ns
SCS deselect time	t _{CSDE}		3t _{CYCP} +15	-	3t _{CYCP} +15	-	ns
SCS↓→SOT delay time	t _{DSE}		-	25	-	25	ns
SCS↑→SOT delay time	t _{DSE}		0	-	0	-	ns

(*1): CSSU bit value×serial chip select timing operating clock cycle [ns]

(*2): CSHD bit value×serial chip select timing operating clock cycle [ns]

(*3): CSDS bit value×serial chip select timing operating clock cycle [ns]

Notes:

- t_{CYCP} indicates the APB bus clock cycle time. For more information about the APB bus number to which the multi-function serial is connected, see 1. S6E2G Series Block Diagram in this data sheet.
- For more information about CSSU, CSHD, CSDS, and the serial chip select timing operating clock, see FM4 Family Peripheral Manual Main Part (002-04856).
- When the external load capacitance C_L = 30 pF.

