



Welcome to [E-XFL.COM](https://www.e-xfl.com)

## Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

## Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

### Details

|                                |                                                                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                                                            |
| Number of LABs/CLBs            | -                                                                                                                                                                   |
| Number of Logic Elements/Cells | 20000                                                                                                                                                               |
| Total RAM Bits                 | 405504                                                                                                                                                              |
| Number of I/O                  | 188                                                                                                                                                                 |
| Number of Gates                | -                                                                                                                                                                   |
| Voltage - Supply               | 1.71V ~ 3.465V                                                                                                                                                      |
| Mounting Type                  | Surface Mount                                                                                                                                                       |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                                                     |
| Package / Case                 | 256-BGA                                                                                                                                                             |
| Supplier Device Package        | 256-FPBGA (17x17)                                                                                                                                                   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/lfxp20c-3fn256c">https://www.e-xfl.com/product-detail/lattice-semiconductor/lfxp20c-3fn256c</a> |

## Architecture Overview

The LatticeXP architecture contains an array of logic blocks surrounded by Programmable I/O Cells (PIC). Interspersed between the rows of logic blocks are rows of sysMEM Embedded Block RAM (EBR) as shown in Figure 2-1.

On the left and right sides of the PFU array, there are Non-volatile Memory Blocks. In configuration mode this non-volatile memory is programmed via the IEEE 1149.1 TAP port or the sysCONFIG™ peripheral port. On power up, the configuration data is transferred from the Non-volatile Memory Blocks to the configuration SRAM. With this technology, expensive external configuration memories are not required and designs are secured from unauthorized read-back. This transfer of data from non-volatile memory to configuration SRAM via wide busses happens in microseconds, providing an “instant-on” capability that allows easy interfacing in many applications.

There are two kinds of logic blocks, the Programmable Functional Unit (PFU) and Programmable Functional unit without RAM/ROM (PFF). The PFU contains the building blocks for logic, arithmetic, RAM, ROM and register functions. The PFF block contains building blocks for logic, arithmetic and ROM functions. Both PFU and PFF blocks are optimized for flexibility, allowing complex designs to be implemented quickly and efficiently. Logic Blocks are arranged in a two-dimensional array. Only one type of block is used per row. The PFU blocks are used on the outside rows. The rest of the core consists of rows of PFF blocks interspersed with rows of PFU blocks. For every three rows of PFF blocks there is a row of PFU blocks.

Each PIC block encompasses two PIOs (PIO pairs) with their respective sysIO interfaces. PIO pairs on the left and right edges of the device can be configured as LVDS transmit/receive pairs. sysMEM EBRs are large dedicated fast memory blocks. They can be configured as RAM or ROM.

The PFU, PFF, PIC and EBR Blocks are arranged in a two-dimensional grid with rows and columns as shown in Figure 2-1. The blocks are connected with many vertical and horizontal routing channel resources. The place and route software tool automatically allocates these routing resources.

At the end of the rows containing the sysMEM Blocks are the sysCLOCK Phase Locked Loop (PLL) Blocks. These PLLs have multiply, divide and phase shifting capability; they are used to manage the phase relationship of the clocks. The LatticeXP architecture provides up to four PLLs per device.

Every device in the family has a JTAG Port with internal Logic Analyzer (ispTRACY) capability. The sysCONFIG port which allows for serial or parallel device configuration. The LatticeXP devices are available for operation from 3.3V, 2.5V, 1.8V and 1.2V power supplies, providing easy integration into the overall system.

The diagram illustrates four PICs (Programmable Interconnect Chips) arranged vertically. Each PIC is represented by a horizontal bar divided into two sections: a grey section on the left and a white section on the right. Arrows point from the white sections to small grey squares representing pins. The pins are labeled as follows:

- PIC 1 (Top):** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).
- PIC 2:** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).
- PIC 3:** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).
- PIC 4 (Bottom):** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).

A bracket on the left groups all four PICs under the label "Four PICs". A bracket on the right groups the pins of each PIC under the label "One PIO Pair". The pins are labeled as follows:

- PIC 1:** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).
- PIC 2:** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).
- PIC 3:** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).
- PIC 4:** PIO A (grey), PIO B (white), PADS "T" (grey), PADS "C" (white).

The diagram illustrates the timing and signal flow for data and strobe signals. It shows multiple data buses (PIO A, PIO B) and a single DQS bus. The DQS signal is shown as a single line with a delay buffer. The diagram is divided into two main sections: the top section shows data buses with associated PADS (PIO A, PIO B, PADS "T", PADS "C") and LVDS Pairs. The bottom section shows data buses with associated PADS (PIO A, PIO B, PADS "T", PADS "C") and LVDS Pairs, with a DQS signal line and a delay buffer.

The PIO contains four blocks: an input register block, output register block, tristate register block and a control logic block. These blocks contain registers for both single data rate (SDR) and double data rate (DDR) operation along with the necessary clock and selection logic. Programmable delay lines used to shift incoming clock and data signals are also included in these blocks.

Input signals are fed from the sysIO buffer to the input register block (as signal DI). If desired the input signal can bypass the register and delay elements and be used directly as a combinatorial signal (INDD), a clock (INCK) and

**Table 2-8. Supported Output Standards**

| Output Standard                       | Drive                      | V <sub>CCIO</sub> (Nom.) |
|---------------------------------------|----------------------------|--------------------------|
| <b>Single-ended Interfaces</b>        |                            |                          |
| LVTTL                                 | 4mA, 8mA, 12mA, 16mA, 20mA | 3.3                      |
| LVC MOS33                             | 4mA, 8mA, 12mA 16mA, 20mA  | 3.3                      |
| LVC MOS25                             | 4mA, 8mA, 12mA 16mA, 20mA  | 2.5                      |
| LVC MOS18                             | 4mA, 8mA, 12mA 16mA        | 1.8                      |
| LVC MOS15                             | 4mA, 8mA                   | 1.5                      |
| LVC MOS12                             | 2mA, 6mA                   | 1.2                      |
| LVC MOS33, Open Drain                 | 4mA, 8mA, 12mA 16mA, 20mA  | —                        |
| LVC MOS25, Open Drain                 | 4mA, 8mA, 12mA 16mA, 20mA  | —                        |
| LVC MOS18, Open Drain                 | 4mA, 8mA, 12mA 16mA        | —                        |
| LVC MOS15, Open Drain                 | 4mA, 8mA                   | —                        |
| LVC MOS12, Open Drain                 | 2mA, 6mA                   | —                        |
| PCI33                                 | N/A                        | 3.3                      |
| HSTL18 Class I, II, III               | N/A                        | 1.8                      |
| HSTL15 Class I, III                   | N/A                        | 1.5                      |
| SSTL3 Class I, II                     | N/A                        | 3.3                      |
| SSTL2 Class I, II                     | N/A                        | 2.5                      |
| SSTL18 Class I                        | N/A                        | 1.8                      |
| <b>Differential Interfaces</b>        |                            |                          |
| Differential SSTL3, Class I, II       | N/A                        | 3.3                      |
| Differential SSTL2, Class I, II       | N/A                        | 2.5                      |
| Differential SSTL18, Class I          | N/A                        | 1.8                      |
| Differential HSTL18, Class I, II, III | N/A                        | 1.8                      |
| Differential HSTL15, Class I, III     | N/A                        | 1.5                      |
| LVDS                                  | N/A                        | 2.5                      |
| BLVDS <sup>1</sup>                    | N/A                        | 2.5                      |
| LVPECL <sup>1</sup>                   | N/A                        | 3.3                      |

1. Emulated with external resistors.

## Hot Socketing

The LatticeXP devices have been carefully designed to ensure predictable behavior during power-up and power-down. Power supplies can be sequenced in any order. During power up and power-down sequences, the I/Os remain in tristate until the power supply voltage is high enough to ensure reliable operation. In addition, leakage into I/O pins is controlled to within specified limits, which allows easy integration with the rest of the system. These capabilities make the LatticeXP ideal for many multiple power supply and hot-swap applications.

## Sleep Mode

The LatticeXP “C” devices (V<sub>CC</sub> = 1.8/2.5/3.3V) have a sleep mode that allows standby current to be reduced by up to three orders of magnitude during periods of system inactivity. Entry and exit to Sleep Mode is controlled by the SLEEPN pin.

During Sleep Mode, the FPGA logic is non-operational, registers and EBR contents are not maintained and I/Os are tri-stated. Do not enter Sleep Mode during device programming or configuration operation. In Sleep Mode, power supplies can be maintained in their normal operating range, eliminating the need for external switching of power supplies. Table 2-9 compares the characteristics of Normal, Off and Sleep Modes.

**Hot Socketing Specifications**<sup>1, 2, 3, 4, 5, 6</sup>

| Symbol   | Parameter                    | Condition                                  | Min. | Typ. | Max.    | Units         |
|----------|------------------------------|--------------------------------------------|------|------|---------|---------------|
| $I_{DK}$ | Input or I/O Leakage Current | $0 \leq V_{IN} \leq V_{IH} \text{ (MAX.)}$ | —    | —    | +/-1000 | $\mu\text{A}$ |

1. Insensitive to sequence of  $V_{CC}$ ,  $V_{CCAUX}$  and  $V_{CCIO}$ . However, assumes monotonic rise/fall rates for  $V_{CC}$ ,  $V_{CCAUX}$  and  $V_{CCIO}$ .
2.  $0 \leq V_{CC} \leq V_{CC} \text{ (MAX)}$  or  $0 \leq V_{CCAUX} \leq V_{CCAUX} \text{ (MAX)}$ .
3.  $0 \leq V_{CCIO} \leq V_{CCIO} \text{ (MAX)}$  for top and bottom I/O banks.
4.  $0.2 \leq V_{CCIO} \leq V_{CCIO} \text{ (MAX)}$  for left and right I/O banks.
5.  $I_{DK}$  is additive to  $I_{PU}$ ,  $I_{PW}$  or  $I_{BH}$ .
6. LVCMOS and LVTTL only.

**Programming and Erase Flash Supply Current<sup>1, 2, 3, 4, 5</sup>**

| Symbol      | Parameter                                    | Device    | Typ <sup>6</sup> | Units |
|-------------|----------------------------------------------|-----------|------------------|-------|
| $I_{CC}$    | Core Power Supply                            | LFXP3E    | 30               | mA    |
|             |                                              | LFXP6E    | 40               | mA    |
|             |                                              | LFXP10E   | 50               | mA    |
|             |                                              | LFXP15E   | 60               | mA    |
|             |                                              | LFXP20E   | 70               | mA    |
|             |                                              | LFXP3C    | 50               | mA    |
|             |                                              | LFXP6C    | 60               | mA    |
|             |                                              | LFXP10C   | 90               | mA    |
|             |                                              | LFXP15C   | 100              | mA    |
|             |                                              | LFXP20C   | 110              | mA    |
| $I_{CCAUX}$ | Auxiliary Power Supply<br>$V_{CCAUX} = 3.3V$ | LFXP3E/C  | 50               | mA    |
|             |                                              | LFXP6E/C  | 60               | mA    |
|             |                                              | LFXP10E/C | 90               | mA    |
|             |                                              | LFXP15E/C | 110              | mA    |
|             |                                              | LFXP20E/C | 130              | mA    |
| $I_{CCJ}$   | $V_{CCJ}$ Power Supply <sup>7</sup>          | All       | 2                | mA    |

1. For further information on supply current, please see details of additional technical documentation at the end of this data sheet.

2. Assumes all outputs are tristated, all inputs are configured as LVCMOS and held at the  $V_{CCIO}$  or GND.

3. Blank user pattern; typical Flash pattern.

4. Bypass or decoupling capacitor across the supply.

5. JTAG programming is at 1MHz.

6.  $T_A=25^{\circ}C$ , power supplies at nominal voltage.

7. When programming via JTAG.

**sysIO Recommended Operating Conditions**


| Standard            | V <sub>CCIO</sub> |      |       | V <sub>REF</sub> (V) |      |       |
|---------------------|-------------------|------|-------|----------------------|------|-------|
|                     | Min.              | Typ. | Max.  | Min.                 | Typ. | Max.  |
| LVC MOS 3.3         | 3.135             | 3.3  | 3.465 | —                    | —    | —     |
| LVC MOS 2.5         | 2.375             | 2.5  | 2.625 | —                    | —    | —     |
| LVC MOS 1.8         | 1.71              | 1.8  | 1.89  | —                    | —    | —     |
| LVC MOS 1.5         | 1.425             | 1.5  | 1.575 | —                    | —    | —     |
| LVC MOS 1.2         | 1.14              | 1.2  | 1.26  | —                    | —    | —     |
| LVTTL               | 3.135             | 3.3  | 3.465 | —                    | —    | —     |
| PCI33               | 3.135             | 3.3  | 3.465 | —                    | —    | —     |
| SSTL18 Class I      | 1.71              | 1.8  | 1.89  | 0.833                | 0.9  | 0.969 |
| SSTL2 Class I, II   | 2.375             | 2.5  | 2.625 | 1.15                 | 1.25 | 1.35  |
| SSTL3 Class I, II   | 3.135             | 3.3  | 3.465 | 1.3                  | 1.5  | 1.7   |
| HSTL15 Class I      | 1.425             | 1.5  | 1.575 | 0.68                 | 0.75 | 0.9   |
| HSTL15 Class III    | 1.425             | 1.5  | 1.575 | —                    | 0.9  | —     |
| HSTL 18 Class I, II | 1.71              | 1.8  | 1.89  | —                    | 0.9  | —     |
| HSTL 18 Class III   | 1.71              | 1.8  | 1.89  | —                    | 1.08 | —     |
| LVDS                | 2.375             | 2.5  | 2.625 | —                    | —    | —     |
| LVPECL <sup>1</sup> | 3.135             | 3.3  | 3.465 | —                    | —    | —     |
| BLVDS <sup>1</sup>  | 2.375             | 2.5  | 2.625 | —                    | —    | —     |

1. Inputs on chip. Outputs are implemented with the addition of external resistors.

**sysIO Differential Electrical Characteristics****LVDS****Over Recommended Operating Conditions**

| Parameter Symbol   | Parameter Description                        | Test Conditions                              | Min.        | Typ. | Max.  | Units         |
|--------------------|----------------------------------------------|----------------------------------------------|-------------|------|-------|---------------|
| $V_{INP}, V_{INM}$ | Input Voltage                                |                                              | 0           | —    | 2.4   | V             |
| $V_{THD}$          | Differential Input Threshold                 |                                              | +/-100      | —    | —     | mV            |
| $V_{CM}$           | Input Common Mode Voltage                    | $100\text{mV} \leq V_{THD}$                  | $V_{THD}/2$ | 1.2  | 1.8   | V             |
|                    |                                              | $200\text{mV} \leq V_{THD}$                  | $V_{THD}/2$ | 1.2  | 1.9   | V             |
|                    |                                              | $350\text{mV} \leq V_{THD}$                  | $V_{THD}/2$ | 1.2  | 2.0   | V             |
| $I_{IN}$           | Input current                                | Power on or power off                        | —           | —    | +/-10 | $\mu\text{A}$ |
| $V_{OH}$           | Output high voltage for $V_{OP}$ or $V_{OM}$ | $R_T = 100\text{ ohms}$                      | —           | 1.38 | 1.60  | V             |
| $V_{OL}$           | Output low voltage for $V_{OP}$ or $V_{OM}$  | $R_T = 100\text{ ohms}$                      | 0.9V        | 1.03 | —     | V             |
| $V_{OD}$           | Output voltage differential                  | $(V_{OP} - V_{OM}), R_T = 100\text{ ohms}$   | 250         | 350  | 450   | mV            |
| $\Delta V_{OD}$    | Change in $V_{OD}$ between high and low      |                                              | —           | —    | 50    | mV            |
| $V_{OS}$           | Output voltage offset                        | $(V_{OP} - V_{OM})/2, R_T = 100\text{ ohms}$ | 1.125       | 1.25 | 1.375 | V             |
| $\Delta V_{OS}$    | Change in $V_{OS}$ between H and L           |                                              | —           | —    | 50    | mV            |
| $I_{OSD}$          | Output short circuit current                 | $V_{OD} = 0\text{V}$ Driver outputs shorted  | —           | —    | 6     | mA            |

Figure 3-5. DDR Timings

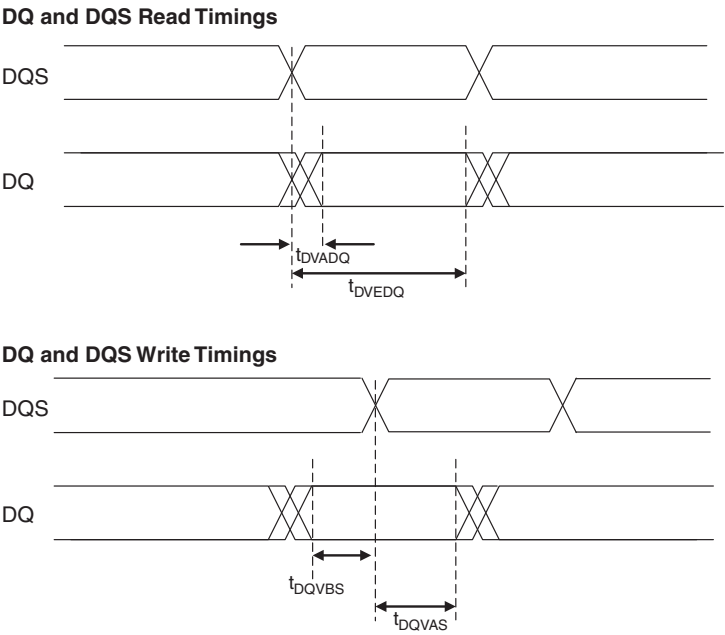

**LatticeXP Internal Timing Parameters<sup>1</sup>**

Over Recommended Operating Conditions

| Parameter                        | Description                                     | -5    |      | -4    |      | -3    |      | Units |
|----------------------------------|-------------------------------------------------|-------|------|-------|------|-------|------|-------|
|                                  |                                                 | Min.  | Max. | Min.  | Max. | Min.  | Max. |       |
| PFU/PFF Logic Mode Timing        |                                                 |       |      |       |      |       |      |       |
| t <sub>LUT4_PFU</sub>            | LUT4 Delay (A to D Inputs to F Output)          | —     | 0.28 | —     | 0.34 | —     | 0.40 | ns    |
| t <sub>LUT6_PFU</sub>            | LUT6 Delay (A to D Inputs to OFX Output)        | —     | 0.44 | —     | 0.53 | —     | 0.63 | ns    |
| t <sub>LSR_PFU</sub>             | Set/Reset to Output of PFU                      | —     | 0.90 | —     | 1.08 | —     | 1.29 | ns    |
| t <sub>SUM_PFU</sub>             | Clock to Mux (M0,M1) Input Setup Time           | 0.13  | —    | 0.15  | —    | 0.19  | —    | ns    |
| t <sub>HM_PFU</sub>              | Clock to Mux (M0,M1) Input Hold Time            | -0.04 | —    | -0.03 | —    | -0.03 | —    | ns    |
| t <sub>SUD_PFU</sub>             | Clock to D Input Setup Time                     | 0.13  | —    | 0.16  | —    | 0.19  | —    | ns    |
| t <sub>HD_PFU</sub>              | Clock to D Input Hold Time                      | -0.03 | —    | -0.02 | —    | -0.02 | —    | ns    |
| t <sub>CK2Q_PFU</sub>            | Clock to Q Delay, D-type Register Configuration | —     | 0.40 | —     | 0.48 | —     | 0.58 | ns    |
| t <sub>LE2Q_PFU</sub>            | Clock to Q Delay Latch Configuration            | —     | 0.53 | —     | 0.64 | —     | 0.76 | ns    |
| t <sub>LD2Q_PFU</sub>            | D to Q Throughput Delay when Latch is Enabled   | —     | 0.55 | —     | 0.66 | —     | 0.79 | ns    |
| PFU Dual Port Memory Mode Timing |                                                 |       |      |       |      |       |      |       |
| t <sub>CORAM_PFU</sub>           | Clock to Output                                 | —     | 0.40 | —     | 0.48 | —     | 0.58 | ns    |
| t <sub>SUDATA_PFU</sub>          | Data Setup Time                                 | -0.18 | —    | -0.14 | —    | -0.11 | —    | ns    |
| t <sub>HDATA_PFU</sub>           | Data Hold Time                                  | 0.28  | —    | 0.34  | —    | 0.40  | —    | ns    |
| t <sub>SUADDR_PFU</sub>          | Address Setup Time                              | -0.46 | —    | -0.37 | —    | -0.30 | —    | ns    |
| t <sub>HADDR_PFU</sub>           | Address Hold Time                               | 0.71  | —    | 0.85  | —    | 1.02  | —    | ns    |
| t <sub>SUWREN_PFU</sub>          | Write/Read Enable Setup Time                    | -0.22 | —    | -0.17 | —    | -0.14 | —    | ns    |
| t <sub>HWREN_PFU</sub>           | Write/Read Enable Hold Time                     | 0.33  | —    | 0.40  | —    | 0.48  | —    | ns    |
| PIC Timing                       |                                                 |       |      |       |      |       |      |       |
| PIO Input/Output Buffer Timing   |                                                 |       |      |       |      |       |      |       |
| t <sub>IN_PIO</sub>              | Input Buffer Delay                              | —     | 0.62 | —     | 0.72 | —     | 0.85 | ns    |
| t <sub>OUT_PIO</sub>             | Output Buffer Delay                             | —     | 2.12 | —     | 2.54 | —     | 3.05 | ns    |
| IOLOGIC Input/Output Timing      |                                                 |       |      |       |      |       |      |       |
| t <sub>SUI_PIO</sub>             | Input Register Setup Time (Data Before Clock)   | 1.35  | —    | 1.83  | —    | 2.37  | —    | ns    |
| t <sub>HI_PIO</sub>              | Input Register Hold Time (Data After Clock)     | 0.05  | —    | 0.05  | —    | 0.05  | —    | ns    |
| t <sub>COO_PIO</sub>             | Output Register Clock to Output Delay           | —     | 0.36 | —     | 0.44 | —     | 0.52 | ns    |
| t <sub>SUCE_PIO</sub>            | Input Register Clock Enable Setup Time          | -0.09 | —    | -0.07 | —    | -0.06 | —    | ns    |
| t <sub>HCE_PIO</sub>             | Input Register Clock Enable Hold Time           | 0.13  | —    | 0.16  | —    | 0.19  | —    | ns    |
| t <sub>SULSR_PIO</sub>           | Set/Reset Setup Time                            | 0.19  | —    | 0.23  | —    | 0.28  | —    | ns    |
| t <sub>HLSR_PIO</sub>            | Set/Reset Hold Time                             | -0.14 | —    | -0.11 | —    | -0.09 | —    | ns    |
| EBR Timing                       |                                                 |       |      |       |      |       |      |       |
| t <sub>CO_EBR</sub>              | Clock to Output from Address or Data            | —     | 4.01 | —     | 4.81 | —     | 5.78 | ns    |
| t <sub>COO_EBR</sub>             | Clock to Output from EBR Output Register        | —     | 0.81 | —     | 0.97 | —     | 1.17 | ns    |
| t <sub>SUDATA_EBR</sub>          | Setup Data to EBR Memory                        | -0.26 | —    | -0.21 | —    | -0.17 | —    | ns    |
| t <sub>HDATA_EBR</sub>           | Hold Data to EBR Memory                         | 0.41  | —    | 0.49  | —    | 0.59  | —    | ns    |
| t <sub>SUADDR_EBR</sub>          | Setup Address to EBR Memory                     | -0.26 | —    | -0.21 | —    | -0.17 | —    | ns    |
| t <sub>HADDR_EBR</sub>           | Hold Address to EBR Memory                      | 0.41  | —    | 0.49  | —    | 0.59  | —    | ns    |
| t <sub>SUWREN_EBR</sub>          | Setup Write/Read Enable to EBR Memory           | -0.17 | —    | -0.13 | —    | -0.11 | —    | ns    |
| t <sub>HWREN_EBR</sub>           | Hold Write/Read Enable to EBR Memory            | 0.26  | —    | 0.31  | —    | 0.37  | —    | ns    |
| t <sub>SUCE_EBR</sub>            | Clock Enable Setup Time to EBR Output Register  | 0.19  | —    | 0.23  | —    | 0.28  | —    | ns    |
| t <sub>HCE_EBR</sub>             | Clock Enable Hold Time to EBR Output Register   | -0.13 | —    | -0.10 | —    | -0.08 | —    | ns    |

Timing Diagrams

PFU Timing Diagrams

Figure 3-6. Slice Single/Dual Port Write Cycle Timing


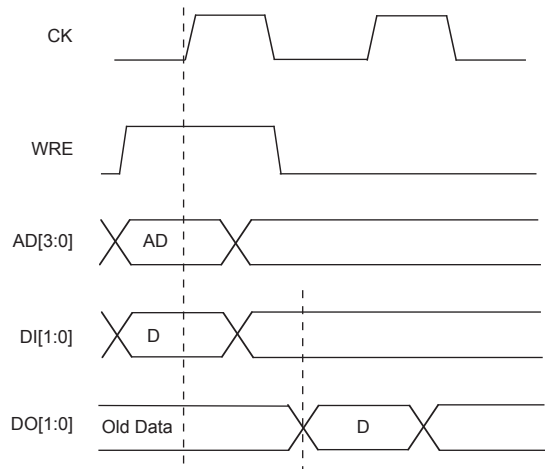


Figure 3-7. Slice Single /Dual Port Read Cycle Timing

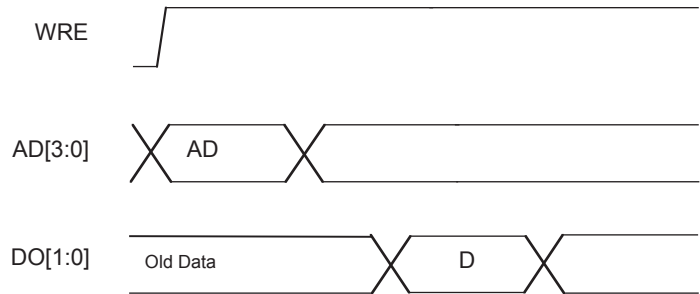

## sysCLOCK PLL Timing

## Over Recommended Operating Conditions

| Parameter                 | Descriptions                          | Conditions                              | Min.  | Typ. | Max.    | Units |
|---------------------------|---------------------------------------|-----------------------------------------|-------|------|---------|-------|
| $f_{IN}$                  | Input Clock Frequency (CLKI, CLKFB)   |                                         | 25    | —    | 375     | MHz   |
| $f_{OUT}$                 | Output Clock Frequency (CLKOP, CLKOS) |                                         | 25    | —    | 375     | MHz   |
| $f_{OUT2}$                | K-Divider Output Frequency (CLKOK)    |                                         | 0.195 | —    | 187.5   | MHz   |
| $f_{VCO}$                 | PLL VCO Frequency                     |                                         | 375   | —    | 750     | MHz   |
| $f_{PFD}$                 | Phase Detector Input Frequency        |                                         | 25    | —    | —       | MHz   |
| <b>AC Characteristics</b> |                                       |                                         |       |      |         |       |
| $t_{DT}$                  | Output Clock Duty Cycle               | Default duty cycle elected <sup>3</sup> | 45    | 50   | 55      | %     |
| $t_{PH}^4$                | Output Phase Accuracy                 |                                         | —     | —    | 0.05    | UI    |
| $t_{OPJIT}^1$             | Output Clock Period Jitter            | $f_{OUT} \geq 100\text{MHz}$            | —     | —    | +/- 125 | ps    |
|                           |                                       | $f_{OUT} < 100\text{MHz}$               | —     | —    | 0.02    | UIPP  |
| $t_{SK}$                  | Input Clock to Output Clock Skew      | Divider ratio = integer                 | —     | —    | +/- 200 | ps    |
| $t_W$                     | Output Clock Pulse Width              | At 90% or 10% <sup>3</sup>              | 1     | —    | —       | ns    |
| $t_{LOCK}^2$              | PLL Lock-in Time                      |                                         | —     | —    | 150     | us    |
| $t_{PA}$                  | Programmable Delay Unit               |                                         | 100   | 250  | 400     | ps    |
| $t_{IPJIT}$               | Input Clock Period Jitter             |                                         | —     | —    | +/- 200 | ps    |
| $t_{FBKDLy}$              | External Feedback Delay               |                                         | —     | —    | 10      | ns    |
| $t_{HI}$                  | Input Clock High Time                 | 90% to 90%                              | 0.5   | —    | —       | ns    |
| $t_{LO}$                  | Input Clock Low Time                  | 10% to 10%                              | 0.5   | —    | —       | ns    |
| $t_{RST}$                 | RST Pulse Width                       |                                         | 10    | —    | —       | ns    |

1. Jitter sample is taken over 10,000 samples of the primary PLL output with clean reference clock.

2. Output clock is valid after  $t_{LOCK}$  for PLL reset and dynamic delay adjustment.


3. Using LVDS output buffers.

4. As compared to CLKOP output.

Timing v.F0.11

## LatticeXP “C” Sleep Mode Timing

| Parameter     | Descriptions                              | Min.   | Typ. | Max. | Units |
|---------------|-------------------------------------------|--------|------|------|-------|
| $t_{PWRDN}$   | SLEEPN Low to I/O Tristate                | —      | 20   | 32   | ns    |
| $t_{PWRUP}$   | SLEEPN High to Power Up                   | LFXP3  | —    | 1.4  | ms    |
|               |                                           | LFXP6  | —    | 1.7  | ms    |
|               |                                           | LFXP10 | —    | 1.1  | ms    |
|               |                                           | LFXP15 | —    | 1.4  | ms    |
|               |                                           | LFXP20 | —    | 1.7  | ms    |
| $t_{WSLEEPN}$ | SLEEPN Pulse Width to Initiate Sleep Mode | 400    | —    | —    | ns    |
| $t_{WAWAKE}$  | SLEEPN Pulse Rejection                    | —      | —    | 120  | ns    |

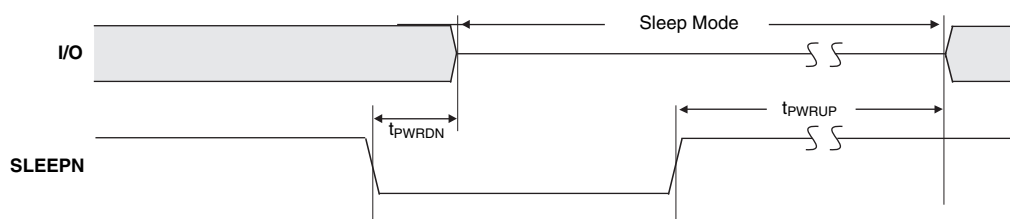

## Flash Download Time

| Symbol               | Parameter                                      |        | Min. | Typ. | Max. | Units |
|----------------------|------------------------------------------------|--------|------|------|------|-------|
| t <sub>REFRESH</sub> | PROGRAMN Low-to-High. Transition to Done High. | LFXP3  | —    | 1.1  | 1.7  | ms    |
|                      |                                                | LFXP6  | —    | 1.4  | 2.0  | ms    |
|                      |                                                | LFXP10 | —    | 0.9  | 1.5  | ms    |
|                      |                                                | LFXP15 | —    | 1.1  | 1.7  | ms    |
|                      |                                                | LFXP20 | —    | 1.3  | 1.9  | ms    |


## JTAG Port Timing Specifications

Over Recommended Operating Conditions

| Symbol               | Parameter                                                          | Min. | Max. | Units |
|----------------------|--------------------------------------------------------------------|------|------|-------|
| $f_{\text{MAX}}$     |                                                                    | —    | 25   | MHz   |
| $t_{\text{BTCP}}$    | TCK [BSCAN] clock pulse width                                      | 40   | —    | ns    |
| $t_{\text{BTCPH}}$   | TCK [BSCAN] clock pulse width high                                 | 20   | —    | ns    |
| $t_{\text{BTCPL}}$   | TCK [BSCAN] clock pulse width low                                  | 20   | —    | ns    |
| $t_{\text{BTS}}$     | TCK [BSCAN] setup time                                             | 10   | —    | ns    |
| $t_{\text{BTH}}$     | TCK [BSCAN] hold time                                              | 8    | —    | ns    |
| $t_{\text{BTRF}}$    | TCK [BSCAN] rise/fall time                                         | 50   | —    | ns    |
| $t_{\text{BTCO}}$    | TAP controller falling edge of clock to valid output               | —    | 10   | ns    |
| $t_{\text{BTCODIS}}$ | TAP controller falling edge of clock to valid disable              | —    | 10   | ns    |
| $t_{\text{BTCOEN}}$  | TAP controller falling edge of clock to valid enable               | —    | 10   | ns    |
| $t_{\text{BTCRS}}$   | BSCAN test capture register setup time                             | 8    | —    | ns    |
| $t_{\text{BTCRH}}$   | BSCAN test capture register hold time                              | 25   | —    | ns    |
| $t_{\text{BUTCO}}$   | BSCAN test update register, falling edge of clock to valid output  | —    | 25   | ns    |
| $t_{\text{BTUODIS}}$ | BSCAN test update register, falling edge of clock to valid disable | —    | 25   | ns    |
| $t_{\text{BTUPOEN}}$ | BSCAN test update register, falling edge of clock to valid enable  | —    | 25   | ns    |

Timing v.F0.11

Figure 3-12. JTAG Port Timing Waveforms

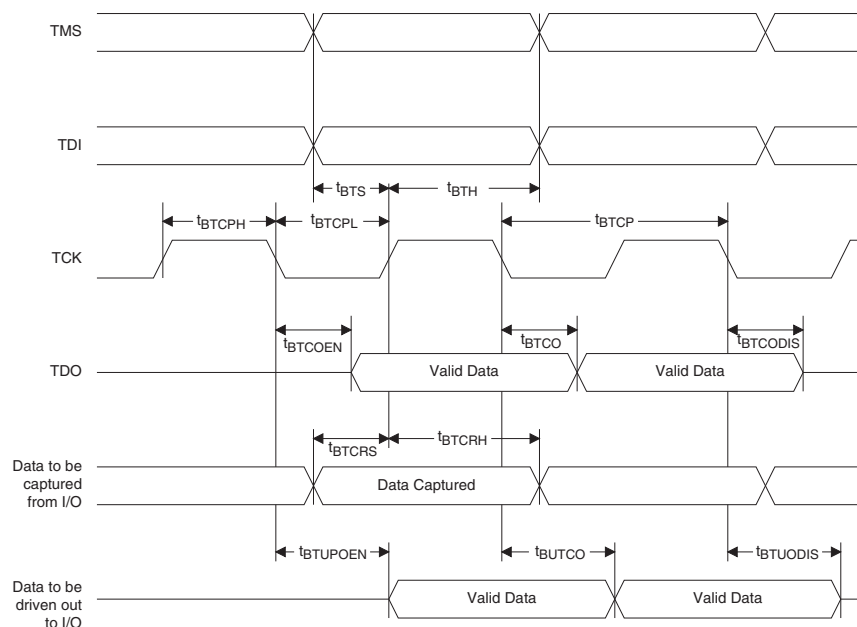

**LFXP3 & LFXP6 Logic Signal Connections: 144 TQFP (Cont.)**

| Pin Number | LFXP3        |      |              |               | LFXP6        |      |              |               |
|------------|--------------|------|--------------|---------------|--------------|------|--------------|---------------|
|            | Pin Function | Bank | Differential | Dual Function | Pin Function | Bank | Differential | Dual Function |
| 139        | PT6A         | 0    | -            | DI            | PT9A         | 0    | -            | DI            |
| 140        | PT5A         | 0    | -            | CSN           | PT8A         | 0    | -            | CSN           |
| 141        | PT3B         | 0    | -            | VREF2_0       | PT6B         | 0    | -            | VREF2_0       |
| 142        | CFG0         | 0    | -            | -             | CFG0         | 0    | -            | -             |
| 143        | CFG1         | 0    | -            | -             | CFG1         | 0    | -            | -             |
| 144        | DONE         | 0    | -            | -             | DONE         | 0    | -            | -             |

1. Applies to LFXP "C" only.
2. Applies to LFXP "E" only.
3. Supports dedicated LVDS outputs.

**LFXP15 & LFXP20 Logic Signal Connections: 256 fpBGA (Cont.)**

| Ball Number | LFXP15                                |      |                |                | LFXP20                                |      |                |                |
|-------------|---------------------------------------|------|----------------|----------------|---------------------------------------|------|----------------|----------------|
|             | Ball Function                         | Bank | Differential   | Dual Function  | Ball Function                         | Bank | Differential   | Dual Function  |
| L4          | PL32A                                 | 6    | -              | -              | PL36A                                 | 6    | -              | -              |
| -           | GNDIO6                                | 6    | -              | -              | GNDIO6                                | 6    | -              | -              |
| K4          | PL33A                                 | 6    | T              | -              | PL37A                                 | 6    | T              | -              |
| K5          | PL33B                                 | 6    | C              | -              | PL37B                                 | 6    | C              | -              |
| N1          | PL35A                                 | 6    | -              | VREF2_6        | PL39A                                 | 6    | -              | VREF2_6        |
| N2          | PL36B                                 | 6    | -              | -              | PL40B                                 | 6    | -              | -              |
| P1          | PL37A                                 | 6    | T <sup>3</sup> | DQS            | PL41A                                 | 6    | T <sup>3</sup> | DQS            |
| P2          | PL37B                                 | 6    | C <sup>3</sup> | -              | PL41B                                 | 6    | C <sup>3</sup> | -              |
| -           | GNDIO6                                | 6    | -              | -              | GNDIO6                                | 6    | -              | -              |
| L5          | PL38A                                 | 6    | T              | LLM0_PLLT_FB_A | PL42A                                 | 6    | T              | LLM0_PLLT_FB_A |
| M6          | PL38B                                 | 6    | C              | LLM0_PLLC_FB_A | PL42B                                 | 6    | C              | LLM0_PLLC_FB_A |
| M3          | PL39A                                 | 6    | T <sup>3</sup> | -              | PL43A                                 | 6    | T <sup>3</sup> | -              |
| N3          | PL39B                                 | 6    | C <sup>3</sup> | -              | PL43B                                 | 6    | C <sup>3</sup> | -              |
| -           | GNDIO6                                | 6    | -              | -              | GNDIO6                                | 6    | -              | -              |
| P4          | SLEEPN <sup>1</sup> /TOE <sup>2</sup> | -    | -              | -              | SLEEPN <sup>1</sup> /TOE <sup>2</sup> | -    | -              | -              |
| P3          | INITN                                 | 5    | -              | -              | INITN                                 | 5    | -              | -              |
| -           | GNDIO5                                | 5    | -              | -              | GNDIO5                                | 5    | -              | -              |
| -           | GNDIO5                                | 5    | -              | -              | GNDIO5                                | 5    | -              | -              |
| -           | GNDIO5                                | 5    | -              | -              | GNDIO5                                | 5    | -              | -              |
| R4          | PB11A                                 | 5    | T              | -              | PB15A                                 | 5    | T              | -              |
| N5          | PB11B                                 | 5    | C              | -              | PB15B                                 | 5    | C              | -              |
| P5          | PB12A                                 | 5    | T              | VREF1_5        | PB16A                                 | 5    | T              | VREF1_5        |
| -           | GNDIO5                                | 5    | -              | -              | GNDIO5                                | 5    | -              | -              |
| R1          | PB12B                                 | 5    | C              | -              | PB16B                                 | 5    | C              | -              |
| N6          | PB13A                                 | 5    | -              | -              | PB17A                                 | 5    | -              | -              |
| M7          | PB14B                                 | 5    | -              | -              | PB18B                                 | 5    | -              | -              |
| R2          | PB15A                                 | 5    | T              | DQS            | PB19A                                 | 5    | T              | DQS            |
| T2          | PB15B                                 | 5    | C              | -              | PB19B                                 | 5    | C              | -              |
| R3          | PB16A                                 | 5    | T              | -              | PB20A                                 | 5    | T              | -              |
| T3          | PB16B                                 | 5    | C              | -              | PB20B                                 | 5    | C              | -              |
| T4          | PB17A                                 | 5    | T              | -              | PB21A                                 | 5    | T              | -              |
| R5          | PB17B                                 | 5    | C              | VREF2_5        | PB21B                                 | 5    | C              | VREF2_5        |
| N7          | PB18A                                 | 5    | T              | -              | PB22A                                 | 5    | T              | -              |
| -           | GNDIO5                                | 5    | -              | -              | GNDIO5                                | 5    | -              | -              |
| M8          | PB18B                                 | 5    | C              | -              | PB22B                                 | 5    | C              | -              |
| T5          | PB19A                                 | 5    | T              | -              | PB23A                                 | 5    | T              | -              |
| P6          | PB19B                                 | 5    | C              | -              | PB23B                                 | 5    | C              | -              |
| T6          | PB20A                                 | 5    | T              | -              | PB24A                                 | 5    | T              | -              |
| R6          | PB20B                                 | 5    | C              | -              | PB24B                                 | 5    | C              | -              |
| P7          | PB21A                                 | 5    | -              | -              | PB25A                                 | 5    | -              | -              |
| N8          | PB22B                                 | 5    | -              | -              | PB26B                                 | 5    | -              | -              |
| R7          | PB23A                                 | 5    | T              | DQS            | PB27A                                 | 5    | T              | DQS            |

**LFXP15 & LFXP20 Logic Signal Connections: 256 fpBGA (Cont.)**

| Ball Number | LFXP15        |      |                |                | LFXP20        |      |                |                |
|-------------|---------------|------|----------------|----------------|---------------|------|----------------|----------------|
|             | Ball Function | Bank | Differential   | Dual Function  | Ball Function | Bank | Differential   | Dual Function  |
| -           | GNDIO2        | 2    | -              | -              | GNDIO2        | 2    | -              | -              |
| F15         | PR10B         | 2    | -              | -              | PR10B         | 2    | -              | -              |
| E15         | PR9A          | 2    | -              | VREF2_2        | PR9A          | 2    | -              | VREF2_2        |
| F14         | PR8B          | 2    | C <sup>3</sup> | -              | PR8B          | 2    | C <sup>3</sup> | -              |
| E14         | PR8A          | 2    | T <sup>3</sup> | -              | PR8A          | 2    | T <sup>3</sup> | -              |
| D15         | PR7B          | 2    | C              | RUM0_PLLC_FB_A | PR7B          | 2    | C              | RUM0_PLLC_FB_A |
| C15         | PR7A          | 2    | T              | RUM0_PLLT_FB_A | PR7A          | 2    | T              | RUM0_PLLT_FB_A |
| -           | GNDIO2        | 2    | -              | -              | GNDIO2        | 2    | -              | -              |
| E16         | TDO           | -    | -              | -              | TDO           | -    | -              | -              |
| D16         | VCCJ          | -    | -              | -              | VCCJ          | -    | -              | -              |
| D14         | TDI           | -    | -              | -              | TDI           | -    | -              | -              |
| C14         | TMS           | -    | -              | -              | TMS           | -    | -              | -              |
| B14         | TCK           | -    | -              | -              | TCK           | -    | -              | -              |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| A15         | PT40B         | 1    | C              | -              | PT44B         | 1    | C              | -              |
| B15         | PT40A         | 1    | T              | -              | PT44A         | 1    | T              | -              |
| D12         | PT39B         | 1    | C              | VREF1_1        | PT43B         | 1    | C              | VREF1_1        |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| C11         | PT39A         | 1    | T              | DQS            | PT43A         | 1    | T              | DQS            |
| A14         | PT38B         | 1    | -              | -              | PT42B         | 1    | -              | -              |
| B13         | PT37A         | 1    | -              | -              | PT41A         | 1    | -              | -              |
| F12         | PT36B         | 1    | C              | -              | PT40B         | 1    | C              | -              |
| E11         | PT36A         | 1    | T              | -              | PT40A         | 1    | T              | -              |
| A13         | PT35B         | 1    | C              | -              | PT39B         | 1    | C              | -              |
| C13         | PT35A         | 1    | T              | D0             | PT39A         | 1    | T              | D0             |
| C10         | PT34B         | 1    | C              | D1             | PT38B         | 1    | C              | D1             |
| E10         | PT34A         | 1    | T              | VREF2_1        | PT38A         | 1    | T              | VREF2_1        |
| A12         | PT33B         | 1    | C              | -              | PT37B         | 1    | C              | -              |
| B12         | PT33A         | 1    | T              | D2             | PT37A         | 1    | T              | D2             |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| C12         | PT32B         | 1    | C              | D3             | PT36B         | 1    | C              | D3             |
| A11         | PT32A         | 1    | T              | -              | PT36A         | 1    | T              | -              |
| B11         | PT31B         | 1    | C              | -              | PT35B         | 1    | C              | -              |
| D11         | PT31A         | 1    | T              | DQS            | PT35A         | 1    | T              | DQS            |
| B9          | PT30B         | 1    | -              | -              | PT34B         | 1    | -              | -              |
| D9          | PT29A         | 1    | -              | D4             | PT33A         | 1    | -              | D4             |
| A10         | PT28B         | 1    | C              | -              | PT32B         | 1    | C              | -              |
| B10         | PT28A         | 1    | T              | D5             | PT32A         | 1    | T              | D5             |
| -           | GNDIO1        | 1    | -              | -              | GNDIO1        | 1    | -              | -              |
| D10         | PT27B         | 1    | C              | D6             | PT31B         | 1    | C              | D6             |

**LFXP10, LFXP15 & LFXP20 Logic Signal Connections: 388 fpBGA**

| Ball Number | LFXP10        |      |                |                | LFXP15        |      |                |                | LFXP20        |      |                |                |
|-------------|---------------|------|----------------|----------------|---------------|------|----------------|----------------|---------------|------|----------------|----------------|
|             | Ball Function | Bank | Diff.          | Dual Function  | Ball Function | Bank | Diff.          | Dual Function  | Ball Function | Bank | Diff.          | Dual Function  |
| F4          | PROGRAMN      | 7    | -              | -              | PROGRAMN      | 7    | -              | -              | PROGRAMN      | 7    | -              | -              |
| G4          | CCLK          | 7    | -              | -              | CCLK          | 7    | -              | -              | CCLK          | 7    | -              | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| D2          | PL2A          | 7    | T <sup>3</sup> | -              | PL6A          | 7    | T <sup>3</sup> | -              | PL6A          | 7    | T <sup>3</sup> | -              |
| D1          | PL2B          | 7    | C <sup>3</sup> | -              | PL6B          | 7    | C <sup>3</sup> | -              | PL6B          | 7    | C <sup>3</sup> | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| E2          | PL3A          | 7    | T              | LUM0_PLLT_FB_A | PL7A          | 7    | T              | LUM0_PLLT_FB_A | PL7A          | 7    | T              | LUM0_PLLT_FB_A |
| E3          | PL3B          | 7    | C              | LUM0_PLLC_FB_A | PL7B          | 7    | C              | LUM0_PLLC_FB_A | PL7B          | 7    | C              | LUM0_PLLC_FB_A |
| F3          | PL4A          | 7    | T <sup>3</sup> | -              | PL8A          | 7    | T <sup>3</sup> | -              | PL8A          | 7    | T <sup>3</sup> | -              |
| F2          | PL4B          | 7    | C <sup>3</sup> | -              | PL8B          | 7    | C <sup>3</sup> | -              | PL8B          | 7    | C <sup>3</sup> | -              |
| H4          | PL5A          | 7    | -              | -              | PL9A          | 7    | -              | -              | PL9A          | 7    | -              | -              |
| H3          | PL6B          | 7    | -              | VREF1_7        | PL10B         | 7    | -              | VREF1_7        | PL10B         | 7    | -              | VREF1_7        |
| G3          | PL7A          | 7    | T <sup>3</sup> | DQS            | PL11A         | 7    | T <sup>3</sup> | DQS            | PL11A         | 7    | T <sup>3</sup> | DQS            |
| G2          | PL7B          | 7    | C <sup>3</sup> | -              | PL11B         | 7    | C <sup>3</sup> | -              | PL11B         | 7    | C <sup>3</sup> | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| F1          | PL8A          | 7    | T              | -              | PL12A         | 7    | T              | -              | PL12A         | 7    | T              | -              |
| E1          | PL8B          | 7    | C              | -              | PL12B         | 7    | C              | -              | PL12B         | 7    | C              | -              |
| J4          | PL9A          | 7    | T <sup>3</sup> | -              | PL13A         | 7    | T <sup>3</sup> | -              | PL13A         | 7    | T <sup>3</sup> | -              |
| K4          | PL9B          | 7    | C <sup>3</sup> | -              | PL13B         | 7    | C <sup>3</sup> | -              | PL13B         | 7    | C <sup>3</sup> | -              |
| G1          | PL11A         | 7    | T <sup>3</sup> | -              | PL15A         | 7    | T <sup>3</sup> | -              | PL15A         | 7    | T <sup>3</sup> | -              |
| H2          | PL11B         | 7    | C <sup>3</sup> | -              | PL15B         | 7    | C <sup>3</sup> | -              | PL15B         | 7    | C <sup>3</sup> | -              |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| J2          | PL12A         | 7    | T              | LUM0_PLLT_IN_A | PL16A         | 7    | T              | LUM0_PLLT_IN_A | PL16A         | 7    | T              | LUM0_PLLT_IN_A |
| H1          | PL12B         | 7    | C              | LUM0_PLLC_IN_A | PL16B         | 7    | C              | LUM0_PLLC_IN_A | PL16B         | 7    | C              | LUM0_PLLC_IN_A |
| J1          | PL13A         | 7    | T <sup>3</sup> | -              | PL17A         | 7    | T <sup>3</sup> | -              | PL17A         | 7    | T <sup>3</sup> | -              |
| K2          | PL13B         | 7    | C <sup>3</sup> | -              | PL17B         | 7    | C <sup>3</sup> | -              | PL17B         | 7    | C <sup>3</sup> | -              |
| K3          | PL14A         | 7    | -              | VREF2_7        | PL18A         | 7    | -              | VREF2_7        | PL18A         | 7    | -              | VREF2_7        |
| J3          | PL15B         | 7    | -              | -              | PL19B         | 7    | -              | -              | PL19B         | 7    | -              | -              |
| K1          | PL16A         | 7    | T <sup>3</sup> | DQS            | PL20A         | 7    | T <sup>3</sup> | DQS            | PL20A         | 7    | T <sup>3</sup> | DQS            |
| -           | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              | GNDIO7        | 7    | -              | -              |
| L2          | PL16B         | 7    | C <sup>3</sup> | -              | PL20B         | 7    | C <sup>3</sup> | -              | PL20B         | 7    | C <sup>3</sup> | -              |
| L3          | PL17A         | 7    | T              | -              | PL21A         | 7    | T              | -              | PL21A         | 7    | T              | -              |
| L4          | PL17B         | 7    | C              | -              | PL21B         | 7    | C              | -              | PL21B         | 7    | C              | -              |
| L1          | PL18A         | 7    | T <sup>3</sup> | -              | PL22A         | 7    | T <sup>3</sup> | -              | PL22A         | 7    | T <sup>3</sup> | -              |
| M1          | PL18B         | 7    | C <sup>3</sup> | -              | PL22B         | 7    | C <sup>3</sup> | -              | PL22B         | 7    | C <sup>3</sup> | -              |
| M2          | VCCP0         | -    | -              | -              | VCCP0         | -    | -              | -              | VCCP0         | -    | -              | -              |
| N1          | GNDP0         | -    | -              | -              | GNDP0         | -    | -              | -              | GNDP0         | -    | -              | -              |
| M3          | PL19A         | 6    | T <sup>3</sup> | -              | PL23A         | 6    | T <sup>3</sup> | -              | PL27A         | 6    | T <sup>3</sup> | -              |
| M4          | PL19B         | 6    | C <sup>3</sup> | -              | PL23B         | 6    | C <sup>3</sup> | -              | PL27B         | 6    | C <sup>3</sup> | -              |
| P1          | PL20A         | 6    | T              | PCLKT6_0       | PL24A         | 6    | T              | PCLKT6_0       | PL28A         | 6    | T              | PCLKT6_0       |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |
| N2          | PL20B         | 6    | C              | PCLKC6_0       | PL24B         | 6    | C              | PCLKC6_0       | PL28B         | 6    | C              | PCLKC6_0       |
| R1          | PL21A         | 6    | T <sup>3</sup> | -              | PL25A         | 6    | T <sup>3</sup> | -              | PL29A         | 6    | T <sup>3</sup> | -              |
| P2          | PL21B         | 6    | C <sup>3</sup> | -              | PL25B         | 6    | C <sup>3</sup> | -              | PL29B         | 6    | C <sup>3</sup> | -              |
| N3          | PL22A         | 6    | -              | -              | PL26A         | 6    | -              | -              | PL30A         | 6    | -              | -              |
| N4          | PL23B         | 6    | -              | VREF1_6        | PL27B         | 6    | -              | VREF1_6        | PL31B         | 6    | -              | VREF1_6        |
| T1          | PL24A         | 6    | T <sup>3</sup> | DQS            | PL28A         | 6    | T <sup>3</sup> | DQS            | PL32A         | 6    | T <sup>3</sup> | DQS            |
| R2          | PL24B         | 6    | C <sup>3</sup> | -              | PL28B         | 6    | C <sup>3</sup> | -              | PL32B         | 6    | C <sup>3</sup> | -              |
| -           | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              | GNDIO6        | 6    | -              | -              |

**LFXP10, LFXP15 & LFXP20 Logic Signal Connections: 388 fpBGA (Cont.)**

| Ball Number | LFXP10        |      |       |               | LFXP15        |      |       |               | LFXP20        |      |       |               |
|-------------|---------------|------|-------|---------------|---------------|------|-------|---------------|---------------|------|-------|---------------|
|             | Ball Function | Bank | Diff. | Dual Function | Ball Function | Bank | Diff. | Dual Function | Ball Function | Bank | Diff. | Dual Function |
| C20         | PT38A         | 1    | T     | -             | PT43A         | 1    | T     | -             | PT47A         | 1    | T     | -             |
| C21         | PT37B         | 1    | C     | -             | PT42B         | 1    | C     | -             | PT46B         | 1    | C     | -             |
| C22         | PT37A         | 1    | T     | -             | PT42A         | 1    | T     | -             | PT46A         | 1    | T     | -             |
| B22         | PT36B         | 1    | C     | -             | PT41B         | 1    | C     | -             | PT45B         | 1    | C     | -             |
| A21         | PT36A         | 1    | T     | -             | PT41A         | 1    | T     | -             | PT45A         | 1    | T     | -             |
| D15         | PT35B         | 1    | C     | -             | PT40B         | 1    | C     | -             | PT44B         | 1    | C     | -             |
| D14         | PT35A         | 1    | T     | -             | PT40A         | 1    | T     | -             | PT44A         | 1    | T     | -             |
| B21         | PT34B         | 1    | C     | VREF1_1       | PT39B         | 1    | C     | VREF1_1       | PT43B         | 1    | C     | VREF1_1       |
| -           | GNDIO1        | 1    | -     | -             | GNDIO1        | 1    | -     | -             | GNDIO1        | 1    | -     | -             |
| A20         | PT34A         | 1    | T     | DQS           | PT39A         | 1    | T     | DQS           | PT43A         | 1    | T     | DQS           |
| B20         | PT33B         | 1    | -     | -             | PT38B         | 1    | -     | -             | PT42B         | 1    | -     | -             |
| A19         | PT32A         | 1    | -     | -             | PT37A         | 1    | -     | -             | PT41A         | 1    | -     | -             |
| B19         | PT31B         | 1    | C     | -             | PT36B         | 1    | C     | -             | PT40B         | 1    | C     | -             |
| A18         | PT31A         | 1    | T     | -             | PT36A         | 1    | T     | -             | PT40A         | 1    | T     | -             |
| C14         | PT30B         | 1    | C     | -             | PT35B         | 1    | C     | -             | PT39B         | 1    | C     | -             |
| C13         | PT30A         | 1    | T     | D0            | PT35A         | 1    | T     | D0            | PT39A         | 1    | T     | D0            |
| B18         | PT29B         | 1    | C     | D1            | PT34B         | 1    | C     | D1            | PT38B         | 1    | C     | D1            |
| A17         | PT29A         | 1    | T     | VREF2_1       | PT34A         | 1    | T     | VREF2_1       | PT38A         | 1    | T     | VREF2_1       |
| B17         | PT28B         | 1    | C     | -             | PT33B         | 1    | C     | -             | PT37B         | 1    | C     | -             |
| A16         | PT28A         | 1    | T     | D2            | PT33A         | 1    | T     | D2            | PT37A         | 1    | T     | D2            |
| -           | GNDIO1        | 1    | -     | -             | GNDIO1        | 1    | -     | -             | GNDIO1        | 1    | -     | -             |
| B16         | PT27B         | 1    | C     | D3            | PT32B         | 1    | C     | D3            | PT36B         | 1    | C     | D3            |
| A15         | PT27A         | 1    | T     | -             | PT32A         | 1    | T     | -             | PT36A         | 1    | T     | -             |
| B15         | PT26B         | 1    | C     | -             | PT31B         | 1    | C     | -             | PT35B         | 1    | C     | -             |
| A14         | PT26A         | 1    | T     | DQS           | PT31A         | 1    | T     | DQS           | PT35A         | 1    | T     | DQS           |
| D13         | PT25B         | 1    | -     | -             | PT30B         | 1    | -     | -             | PT34B         | 1    | -     | -             |
| D12         | PT24A         | 1    | -     | D4            | PT29A         | 1    | -     | D4            | PT33A         | 1    | -     | D4            |
| B14         | PT23B         | 1    | C     | -             | PT28B         | 1    | C     | -             | PT32B         | 1    | C     | -             |
| A13         | PT23A         | 1    | T     | D5            | PT28A         | 1    | T     | D5            | PT32A         | 1    | T     | D5            |
| -           | GNDIO1        | 1    | -     | -             | GNDIO1        | 1    | -     | -             | GNDIO1        | 1    | -     | -             |
| B13         | PT22B         | 1    | C     | D6            | PT27B         | 1    | C     | D6            | PT31B         | 1    | C     | D6            |
| A12         | PT22A         | 1    | T     | -             | PT27A         | 1    | T     | -             | PT31A         | 1    | T     | -             |
| B12         | PT21B         | 1    | C     | D7            | PT26B         | 1    | C     | D7            | PT30B         | 1    | C     | D7            |
| C12         | PT21A         | 1    | T     | -             | PT26A         | 1    | T     | -             | PT30A         | 1    | T     | -             |
| C11         | PT20B         | 0    | C     | BUSY          | PT25B         | 0    | C     | BUSY          | PT29B         | 0    | C     | BUSY          |
| -           | GNDIO0        | 0    | -     | -             | GNDIO0        | 0    | -     | -             | GNDIO0        | 0    | -     | -             |
| B11         | PT20A         | 0    | T     | CS1N          | PT25A         | 0    | T     | CS1N          | PT29A         | 0    | T     | CS1N          |
| A11         | PT19B         | 0    | C     | PCLKC0_0      | PT24B         | 0    | C     | PCLKC0_0      | PT28B         | 0    | C     | PCLKC0_0      |
| A10         | PT19A         | 0    | T     | PCLKT0_0      | PT24A         | 0    | T     | PCLKT0_0      | PT28A         | 0    | T     | PCLKT0_0      |
| B10         | PT18B         | 0    | C     | -             | PT23B         | 0    | C     | -             | PT27B         | 0    | C     | -             |
| B9          | PT18A         | 0    | T     | DQS           | PT23A         | 0    | T     | DQS           | PT27A         | 0    | T     | DQS           |
| D11         | PT17B         | 0    | -     | -             | PT22B         | 0    | -     | -             | PT26B         | 0    | -     | -             |
| D10         | PT16A         | 0    | -     | DOUT          | PT21A         | 0    | -     | DOUT          | PT25A         | 0    | -     | DOUT          |
| A9          | PT15B         | 0    | C     | -             | PT20B         | 0    | C     | -             | PT24B         | 0    | C     | -             |
| -           | GNDIO0        | 0    | -     | -             | GNDIO0        | 0    | -     | -             | GNDIO0        | 0    | -     | -             |
| C8          | PT15A         | 0    | T     | WRITEN        | PT20A         | 0    | T     | WRITEN        | PT24A         | 0    | T     | WRITEN        |
| B8          | PT14B         | 0    | C     | -             | PT19B         | 0    | C     | -             | PT23B         | 0    | C     | -             |
| A8          | PT14A         | 0    | T     | VREF1_0       | PT19A         | 0    | T     | VREF1_0       | PT23A         | 0    | T     | VREF1_0       |
| C7          | PT13B         | 0    | C     | -             | PT18B         | 0    | C     | -             | PT22B         | 0    | C     | -             |

**LFXP15 & LFXP20 Logic Signal Connections: 484 fpBGA (Cont.)**

| Ball Number | LFXP15        |      |              |               | LFXP20        |      |              |               |
|-------------|---------------|------|--------------|---------------|---------------|------|--------------|---------------|
|             | Ball Function | Bank | Differential | Dual Function | Ball Function | Bank | Differential | Dual Function |
| A14         | PT30B         | 1    | -            | -             | PT34B         | 1    | -            | -             |
| B14         | PT29A         | 1    | -            | D4            | PT33A         | 1    | -            | D4            |
| C12         | PT28B         | 1    | C            | -             | PT32B         | 1    | C            | -             |
| B12         | PT28A         | 1    | T            | D5            | PT32A         | 1    | T            | D5            |
| -           | GNDIO1        | 1    | -            | -             | GNDIO1        | 1    | -            | -             |
| D12         | PT27B         | 1    | C            | D6            | PT31B         | 1    | C            | D6            |
| E12         | PT27A         | 1    | T            | -             | PT31A         | 1    | T            | -             |
| A13         | PT26B         | 1    | C            | D7            | PT30B         | 1    | C            | D7            |
| A12         | PT26A         | 1    | T            | -             | PT30A         | 1    | T            | -             |
| A11         | PT25B         | 0    | C            | BUSY          | PT29B         | 0    | C            | BUSY          |
| -           | GNDIO0        | 0    | -            | -             | GNDIO0        | 0    | -            | -             |
| A10         | PT25A         | 0    | T            | CS1N          | PT29A         | 0    | T            | CS1N          |
| D11         | PT24B         | 0    | C            | PCLKC0_0      | PT28B         | 0    | C            | PCLKC0_0      |
| E11         | PT24A         | 0    | T            | PCLKT0_0      | PT28A         | 0    | T            | PCLKT0_0      |
| B11         | PT23B         | 0    | C            | -             | PT27B         | 0    | C            | -             |
| C11         | PT23A         | 0    | T            | DQS           | PT27A         | 0    | T            | DQS           |
| B9          | PT22B         | 0    | -            | -             | PT26B         | 0    | -            | -             |
| A9          | PT21A         | 0    | -            | DOUT          | PT25A         | 0    | -            | DOUT          |
| B8          | PT20B         | 0    | C            | -             | PT24B         | 0    | C            | -             |
| -           | GNDIO0        | 0    | -            | -             | GNDIO0        | 0    | -            | -             |
| A8          | PT20A         | 0    | T            | WRITEN        | PT24A         | 0    | T            | WRITEN        |
| E10         | PT19B         | 0    | C            | -             | PT23B         | 0    | C            | -             |
| D10         | PT19A         | 0    | T            | VREF1_0       | PT23A         | 0    | T            | VREF1_0       |
| C10         | PT18B         | 0    | C            | -             | PT22B         | 0    | C            | -             |
| B10         | PT18A         | 0    | T            | DI            | PT22A         | 0    | T            | DI            |
| B7          | PT17B         | 0    | C            | -             | PT21B         | 0    | C            | -             |
| A7          | PT17A         | 0    | T            | CSN           | PT21A         | 0    | T            | CSN           |
| C9          | PT16B         | 0    | C            | -             | PT20B         | 0    | C            | -             |
| D9          | PT16A         | 0    | T            | -             | PT20A         | 0    | T            | -             |
| B6          | PT15B         | 0    | C            | VREF2_0       | PT19B         | 0    | C            | VREF2_0       |
| A6          | PT15A         | 0    | T            | DQS           | PT19A         | 0    | T            | DQS           |
| F9          | PT14B         | 0    | -            | -             | PT18B         | 0    | -            | -             |
| E9          | PT13A         | 0    | -            | -             | PT17A         | 0    | -            | -             |
| -           | GNDIO0        | 0    | -            | -             | GNDIO0        | 0    | -            | -             |
| B5          | PT12B         | 0    | C            | -             | PT16B         | 0    | C            | -             |
| A5          | PT12A         | 0    | T            | -             | PT16A         | 0    | T            | -             |
| C8          | PT11B         | 0    | C            | -             | PT15B         | 0    | C            | -             |
| D8          | PT11A         | 0    | T            | -             | PT15A         | 0    | T            | -             |
| B4          | PT10B         | 0    | C            | -             | PT14B         | 0    | C            | -             |
| A4          | PT10A         | 0    | T            | -             | PT14A         | 0    | T            | -             |
| F8          | PT9B          | 0    | C            | -             | PT13B         | 0    | C            | -             |
| E8          | PT9A          | 0    | T            | -             | PT13A         | 0    | T            | -             |

**Commercial (Cont.)**

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|---------|-------|---------|------|-------|-------|
| LFXP15E-3FN484C | 300  | 1.2V    | -3    | fpBGA   | 484  | COM   | 15.5K |
| LFXP15E-4FN484C | 300  | 1.2V    | -4    | fpBGA   | 484  | COM   | 15.5K |
| LFXP15E-5FN484C | 300  | 1.2V    | -5    | fpBGA   | 484  | COM   | 15.5K |
| LFXP15E-3FN388C | 268  | 1.2V    | -3    | fpBGA   | 388  | COM   | 15.5K |
| LFXP15E-4FN388C | 268  | 1.2V    | -4    | fpBGA   | 388  | COM   | 15.5K |
| LFXP15E-5FN388C | 268  | 1.2V    | -5    | fpBGA   | 388  | COM   | 15.5K |
| LFXP15E-3FN256C | 188  | 1.2V    | -3    | fpBGA   | 256  | COM   | 15.5K |
| LFXP15E-4FN256C | 188  | 1.2V    | -4    | fpBGA   | 256  | COM   | 15.5K |
| LFXP15E-5FN256C | 188  | 1.2V    | -5    | fpBGA   | 256  | COM   | 15.5K |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|---------|-------|---------|------|-------|-------|
| LFXP20E-3FN484C | 340  | 1.2V    | -3    | fpBGA   | 484  | COM   | 19.7K |
| LFXP20E-4FN484C | 340  | 1.2V    | -4    | fpBGA   | 484  | COM   | 19.7K |
| LFXP20E-5FN484C | 340  | 1.2V    | -5    | fpBGA   | 484  | COM   | 19.7K |
| LFXP20E-3FN388C | 268  | 1.2V    | -3    | fpBGA   | 388  | COM   | 19.7K |
| LFXP20E-4FN388C | 268  | 1.2V    | -4    | fpBGA   | 388  | COM   | 19.7K |
| LFXP20E-5FN388C | 268  | 1.2V    | -5    | fpBGA   | 388  | COM   | 19.7K |
| LFXP20E-3FN256C | 188  | 1.2V    | -3    | fpBGA   | 256  | COM   | 19.7K |
| LFXP20E-4FN256C | 188  | 1.2V    | -4    | fpBGA   | 256  | COM   | 19.7K |
| LFXP20E-5FN256C | 188  | 1.2V    | -5    | fpBGA   | 256  | COM   | 19.7K |

**Industrial**

| Part Number    | I/Os | Voltage      | Grade | Package | Pins | Temp. | LUTs |
|----------------|------|--------------|-------|---------|------|-------|------|
| LFXP3C-3QN208I | 136  | 1.8/2.5/3.3V | -3    | PQFP    | 208  | IND   | 3.1K |
| LFXP3C-4QN208I | 136  | 1.8/2.5/3.3V | -4    | PQFP    | 208  | IND   | 3.1K |
| LFXP3C-3TN144I | 100  | 1.8/2.5/3.3V | -3    | TQFP    | 144  | IND   | 3.1K |
| LFXP3C-4TN144I | 100  | 1.8/2.5/3.3V | -4    | TQFP    | 144  | IND   | 3.1K |
| LFXP3C-3TN100I | 62   | 1.8/2.5/3.3V | -3    | TQFP    | 100  | IND   | 3.1K |
| LFXP3C-4TN100I | 62   | 1.8/2.5/3.3V | -4    | TQFP    | 100  | IND   | 3.1K |

| Part Number    | I/Os | Voltage      | Grade | Package | Pins | Temp. | LUTs |
|----------------|------|--------------|-------|---------|------|-------|------|
| LFXP6C-3FN256I | 188  | 1.8/2.5/3.3V | -3    | fpBGA   | 256  | IND   | 5.8K |
| LFXP6C-4FN256I | 188  | 1.8/2.5/3.3V | -4    | fpBGA   | 256  | IND   | 5.8K |
| LFXP6C-3QN208I | 142  | 1.8/2.5/3.3V | -3    | PQFP    | 208  | IND   | 5.8K |
| LFXP6C-4QN208I | 142  | 1.8/2.5/3.3V | -4    | PQFP    | 208  | IND   | 5.8K |
| LFXP6C-3TN144I | 100  | 1.8/2.5/3.3V | -3    | TQFP    | 144  | IND   | 5.8K |
| LFXP6C-4TN144I | 100  | 1.8/2.5/3.3V | -4    | TQFP    | 144  | IND   | 5.8K |

**Industrial (Cont.)**

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs |
|-----------------|------|---------|-------|---------|------|-------|------|
| LFXP10E-3FN388I | 244  | 1.2V    | -3    | fpBGA   | 388  | IND   | 9.7K |
| LFXP10E-4FN388I | 244  | 1.2V    | -4    | fpBGA   | 388  | IND   | 9.7K |
| LFXP10E-3FN256I | 188  | 1.2V    | -3    | fpBGA   | 256  | IND   | 9.7K |
| LFXP10E-4FN256I | 188  | 1.2V    | -4    | fpBGA   | 256  | IND   | 9.7K |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|---------|-------|---------|------|-------|-------|
| LFXP15E-3FN484I | 300  | 1.2V    | -3    | fpBGA   | 484  | IND   | 15.5K |
| LFXP15E-4FN484I | 300  | 1.2V    | -4    | fpBGA   | 484  | IND   | 15.5K |
| LFXP15E-3FN388I | 268  | 1.2V    | -3    | fpBGA   | 388  | IND   | 15.5K |
| LFXP15E-4FN388I | 268  | 1.2V    | -4    | fpBGA   | 388  | IND   | 15.5K |
| LFXP15E-3FN256I | 188  | 1.2V    | -3    | fpBGA   | 256  | IND   | 15.5K |
| LFXP15E-4FN256I | 188  | 1.2V    | -4    | fpBGA   | 256  | IND   | 15.5K |

| Part Number     | I/Os | Voltage | Grade | Package | Pins | Temp. | LUTs  |
|-----------------|------|---------|-------|---------|------|-------|-------|
| LFXP20E-3FN484I | 340  | 1.2V    | -3    | fpBGA   | 484  | IND   | 19.7K |
| LFXP20E-4FN484I | 340  | 1.2V    | -4    | fpBGA   | 484  | IND   | 19.7K |
| LFXP20E-3FN388I | 268  | 1.2V    | -3    | fpBGA   | 388  | IND   | 19.7K |
| LFXP20E-4FN388I | 268  | 1.2V    | -4    | fpBGA   | 388  | IND   | 19.7K |
| LFXP20E-3FN256I | 188  | 1.2V    | -3    | fpBGA   | 256  | IND   | 19.7K |
| LFXP20E-4FN256I | 188  | 1.2V    | -4    | fpBGA   | 256  | IND   | 19.7K |