


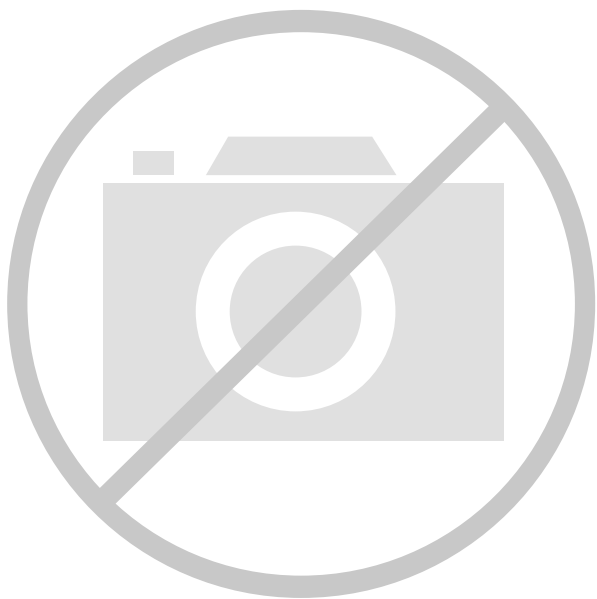

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - CPLDs \(Complex Programmable Logic Devices\)](#)

Embedded - CPLDs, or Complex Programmable Logic Devices, are highly versatile digital logic devices used in electronic systems. These programmable components are designed to perform complex logical operations and can be customized for specific applications. Unlike fixed-function ICs, CPLDs offer the flexibility to reprogram their configuration, making them an ideal choice for various embedded systems. They consist of a set of logic gates and programmable interconnects, allowing designers to implement complex logic circuits without needing custom hardware.

### Applications of Embedded - CPLDs

#### Details

|                                 |                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                  | Obsolete                                                                                                                                                        |
| Programmable Type               | EE PLD                                                                                                                                                          |
| Delay Time tpd(1) Max           | 15 ns                                                                                                                                                           |
| Voltage Supply - Internal       | 4.75V ~ 5.25V                                                                                                                                                   |
| Number of Logic Elements/Blocks | -                                                                                                                                                               |
| Number of Macrocells            | 8                                                                                                                                                               |
| Number of Gates                 | -                                                                                                                                                               |
| Number of I/O                   | -                                                                                                                                                               |
| Operating Temperature           | 0°C ~ 75°C (TA)                                                                                                                                                 |
| Mounting Type                   | Through Hole                                                                                                                                                    |
| Package / Case                  | 24-DIP (0.300", 7.62mm)                                                                                                                                         |
| Supplier Device Package         | 24-PDIP                                                                                                                                                         |
| Purchase URL                    | <a href="https://www.e-xfl.com/product-detail/lattice-semiconductor/gal20v8b-15lp">https://www.e-xfl.com/product-detail/lattice-semiconductor/gal20v8b-15lp</a> |




| Product Line                 | Ordering Part Number | Product Status      | Reference PCN                    |
|------------------------------|----------------------|---------------------|----------------------------------|
| <b>GAL20V8B<br/>(Cont'd)</b> | GAL20V8B-25QJ        | <b>Discontinued</b> | <a href="#"><u>PCN#13-10</u></a> |
|                              | GAL20V8B-25QJN       |                     |                                  |
|                              | GAL20V8B-20QJI       |                     | <a href="#"><u>PCN#09-10</u></a> |
|                              | GAL20V8B-20QJNI      |                     |                                  |
|                              | GAL20V8B-25QJI       |                     | <a href="#"><u>PCN#13-10</u></a> |
|                              | GAL20V8B-25QJNI      |                     |                                  |
| <b>GAL20V8C</b>              | GAL20V8C-5LJ         |                     | <a href="#"><u>PCN#06-07</u></a> |
|                              | GAL20V8C-5LJN        |                     |                                  |
|                              | GAL20V8C-7LJ         |                     | <a href="#"><u>PCN#13-10</u></a> |
|                              | GAL20V8C-7LJN        |                     |                                  |
|                              | GAL20V8C-10LJ        |                     |                                  |
|                              | GAL20V8C-10LJN       |                     |                                  |
|                              | GAL20V8C-10LJI       |                     |                                  |
|                              | GAL20V8C-10LJNI      |                     |                                  |

## Features

- **HIGH PERFORMANCE E<sup>2</sup>CMOS® TECHNOLOGY**
  - 5 ns Maximum Propagation Delay
  - $F_{max} = 166$  MHz
  - 4 ns Maximum from Clock Input to Data Output
  - UltraMOS® Advanced CMOS Technology
- **50% to 75% REDUCTION IN POWER FROM BIPOLAR**
  - 75mA Typ  $I_{cc}$  on Low Power Device
  - 45mA Typ  $I_{cc}$  on Quarter Power Device
- **ACTIVE PULL-UPS ON ALL PINS**
- **E<sup>2</sup> CELL TECHNOLOGY**
  - Reconfigurable Logic
  - Reprogrammable Cells
  - 100% Tested/100% Yields
  - High Speed Electrical Erasure (<100ms)
  - 20 Year Data Retention
- **EIGHT OUTPUT LOGIC MACROCELLS**
  - Maximum Flexibility for Complex Logic Designs
  - Programmable Output Polarity
  - Also Emulates 24-pin PAL® Devices with Full Function/Fuse Map/Parametric Compatibility
- **PRELOAD AND POWER-ON RESET OF ALL REGISTERS**
  - 100% Functional Testability
- **APPLICATIONS INCLUDE:**
  - DMA Control
  - State Machine Control
  - High Speed Graphics Processing
  - Standard Logic Speed Upgrade
- **ELECTRONIC SIGNATURE FOR IDENTIFICATION**
- **LEAD-FREE PACKAGE OPTIONS**

## Functional Block Diagram

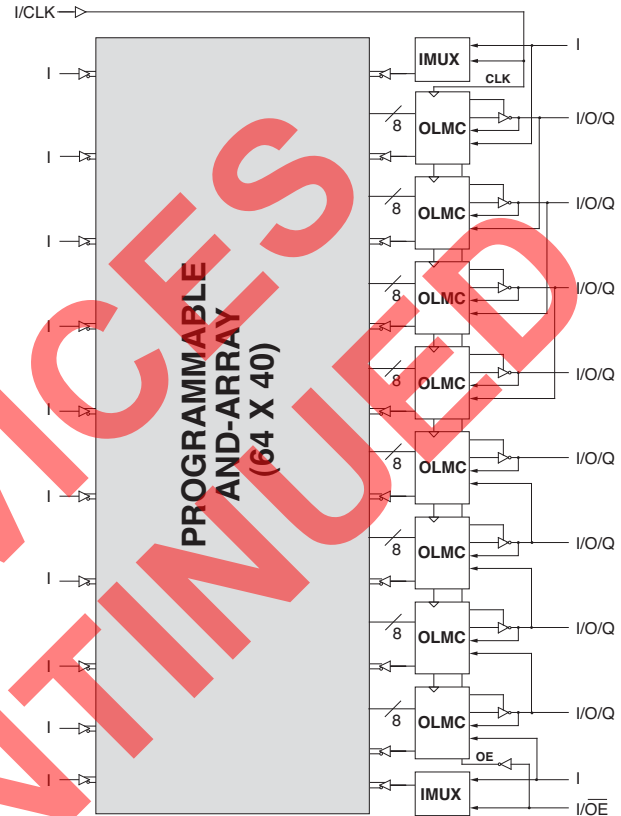



## Description

The GAL20V8C, at 5ns maximum propagation delay time, combines a high performance CMOS process with Electrically Erasable (E<sup>2</sup>) floating gate technology to provide the highest speed performance available in the PLD market. High speed erase times (<100ms) allow the devices to be reprogrammed quickly and efficiently.

The generic architecture provides maximum design flexibility by allowing the Output Logic Macrocell (OLMC) to be configured by the user. An important subset of the many architecture configurations possible with the GAL20V8 are the PAL architectures listed in the table of the macrocell description section. GAL20V8 devices are capable of emulating any of these PAL architectures with full function/fuse map/parametric compatibility.

Unique test circuitry and reprogrammable cells allow complete AC, DC, and functional testing during manufacture. As a result, Lattice Semiconductor delivers 100% field programmability and functionality of all GAL products. In addition, 100 erase/write cycles and data retention in excess of 20 years are specified.

## Pin Configuration

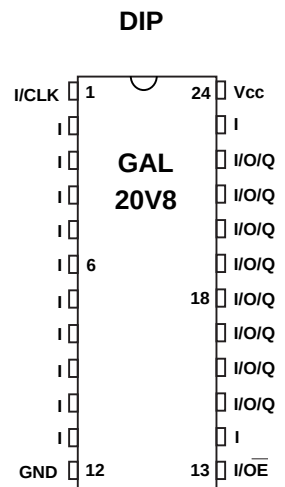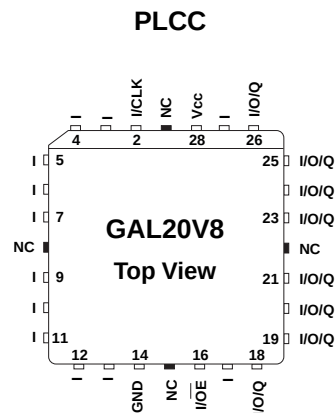

## GAL20V8 Ordering Information

### Conventional Packaging Commercial Grade Specifications

| Tpd (ns) | Tsu (ns) | Tco (ns) | Icc (mA) | Ordering #                | Package            |
|----------|----------|----------|----------|---------------------------|--------------------|
| 5        | 3        | 4        | 115      | GAL20V8C-5LJ <sup>1</sup> | 28-Lead PLCC       |
| 7.5      | 7        | 5        | 115      | GAL20V8C-7LJ              | 28-Lead PLCC       |
|          |          |          | 115      | GAL20V8B-7LP <sup>1</sup> | 24-Pin Plastic DIP |
| 10       | 10       | 7        | 115      | GAL20V8C-10LJ             | 28-Lead PLCC       |
|          |          |          | 115      | GAL20V8B-10LP             | 24-Pin Plastic DIP |
| 15       | 12       | 10       | 55       | GAL20V8B-15QP             | 24-Pin Plastic DIP |
|          |          |          | 55       | GAL20V8B-15QJ             | 28-Lead PLCC       |
|          |          |          | 90       | GAL20V8B-15LP             | 24-Pin Plastic DIP |
|          |          |          | 90       | GAL20V8B-15LJ             | 28-Lead PLCC       |
| 25       | 15       | 12       | 55       | GAL20V8B-25QP             | 24-Pin Plastic DIP |
|          |          |          | 55       | GAL20V8B-25QJ             | 28-Lead PLCC       |
|          |          |          | 90       | GAL20V8B-25LP             | 24-Pin Plastic DIP |
|          |          |          | 90       | GAL20V8B-25LJ             | 28-Lead PLCC       |

### Industrial Grade Specifications

| Tpd (ns) | Tsu (ns) | Tco (ns) | Icc (mA) | Ordering #                  | Package            |
|----------|----------|----------|----------|-----------------------------|--------------------|
| 10       | 10       | 7        | 130      | GAL20V8C-10LJI              | 28-Lead PLCC       |
|          |          |          | 130      | GAL20V8B-10LPI <sup>1</sup> | 24-Pin Plastic DIP |
|          |          |          | 130      | GAL20V8B-10LJI              | 28-Lead PLCC       |
| 15       | 12       | 10       | 130      | GAL20V8B-15LPI              | 24-Pin Plastic DIP |
|          |          |          | 130      | GAL20V8B-15LJI              | 28-Lead PLCC       |
| 20       | 13       | 11       | 65       | GAL20V8B-20QPI              | 24-Pin Plastic DIP |
|          |          |          | 65       | GAL20V8B-20QJI              | 28-Lead PLCC       |
| 25       | 15       | 12       | 65       | GAL20V8B-25QPI              | 24-Pin Plastic DIP |
|          |          |          | 65       | GAL20V8B-25QJI              | 28-Lead PLCC       |
|          |          |          | 130      | GAL20V8B-25LPI              | 24-Pin Plastic DIP |
|          |          |          | 130      | GAL20V8B-25LJI              | 28-Lead PLCC       |

1. Discontinued per PCN #06-07. Contact Rochester Electronics for available inventory.

**Lead-Free Packaging**

**Commercial Grade Specifications**


| Tpd (ns) | Tsu (ns) | Tco (ns) | Icc (mA) | Ordering #                 | Package                      |
|----------|----------|----------|----------|----------------------------|------------------------------|
| 5        | 3        | 4        | 115      | GAL20V8C-5LJN <sup>1</sup> | Lead-Free 28-Lead PLCC       |
| 7.5      | 7        | 5        | 115      | GAL20V8C-7LJN              | Lead-Free 28-Lead PLCC       |
|          |          |          | 115      | GAL20V8B-7LPN <sup>1</sup> | Lead-Free 24-Pin Plastic DIP |
| 10       | 10       | 7        | 115      | GAL20V8C-10LJN             | Lead-Free 28-Lead PLCC       |
|          |          |          | 115      | GAL20V8B-10LPN             | Lead-Free 24-Pin Plastic DIP |
| 15       | 12       | 10       | 55       | GAL20V8B-15QJN             | Lead-Free 28-Lead PLCC       |
|          |          |          | 55       | GAL20V8B-15QPN             | Lead-Free 24-Pin Plastic DIP |
|          |          |          | 90       | GAL20V8B-15LJN             | Lead-Free 28-Lead PLCC       |
|          |          |          | 90       | GAL20V8B-15LPN             | Lead-Free 24-Pin Plastic DIP |
| 25       | 15       | 12       | 55       | GAL20V8B-25QJN             | Lead-Free 28-Lead PLCC       |
|          |          |          | 55       | GAL20V8B-25QPN             | Lead-Free 24-Pin Plastic DIP |
|          |          |          | 90       | GAL20V8B-25LJN             | Lead-Free 28-Lead PLCC       |
|          |          |          | 90       | GAL20V8B-25LPN             | Lead-Free 24-Pin Plastic DIP |

**Industrial Grade Specifications**

| Tpd (ns) | Tsu (ns) | Tco (ns) | Icc (mA) | Ordering #                  | Package                      |
|----------|----------|----------|----------|-----------------------------|------------------------------|
| 10       | 10       | 7        | 130      | GAL20V8C-10LJN <sup>1</sup> | Lead-Free 28-Pin Plastic DIP |
|          |          |          | 130      | GAL20V8B-10LPN <sup>1</sup> | Lead-Free 24-Pin Plastic DIP |
| 15       | 12       | 10       | 130      | GAL20V8B-15LJN <sup>1</sup> | Lead-Free 28-Lead PLCC       |
|          |          |          | 130      | GAL20V8B-15LPN <sup>1</sup> | Lead-Free 24-Pin Plastic DIP |
| 20       | 13       | 11       | 65       | GAL20V8B-20QJN <sup>1</sup> | Lead-Free 28-Lead PLCC       |
|          |          |          | 65       | GAL20V8B-20QPN <sup>1</sup> | Lead-Free 24-Pin Plastic DIP |
| 25       | 15       | 12       | 65       | GAL20V8B-25QJN <sup>1</sup> | Lead-Free 28-Lead PLCC       |
|          |          |          | 65       | GAL20V8B-25QPN <sup>1</sup> | Lead-Free 24-Pin Plastic DIP |
|          |          |          | 130      | GAL20V8B-25LJN <sup>1</sup> | Lead-Free 28-Lead PLCC       |
|          |          |          | 130      | GAL20V8B-25LPN <sup>1</sup> | Lead-Free 24-Pin Plastic DIP |


1. Discontinued per PCN #06-07. Contact Rochester Electronics for available inventory.

**Part Number Description**

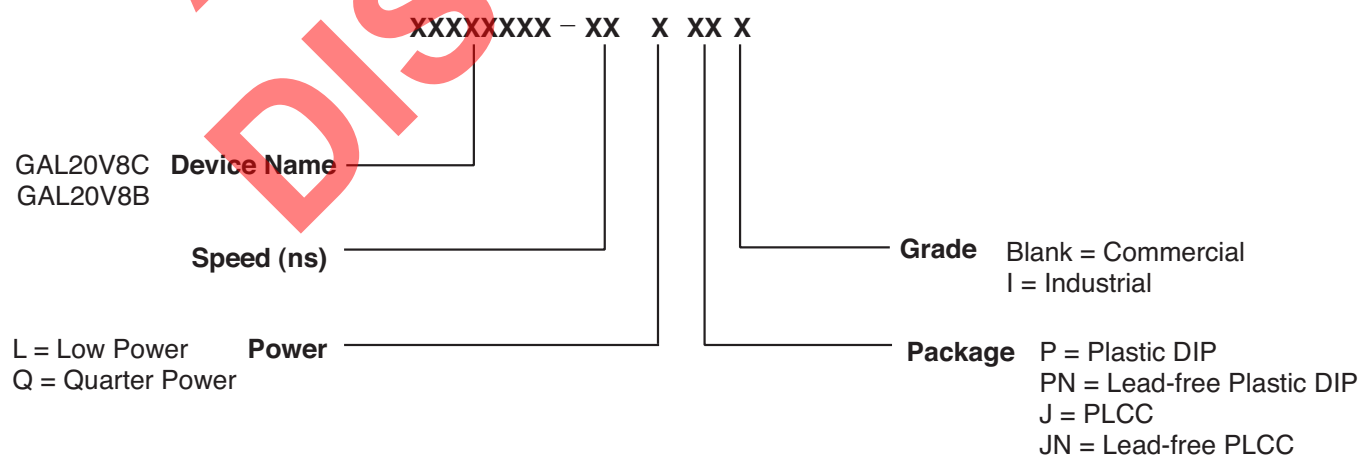

**Registered Mode Logic Diagram**

DIP (PLCC) Package Pinouts

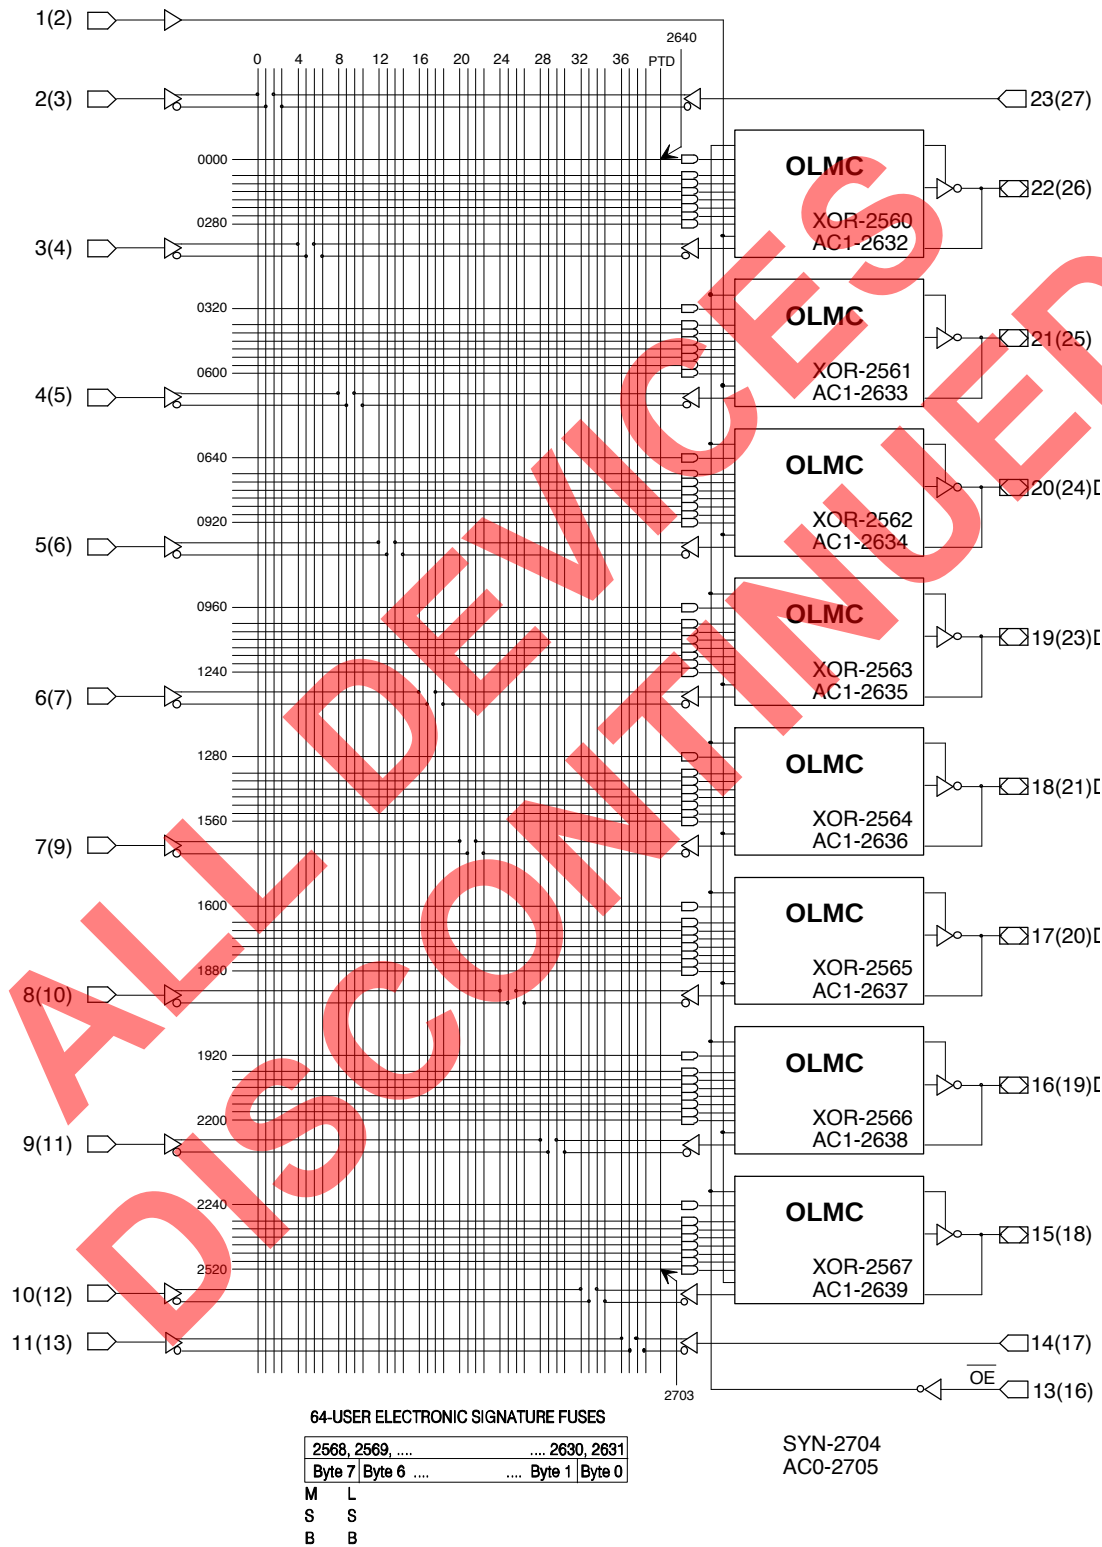

## Complex Mode

In the Complex mode, macrocells are configured as output only or I/O functions.


Architecture configurations available in this mode are similar to the common 20L8 and 20P8 devices with programmable polarity in each macrocell.

Up to six I/Os are possible in this mode. Dedicated inputs or outputs can be implemented as subsets of the I/O function. The two outer most macrocells (pins 15 & 22) do not have input capability. De-

signs requiring eight I/Os can be implemented in the Registered mode.

All macrocells have seven product terms per output. One product term is used for programmable output enable control. Pins 1 and 13 are always available as data inputs into the AND array.

The JEDEC fuse numbers including the UES fuses and PTD fuses are shown on the logic diagram on the following page.

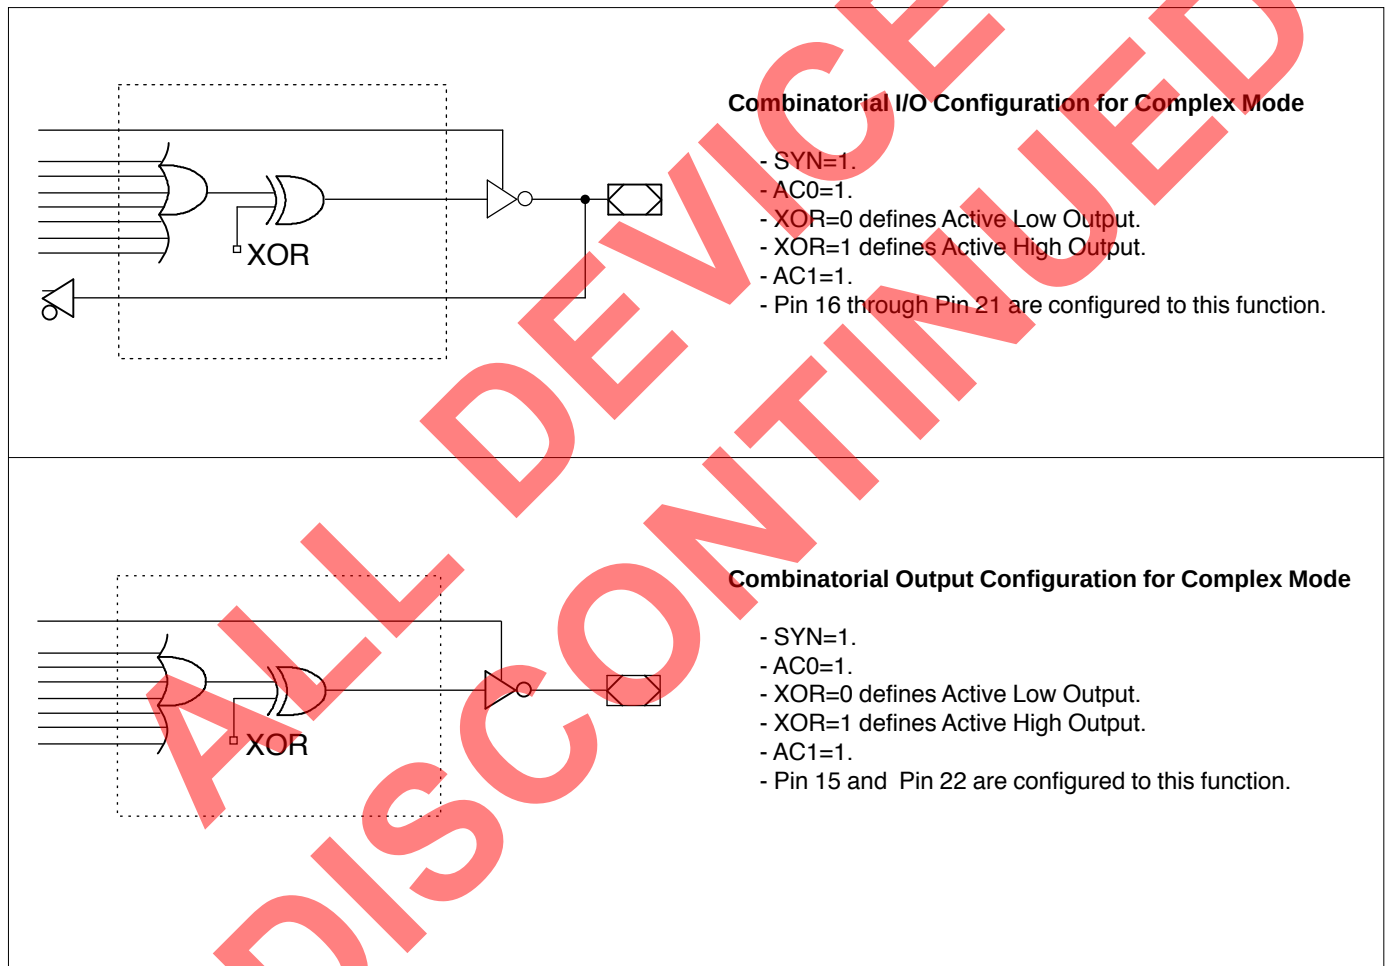

Note: The development software configures all of the architecture control bits and checks for proper pin usage automatically.

**Complex Mode Logic Diagram**

**DIP (PLCC) Package Pinouts**





## Simple Mode


In the Simple mode, pins are configured as dedicated inputs or as dedicated, always active, combinatorial outputs.

Architecture configurations available in this mode are similar to the common 14L8 and 16P6 devices with many permutations of generic output polarity or input choices.

All outputs in the simple mode have a maximum of eight product terms that can control the logic. In addition, each output has programmable polarity.

Pins 1 and 13 are always available as data inputs into the AND array. The "center" two macrocells (pins 18 and 19) cannot be used in the input configuration.


The JEDEC fuse numbers including the UES fuses and PTD fuses are shown on the logic diagram on the following page.

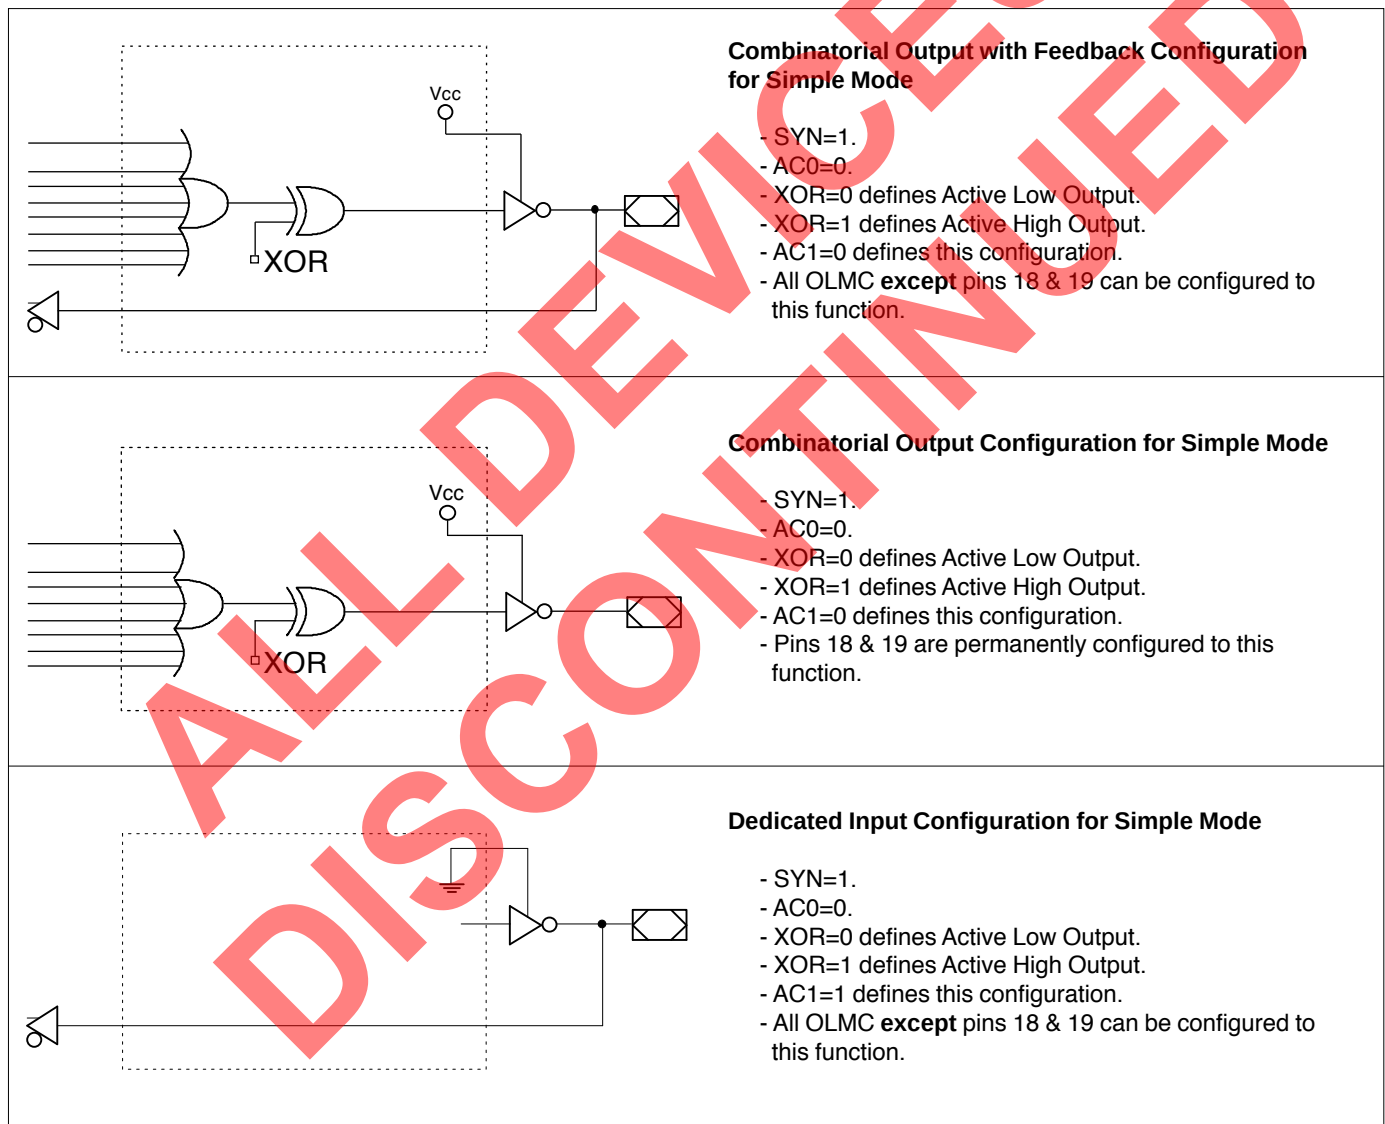

Note: The development software configures all of the architecture control bits and checks for proper pin usage automatically.

**Simple Mode Logic Diagram**

**DIP (PLCC) Package Pinouts**

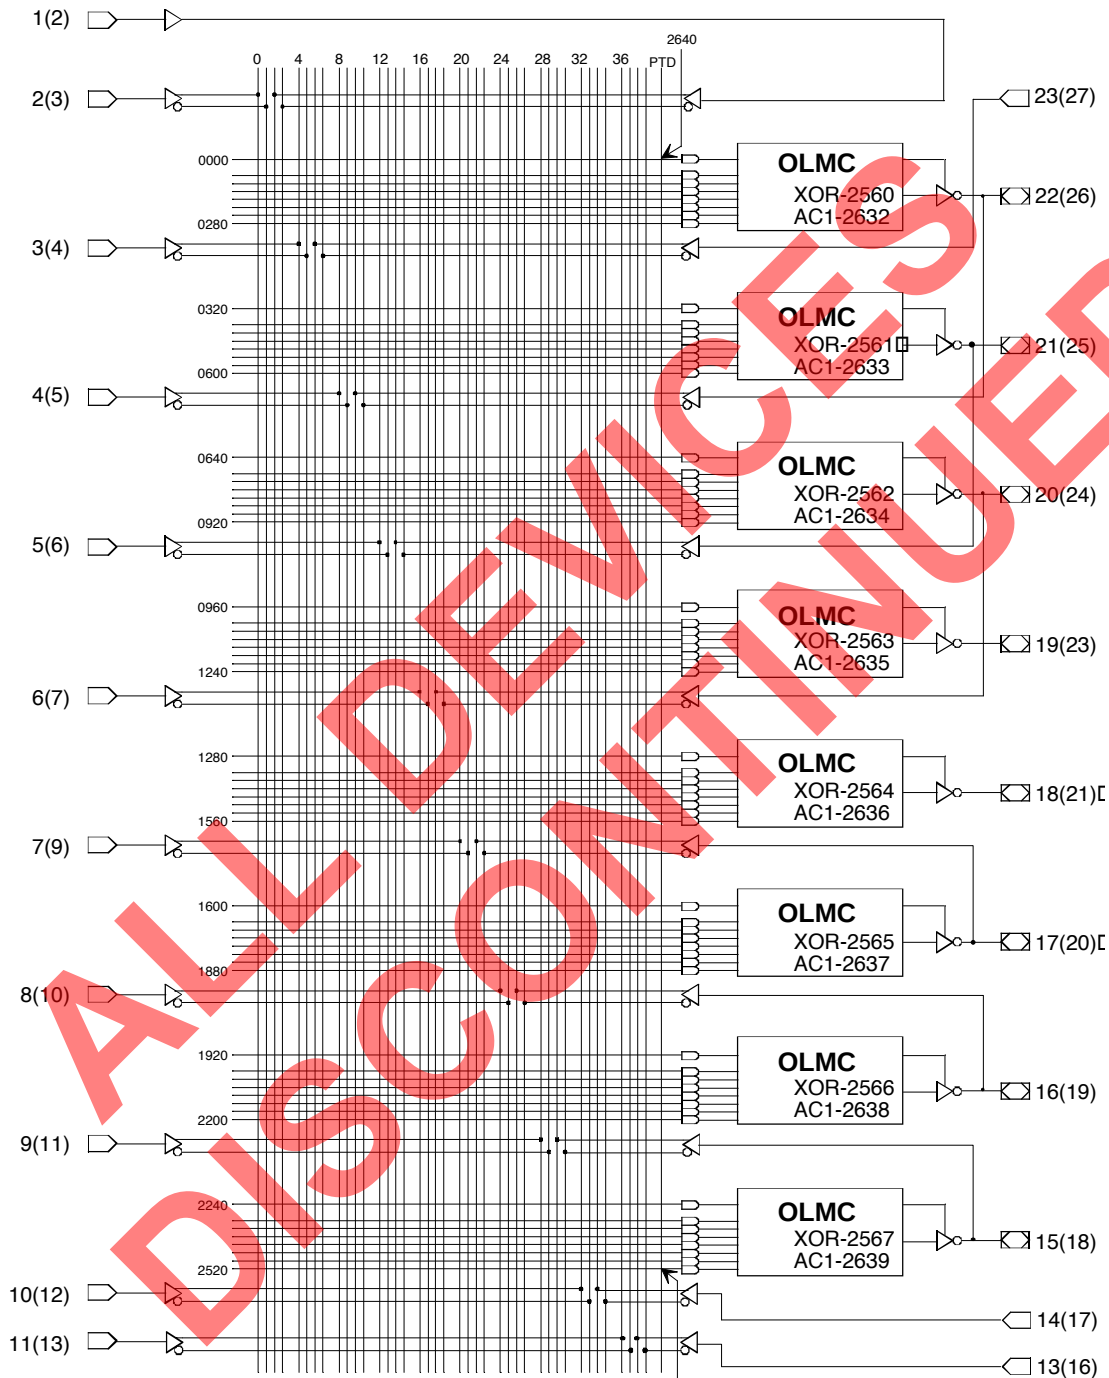

SYN-2704  
AC0-2705

## Absolute Maximum Ratings<sup>(1)</sup>

Supply voltage  $V_{CC}$  ..... -0.5 to +7V  
 Input voltage applied ..... -2.5 to  $V_{CC} + 1.0V$   
 Off-state output voltage applied ..... -2.5 to  $V_{CC} + 1.0V$   
 Storage Temperature ..... -65 to 150°C  
 Ambient Temperature with

Power Applied ..... -55 to 125°C

1. Stresses above those listed under the "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress only ratings and functional operation of the device at these or at any other conditions above those indicated in the operational sections of this specification is not implied (while programming, follow the programming specifications).

## Recommended Operating Conditions

### Commercial Devices:

Ambient Temperature ( $T_A$ ) ..... 0 to 75°C  
 Supply voltage ( $V_{CC}$ )  
 with Respect to Ground ..... +4.75 to +5.25V

### Industrial Devices:

Ambient Temperature ( $T_A$ ) ..... -40 to 85°C  
 Supply voltage ( $V_{CC}$ )  
 with Respect to Ground ..... +4.50 to +5.50V

## DC Electrical Characteristics

Over Recommended Operating Conditions (Unless Otherwise Specified)

| SYMBOL                            | PARAMETER                         | CONDITION                                            | MIN.           | TYP. <sup>3</sup> | MAX.         | UNITS |
|-----------------------------------|-----------------------------------|------------------------------------------------------|----------------|-------------------|--------------|-------|
| <b>V<sub>IL</sub></b>             | Input Low Voltage                 |                                                      | $V_{SS} - 0.5$ | —                 | 0.8          | V     |
| <b>V<sub>IH</sub></b>             | Input High Voltage                |                                                      | 2.0            | —                 | $V_{CC} + 1$ | V     |
| <b>I<sub>IL</sub><sup>1</sup></b> | Input or I/O Low Leakage Current  | $0V \leq V_{IN} \leq V_{IL} (MAX.)$                  | —              | —                 | -100         | μA    |
| <b>I<sub>IH</sub></b>             | Input or I/O High Leakage Current | $3.5V \leq V_{IN} \leq V_{CC}$                       | —              | —                 | 10           | μA    |
| <b>V<sub>OL</sub></b>             | Output Low Voltage                | $I_{OL} = MAX.$ $V_{IN} = V_{IL} \text{ or } V_{IH}$ | —              | —                 | 0.5          | V     |
| <b>V<sub>OH</sub></b>             | Output High Voltage               | $I_{OH} = MAX.$ $V_{IN} = V_{IL} \text{ or } V_{IH}$ | 2.4            | —                 | —            | V     |
| <b>I<sub>OL</sub></b>             | Low Level Output Current          |                                                      | —              | —                 | 16           | mA    |
| <b>I<sub>OH</sub></b>             | High Level Output Current         |                                                      | —              | —                 | -3.2         | mA    |
| <b>I<sub>OS</sub><sup>2</sup></b> | Output Short Circuit Current      | $V_{CC} = 5V$ $V_{OUT} = 0.5V$ $T_A = 25^\circ C$    | -30            | —                 | -150         | mA    |

### COMMERCIAL

|                       |                                |                                                                      |             |   |    |     |    |
|-----------------------|--------------------------------|----------------------------------------------------------------------|-------------|---|----|-----|----|
| <b>I<sub>CC</sub></b> | Operating Power Supply Current | $V_{IL} = 0.5V$ $V_{IH} = 3.0V$<br>$f_{toggle} = 15MHz$ Outputs Open | L -5/-7/-10 | — | 75 | 115 | mA |
|-----------------------|--------------------------------|----------------------------------------------------------------------|-------------|---|----|-----|----|

### INDUSTRIAL

|                       |                                |                                                                      |      |   |    |     |    |
|-----------------------|--------------------------------|----------------------------------------------------------------------|------|---|----|-----|----|
| <b>I<sub>CC</sub></b> | Operating Power Supply Current | $V_{IL} = 0.5V$ $V_{IH} = 3.0V$<br>$f_{toggle} = 15MHz$ Outputs Open | L-10 | — | 75 | 130 | mA |
|-----------------------|--------------------------------|----------------------------------------------------------------------|------|---|----|-----|----|

1) The leakage current is due to the internal pull-up resistor on all pins. See **Input Buffer** section for more information.

2) One output at a time for a maximum duration of one second.  $V_{out} = 0.5V$  was selected to avoid test problems caused by tester ground degradation. Characterized but not 100% tested.

3) Typical values are at  $V_{CC} = 5V$  and  $T_A = 25^\circ C$

## AC Switching Characteristics

Over Recommended Operating Conditions

|                                    |                          |                                                                                        |                     | COM   |      | COM  |      | COM/IND |      |       |
|------------------------------------|--------------------------|----------------------------------------------------------------------------------------|---------------------|-------|------|------|------|---------|------|-------|
| PARAMETER                          | TEST COND <sup>1</sup> . | DESCRIPTION                                                                            |                     | -5    |      | -7   |      | -10     |      | UNITS |
|                                    |                          |                                                                                        |                     | MIN.  | MAX. | MIN. | MAX. | MIN.    | MAX. |       |
| <b>t<sub>pd</sub></b>              | A                        | Input or I/O to                                                                        | 8 outputs switching | 1     | 5    | 3    | 7.5  | 3       | 10   | ns    |
|                                    |                          | Comb. Output                                                                           | 1 output switching  | —     | —    | —    | 7    | —       | —    | ns    |
| <b>t<sub>co</sub></b>              | A                        | Clock to Output Delay                                                                  |                     | 1     | 4    | 2    | 5    | 2       | 7    | ns    |
| <b>t<sub>cf</sub><sup>2</sup></b>  | —                        | Clock to Feedback Delay                                                                |                     | —     | 3    | —    | 3    | —       | 6    | ns    |
| <b>t<sub>su</sub></b>              | —                        | Setup Time, Input or Feedback before Clock↑                                            |                     | 3     | —    | 5    | —    | 7.5     | —    | ns    |
| <b>t<sub>h</sub></b>               | —                        | Hold Time, Input or Feedback after Clock↑                                              |                     | 0     | —    | 0    | —    | 0       | —    | ns    |
| <b>f<sub>max</sub><sup>3</sup></b> | A                        | Maximum Clock Frequency with External Feedback, 1/(t <sub>su</sub> + t <sub>co</sub> ) |                     | 142.8 | —    | 100  | —    | 66.7    | —    | MHz   |
|                                    | A                        | Maximum Clock Frequency with Internal Feedback, 1/(t <sub>su</sub> + t <sub>cf</sub> ) |                     | 166   | —    | 125  | —    | 71.4    | —    | MHz   |
|                                    | A                        | Maximum Clock Frequency with No Feedback                                               |                     | 166   | —    | 125  | —    | 83.3    | —    | MHz   |
| <b>t<sub>wh</sub></b>              | —                        | Clock Pulse Duration, High                                                             |                     | 3     | —    | 4    | —    | 6       | —    | ns    |
| <b>t<sub>wl</sub></b>              | —                        | Clock Pulse Duration, Low                                                              |                     | 3     | —    | 4    | —    | 6       | —    | ns    |
| <b>t<sub>en</sub></b>              | B                        | Input or I/O to Output Enabled                                                         |                     | 1     | 6    | 3    | 9    | 3       | 10   | ns    |
|                                    | B                        | OE to Output Enabled                                                                   |                     | 1     | 6    | 2    | 6    | 2       | 10   | ns    |
| <b>t<sub>dis</sub></b>             | C                        | Input or I/O to Output Disabled                                                        |                     | 1     | 5    | 2    | 9    | 2       | 10   | ns    |
|                                    | C                        | OE to Output Disabled                                                                  |                     | 1     | 5    | 1.5  | 6    | 1.5     | 10   | ns    |

1) Refer to **Switching Test Conditions** section.

2) Calculated from f<sub>max</sub> with internal feedback. Refer to **f<sub>max</sub> Descriptions** section.

3) Refer to **f<sub>max</sub> Descriptions** section. Characterized initially and after any design or process changes that may affect these parameters.

## Capacitance (T<sub>A</sub> = 25°C, f = 1.0 MHz)

| SYMBOL           | PARAMETER         | MAXIMUM* | UNITS | TEST CONDITIONS                                 |
|------------------|-------------------|----------|-------|-------------------------------------------------|
| C <sub>I</sub>   | Input Capacitance | 8        | pF    | V <sub>CC</sub> = 5.0V, V <sub>I</sub> = 2.0V   |
| C <sub>I/O</sub> | I/O Capacitance   | 8        | pF    | V <sub>CC</sub> = 5.0V, V <sub>I/O</sub> = 2.0V |

\*Characterized but not 100% tested

## AC Switching Characteristics

Over Recommended Operating Conditions

| PARAM.                             | TEST COND <sup>1</sup> . | DESCRIPTION                                                                            |                     | COM  |      | COM / IND |      | COM / IND |      | IND  |      | COM / IND |      | UNITS |
|------------------------------------|--------------------------|----------------------------------------------------------------------------------------|---------------------|------|------|-----------|------|-----------|------|------|------|-----------|------|-------|
|                                    |                          |                                                                                        |                     | -7   |      | -10       |      | -15       |      | -20  |      | -25       |      |       |
|                                    |                          |                                                                                        |                     | MIN. | MAX. | MIN.      | MAX. | MIN.      | MAX. | MIN. | MAX. | MIN.      | MAX. |       |
| <b>t<sub>pd</sub></b>              | A                        | Input or I/O to                                                                        | 8 outputs switching | 3    | 7.5  | 3         | 10   | 3         | 15   | 3    | 20   | 3         | 25   | ns    |
|                                    |                          | Comb. Output                                                                           | 1 output switching  | —    | 7    | —         | —    | —         | —    | —    | —    | —         | —    | ns    |
| <b>t<sub>co</sub></b>              | A                        | Clock to Output Delay                                                                  |                     | 2    | 5    | 2         | 7    | 2         | 10   | 2    | 11   | 2         | 12   | ns    |
| <b>t<sub>cf</sub><sup>2</sup></b>  | —                        | Clock to Feedback Delay                                                                |                     | —    | 3    | —         | 6    | —         | 8    | —    | 9    | —         | 10   | ns    |
| <b>t<sub>su</sub></b>              | —                        | Setup Time, Input or Fdbk before Clk↑                                                  |                     | 7    | —    | 10        | —    | 12        | —    | 13   | —    | 15        | —    | ns    |
| <b>t<sub>h</sub></b>               | —                        | Hold Time, Input or Fdbk after Clk↑                                                    |                     | 0    | —    | 0         | —    | 0         | —    | 0    | —    | 0         | —    | ns    |
| <b>f<sub>max</sub><sup>3</sup></b> | A                        | Maximum Clock Frequency with External Feedback, 1/(t <sub>su</sub> + t <sub>co</sub> ) |                     | 83.3 | —    | 58.8      | —    | 45.5      | —    | 41.6 | —    | 37        | —    | MHz   |
|                                    | A                        | Maximum Clock Frequency with Internal Feedback, 1/(t <sub>su</sub> + t <sub>cf</sub> ) |                     | 100  | —    | 62.5      | —    | 50        | —    | 45.4 | —    | 40        | —    | MHz   |
|                                    | A                        | Maximum Clock Frequency with No Feedback                                               |                     | 100  | —    | 62.5      | —    | 62.5      | —    | 50   | —    | 41.7      | —    | MHz   |
| <b>t<sub>wh</sub></b>              | —                        | Clock Pulse Duration, High                                                             |                     | 5    | —    | 8         | —    | 8         | —    | 10   | —    | 12        | —    | ns    |
| <b>t<sub>wl</sub></b>              | —                        | Clock Pulse Duration, Low                                                              |                     | 5    | —    | 8         | —    | 8         | —    | 10   | —    | 12        | —    | ns    |
| <b>t<sub>en</sub></b>              | B                        | Input or I/O to Output Enabled                                                         |                     | 3    | 9    | 3         | 10   | —         | 15   | —    | 18   | —         | 25   | ns    |
|                                    | B                        | $\overline{OE}$ to Output Enabled                                                      |                     | 2    | 6    | 2         | 10   | —         | 15   | —    | 18   | —         | 20   | ns    |
| <b>t<sub>dis</sub></b>             | C                        | Input or I/O to Output Disabled                                                        |                     | 2    | 9    | 2         | 10   | —         | 15   | —    | 18   | —         | 25   | ns    |
|                                    | C                        | $\overline{OE}$ to Output Disabled                                                     |                     | 1.5  | 6    | 1.5       | 10   | —         | 15   | —    | 18   | —         | 20   | ns    |

1) Refer to **Switching Test Conditions** section.

2) Calculated from f<sub>max</sub> with internal feedback. Refer to **f<sub>max</sub> Descriptions** section.


3) Refer to **f<sub>max</sub> Descriptions** section.

## Capacitance (TA = 25°C, f = 1.0 MHz)


| SYMBOL           | PARAMETER         | MAXIMUM* | UNITS | TEST CONDITIONS                                 |
|------------------|-------------------|----------|-------|-------------------------------------------------|
| C <sub>i</sub>   | Input Capacitance | 8        | pF    | V <sub>CC</sub> = 5.0V, V <sub>I</sub> = 2.0V   |
| C <sub>i/o</sub> | I/O Capacitance   | 8        | pF    | V <sub>CC</sub> = 5.0V, V <sub>I/O</sub> = 2.0V |

\*Characterized but not 100% tested.


**Switching Waveforms**

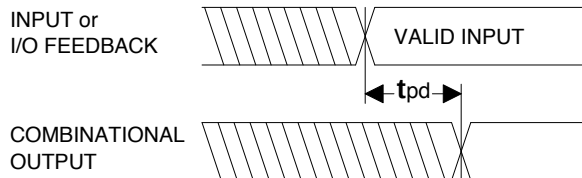


**Combinatorial Output**

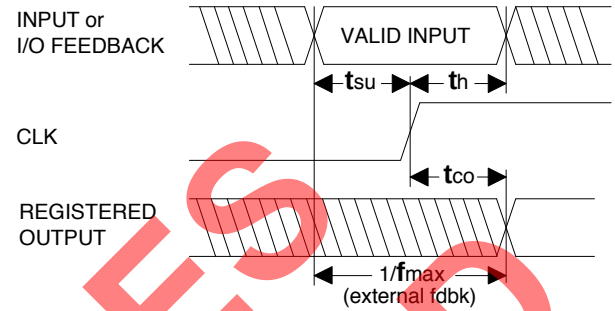


**Registered Output**

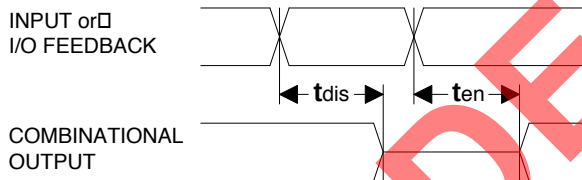


**Input or I/O to Output Enable/Disable**

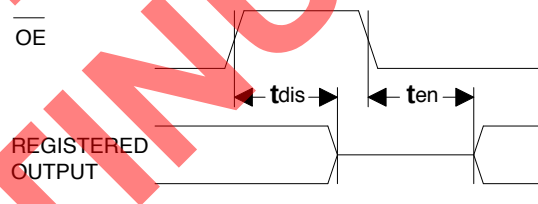

**OE to Output Enable/Disable**

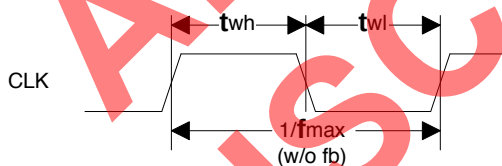


**Clock Width**

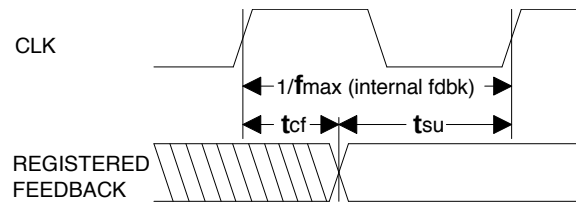


**$f_{max}$  with Feedback**

## f<sub>max</sub> Descriptions

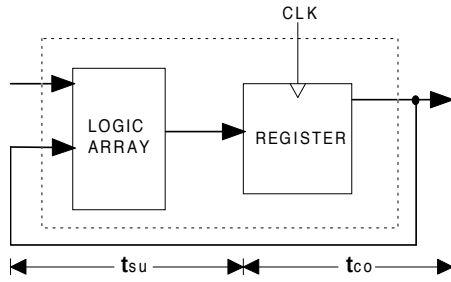


**f<sub>max</sub> with External Feedback  $1/(t_{su}+t_{co})$**

**Note:** f<sub>max</sub> with external feedback is calculated from measured t<sub>su</sub> and t<sub>co</sub>.

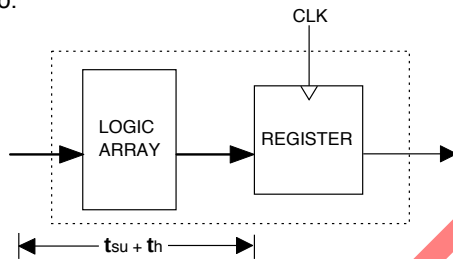

**f<sub>max</sub> with No Feedback**

**Note:** f<sub>max</sub> with no feedback may be less than  $1/(t_{wh} + t_{wl})$ . This is to allow for a clock duty cycle of other than 50%.

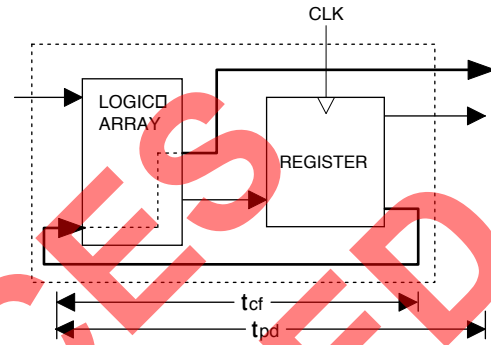


**f<sub>max</sub> with Internal Feedback  $1/(t_{su}+t_{cf})$**

**Note:** t<sub>cf</sub> is a calculated value, derived by subtracting t<sub>su</sub> from the period of f<sub>max</sub> w/ internal feedback ( $t_{cf} = 1/f_{max} - t_{su}$ ). The value of t<sub>cf</sub> is used primarily when calculating the delay from clocking a register to a combinational output (through registered feedback), as shown above. For example, the timing from clock to a combinational output is equal to t<sub>cf</sub> + t<sub>pd</sub>.

## Switching Test Conditions

| Input Pulse Levels             |          | GND to 3.0V       |
|--------------------------------|----------|-------------------|
| Input Rise and Fall Times      | GAL20V8B | 2 – 3ns 10% – 90% |
|                                | GAL20V8C | 1.5ns 10% – 90%   |
| Input Timing Reference Levels  |          | 1.5V              |
| Output Timing Reference Levels |          | 1.5V              |
| Output Load                    |          | See Figure        |

3-state levels are measured 0.5V from steady-state active level.

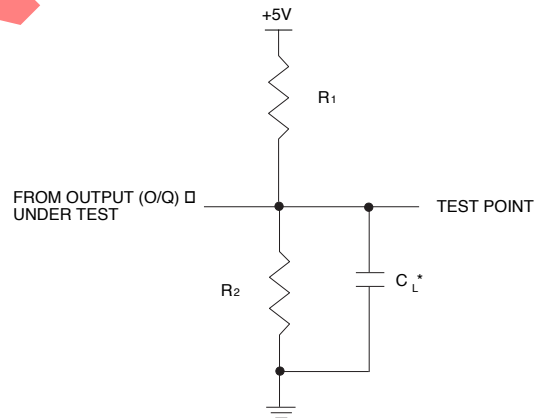

\*C<sub>L</sub> INCLUDES TEST FIXTURE AND PROBE CAPACITANCE

### GAL20V8B Output Load Conditions (see figure)

| Test Condition | R <sub>1</sub> | R <sub>2</sub> | C <sub>L</sub> |
|----------------|----------------|----------------|----------------|
| A              | 200Ω           | 390Ω           | 50pF           |
| B              | ∞              | 390Ω           | 50pF           |
|                |                |                |                |
| C              | 200Ω           | 390Ω           | 5pF            |
|                |                |                |                |

### GAL20V8C Output Load Conditions (see figure)

| Test Condition | R <sub>1</sub> | R <sub>2</sub> | C <sub>L</sub> |
|----------------|----------------|----------------|----------------|
| A              | 200Ω           | 200Ω           | 50pF           |
| B              | ∞              | 200Ω           | 50pF           |
|                |                |                |                |
| C              | 200Ω           | 200Ω           | 5pF            |
|                |                |                |                |

## Electronic Signature

An electronic signature is provided in every GAL20V8 device. It contains 64 bits of reprogrammable memory that can contain user defined data. Some uses include user ID codes, revision numbers, or inventory control. The signature data is always available to the user independent of the state of the security cell.

NOTE: The electronic signature is included in checksum calculations. Changing the electronic signature will alter the checksum.

## Security Cell

A security cell is provided in the GAL20V8 devices to prevent unauthorized copying of the array patterns. Once programmed, this cell prevents further read access to the functional bits in the device. This cell can only be erased by re-programming the device, so the original configuration can never be examined once this cell is programmed. The Electronic Signature is always available to the user, regardless of the state of this control cell.

## Latch-Up Protection

GAL20V8 devices are designed with an on-board charge pump to negatively bias the substrate. The negative bias minimizes the potential of latch-up caused by negative input undershoots. Additionally, outputs are designed with n-channel pull-ups instead of the traditional p-channel pull-ups in order to eliminate latch-up due to output overshoots.

## Device Programming

GAL devices are programmed using a Lattice Semiconductor-approved Logic Programmer, available from a number of manufacturers. Complete programming of the device takes only a few seconds. Erasing of the device is transparent to the user, and is done automatically as part of the programming cycle.

## Output Register Preload

When testing state machine designs, all possible states and state transitions must be verified in the design, not just those required in the normal machine operations. This is because, in system operation, certain events occur that may throw the logic into an illegal state (power-up, line voltage glitches, brown-outs, etc.). To test a design for proper treatment of these conditions, a way must be provided to break the feedback paths, and force any desired (i.e., illegal) state into the registers. Then the machine can be sequenced and the outputs tested for correct next state conditions.


GAL20V8 devices include circuitry that allows each registered output to be synchronously set either high or low. Thus, any present state condition can be forced for test sequencing. If necessary, approved GAL programmers capable of executing test vectors perform output register preload automatically.

## Input Buffers

GAL20V8 devices are designed with TTL level compatible input buffers. These buffers have a characteristically high impedance, and present a much lighter load to the driving logic than bipolar TTL devices.


The GAL20V8 input and I/O pins have built-in active pull-ups. As a result, unused inputs and I/O's will float to a TTL "high" (logical "1"). Lattice Semiconductor recommends that all unused inputs and tri-stated I/O pins be connected to another active input, V<sub>CC</sub>, or Ground. Doing this will tend to improve noise immunity and reduce I<sub>CC</sub> for the device.

**Typical Input Pull-up Characteristic**

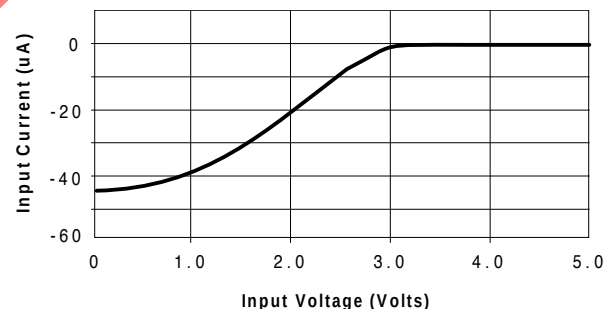




## Power-Up Reset

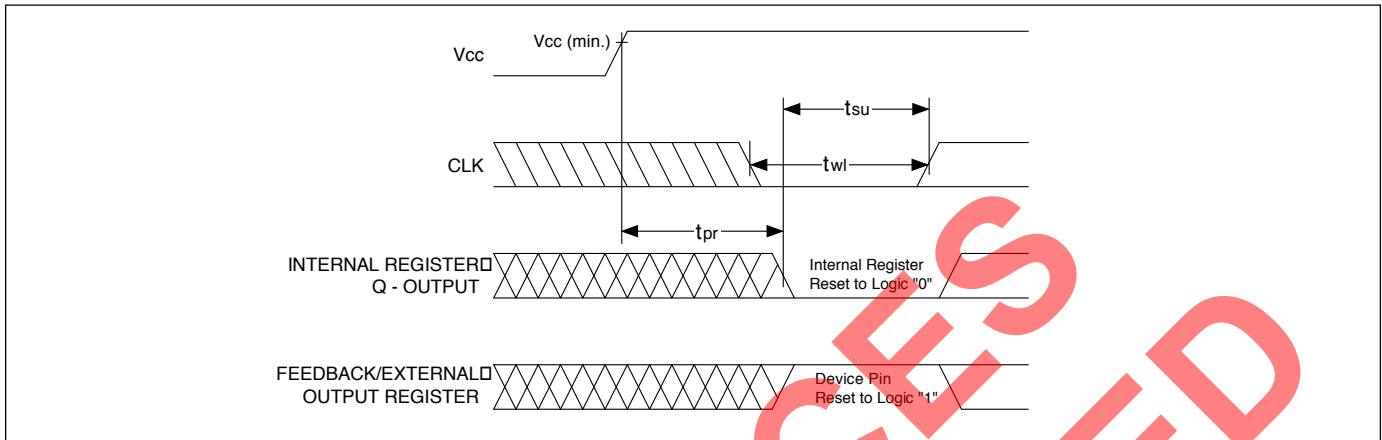

Circuitry within the GAL20V8 provides a reset signal to all registers during power-up. All internal registers will have their Q outputs set low after a specified time ( $t_{pr}$ , 1  $\mu$ s MAX). As a result, the state on the registered output pins (if they are enabled) will always be high on power-up, regardless of the programmed polarity of the output pins. This feature can greatly simplify state machine design by providing a known state on power-up. Because of the asynchronous nature of system power-up, some conditions must be met to provide


a valid power-up reset of the device. First, the  $V_{CC}$  rise must be monotonic. Second, the clock input must be at static TTL level as shown in the diagram during power up. The registers will reset within a maximum of  $t_{pr}$  time. As in normal system operation, avoid clocking the device until all input and feedback path setup times have been met. The clock must also meet the minimum pulse width requirements.

## Input/Output Equivalent Schematics

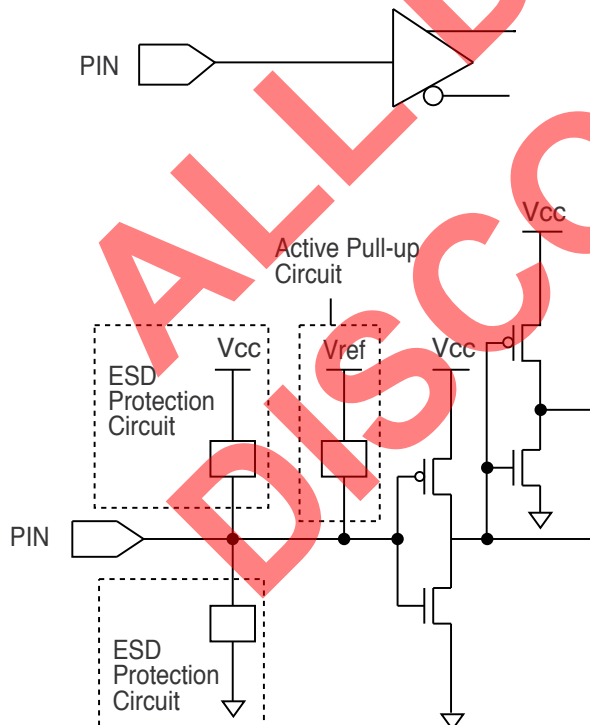

Typ.  $V_{ref} = 3.2V$









Typical Input

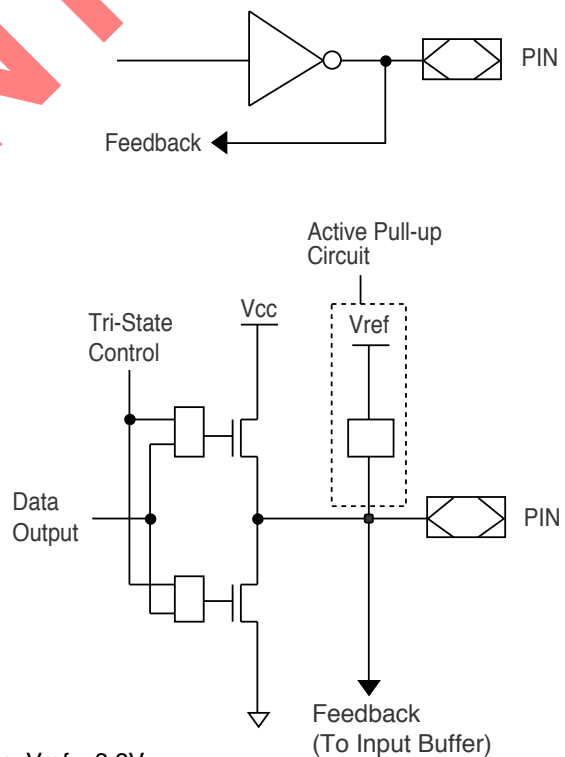

Typ.  $V_{ref} = 3.2V$


Typical Output

**GAL20V8C: Typical AC and DC Characteristic Diagrams**

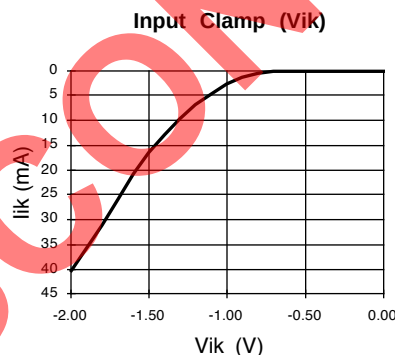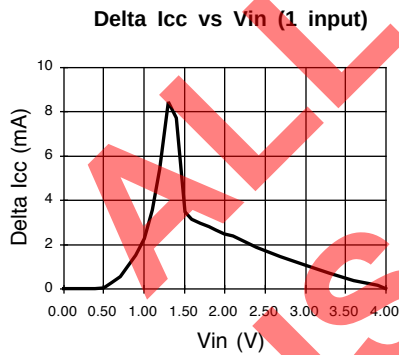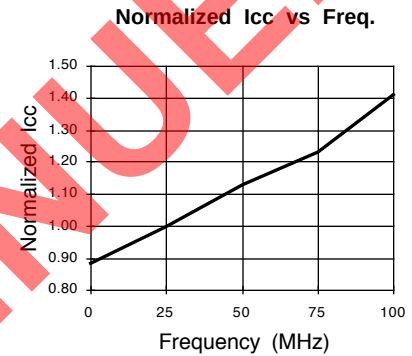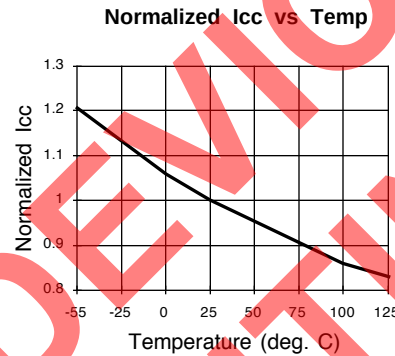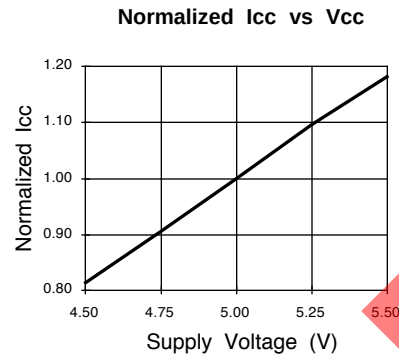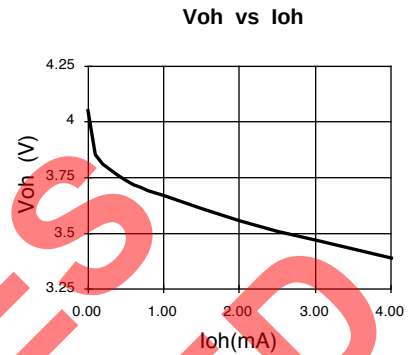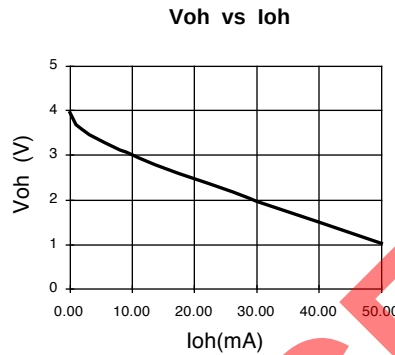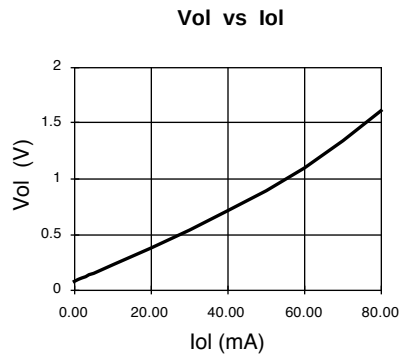


**GAL20V8B-7/-10: Typical AC and DC Characteristic Diagrams**


**Normalized Tpd vs Vcc**

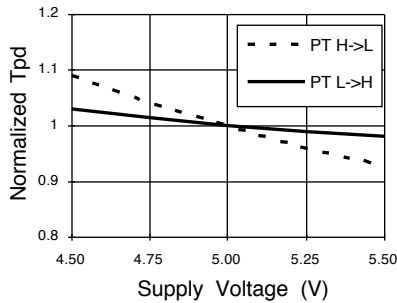


**Normalized Tco vs Vcc**

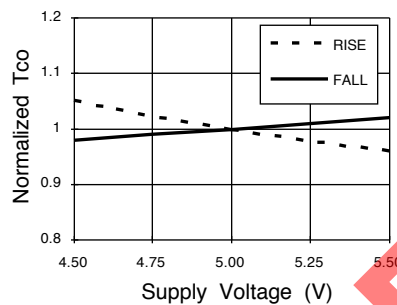


**Normalized Tsu vs Vcc**

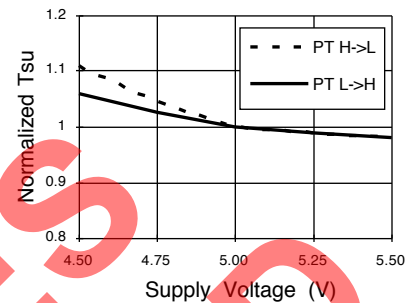


**Normalized Tpd vs Temp**

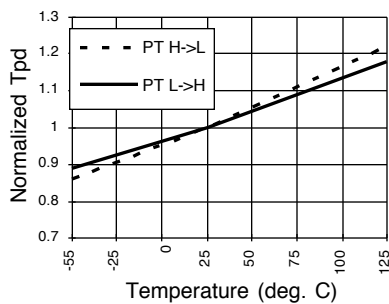


**Normalized Tco vs Temp**

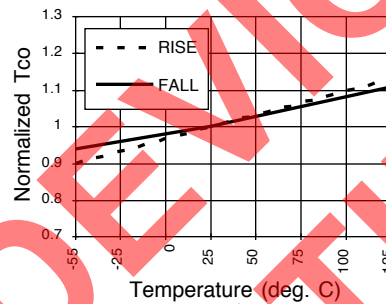


**Normalized Tsu vs Temp**

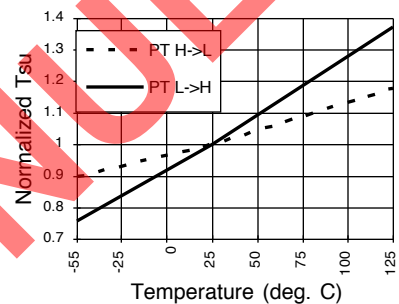


**Delta Tpd vs # of Outputs Switching**

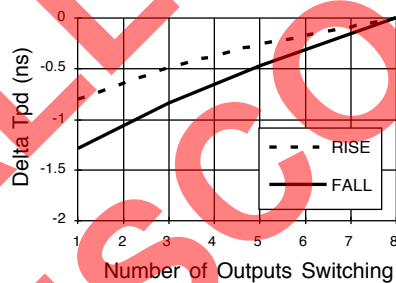


**Delta Tco vs # of Outputs Switching**

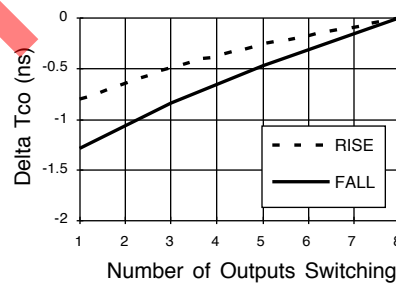









**Delta Tpd vs Output Loading**

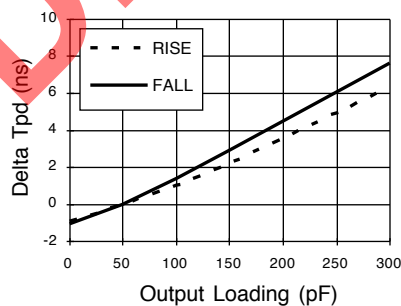

**Delta Tco vs Output Loading**

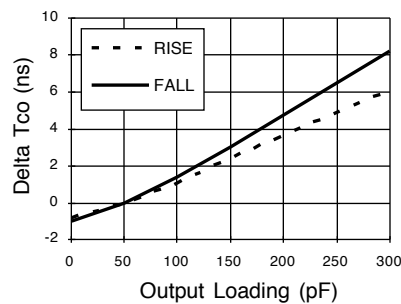

**GAL20V8B-7/-10: Typical AC and DC Characteristic Diagrams**

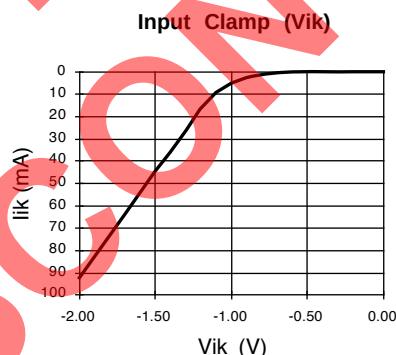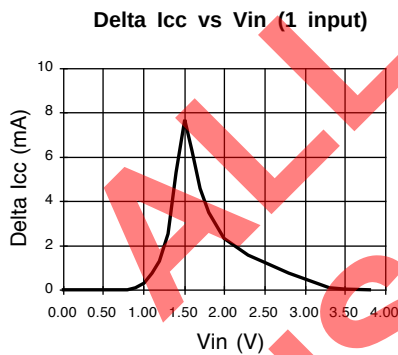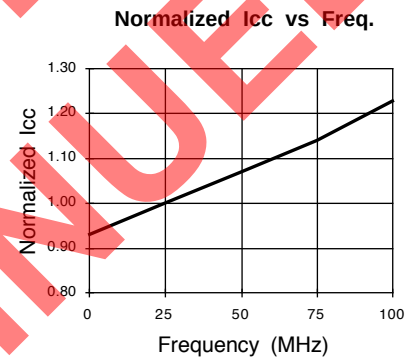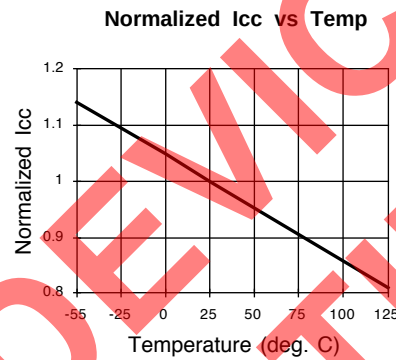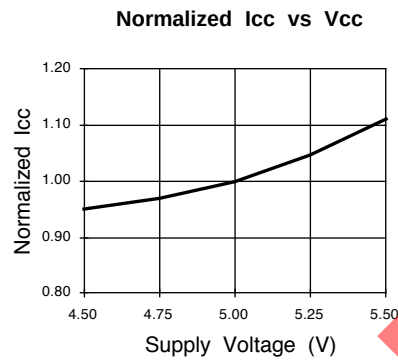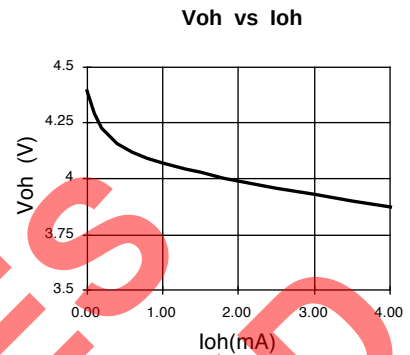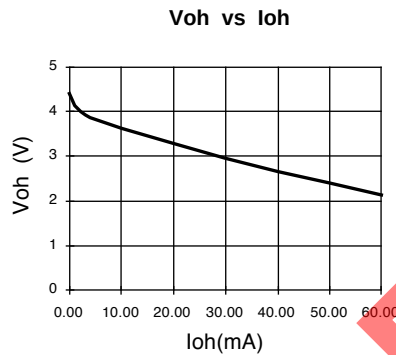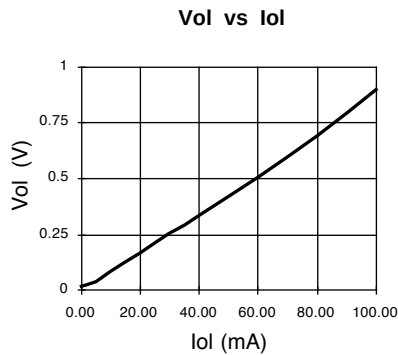

**GAL20V8B-15/-25: Typical AC and DC Characteristic Diagrams**

