



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                    |
| Number of LABs/CLBs            | 16825                                                                                                                                     |
| Number of Logic Elements/Cells | 215360                                                                                                                                    |
| Total RAM Bits                 | 13455360                                                                                                                                  |
| Number of I/O                  | 400                                                                                                                                       |
| Number of Gates                | -                                                                                                                                         |
| Voltage - Supply               | 0.95V ~ 1.05V                                                                                                                             |
| Mounting Type                  | Surface Mount                                                                                                                             |
| Operating Temperature          | 0°C ~ 100°C (TJ)                                                                                                                          |
| Package / Case                 | 676-BBGA, FCBGA                                                                                                                           |
| Supplier Device Package        | 676-FCBGA (27x27)                                                                                                                         |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/xilinx/xc7a200t-3fbg676e">https://www.e-xfl.com/product-detail/xilinx/xc7a200t-3fbg676e</a> |

Table 9: Differential SelectIO DC Input and Output Levels

| I/O Standard | $V_{ICM}^{(1)}$ |        |             | $V_{ID}^{(2)}$ |        |        | $V_{OCM}^{(3)}$ |                 |                 | $V_{OD}^{(4)}$ |        |        |
|--------------|-----------------|--------|-------------|----------------|--------|--------|-----------------|-----------------|-----------------|----------------|--------|--------|
|              | V, Min          | V, Typ | V, Max      | V, Min         | V, Typ | V, Max | V, Min          | V, Typ          | V, Max          | V, Min         | V, Typ | V, Max |
| BLVDS_25     | 0.300           | 1.200  | 1.425       | 0.100          | —      | —      | —               | 1.250           | —               | Note 5         |        |        |
| MINI_LVDS_25 | 0.300           | 1.200  | $V_{CCAUX}$ | 0.200          | 0.400  | 0.600  | 1.000           | 1.200           | 1.400           | 0.300          | 0.450  | 0.600  |
| PPDS_25      | 0.200           | 0.900  | $V_{CCAUX}$ | 0.100          | 0.250  | 0.400  | 0.500           | 0.950           | 1.400           | 0.100          | 0.250  | 0.400  |
| RSDS_25      | 0.300           | 0.900  | 1.500       | 0.100          | 0.350  | 0.600  | 1.000           | 1.200           | 1.400           | 0.100          | 0.350  | 0.600  |
| TMDS_33      | 2.700           | 2.965  | 3.230       | 0.150          | 0.675  | 1.200  | $V_{CCO}-0.405$ | $V_{CCO}-0.300$ | $V_{CCO}-0.190$ | 0.400          | 0.600  | 0.800  |

**Notes:**

1.  $V_{ICM}$  is the input common mode voltage.
2.  $V_{ID}$  is the input differential voltage ( $Q - \bar{Q}$ ).
3.  $V_{OCM}$  is the output common mode voltage.
4.  $V_{OD}$  is the output differential voltage ( $Q - \bar{Q}$ ).
5.  $V_{OD}$  for BLVDS will vary significantly depending on topology and loading.

Table 10: Complementary Differential SelectIO DC Input and Output Levels

| I/O Standard    | $V_{ICM}^{(1)}$ |        |        | $V_{ID}^{(2)}$ |        | $V_{OL}^{(3)}$        | $V_{OH}^{(4)}$        | $I_{OL}$ | $I_{OH}$ |
|-----------------|-----------------|--------|--------|----------------|--------|-----------------------|-----------------------|----------|----------|
|                 | V, Min          | V, Typ | V, Max | V, Min         | V, Max | V, Max                | V, Min                | mA, Max  | mA, Min  |
| DIFF_HSTL_I     | 0.300           | 0.750  | 1.125  | 0.100          | —      | 0.400                 | $V_{CCO}-0.400$       | 8.00     | –8.00    |
| DIFF_HSTL_I_18  | 0.300           | 0.900  | 1.425  | 0.100          | —      | 0.400                 | $V_{CCO}-0.400$       | 8.00     | –8.00    |
| DIFF_HSTL_II    | 0.300           | 0.750  | 1.125  | 0.100          | —      | 0.400                 | $V_{CCO}-0.400$       | 16.00    | –16.00   |
| DIFF_HSTL_II_18 | 0.300           | 0.900  | 1.425  | 0.100          | —      | 0.400                 | $V_{CCO}-0.400$       | 16.00    | –16.00   |
| DIFF_HSUL_12    | 0.300           | 0.600  | 0.850  | 0.100          | —      | 20% $V_{CCO}$         | 80% $V_{CCO}$         | 0.100    | –0.100   |
| DIFF_MOBILE_DDR | 0.300           | 0.900  | 1.425  | 0.100          | —      | 10% $V_{CCO}$         | 90% $V_{CCO}$         | 0.100    | –0.100   |
| DIFF_SSTL135    | 0.300           | 0.675  | 1.000  | 0.100          | —      | $(V_{CCO}/2) - 0.150$ | $(V_{CCO}/2) + 0.150$ | 13.0     | –13.0    |
| DIFF_SSTL135_R  | 0.300           | 0.675  | 1.000  | 0.100          | —      | $(V_{CCO}/2) - 0.150$ | $(V_{CCO}/2) + 0.150$ | 8.9      | –8.9     |
| DIFF_SSTL15     | 0.300           | 0.750  | 1.125  | 0.100          | —      | $(V_{CCO}/2) - 0.175$ | $(V_{CCO}/2) + 0.175$ | 13.0     | –13.0    |
| DIFF_SSTL15_R   | 0.300           | 0.750  | 1.125  | 0.100          | —      | $(V_{CCO}/2) - 0.175$ | $(V_{CCO}/2) + 0.175$ | 8.9      | –8.9     |
| DIFF_SSTL18_I   | 0.300           | 0.900  | 1.425  | 0.100          | —      | $(V_{CCO}/2) - 0.470$ | $(V_{CCO}/2) + 0.470$ | 8.00     | –8.00    |
| DIFF_SSTL18_II  | 0.300           | 0.900  | 1.425  | 0.100          | —      | $(V_{CCO}/2) - 0.600$ | $(V_{CCO}/2) + 0.600$ | 13.4     | –13.4    |

**Notes:**

1.  $V_{ICM}$  is the input common mode voltage.
2.  $V_{ID}$  is the input differential voltage ( $Q - \bar{Q}$ ).
3.  $V_{OL}$  is the single-ended low-output voltage.
4.  $V_{OH}$  is the single-ended high-output voltage.

## Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Artix-7 devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 9](#).

Table 14: Networking Applications Interface Performances

| Description                                                | Speed Grade |        |     |      | Units |
|------------------------------------------------------------|-------------|--------|-----|------|-------|
|                                                            | 1.0V        |        |     | 0.9V |       |
|                                                            | -3          | -2/-2L | -1  | -2L  |       |
| SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)  | 680         | 680    | 600 | 600  | Mb/s  |
| DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14) | 1250        | 1250   | 950 | 950  | Mb/s  |
| SDR LVDS receiver (SFI-4.1) <sup>(1)</sup>                 | 680         | 680    | 600 | 600  | Mb/s  |
| DDR LVDS receiver (SPI-4.2) <sup>(1)</sup>                 | 1250        | 1250   | 950 | 950  | Mb/s  |

### Notes:

1. LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 15: Maximum Physical Interface (PHY) Rate for Memory Interfaces<sup>(1)(2)</sup>

| Memory Standard        | Speed Grade |        |     |      | Units |
|------------------------|-------------|--------|-----|------|-------|
|                        | 1.0V        |        |     | 0.9V |       |
|                        | -3          | -2/-2L | -1  | -2L  |       |
| 4:1 Memory Controllers |             |        |     |      |       |
| DDR3                   | 1066        | 800    | 800 | 800  | Mb/s  |
| DDR3L                  | 800         | 800    | 667 | 667  | Mb/s  |
| DDR2                   | 800         | 800    | 667 | 667  | Mb/s  |
| LPDDR2                 | 667         | 667    | 533 | 533  | Mb/s  |
| 2:1 Memory Controllers |             |        |     |      |       |
| DDR3                   | 800         | 700    | 620 | 620  | Mb/s  |
| DDR3L                  | 800         | 700    | 620 | 620  | Mb/s  |
| DDR2                   | 800         | 700    | 620 | 620  | Mb/s  |

### Notes:

1.  $V_{REF}$  tracking is required. For more information, see [UG586, 7 Series FPGAs Memory Interface Solutions User Guide](#).
2. When using the internal  $V_{REF}$  the maximum data rate is 800 Mb/s (400 MHz).

Table 16: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

| I/O Standard      | T <sub>IOPI</sub> |        |      |      | T <sub>IOOP</sub> |        |      |      | T <sub>IOTP</sub> |        |      |      | Units |
|-------------------|-------------------|--------|------|------|-------------------|--------|------|------|-------------------|--------|------|------|-------|
|                   | Speed Grade       |        |      |      | Speed Grade       |        |      |      | Speed Grade       |        |      |      |       |
|                   | 1.0V              |        | 0.9V |      | 1.0V              |        | 0.9V |      | 1.0V              |        | 0.9V |      |       |
|                   | -3                | -2/-2L | -1   | -2L  | -3                | -2/-2L | -1   | -2L  | -3                | -2/-2L | -1   | -2L  |       |
| HSTL_II_F         | 0.65              | 0.73   | 0.80 | 0.85 | 1.12              | 1.24   | 1.49 | 1.71 | 1.69              | 1.90   | 2.32 | 2.36 | ns    |
| HSTL_I_18_F       | 0.67              | 0.75   | 0.82 | 0.87 | 1.13              | 1.26   | 1.51 | 1.72 | 1.70              | 1.92   | 2.34 | 2.37 | ns    |
| HSTL_II_18_F      | 0.66              | 0.75   | 0.81 | 0.87 | 1.12              | 1.24   | 1.49 | 1.71 | 1.69              | 1.90   | 2.32 | 2.36 | ns    |
| DIFF_HSTL_I_F     | 0.68              | 0.76   | 0.83 | 0.85 | 1.18              | 1.30   | 1.56 | 1.77 | 1.75              | 1.96   | 2.39 | 2.42 | ns    |
| DIFF_HSTL_II_F    | 0.68              | 0.76   | 0.83 | 0.85 | 1.21              | 1.33   | 1.59 | 1.77 | 1.78              | 1.99   | 2.42 | 2.42 | ns    |
| DIFF_HSTL_I_18_F  | 0.71              | 0.79   | 0.86 | 0.87 | 1.21              | 1.33   | 1.59 | 1.77 | 1.78              | 1.99   | 2.42 | 2.42 | ns    |
| DIFF_HSTL_II_18_F | 0.70              | 0.78   | 0.85 | 0.87 | 1.21              | 1.33   | 1.59 | 1.77 | 1.78              | 1.99   | 2.42 | 2.42 | ns    |
| LVC MOS33_S4      | 1.26              | 1.34   | 1.41 | 1.62 | 3.80              | 3.93   | 4.18 | 4.41 | 4.37              | 4.59   | 5.01 | 5.06 | ns    |
| LVC MOS33_S8      | 1.26              | 1.34   | 1.41 | 1.62 | 3.52              | 3.65   | 3.90 | 4.13 | 4.09              | 4.31   | 4.73 | 4.78 | ns    |
| LVC MOS33_S12     | 1.26              | 1.34   | 1.41 | 1.62 | 3.09              | 3.21   | 3.46 | 3.69 | 3.65              | 3.87   | 4.29 | 4.34 | ns    |
| LVC MOS33_S16     | 1.26              | 1.34   | 1.41 | 1.62 | 3.40              | 3.52   | 3.77 | 4.00 | 3.97              | 4.18   | 4.60 | 4.65 | ns    |
| LVC MOS33_F4      | 1.26              | 1.34   | 1.41 | 1.62 | 3.26              | 3.38   | 3.64 | 3.86 | 3.83              | 4.04   | 4.46 | 4.51 | ns    |
| LVC MOS33_F8      | 1.26              | 1.34   | 1.41 | 1.62 | 2.74              | 2.87   | 3.12 | 3.35 | 3.31              | 3.52   | 3.95 | 4.00 | ns    |
| LVC MOS33_F12     | 1.26              | 1.34   | 1.41 | 1.62 | 2.55              | 2.68   | 2.93 | 3.16 | 3.12              | 3.34   | 3.76 | 3.81 | ns    |
| LVC MOS33_F16     | 1.26              | 1.34   | 1.41 | 1.62 | 2.55              | 2.68   | 2.93 | 3.16 | 3.12              | 3.34   | 3.76 | 3.81 | ns    |
| LVC MOS25_S4      | 1.12              | 1.20   | 1.27 | 1.43 | 3.13              | 3.26   | 3.51 | 3.72 | 3.70              | 3.91   | 4.34 | 4.37 | ns    |
| LVC MOS25_S8      | 1.12              | 1.20   | 1.27 | 1.43 | 2.88              | 3.01   | 3.26 | 3.49 | 3.45              | 3.67   | 4.09 | 4.14 | ns    |
| LVC MOS25_S12     | 1.12              | 1.20   | 1.27 | 1.43 | 2.48              | 2.60   | 2.85 | 3.08 | 3.05              | 3.26   | 3.68 | 3.73 | ns    |
| LVC MOS25_S16     | 1.12              | 1.20   | 1.27 | 1.43 | 2.82              | 2.94   | 3.20 | 3.43 | 3.39              | 3.60   | 4.03 | 4.08 | ns    |
| LVC MOS25_F4      | 1.12              | 1.20   | 1.27 | 1.43 | 2.74              | 2.87   | 3.12 | 3.35 | 3.31              | 3.52   | 3.95 | 4.00 | ns    |
| LVC MOS25_F8      | 1.12              | 1.20   | 1.27 | 1.43 | 2.18              | 2.30   | 2.56 | 2.79 | 2.75              | 2.96   | 3.39 | 3.44 | ns    |
| LVC MOS25_F12     | 1.12              | 1.20   | 1.27 | 1.43 | 2.16              | 2.29   | 2.54 | 2.77 | 2.73              | 2.95   | 3.37 | 3.42 | ns    |
| LVC MOS25_F16     | 1.12              | 1.20   | 1.27 | 1.43 | 2.01              | 2.13   | 2.39 | 2.61 | 2.58              | 2.79   | 3.21 | 3.26 | ns    |
| LVC MOS18_S4      | 0.74              | 0.83   | 0.89 | 0.94 | 1.62              | 1.74   | 1.99 | 2.19 | 2.19              | 2.40   | 2.82 | 2.84 | ns    |
| LVC MOS18_S8      | 0.74              | 0.83   | 0.89 | 0.94 | 2.18              | 2.30   | 2.56 | 2.79 | 2.75              | 2.96   | 3.39 | 3.44 | ns    |
| LVC MOS18_S12     | 0.74              | 0.83   | 0.89 | 0.94 | 2.18              | 2.30   | 2.56 | 2.79 | 2.75              | 2.96   | 3.39 | 3.44 | ns    |
| LVC MOS18_S16     | 0.74              | 0.83   | 0.89 | 0.94 | 1.52              | 1.65   | 1.90 | 2.13 | 2.09              | 2.31   | 2.73 | 2.78 | ns    |
| LVC MOS18_S24     | 0.74              | 0.83   | 0.89 | 0.94 | 1.60              | 1.72   | 1.98 | 2.21 | 2.17              | 2.38   | 2.81 | 2.86 | ns    |
| LVC MOS18_F4      | 0.74              | 0.83   | 0.89 | 0.94 | 1.45              | 1.57   | 1.82 | 2.05 | 2.01              | 2.23   | 2.65 | 2.70 | ns    |
| LVC MOS18_F8      | 0.74              | 0.83   | 0.89 | 0.94 | 1.68              | 1.80   | 2.06 | 2.29 | 2.25              | 2.46   | 2.89 | 2.94 | ns    |
| LVC MOS18_F12     | 0.74              | 0.83   | 0.89 | 0.94 | 1.68              | 1.80   | 2.06 | 2.29 | 2.25              | 2.46   | 2.89 | 2.94 | ns    |
| LVC MOS18_F16     | 0.74              | 0.83   | 0.89 | 0.94 | 1.40              | 1.52   | 1.77 | 2.00 | 1.97              | 2.18   | 2.60 | 2.65 | ns    |
| LVC MOS18_F24     | 0.74              | 0.83   | 0.89 | 0.94 | 1.34              | 1.46   | 1.71 | 1.94 | 1.90              | 2.12   | 2.54 | 2.59 | ns    |
| LVC MOS15_S4      | 0.77              | 0.86   | 0.93 | 0.98 | 2.05              | 2.18   | 2.43 | 2.50 | 2.62              | 2.84   | 3.26 | 3.15 | ns    |
| LVC MOS15_S8      | 0.77              | 0.86   | 0.93 | 0.98 | 2.09              | 2.21   | 2.46 | 2.69 | 2.65              | 2.87   | 3.29 | 3.34 | ns    |
| LVC MOS15_S12     | 0.77              | 0.86   | 0.93 | 0.98 | 1.59              | 1.71   | 1.96 | 2.19 | 2.15              | 2.37   | 2.79 | 2.84 | ns    |
| LVC MOS15_S16     | 0.77              | 0.86   | 0.93 | 0.98 | 1.59              | 1.71   | 1.96 | 2.19 | 2.15              | 2.37   | 2.79 | 2.84 | ns    |

Table 23: IO\_FIFO Switching Characteristics

| Symbol                                             | Description            | Speed Grade |            |            |            | Units |
|----------------------------------------------------|------------------------|-------------|------------|------------|------------|-------|
|                                                    |                        | 1.0V        |            |            | 0.9V       |       |
|                                                    |                        | -3          | -2/-2L     | -1         | -2L        |       |
| IO_FIFO Clock to Out Delays                        |                        |             |            |            |            |       |
| T <sub>OFFCKO_DO</sub>                             | RDCLK to Q outputs     | 0.55        | 0.60       | 0.68       | 0.81       | ns    |
| T <sub>CKO_FLAGS</sub>                             | Clock to IO_FIFO flags | 0.55        | 0.61       | 0.77       | 0.55       | ns    |
| Setup/Hold                                         |                        |             |            |            |            |       |
| T <sub>CCK_D</sub> /T <sub>CKC_D</sub>             | D inputs to WRCLK      | 0.47/0.02   | 0.51/0.02  | 0.58/0.02  | 0.76/−0.05 | ns    |
| T <sub>IFFCKC_WREN</sub> /T <sub>IFFCKC_WREN</sub> | WREN to WRCLK          | 0.42/−0.01  | 0.47/−0.01 | 0.53/−0.01 | 0.70/−0.05 | ns    |
| T <sub>OFFCKC_RDEN</sub> /T <sub>OFFCKC_RDEN</sub> | RDEN to RDCLK          | 0.53/0.02   | 0.58/0.02  | 0.66/0.02  | 0.79/−0.02 | ns    |
| Minimum Pulse Width                                |                        |             |            |            |            |       |
| T <sub>PWH_IO_FIFO</sub>                           | RESET, RDCLK, WRCLK    | 1.62        | 2.15       | 2.15       | 2.15       | ns    |
| T <sub>PWL_IO_FIFO</sub>                           | RESET, RDCLK, WRCLK    | 1.62        | 2.15       | 2.15       | 2.15       | ns    |
| Maximum Frequency                                  |                        |             |            |            |            |       |
| F <sub>MAX</sub>                                   | RDCLK and WRCLK        | 266.67      | 200.00     | 200.00     | 200.00     | MHz   |

## CLB Switching Characteristics

Table 24: CLB Switching Characteristics

| Symbol                                                        | Description                                                                                      | Speed Grade |           |           |            | Units   |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------|-----------|-----------|------------|---------|
|                                                               |                                                                                                  | 1.0V        |           |           | 0.9V       |         |
|                                                               |                                                                                                  | -3          | -2/-2L    | -1        | -2L        |         |
| Combinatorial Delays                                          |                                                                                                  |             |           |           |            |         |
| T <sub>ILO</sub>                                              | An – Dn LUT address to A                                                                         | 0.10        | 0.11      | 0.13      | 0.15       | ns, Max |
| T <sub>ILO_2</sub>                                            | An – Dn LUT address to AMUX/CMUX                                                                 | 0.27        | 0.30      | 0.36      | 0.41       | ns, Max |
| T <sub>ILO_3</sub>                                            | An – Dn LUT address to BMUX_A                                                                    | 0.42        | 0.46      | 0.55      | 0.65       | ns, Max |
| T <sub>ITO</sub>                                              | An – Dn inputs to A – D Q outputs                                                                | 0.94        | 1.05      | 1.27      | 1.51       | ns, Max |
| T <sub>AXA</sub>                                              | AX inputs to AMUX output                                                                         | 0.62        | 0.69      | 0.84      | 1.01       | ns, Max |
| T <sub>AXB</sub>                                              | AX inputs to BMUX output                                                                         | 0.58        | 0.66      | 0.83      | 0.98       | ns, Max |
| T <sub>AXC</sub>                                              | AX inputs to CMUX output                                                                         | 0.60        | 0.68      | 0.82      | 0.98       | ns, Max |
| T <sub>AXD</sub>                                              | AX inputs to DMUX output                                                                         | 0.68        | 0.75      | 0.90      | 1.08       | ns, Max |
| T <sub>BXB</sub>                                              | BX inputs to BMUX output                                                                         | 0.51        | 0.57      | 0.69      | 0.82       | ns, Max |
| T <sub>BXD</sub>                                              | BX inputs to DMUX output                                                                         | 0.62        | 0.69      | 0.82      | 0.99       | ns, Max |
| T <sub>CXC</sub>                                              | CX inputs to CMUX output                                                                         | 0.42        | 0.48      | 0.58      | 0.69       | ns, Max |
| T <sub>CXD</sub>                                              | CX inputs to DMUX output                                                                         | 0.53        | 0.59      | 0.71      | 0.86       | ns, Max |
| T <sub>DXD</sub>                                              | DX inputs to DMUX output                                                                         | 0.52        | 0.58      | 0.70      | 0.84       | ns, Max |
| Sequential Delays                                             |                                                                                                  |             |           |           |            |         |
| T <sub>CKO</sub>                                              | Clock to AQ – DQ outputs                                                                         | 0.40        | 0.44      | 0.53      | 0.62       | ns, Max |
| T <sub>SHCKO</sub>                                            | Clock to AMUX – DMUX outputs                                                                     | 0.47        | 0.53      | 0.66      | 0.73       | ns, Max |
| Setup and Hold Times of CLB Flip-Flops Before/After Clock CLK |                                                                                                  |             |           |           |            |         |
| T <sub>AS</sub> /T <sub>AH</sub>                              | A <sub>N</sub> – D <sub>N</sub> input to CLK on A – D flip-flops                                 | 0.07/0.12   | 0.09/0.14 | 0.11/0.18 | 0.11/0.20  | ns, Min |
| T <sub>DICK</sub> /T <sub>CKDI</sub>                          | A <sub>X</sub> – D <sub>X</sub> input to CLK on A – D flip-flops                                 | 0.06/0.19   | 0.07/0.21 | 0.09/0.26 | 0.09/0.31  | ns, Min |
|                                                               | A <sub>X</sub> – D <sub>X</sub> input through MUXs and/or carry logic to CLK on A – D flip-flops | 0.59/0.08   | 0.66/0.09 | 0.81/0.11 | 0.97/0.12  | ns, Min |
| T <sub>CECK_CLB</sub> /T <sub>CKCE_CLB</sub>                  | CE input to CLK on A – D flip-flops                                                              | 0.15/0.00   | 0.17/0.00 | 0.21/0.01 | 0.34/–0.01 | ns, Min |
| T <sub>SRCK</sub> /T <sub>CKSR</sub>                          | SR input to CLK on A – D flip-flops                                                              | 0.38/0.03   | 0.43/0.04 | 0.53/0.05 | 0.62/0.05  | ns, Min |
| Set/Reset                                                     |                                                                                                  |             |           |           |            |         |
| T <sub>SRMIN</sub>                                            | SR input minimum pulse width                                                                     | 0.52        | 0.78      | 1.04      | 0.95       | ns, Min |
| T <sub>RQ</sub>                                               | Delay from SR input to AQ – DQ flip-flops                                                        | 0.53        | 0.59      | 0.71      | 0.83       | ns, Max |
| T <sub>CEO</sub>                                              | Delay from CE input to AQ – DQ flip-flops                                                        | 0.52        | 0.58      | 0.70      | 0.83       | ns, Max |
| F <sub>TOG</sub>                                              | Toggle frequency (for export control)                                                            | 1412        | 1286      | 1098      | 1098       | MHz     |

## CLB Distributed RAM Switching Characteristics (SLICEM Only)

Table 25: CLB Distributed RAM Switching Characteristics

| Symbol                                             | Description                                                | Speed Grade |           |           |           | Units   |
|----------------------------------------------------|------------------------------------------------------------|-------------|-----------|-----------|-----------|---------|
|                                                    |                                                            | 1.0V        |           |           | 0.9V      |         |
|                                                    |                                                            | -3          | -2/-2L    | -1        | -2L       |         |
| Sequential Delays                                  |                                                            |             |           |           |           |         |
| T <sub>SHCKO</sub>                                 | Clock to A – B outputs                                     | 0.98        | 1.09      | 1.32      | 1.54      | ns, Max |
| T <sub>SHCKO_1</sub>                               | Clock to AMUX – BMUX outputs                               | 1.37        | 1.53      | 1.86      | 2.18      | ns, Max |
| Setup and Hold Times Before/After Clock CLK        |                                                            |             |           |           |           |         |
| T <sub>DS_LRAM</sub> /T <sub>DH_LRAM</sub>         | A – D inputs to CLK                                        | 0.54/0.28   | 0.60/0.30 | 0.72/0.35 | 0.96/0.40 | ns, Min |
| T <sub>AS_LRAM</sub> /T <sub>AH_LRAM</sub>         | Address An inputs to clock                                 | 0.27/0.55   | 0.30/0.60 | 0.37/0.70 | 0.43/0.71 | ns, Min |
|                                                    | Address An inputs through MUXs and/or carry logic to clock | 0.69/0.18   | 0.77/0.21 | 0.94/0.26 | 1.11/0.29 | ns, Min |
| T <sub>WS_LRAM</sub> /T <sub>WH_LRAM</sub>         | WE input to clock                                          | 0.38/0.10   | 0.43/0.12 | 0.53/0.17 | 0.62/0.13 | ns, Min |
| T <sub>CECK_LRAM</sub> /<br>T <sub>CKCE_LRAM</sub> | CE input to CLK                                            | 0.39/0.10   | 0.44/0.11 | 0.53/0.17 | 0.63/0.12 | ns, Min |
| Clock CLK                                          |                                                            |             |           |           |           |         |
| T <sub>MPW_LRAM</sub>                              | Minimum pulse width                                        | 1.05        | 1.13      | 1.25      | 0.82      | ns, Min |
| T <sub>MCP</sub>                                   | Minimum clock period                                       | 2.10        | 2.26      | 2.50      | 1.64      | ns, Min |

### Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time.
2.  $T_{SHCKO}$  also represents the CLK to XMUX output. Refer to TRACE report for the CLK to XMUX path.

## CLB Shift Register Switching Characteristics (SLICEM Only)

Table 26: CLB Shift Register Switching Characteristics

| Symbol                                                 | Description                         | Speed Grade |           |           |           | Units   |
|--------------------------------------------------------|-------------------------------------|-------------|-----------|-----------|-----------|---------|
|                                                        |                                     | 1.0V        |           |           | 0.9V      |         |
|                                                        |                                     | -3          | -2/-2L    | -1        | -2L       |         |
| Sequential Delays                                      |                                     |             |           |           |           |         |
| T <sub>REG</sub>                                       | Clock to A – D outputs              | 1.19        | 1.33      | 1.61      | 1.89      | ns, Max |
| T <sub>REG_MUX</sub>                                   | Clock to AMUX – DMUX output         | 1.58        | 1.77      | 2.15      | 2.53      | ns, Max |
| T <sub>REG_M31</sub>                                   | Clock to DMUX output via M31 output | 1.12        | 1.23      | 1.46      | 1.68      | ns, Max |
| Setup and Hold Times Before/After Clock CLK            |                                     |             |           |           |           |         |
| T <sub>WS_SHFREG</sub> /<br>T <sub>WH_SHFREG</sub>     | WE input                            | 0.37/0.10   | 0.41/0.12 | 0.51/0.17 | 0.59/0.13 | ns, Min |
| T <sub>CECK_SHFREG</sub> /<br>T <sub>CKCE_SHFREG</sub> | CE input to CLK                     | 0.37/0.10   | 0.42/0.11 | 0.52/0.17 | 0.60/0.12 | ns, Min |
| T <sub>DS_SHFREG</sub> /<br>T <sub>DH_SHFREG</sub>     | A – D inputs to CLK                 | 0.33/0.34   | 0.37/0.37 | 0.44/0.43 | 0.54/0.47 | ns, Min |
| Clock CLK                                              |                                     |             |           |           |           |         |
| T <sub>MPW_SHFREG</sub>                                | Minimum pulse width                 | 0.77        | 0.86      | 0.98      | 1.04      | ns, Min |

### Notes:

1. A Zero "0" Hold Time listing indicates no hold time or a negative hold time.

Table 28: DSP48E1 Switching Characteristics (Cont'd)

| Symbol                                                           | Description                                                  | Speed Grade |        |        |        | Units |
|------------------------------------------------------------------|--------------------------------------------------------------|-------------|--------|--------|--------|-------|
|                                                                  |                                                              | 1.0V        |        |        | 0.9V   |       |
|                                                                  |                                                              | -3          | -2/-2L | -1     | -2L    |       |
| Clock to Outs from Pipeline Register Clock to Output Pins        |                                                              |             |        |        |        |       |
| T <sub>DSPCKO_P_MREG</sub>                                       | CLK MREG to P output                                         | 1.68        | 1.93   | 2.31   | 2.73   | ns    |
| T <sub>DSPCKO_CARRYCASCOUT_MREG</sub>                            | CLK MREG to CARRYCASCOUT output                              | 1.92        | 2.21   | 2.64   | 3.12   | ns    |
| T <sub>DSPCKO_P_ADREG_MULT</sub>                                 | CLK ADREG to P output using multiplier                       | 2.72        | 3.10   | 3.69   | 4.60   | ns    |
| T <sub>DSPCKO_CARRYCASCOUT_ADREG_MULT</sub>                      | CLK ADREG to CARRYCASCOUT output using multiplier            | 2.96        | 3.38   | 4.02   | 4.99   | ns    |
| Clock to Outs from Input Register Clock to Output Pins           |                                                              |             |        |        |        |       |
| T <sub>DSPCKO_P_AREG_MULT</sub>                                  | CLK AREG to P output using multiplier                        | 3.94        | 4.51   | 5.37   | 6.84   | ns    |
| T <sub>DSPCKO_P_BREG</sub>                                       | CLK BREG to P output not using multiplier                    | 1.64        | 1.87   | 2.22   | 2.65   | ns    |
| T <sub>DSPCKO_P_CREG</sub>                                       | CLK CREG to P output not using multiplier                    | 1.69        | 1.93   | 2.30   | 2.81   | ns    |
| T <sub>DSPCKO_P_DREG_MULT</sub>                                  | CLK DREG to P output using multiplier                        | 3.91        | 4.48   | 5.32   | 6.77   | ns    |
| Clock to Outs from Input Register Clock to Cascading Output Pins |                                                              |             |        |        |        |       |
| T <sub>DSPCKO_{ACOUT; BCOUT}_{AREG; BREG}</sub>                  | CLK (ACOUT, BCOUT) to {A,B} register output                  | 0.64        | 0.73   | 0.87   | 1.02   | ns    |
| T <sub>DSPCKO_CARRYCASCOUT_{AREG, BREG}_MULT</sub>               | CLK (AREG, BREG) to CARRYCASCOUT output using multiplier     | 4.19        | 4.79   | 5.70   | 7.24   | ns    |
| T <sub>DSPCKO_CARRYCASCOUT_BREG</sub>                            | CLK BREG to CARRYCASCOUT output not using multiplier         | 1.88        | 2.15   | 2.55   | 3.04   | ns    |
| T <sub>DSPCKO_CARRYCASCOUT_DREG_MULT</sub>                       | CLK DREG to CARRYCASCOUT output using multiplier             | 4.16        | 4.76   | 5.65   | 7.17   | ns    |
| T <sub>DSPCKO_CARRYCASCOUT_CREG</sub>                            | CLK CREG to CARRYCASCOUT output                              | 1.94        | 2.21   | 2.63   | 3.20   | ns    |
| Maximum Frequency                                                |                                                              |             |        |        |        |       |
| F <sub>MAX</sub>                                                 | With all registers used                                      | 628.93      | 550.66 | 464.25 | 363.77 | MHz   |
| F <sub>MAX_PATDET</sub>                                          | With pattern detector                                        | 531.63      | 465.77 | 392.93 | 310.08 | MHz   |
| F <sub>MAX_MULT_NOMREG</sub>                                     | Two register multiply without MREG                           | 349.28      | 305.62 | 257.47 | 210.44 | MHz   |
| F <sub>MAX_MULT_NOMREG_PATDET</sub>                              | Two register multiply without MREG with pattern detect       | 317.26      | 277.62 | 233.92 | 191.28 | MHz   |
| F <sub>MAX_PREADD_MULT_NOADREG</sub>                             | Without ADREG                                                | 397.30      | 346.26 | 290.44 | 223.26 | MHz   |
| F <sub>MAX_PREADD_MULT_NOADREG_PATDET</sub>                      | Without ADREG with pattern detect                            | 397.30      | 346.26 | 290.44 | 223.26 | MHz   |
| F <sub>MAX_NOPIPELINEREG</sub>                                   | Without pipeline registers (MREG, ADREG)                     | 260.01      | 227.01 | 190.69 | 150.13 | MHz   |
| F <sub>MAX_NOPIPELINEREG_PATDET</sub>                            | Without pipeline registers (MREG, ADREG) with pattern detect | 241.72      | 211.15 | 177.43 | 140.10 | MHz   |



## Clock Buffers and Networks

Table 29: Global Clock Switching Characteristics (Including BUFGCTRL)

| Symbol                              | Description                    | Speed Grade |           |           |           | Units |
|-------------------------------------|--------------------------------|-------------|-----------|-----------|-----------|-------|
|                                     |                                | 1.0V        |           |           | 0.9V      |       |
|                                     |                                | -3          | -2/-2L    | -1        | -2L       |       |
| $T_{BCCCK\_CE}/T_{BCCCK\_CE}^{(1)}$ | CE pins setup/hold             | 0.12/0.39   | 0.13/0.40 | 0.16/0.41 | 0.31/0.17 | ns    |
| $T_{BCCCK\_S}/T_{BCCCK\_S}^{(1)}$   | S pins setup/hold              | 0.12/0.39   | 0.13/0.40 | 0.16/0.41 | 0.31/0.17 | ns    |
| $T_{BCKO\_O}^{(2)}$                 | BUFGCTRL delay from I0/I1 to O | 0.08        | 0.09      | 0.10      | 0.14      | ns    |
| <b>Maximum Frequency</b>            |                                |             |           |           |           |       |
| $F_{MAX\_BUFG}$                     | Global clock tree (BUFG)       | 628.00      | 628.00    | 464.00    | 394.00    | MHz   |

**Notes:**

1.  $T_{BCCCK\_CE}$  and  $T_{BCCCK\_S}$  must be satisfied to assure glitch-free operation of the global clock when switching between clocks. These parameters do not apply to the BUFGMUX primitive that assures glitch-free operation. The other global clock setup and hold times are optional; only needing to be satisfied if device operation requires simulation matches on a cycle-for-cycle basis when switching between clocks.
2.  $T_{BCKO\_O}$  (BUFG delay from I0 to O) values are the same as  $T_{BCKO\_O}$  values.

Table 30: Input/Output Clock Switching Characteristics (BUFIO)

| Symbol                   | Description                    | Speed Grade |        |        |        | Units |
|--------------------------|--------------------------------|-------------|--------|--------|--------|-------|
|                          |                                | 1.0V        |        |        | 0.9V   |       |
|                          |                                | -3          | -2/-2L | -1     | -2L    |       |
| $T_{BIOCKO\_O}$          | Clock to out delay from I to O | 1.11        | 1.26   | 1.54   | 1.56   | ns    |
| <b>Maximum Frequency</b> |                                |             |        |        |        |       |
| $F_{MAX\_BUFIO}$         | I/O clock tree (BUFIO)         | 680.00      | 680.00 | 600.00 | 600.00 | MHz   |

Table 31: Regional Clock Buffer Switching Characteristics (BUFR)

| Symbol                   | Description                                                     | Speed Grade |        |        |        | Units |
|--------------------------|-----------------------------------------------------------------|-------------|--------|--------|--------|-------|
|                          |                                                                 | 1.0V        |        |        | 0.9V   |       |
|                          |                                                                 | -3          | -2/-2L | -1     | -2L    |       |
| $T_{BRCKO\_O}$           | Clock to out delay from I to O                                  | 0.64        | 0.76   | 0.99   | 1.24   | ns    |
| $T_{BRCKO\_O\_BYP}$      | Clock to out delay from I to O with Divide Bypass attribute set | 0.34        | 0.39   | 0.52   | 0.72   | ns    |
| $T_{BRDO\_O}$            | Propagation delay from CLR to O                                 | 0.81        | 0.85   | 1.09   | 0.96   | ns    |
| <b>Maximum Frequency</b> |                                                                 |             |        |        |        |       |
| $F_{MAX\_BUFR}^{(1)}$    | Regional clock tree (BUFR)                                      | 420.00      | 375.00 | 315.00 | 315.00 | MHz   |

**Notes:**

1. The maximum input frequency to the BUFR and BUFMR is the BUFIO  $F_{MAX}$  frequency.

Table 32: Horizontal Clock Buffer Switching Characteristics (BUFH)

| Symbol                      | Description                    | Speed Grade |           |           |           | Units |
|-----------------------------|--------------------------------|-------------|-----------|-----------|-----------|-------|
|                             |                                | 1.0V        |           |           | 0.9V      |       |
|                             |                                | -3          | -2/-2L    | -1        | -2L       |       |
| $T_{BHCKO\_O}$              | BUFH delay from I to O         | 0.10        | 0.11      | 0.13      | 0.16      | ns    |
| $T_{BHCK\_CE}/T_{BHCK\_CE}$ | CE pin setup and hold          | 0.19/0.13   | 0.22/0.15 | 0.28/0.21 | 0.35/0.08 | ns    |
| <b>Maximum Frequency</b>    |                                |             |           |           |           |       |
| $F_{MAX\_BUFH}$             | Horizontal clock buffer (BUFH) | 628.00      | 628.00    | 464.00    | 394.00    | MHz   |

Table 33: Duty Cycle Distortion and Clock-Tree Skew

| Symbol           | Description                                            | Device   | Speed Grade |        |      |      | Units |
|------------------|--------------------------------------------------------|----------|-------------|--------|------|------|-------|
|                  |                                                        |          | 1.0V        |        |      | 0.9V |       |
|                  |                                                        |          | -3          | -2/-2L | -1   | -2L  |       |
| $T_{DCD\_CLK}$   | Global clock tree duty-cycle distortion <sup>(1)</sup> | All      | 0.20        | 0.20   | 0.20 | 0.25 | ns    |
| $T_{CKSKEW}$     | Global clock tree skew <sup>(2)</sup>                  | XC7A100T | 0.27        | 0.33   | 0.36 | 0.48 | ns    |
|                  |                                                        | XC7A200T | 0.40        | 0.48   | 0.54 | 0.69 | ns    |
| $T_{DCD\_BUFIO}$ | I/O clock tree duty cycle distortion                   | All      | 0.14        | 0.14   | 0.14 | 0.14 | ns    |
| $T_{BUFIOSKEW}$  | I/O clock tree skew across one clock region            | All      | 0.03        | 0.03   | 0.03 | 0.03 | ns    |
| $T_{DCD\_BUFR}$  | Regional clock tree duty cycle distortion              | All      | 0.18        | 0.18   | 0.18 | 0.18 | ns    |

**Notes:**

- These parameters represent the worst-case duty cycle distortion observable at the I/O flip flops. For all I/O standards, IBIS can be used to calculate any additional duty cycle distortion that might be caused by asymmetrical rise/fall times.
- The  $T_{CKSKEW}$  value represents the worst-case clock-tree skew observable between sequential I/O elements. Significantly less clock-tree skew exists for I/O registers that are close to each other and fed by the same or adjacent clock-tree branches. Use the Xilinx FPGA\_Editor and Timing Analyzer tools to evaluate clock skew specific to your application.

## MMCM Switching Characteristics

Table 34: MMCM Specification

| Symbol                 | Description                                 | Speed Grade                             |         |         |         | Units |
|------------------------|---------------------------------------------|-----------------------------------------|---------|---------|---------|-------|
|                        |                                             | 1.0V                                    |         |         | 0.9V    |       |
|                        |                                             | -3                                      | -2/-2L  | -1      | -2L     |       |
| $MMCM\_F_{INMAX}$      | Maximum input clock frequency               | 800.00                                  | 800.00  | 800.00  | 800.00  | MHz   |
| $MMCM\_F_{INMIN}$      | Minimum input clock frequency               | 10.00                                   | 10.00   | 10.00   | 10.00   | MHz   |
| $MMCM\_F_{INJITTER}$   | Maximum input clock period jitter           | < 20% of clock input period or 1 ns Max |         |         |         |       |
| $MMCM\_F_{INDUTY}$     | Allowable input duty cycle: 10—49 MHz       | 25                                      | 25      | 25      | 25      | %     |
|                        | Allowable input duty cycle: 50—199 MHz      | 30                                      | 30      | 30      | 30      | %     |
|                        | Allowable input duty cycle: 200—399 MHz     | 35                                      | 35      | 35      | 35      | %     |
|                        | Allowable input duty cycle: 400—499 MHz     | 40                                      | 40      | 40      | 40      | %     |
|                        | Allowable input duty cycle: >500 MHz        | 45                                      | 45      | 45      | 45      | %     |
| $MMCM\_F_{MIN\_PSCLK}$ | Minimum dynamic phase-shift clock frequency | 0.01                                    | 0.01    | 0.01    | 0.01    | MHz   |
| $MMCM\_F_{MAX\_PSCLK}$ | Maximum dynamic phase-shift clock frequency | 550.00                                  | 500.00  | 450.00  | 450.00  | MHz   |
| $MMCM\_F_{VCOMIN}$     | Minimum MMCM VCO frequency                  | 600.00                                  | 600.00  | 600.00  | 600.00  | MHz   |
| $MMCM\_F_{VCOMAX}$     | Maximum MMCM VCO frequency                  | 1600.00                                 | 1440.00 | 1200.00 | 1200.00 | MHz   |

## PLL Switching Characteristics

Table 35: PLL Specification

| Symbol                                                           | Description                                           | Speed Grade                             |           |           |           | Units    |
|------------------------------------------------------------------|-------------------------------------------------------|-----------------------------------------|-----------|-----------|-----------|----------|
|                                                                  |                                                       | 1.0V                                    |           |           | 0.9V      |          |
|                                                                  |                                                       | -3                                      | -2/-2L    | -1        | -2L       |          |
| PLL_F <sub>INMAX</sub>                                           | Maximum input clock frequency                         | 800.00                                  | 800.00    | 800.00    | 800.00    | MHz      |
| PLL_F <sub>INMIN</sub>                                           | Minimum input clock frequency                         | 19.00                                   | 19.00     | 19.00     | 19.00     | MHz      |
| PLL_F <sub>INJITTER</sub>                                        | Maximum input clock period jitter                     | < 20% of clock input period or 1 ns Max |           |           |           |          |
| PLL_F <sub>INDUTY</sub>                                          | Allowable input duty cycle: 19—49 MHz                 | 25                                      | 25        | 25        | 25        | %        |
|                                                                  | Allowable input duty cycle: 50—199 MHz                | 30                                      | 30        | 30        | 30        | %        |
|                                                                  | Allowable input duty cycle: 200—399 MHz               | 35                                      | 35        | 35        | 35        | %        |
|                                                                  | Allowable input duty cycle: 400—499 MHz               | 40                                      | 40        | 40        | 40        | %        |
|                                                                  | Allowable input duty cycle: >500 MHz                  | 45                                      | 45        | 45        | 45        | %        |
| PLL_F <sub>VCOMIN</sub>                                          | Minimum PLL VCO frequency                             | 800.00                                  | 800.00    | 800.00    | 800.00    | MHz      |
| PLL_F <sub>VCOMAX</sub>                                          | Maximum PLL VCO frequency                             | 2133.00                                 | 1866.00   | 1600.00   | 1600.00   | MHz      |
| PLL_F <sub>BANDWIDTH</sub>                                       | Low PLL bandwidth at typical <sup>(1)</sup>           | 1.00                                    | 1.00      | 1.00      | 1.00      | MHz      |
|                                                                  | High PLL bandwidth at typical <sup>(1)</sup>          | 4.00                                    | 4.00      | 4.00      | 4.00      | MHz      |
| PLL_T <sub>STATPHAOFFSET</sub>                                   | Static phase offset of the PLL outputs <sup>(2)</sup> | 0.12                                    | 0.12      | 0.12      | 0.12      | ns       |
| PLL_T <sub>OUTJITTER</sub>                                       | PLL output jitter                                     | Note 3                                  |           |           |           |          |
| PLL_T <sub>OUTDUTY</sub>                                         | PLL output clock duty-cycle precision <sup>(4)</sup>  | 0.20                                    | 0.20      | 0.20      | 0.25      | ns       |
| PLL_T <sub>LOCKMAX</sub>                                         | PLL maximum lock time                                 | 100.00                                  | 100.00    | 100.00    | 100.00    | μs       |
| PLL_F <sub>OUTMAX</sub>                                          | PLL maximum output frequency                          | 800.00                                  | 800.00    | 800.00    | 800.00    | MHz      |
| PLL_F <sub>OUTMIN</sub>                                          | PLL minimum output frequency <sup>(5)</sup>           | 6.25                                    | 6.25      | 6.25      | 6.25      | MHz      |
| PLL_T <sub>EXTFDVAR</sub>                                        | External clock feedback variation                     | < 20% of clock input period or 1 ns Max |           |           |           |          |
| PLL_RST <sub>MINPULSE</sub>                                      | Minimum reset pulse width                             | 5.00                                    | 5.00      | 5.00      | 5.00      | ns       |
| PLL_F <sub>PFDMAX</sub>                                          | Maximum frequency at the phase frequency detector     | 550.00                                  | 500.00    | 450.00    | 450.00    | MHz      |
| PLL_F <sub>PFDMIN</sub>                                          | Minimum frequency at the phase frequency detector     | 19.00                                   | 19.00     | 19.00     | 19.00     | MHz      |
| PLL_T <sub>FBDELAY</sub>                                         | Maximum delay in the feedback path                    | 3 ns Max or one CLKIN cycle             |           |           |           |          |
| Dynamic Reconfiguration Port (DRP) for PLL Before and After DCLK |                                                       |                                         |           |           |           |          |
| T <sub>PLLDCK_DADDR</sub> /<br>T <sub>PLLCKD_DADDR</sub>         | Setup and hold of D address                           | 1.25/0.15                               | 1.40/0.15 | 1.63/0.15 | 1.43/0.00 | ns, Min  |
| T <sub>PLLDCK_DI</sub> /T <sub>PLLCKD_DI</sub>                   | Setup and hold of D input                             | 1.25/0.15                               | 1.40/0.15 | 1.63/0.15 | 1.43/0.00 | ns, Min  |
| T <sub>PLLDCK_DEN</sub> /<br>T <sub>PLLCKD_DEN</sub>             | Setup and hold of D enable                            | 1.76/0.00                               | 1.97/0.00 | 2.29/0.00 | 2.40/0.00 | ns, Min  |
| T <sub>PLLDCK_DWE</sub> /<br>T <sub>PLLCKD_DWE</sub>             | Setup and hold of D write enable                      | 1.25/0.15                               | 1.40/0.15 | 1.63/0.15 | 1.43/0.00 | ns, Min  |
| T <sub>PLLCKO_DRDY</sub>                                         | CLK to out of DRDY                                    | 0.65                                    | 0.72      | 0.99      | 0.99      | ns, Max  |
| F <sub>DCK</sub>                                                 | DCLK frequency                                        | 200.00                                  | 200.00    | 200.00    | 100.00    | MHz, Max |

### Notes:

1. The PLL does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
2. The static offset is measured between any PLL outputs with identical phase.
3. Values for this parameter are available in the Clocking Wizard.  
See [http://www.xilinx.com/products/intellectual-property/clocking\\_wizard.htm](http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm).
4. Includes global clock buffer.
5. Calculated as F<sub>VCO</sub>/128 assuming output duty cycle is 50%.

## Device Pin-to-Pin Output Parameter Guidelines

All devices are 100% functionally tested. Values are expressed in nanoseconds unless otherwise noted.

**Table 36: Clock-Capable Clock Input to Output Delay Without MMCM/PLL (Near Clock Region)**

| Symbol                                                                                                            | Description                                                                     | Device   | Speed Grade |        |      |      | Units |
|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------|-------------|--------|------|------|-------|
|                                                                                                                   |                                                                                 |          | 1.0V        |        |      | 0.9V |       |
|                                                                                                                   |                                                                                 |          | -3          | -2/-2L | -1   | -2L  |       |
| SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>without</i> MMCM/PLL. |                                                                                 |          |             |        |      |      |       |
| T <sub>ICKOF</sub>                                                                                                | Clock-capable clock input and OUTFF <i>without</i> MMCM/PLL (near clock region) | XC7A100T | 5.14        | 5.74   | 6.72 | 7.64 | ns    |
|                                                                                                                   |                                                                                 | XC7A200T | 5.47        | 6.11   | 7.16 | 8.10 | ns    |

### Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.

**Table 37: Clock-Capable Clock Input to Output Delay Without MMCM/PLL (Far Clock Region)**

| Symbol                                                                                                            | Description                                                                    | Device   | Speed Grade |        |      |      | Units |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------|-------------|--------|------|------|-------|
|                                                                                                                   |                                                                                |          | 1.0V        |        |      | 0.9V |       |
|                                                                                                                   |                                                                                |          | -3          | -2/-2L | -1   | -2L  |       |
| SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>without</i> MMCM/PLL. |                                                                                |          |             |        |      |      |       |
| T <sub>ICKOFFAR</sub>                                                                                             | Clock-capable clock input and OUTFF <i>without</i> MMCM/PLL (far clock region) | XC7A100T | 5.38        | 6.01   | 7.02 | 7.96 | ns    |
|                                                                                                                   |                                                                                | XC7A200T | 6.17        | 6.89   | 8.05 | 9.05 | ns    |

### Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.

**Table 38: Clock-Capable Clock Input to Output Delay With MMCM**

| Symbol                                                                                                     | Description                                          | Device   | Speed Grade |        |      |      | Units |
|------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------|-------------|--------|------|------|-------|
|                                                                                                            |                                                      |          | 1.0V        |        |      | 0.9V |       |
|                                                                                                            |                                                      |          | -3          | -2/-2L | -1   | -2L  |       |
| SSTL15 Clock-Capable Clock Input to Output Delay using Output Flip-Flop, Fast Slew Rate, <i>with</i> MMCM. |                                                      |          |             |        |      |      |       |
| T <sub>ICKOFMMCMCC</sub>                                                                                   | Clock-capable clock input and OUTFF <i>with</i> MMCM | XC7A100T | 0.89        | 0.94   | 0.96 | 1.81 | ns    |
|                                                                                                            |                                                      | XC7A200T | 0.90        | 0.97   | 1.01 | 1.86 | ns    |

### Notes:

1. Listed above are representative values where one global clock input drives one vertical clock line in each accessible column, and where all accessible IOB and CLB flip-flops are clocked by the global clock net.
2. MMCM output jitter is already included in the timing calculation.

Table 44: Data Input Setup and Hold Times Relative to a Forwarded Clock Input Pin Using BUFIO

| Symbol                                                                                             | Description                 | Speed Grade |            |            |            | Units |
|----------------------------------------------------------------------------------------------------|-----------------------------|-------------|------------|------------|------------|-------|
|                                                                                                    |                             | 1.0V        |            |            | 0.9V       |       |
|                                                                                                    |                             | -3          | -2/-2L     | -1         | -2L        |       |
| Input Setup and Hold Time Relative to a Forwarded Clock Input Pin Using BUFIO for SSTL15 Standard. |                             |             |            |            |            |       |
| T <sub>PSCS</sub> /T <sub>PHCS</sub>                                                               | Setup and hold of I/O clock | −0.38/1.31  | −0.38/1.46 | −0.38/1.76 | −0.16/1.89 | ns    |

Table 45: Sample Window

| Symbol            | Description                                                | Speed Grade |        |      |      | Units |
|-------------------|------------------------------------------------------------|-------------|--------|------|------|-------|
|                   |                                                            | 1.0V        |        |      | 0.9V |       |
|                   |                                                            | -3          | -2/-2L | -1   | -2L  |       |
| $T_{SAMP}$        | Sampling error at receiver pins <sup>(1)</sup>             | 0.59        | 0.64   | 0.70 | 0.70 | ns    |
| $T_{SAMP\_BUFIO}$ | Sampling error at receiver pins using BUFIO <sup>(2)</sup> | 0.35        | 0.40   | 0.46 | 0.46 | ns    |

**Notes:**

- This parameter indicates the total sampling error of the Artix-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the MMCM to capture the DDR input registers' edges of operation. These measurements include:
  - CLK0 MMCM jitter
  - MMCM accuracy (phase offset)
  - MMCM phase shift resolution
These measurements do not include package or clock tree skew.
- This parameter indicates the total sampling error of the Artix-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the BUFIO clock network and IDELAY to capture the DDR input registers' edges of operation. These measurements do not include package or clock tree skew.

## Additional Package Parameter Guidelines

The parameters in this section provide the necessary values for calculating timing budgets for Artix-7 FPGA clock transmitter and receiver data-valid windows.

Table 46: Package Skew

| Symbol        | Description                 | Device   | Package | Value | Units |
|---------------|-----------------------------|----------|---------|-------|-------|
| $T_{PKGSKEW}$ | Package skew <sup>(1)</sup> | XC7A100T | CSG324  | 113   | ps    |
|               |                             |          | FTG256  | 120   | ps    |
|               |                             |          | FGG484  | 144   | ps    |
|               |                             |          | FGG676  | 153   | ps    |
|               |                             | XC7A200T | SBG484  | 111   | ps    |
|               |                             |          | FBG484  | 109   | ps    |
|               |                             |          | FBG676  | 121   | ps    |
|               |                             |          | FFG1156 | 151   | ps    |

**Notes:**

- These values represent the worst-case skew between any two SelectIO resources in the package: shortest delay to longest delay from die pad to ball.
- Package delay information is available for these device/package combinations. This information can be used to deskew the package.

## GTP Transceiver Specifications

### GTP Transceiver DC Input and Output Levels

Table 47 summarizes the DC output specifications of the GTP transceivers in Artix-7 FPGAs. Consult [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) for further details.

Table 47: GTP Transceiver DC Specifications

| Symbol               | DC Parameter                                                                   | Conditions                                         | Min                          | Typ               | Max           | Units |
|----------------------|--------------------------------------------------------------------------------|----------------------------------------------------|------------------------------|-------------------|---------------|-------|
| DV <sub>PPOUT</sub>  | Differential peak-to-peak output voltage <sup>(1)</sup>                        | Transmitter output swing is set to maximum setting | –                            | –                 | 1000          | mV    |
| V <sub>CMOUTDC</sub> | DC common mode output voltage                                                  | Equation based                                     | $V_{MGTAVTT} - DV_{PPOUT}/4$ |                   |               | mV    |
| R <sub>OUT</sub>     | Differential output resistance                                                 |                                                    | –                            | 100               | –             | Ω     |
| V <sub>CMOUTAC</sub> | Common mode output voltage: AC coupled                                         |                                                    | $1/2 V_{MGTAVTT}$            |                   |               | mV    |
| T <sub>OSKEW</sub>   | Transmitter output pair (TXP and TXN) intra-pair skew (FFG, FBG, SBG packages) |                                                    | –                            | –                 | 10            | ps    |
|                      | Transmitter output pair (TXP and TXN) intra-pair skew (FGG, FTG, CSG packages) |                                                    | –                            | –                 | 12            | ps    |
| DV <sub>PPIN</sub>   | Differential peak-to-peak input voltage                                        | External AC coupled                                | 150                          | –                 | 2000          | mV    |
| V <sub>IN</sub>      | Absolute input voltage                                                         | DC coupled $V_{MGTAVTT} = 1.2V$                    | –200                         | –                 | $V_{MGTAVTT}$ | mV    |
| V <sub>CMIN</sub>    | Common mode input voltage                                                      | DC coupled $V_{MGTAVTT} = 1.2V$                    | –                            | $2/3 V_{MGTAVTT}$ | –             | mV    |
| R <sub>IN</sub>      | Differential input resistance                                                  |                                                    | –                            | 100               | –             | Ω     |
| C <sub>EXT</sub>     | Recommended external AC coupling capacitor <sup>(2)</sup>                      |                                                    | –                            | 100               | –             | nF    |

#### Notes:

1. The output swing and preemphasis levels are programmable using the attributes discussed in [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) and can result in values lower than reported in this table.
2. Other values can be used as appropriate to conform to specific protocols and standards.

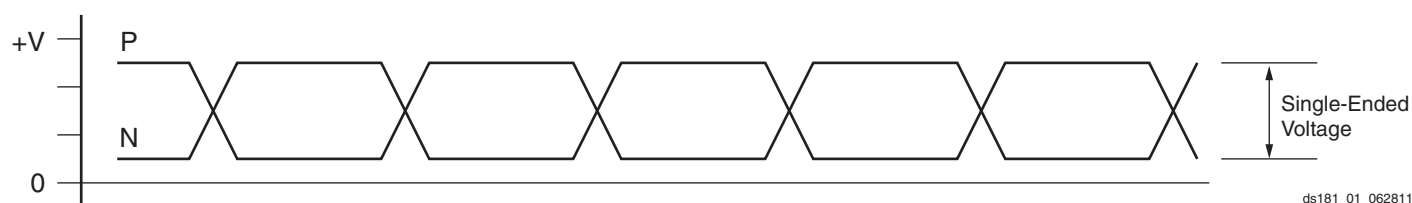


Figure 1: Single-Ended Peak-to-Peak Voltage

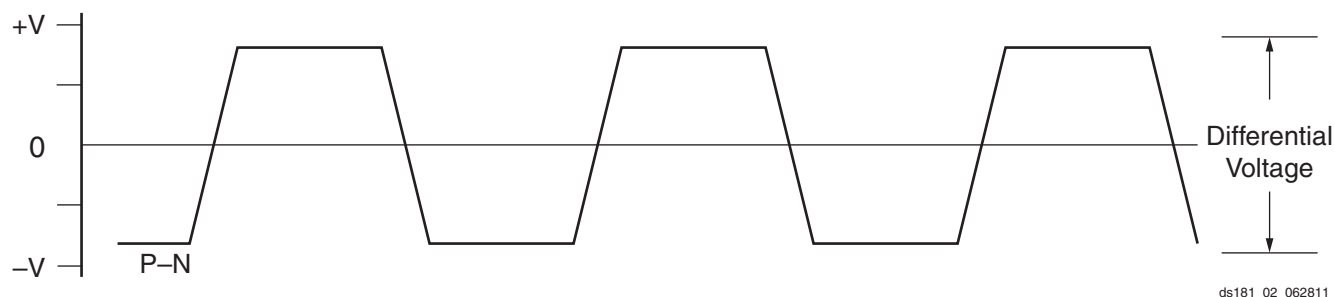


Figure 2: Differential Peak-to-Peak Voltage

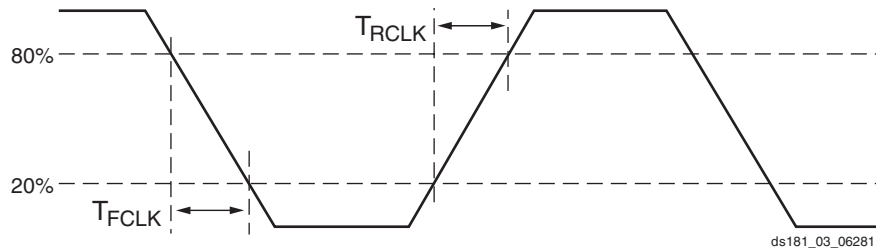


Figure 3: Reference Clock Timing Parameters

Table 52: GTP Transceiver PLL/Lock Time Adaptation

| Symbol      | Description                                           | Conditions                                                                                                                                        | All Speed Grades |        |                   | Units |
|-------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------|-------------------|-------|
|             |                                                       |                                                                                                                                                   | Min              | Typ    | Max               |       |
| $T_{LOCK}$  | Initial PLL lock                                      |                                                                                                                                                   | –                | –      | 1                 | ms    |
| $T_{DLOCK}$ | Clock recovery phase acquisition and adaptation time. | After the PLL is locked to the reference clock, this is the time it takes to lock the clock data recovery (CDR) to the data present at the input. | –                | 50,000 | $2.3 \times 10^6$ | UI    |

Table 53: GTP Transceiver User Clock Switching Characteristics<sup>(1)</sup>

| Symbol      | Description                 | Conditions       | Speed Grade |         |         |         | Units |
|-------------|-----------------------------|------------------|-------------|---------|---------|---------|-------|
|             |                             |                  | 1.0V        |         |         | 0.9V    |       |
|             |                             |                  | -3          | -2/-2L  | -1      | -2L     |       |
| $F_{TXOUT}$ | TXOUTCLK maximum frequency  |                  | 412.500     | 412.500 | 234.375 | 234.375 | MHz   |
| $F_{RXOUT}$ | RXOUTCLK maximum frequency  |                  | 412.500     | 412.500 | 234.375 | 234.375 | MHz   |
| $F_{TXIN}$  | TXUSRCLK maximum frequency  | 16-bit data path | 412.500     | 412.500 | 234.375 | 234.375 | MHz   |
| $F_{RXIN}$  | RXUSRCLK maximum frequency  | 16-bit data path | 412.500     | 412.500 | 234.375 | 234.375 | MHz   |
| $F_{TXIN2}$ | TXUSRCLK2 maximum frequency | 16-bit data path | 412.500     | 412.500 | 234.375 | 234.375 | MHz   |
| $F_{RXIN2}$ | RXUSRCLK2 maximum frequency | 16-bit data path | 412.500     | 412.500 | 234.375 | 234.375 | MHz   |

#### Notes:

1. Clocking must be implemented as described in [UG482](#): 7 Series FPGAs GTP Transceiver User Guide.

Table 54: GTP Transceiver Transmitter Switching Characteristics

| Symbol                       | Description                            | Condition                | Min   | Typ | Max                 | Units |
|------------------------------|----------------------------------------|--------------------------|-------|-----|---------------------|-------|
| F <sub>GTPTX</sub>           | Serial data rate range                 |                          | 0.500 | –   | F <sub>GTPMAX</sub> | Gb/s  |
| T <sub>RTX</sub>             | TX rise time                           | 20%–80%                  | –     | 50  | –                   | ps    |
| T <sub>FTX</sub>             | TX fall time                           | 20%–80%                  | –     | 50  | –                   | ps    |
| T <sub>LLSKEW</sub>          | TX lane-to-lane skew <sup>(1)</sup>    |                          | –     | –   | 500                 | ps    |
| V <sub>TXOOBVDPP</sub>       | Electrical idle amplitude              |                          | –     | –   | 20                  | mV    |
| T <sub>TXOOBTRANSITION</sub> | Electrical idle transition time        |                          | –     | –   | 140                 | ns    |
| TJ <sub>6.6</sub>            | Total Jitter <sup>(2)(3)</sup>         | 6.6 Gb/s                 | –     | –   | 0.30                | UI    |
| DJ <sub>6.6</sub>            | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.15                | UI    |
| TJ <sub>5.0</sub>            | Total Jitter <sup>(2)(3)</sup>         | 5.0 Gb/s                 | –     | –   | 0.30                | UI    |
| DJ <sub>5.0</sub>            | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.15                | UI    |
| TJ <sub>4.25</sub>           | Total Jitter <sup>(2)(3)</sup>         | 4.25 Gb/s                | –     | –   | 0.30                | UI    |
| DJ <sub>4.25</sub>           | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.15                | UI    |
| TJ <sub>3.75</sub>           | Total Jitter <sup>(2)(3)</sup>         | 3.75 Gb/s                | –     | –   | 0.30                | UI    |
| DJ <sub>3.75</sub>           | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.15                | UI    |
| TJ <sub>3.2</sub>            | Total Jitter <sup>(2)(3)</sup>         | 3.20 Gb/s <sup>(4)</sup> | –     | –   | 0.2                 | UI    |
| DJ <sub>3.2</sub>            | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.1                 | UI    |
| TJ <sub>3.2L</sub>           | Total Jitter <sup>(2)(3)</sup>         | 3.20 Gb/s <sup>(5)</sup> | –     | –   | 0.32                | UI    |
| DJ <sub>3.2L</sub>           | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.16                | UI    |
| TJ <sub>2.5</sub>            | Total Jitter <sup>(2)(3)</sup>         | 2.5 Gb/s <sup>(6)</sup>  | –     | –   | 0.20                | UI    |
| DJ <sub>2.5</sub>            | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.08                | UI    |
| TJ <sub>1.25</sub>           | Total Jitter <sup>(2)(3)</sup>         | 1.25 Gb/s <sup>(7)</sup> | –     | –   | 0.15                | UI    |
| DJ <sub>1.25</sub>           | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.06                | UI    |
| TJ <sub>500</sub>            | Total Jitter <sup>(2)(3)</sup>         | 500 Mb/s                 | –     | –   | 0.1                 | UI    |
| DJ <sub>500</sub>            | Deterministic Jitter <sup>(2)(3)</sup> |                          | –     | –   | 0.03                | UI    |

**Notes:**

- Using same REFCLK input with TX phase alignment enabled for up to four consecutive transmitters (one fully populated GTP Quad).
- Using PLL[0/1]\_FBDIV = 2, 20-bit internal data width. These values are NOT intended for protocol specific compliance determinations.
- All jitter values are based on a bit-error ratio of 1e<sup>-12</sup>.
- PLL frequency at 3.2 GHz and TXOUT\_DIV = 2.
- PLL frequency at 1.6 GHz and TXOUT\_DIV = 1.
- PLL frequency at 2.5 GHz and TXOUT\_DIV = 2.
- PLL frequency at 2.5 GHz and TXOUT\_DIV = 4.



Table 55: GTP Transceiver Receiver Switching Characteristics

| Symbol                                               | Description                                                   |                            | Min   | Typ | Max                 | Units |
|------------------------------------------------------|---------------------------------------------------------------|----------------------------|-------|-----|---------------------|-------|
| F <sub>GTPRX</sub>                                   | Serial data rate                                              | RX oversampler not enabled | 0.500 | –   | F <sub>GTPMAX</sub> | Gb/s  |
| T <sub>RXELECIDLE</sub>                              | Time for RXELECIDLE to respond to loss or restoration of data |                            | –     | 10  | –                   | ns    |
| RX <sub>OOBVDPP</sub>                                | OOB detect threshold peak-to-peak                             |                            | 60    | –   | 150                 | mV    |
| RX <sub>SST</sub>                                    | Receiver spread-spectrum tracking <sup>(1)</sup>              | Modulated @ 33 KHz         | –5000 | –   | 5000                | ppm   |
| RX <sub>RL</sub>                                     | Run length (CID)                                              |                            | –     | –   | 512                 | UI    |
| RX <sub>PPMTOL</sub>                                 | Data/REFCLK PPM offset tolerance                              |                            | –1250 | –   | 1250                | ppm   |
| SJ Jitter Tolerance <sup>(2)</sup>                   |                                                               |                            |       |     |                     |       |
| JT_SJ <sub>6.6</sub>                                 | Sinusoidal Jitter <sup>(3)</sup>                              | 6.6 Gb/s                   | 0.44  | –   | –                   | UI    |
| JT_SJ <sub>5.0</sub>                                 | Sinusoidal Jitter <sup>(3)</sup>                              | 5.0 Gb/s                   | 0.44  | –   | –                   | UI    |
| JT_SJ <sub>4.25</sub>                                | Sinusoidal Jitter <sup>(3)</sup>                              | 4.25 Gb/s                  | 0.44  | –   | –                   | UI    |
| JT_SJ <sub>3.75</sub>                                | Sinusoidal Jitter <sup>(3)</sup>                              | 3.75 Gb/s                  | 0.44  | –   | –                   | UI    |
| JT_SJ <sub>3.2</sub>                                 | Sinusoidal Jitter <sup>(3)</sup>                              | 3.2 Gb/s <sup>(4)</sup>    | 0.45  | –   | –                   | UI    |
| JT_SJ <sub>3.2L</sub>                                | Sinusoidal Jitter <sup>(3)</sup>                              | 3.2 Gb/s <sup>(5)</sup>    | 0.45  | –   | –                   | UI    |
| JT_SJ <sub>2.5</sub>                                 | Sinusoidal Jitter <sup>(3)</sup>                              | 2.5 Gb/s <sup>(6)</sup>    | 0.5   | –   | –                   | UI    |
| JT_SJ <sub>1.25</sub>                                | Sinusoidal Jitter <sup>(3)</sup>                              | 1.25 Gb/s <sup>(7)</sup>   | 0.5   | –   | –                   | UI    |
| JT_SJ <sub>500</sub>                                 | Sinusoidal Jitter <sup>(3)</sup>                              | 500 Mb/s                   | 0.4   | –   | –                   | UI    |
| SJ Jitter Tolerance with Stressed Eye <sup>(2)</sup> |                                                               |                            |       |     |                     |       |
| JT_TJSE <sub>3.2</sub>                               | Total Jitter with Stressed Eye <sup>(8)</sup>                 | 3.2 Gb/s                   | 0.70  | –   | –                   | UI    |
| JT_TJSE <sub>6.6</sub>                               |                                                               | 6.6 Gb/s                   | 0.70  | –   | –                   | UI    |
| JT_SJSE <sub>3.2</sub>                               | Sinusoidal Jitter with Stressed Eye <sup>(8)</sup>            | 3.2 Gb/s                   | 0.1   | –   | –                   | UI    |
| JT_SJSE <sub>6.6</sub>                               |                                                               | 6.6 Gb/s                   | 0.1   | –   | –                   | UI    |

**Notes:**

- Using  $RXOUT\_DIV = 1, 2, \text{ and } 4$ .
- All jitter values are based on a bit error ratio of  $1e^{-12}$ .
- The frequency of the injected sinusoidal jitter is 10 MHz.
- PLL frequency at 3.2 GHz and  $RXOUT\_DIV = 2$ .
- PLL frequency at 1.6 GHz and  $RXOUT\_DIV = 1$ .
- PLL frequency at 2.5 GHz and  $RXOUT\_DIV = 2$ .
- PLL frequency at 2.5 GHz and  $RXOUT\_DIV = 4$ .
- Composite jitter.

## GTP Transceiver Protocol Jitter Characteristics

For Table 56 through Table 60, the [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) contains recommended settings for optimal usage of protocol specific characteristics.

Table 56: Gigabit Ethernet Protocol Characteristics

| Description                                                      | Line Rate (Mb/s) | Min   | Max  | Units |
|------------------------------------------------------------------|------------------|-------|------|-------|
| <b>Gigabit Ethernet Transmitter Jitter Generation</b>            |                  |       |      |       |
| Total transmitter jitter (T <sub>TJ</sub> )                      | 1250             | –     | 0.24 | UI    |
| <b>Gigabit Ethernet Receiver High Frequency Jitter Tolerance</b> |                  |       |      |       |
| Total receiver jitter tolerance                                  | 1250             | 0.749 | –    | UI    |

Table 57: XAUI Protocol Characteristics

| Description                                          | Line Rate (Mb/s) | Min  | Max  | Units |
|------------------------------------------------------|------------------|------|------|-------|
| <b>XAUI Transmitter Jitter Generation</b>            |                  |      |      |       |
| Total transmitter jitter (T <sub>TJ</sub> )          | 3125             | –    | 0.35 | UI    |
| <b>XAUI Receiver High Frequency Jitter Tolerance</b> |                  |      |      |       |
| Total receiver jitter tolerance                      | 3125             | 0.65 | –    | UI    |

Table 58: PCI Express Protocol Characteristics<sup>(1)</sup>

| Standard                                                    | Description                                  | Line Rate (Mb/s) | Min  | Max  | Units |
|-------------------------------------------------------------|----------------------------------------------|------------------|------|------|-------|
| <b>PCI Express Transmitter Jitter Generation</b>            |                                              |                  |      |      |       |
| PCI Express Gen 1                                           | Total transmitter jitter                     | 2500             | –    | 0.25 | UI    |
| PCI Express Gen 2                                           | Total transmitter jitter                     | 5000             | –    | 0.25 | UI    |
| <b>PCI Express Receiver High Frequency Jitter Tolerance</b> |                                              |                  |      |      |       |
| PCI Express Gen 1                                           | Total receiver jitter tolerance              | 2500             | 0.65 | –    | UI    |
| PCI Express Gen 2 <sup>(2)</sup>                            | Receiver inherent timing error               | 5000             | 0.40 | –    | UI    |
|                                                             | Receiver inherent deterministic timing error |                  | 0.30 | –    | UI    |

### Notes:

1. Tested per card electromechanical (CEM) methodology.
2. Using common REFCLK.

Table 59: CEI-6G Protocol Characteristics

| Description                                            | Line Rate (Mb/s) | Interface | Min | Max | Units |
|--------------------------------------------------------|------------------|-----------|-----|-----|-------|
| <b>CEI-6G Transmitter Jitter Generation</b>            |                  |           |     |     |       |
| Total transmitter jitter <sup>(1)</sup>                | 4976–6375        | CEI-6G-SR | –   | 0.3 | UI    |
| <b>CEI-6G Receiver High Frequency Jitter Tolerance</b> |                  |           |     |     |       |
| Total receiver jitter tolerance <sup>(1)</sup>         | 4976–6375        | CEI-6G-SR | 0.6 | –   | UI    |

### Notes:

1. Tested at most commonly used line rate of 6250 Mb/s using 390.625 MHz reference clock.

Table 60: CPRI Protocol Characteristics

| Description                                     | Line Rate (Mb/s)      | Min  | Max  | Units |
|-------------------------------------------------|-----------------------|------|------|-------|
| <b>CPRI Transmitter Jitter Generation</b>       |                       |      |      |       |
| Total transmitter jitter                        | 614.4                 | –    | 0.35 | UI    |
|                                                 | 1228.8                | –    | 0.35 | UI    |
|                                                 | 2457.6                | –    | 0.35 | UI    |
|                                                 | 3072.0                | –    | 0.35 | UI    |
|                                                 | 4915.2                | –    | 0.3  | UI    |
|                                                 | 6144.0                | –    | 0.3  | UI    |
| <b>CPRI Receiver Frequency Jitter Tolerance</b> |                       |      |      |       |
| Total receiver jitter tolerance                 | 614.4                 | 0.65 | –    | UI    |
|                                                 | 1228.8                | 0.65 | –    | UI    |
|                                                 | 2457.6                | 0.65 | –    | UI    |
|                                                 | 3072.0                | 0.65 | –    | UI    |
|                                                 | 4915.2 <sup>(1)</sup> | 0.60 | –    | UI    |
|                                                 | 6144.0 <sup>(1)</sup> | 0.60 | –    | UI    |

**Notes:**

1. Tested to CEI-6G-SR.

## Integrated Interface Block for PCI Express Designs Switching Characteristics

More information and documentation on solutions for PCI Express designs can be found at:

<http://www.xilinx.com/technology/protocols/pciexpress.htm>

Table 61: Maximum Performance for PCI Express Designs

| Symbol                | Description                    | Speed Grade |        |        |        | Units |
|-----------------------|--------------------------------|-------------|--------|--------|--------|-------|
|                       |                                | 1.0V        |        |        | 0.9V   |       |
|                       |                                | -3          | -2/-2L | -1     | -2L    |       |
| F <sub>PIPECLK</sub>  | Pipe clock maximum frequency   | 250.00      | 250.00 | 250.00 | 250.00 | MHz   |
| F <sub>USERCLK</sub>  | User clock maximum frequency   | 250.00      | 250.00 | 250.00 | 250.00 | MHz   |
| F <sub>USERCLK2</sub> | User clock 2 maximum frequency | 250.00      | 250.00 | 250.00 | 250.00 | MHz   |
| F <sub>DRPCLK</sub>   | DRP clock maximum frequency    | 250.00      | 250.00 | 250.00 | 250.00 | MHz   |

## Revision History

The following table shows the revision history for this document:

| Date     | Version | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 09/26/11 | 1.0     | Initial Xilinx release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 11/07/11 | 1.1     | Revised the $V_{OCM}$ specification in <a href="#">Table 11</a> . Updated the <a href="#">AC Switching Characteristics</a> based upon the ISE 13.3 software v1.02 speed specification throughout document including <a href="#">Table 12</a> and <a href="#">Table 13</a> . Added $MMCM\_T_{FBDELAY}$ while adding $MMCM\_$ to the symbol names of a few specifications in <a href="#">Table 34</a> and PLL to the symbol names in <a href="#">Table 35</a> . In <a href="#">Table 36</a> through <a href="#">Table 43</a> , updated the pin-to-pin description with the SSTL15 standard. Updated units in <a href="#">Table 46</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 02/13/12 | 1.2     | Updated the Artix-7 family of devices listed throughout the entire data sheet. Updated the <a href="#">AC Switching Characteristics</a> based upon the ISE 13.4 software v1.03 for the -3, -2, and -1 speed grades and v1.00 for the -2L speed grade.<br>Updated summary description on <a href="#">page 1</a> . In <a href="#">Table 2</a> , revised $V_{CCO}$ for the 3.3V HR I/O banks and updated $T_j$ . Updated the notes in <a href="#">Table 5</a> . Added MGTAVCC and MGTAVTT power supply ramp times to <a href="#">Table 7</a> . Rearranged <a href="#">Table 8</a> , added Mobile_DDR, HSTL_I_18, HSTL_II_18, HSUL_12, SSTL135_R, SSTL15_R, and SSTL12 and removed DIFF_SSTL135, DIFF_SSTL18_I, DIFF_SSTL18_II, DIFF_HSTL_I, and DIFF_HSTL_II. Added <a href="#">Table 9</a> and <a href="#">Table 10</a> . Revised the specifications in <a href="#">Table 11</a> . Revised $V_{IN}$ in <a href="#">Table 47</a> . Updated the <a href="#">eFUSE Programming Conditions</a> section and removed the endurance table. Added the table. Revised $F_{TXIN}$ and $F_{RXIN}$ in <a href="#">Table 53</a> . Revised $I_{CCADC}$ and updated <a href="#">Note 1</a> in <a href="#">Table 62</a> . Revised DDR LVDS transmitter data width in <a href="#">Table 14</a> . Removed notes from <a href="#">Table 24</a> as they are no longer applicable. Updated specifications in <a href="#">Table 63</a> . Updated <a href="#">Note 1</a> in <a href="#">Table 33</a> . |
| 06/01/12 | 1.3     | Reorganized entire data sheet including adding <a href="#">Table 40</a> and <a href="#">Table 44</a> .<br>Updated $T_{SOL}$ in <a href="#">Table 1</a> . Updated $I_{BATT}$ and added $R_{IN\_TERM}$ to <a href="#">Table 3</a> . Updated <a href="#">Power-On/Off Power Supply Sequencing</a> section with regards to GTP transceivers. In <a href="#">Table 8</a> , updated many parameters including SSTL135 and SSTL135_R. Removed $V_{OX}$ column and added DIFF_HSUL_12 to <a href="#">Table 10</a> . Updated $V_{OL}$ in <a href="#">Table 11</a> . Updated <a href="#">Table 14</a> and removed notes 2 and 3. Updated <a href="#">Table 15</a> .<br>Updated the <a href="#">AC Switching Characteristics</a> based upon the ISE 14.1 software v1.03 for the -3, -2, -2L (1.0V), -1, and v1.01 for the -2L (0.9V) speed specifications throughout the document.<br>In <a href="#">Table 27</a> , updated <a href="#">Reset Delays</a> section including <a href="#">Note 10</a> and <a href="#">Note 11</a> . In <a href="#">Table 53</a> , replaced $F_{TXOUT}$ with $F_{GLK}$ . Updated many of the XADC specifications in <a href="#">Table 62</a> and added <a href="#">Note 2</a> . Updated and moved <i>Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK</i> section from <a href="#">Table 63</a> to <a href="#">Table 34</a> and <a href="#">Table 35</a> .                                                                                  |

## Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials, or to advise you of any corrections or update. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

### AUTOMOTIVE APPLICATIONS DISCLAIMER

XILINX PRODUCTS ARE NOT DESIGNED OR INTENDED TO BE FAIL-SAFE, OR FOR USE IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE, SUCH AS APPLICATIONS RELATED TO: (I) THE DEPLOYMENT OF AIRBAGS, (II) CONTROL OF A VEHICLE, UNLESS THERE IS A FAIL-SAFE OR REDUNDANCY FEATURE (WHICH DOES NOT INCLUDE USE OF SOFTWARE IN THE XILINX DEVICE TO IMPLEMENT THE REDUNDANCY) AND A WARNING SIGNAL UPON FAILURE TO THE OPERATOR, OR (III) USES THAT COULD LEAD TO DEATH OR PERSONAL INJURY. CUSTOMER ASSUMES THE SOLE RISK AND LIABILITY OF ANY USE OF XILINX PRODUCTS IN SUCH APPLICATIONS.