

Welcome to [E-XFL.COM](#)

Understanding **Embedded - FPGAs (Field Programmable Gate Array)**

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

Product Status	Active
Number of LABs/CLBs	4075
Number of Logic Elements/Cells	52160
Total RAM Bits	2764800
Number of I/O	106
Number of Gates	-
Voltage - Supply	0.95V ~ 1.05V
Mounting Type	Surface Mount
Operating Temperature	0°C ~ 85°C (TJ)
Package / Case	238-LFBGA, CSPBGA
Supplier Device Package	238-CSBGA (10x10)
Purchase URL	https://www.e-xfl.com/product-detail/xilinx/xc7a50t-1cpg236c

Table 2: Recommended Operating Conditions⁽¹⁾⁽²⁾ (Cont'd)

Symbol	Description	Min	Typ	Max	Units
Temperature					
T_j	Junction temperature operating range for commercial (C) temperature devices	0	—	85	°C
	Junction temperature operating range for extended (E) temperature devices	0	—	100	°C
	Junction temperature operating range for industrial (I) temperature devices	-40	—	100	°C

Notes:

1. All voltages are relative to ground.
2. For the design of the power distribution system consult [UG483, 7 Series FPGAs PCB Design and Pin Planning Guide](#).
3. Configuration data is retained even if V_{CCO} drops to 0V.
4. Includes V_{CCO} of 1.2V, 1.5V, 1.8V, 2.5V, and 3.3V.
5. The lower absolute voltage specification always applies.
6. A total of 200 mA per bank should not be exceeded.
7. V_{CCBATT} is required only when using bitstream encryption. If battery is not used, connect V_{CCBATT} to either ground or V_{CCAUX} .
8. Each voltage listed requires the filter circuit described in [UG482: 7 Series FPGAs GTP Transceiver User Guide](#).
9. Voltages are specified for the temperature range of $T_j = 0^\circ\text{C}$ to $+85^\circ\text{C}$.

Table 3: DC Characteristics Over Recommended Operating Conditions

Symbol	Description	Min	Typ ⁽¹⁾	Max	Units
V_{DRINT}	Data retention V_{CCINT} voltage (below which configuration data might be lost)	0.75	—	—	V
V_{DRI}	Data retention V_{CCAUX} voltage (below which configuration data might be lost)	1.5	—	—	V
I_{REF}	V_{REF} leakage current per pin	—	—	15	μA
I_L	Input or output leakage current per pin (sample-tested)	—	—	15	μA
$C_{IN}^{(2)}$	Die input capacitance at the pad	—	—	8	pF
I_{RPU}	Pad pull-up (when selected) @ $V_{IN} = 0\text{V}$, $V_{CCO} = 3.3\text{V}$	90	—	330	μA
	Pad pull-up (when selected) @ $V_{IN} = 0\text{V}$, $V_{CCO} = 2.5\text{V}$	68	—	250	μA
	Pad pull-up (when selected) @ $V_{IN} = 0\text{V}$, $V_{CCO} = 1.8\text{V}$	34	—	220	μA
	Pad pull-up (when selected) @ $V_{IN} = 0\text{V}$, $V_{CCO} = 1.5\text{V}$	23	—	150	μA
	Pad pull-up (when selected) @ $V_{IN} = 0\text{V}$, $V_{CCO} = 1.2\text{V}$	12	—	120	μA
I_{RPD}	Pad pull-down (when selected) @ $V_{IN} = 3.3\text{V}$	68	—	330	μA
	Pad pull-down (when selected) @ $V_{IN} = 1.8\text{V}$	45	—	180	μA
I_{CCADC}	Analog supply current, analog circuits in powered up state	—	—	25	mA
$I_{BATT}^{(3)}$	Battery supply current	—	—	150	nA
$R_{IN_TERM}^{(4)}$	Thevenin equivalent resistance of programmable input termination to $V_{CCO}/2$ (UNTUNED_SPLIT_40) for commercial (C), and industrial (I), and extended (E) temperature devices	28	40	55	Ω
	Thevenin equivalent resistance of programmable input termination to $V_{CCO}/2$ (UNTUNED_SPLIT_50) for commercial (C), and industrial (I), and extended (E) temperature devices	35	50	65	Ω
	Thevenin equivalent resistance of programmable input termination to $V_{CCO}/2$ (UNTUNED_SPLIT_60) for commercial (C), and industrial (I), and extended (E) temperature devices	44	60	83	Ω

Table 6 shows the minimum current, in addition to I_{CCQ} , that is required by Artix-7 devices for proper power-on and configuration. If the current minimums shown in **Table 5** and **Table 6** are met, the device powers on after all four supplies have passed through their power-on reset threshold voltages. The FPGA must not be configured until after V_{CCINT} is applied.

Once initialized and configured, use the Xilinx Power Estimator (XPE) tools to estimate current drain on these supplies.

Table 6: Power-On Current for Artix-7 Devices⁽¹⁾

Device	$I_{CCINTMIN}$	$I_{CCAUXMIN}$	I_{CCOMIN}	$I_{CCBRAMMIN}$	Units
	Typ ⁽²⁾	Typ ⁽²⁾	Typ ⁽²⁾	Typ ⁽²⁾	
XC7A100T	$I_{CCINTQ} + 170$	$I_{CCAUXQ} + 40$	$I_{CCOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 60$	mA
XC7A200T	$I_{CCINTQ} + 340$	$I_{CCAUXQ} + 50$	$I_{CCOQ} + 40$ mA per bank	$I_{CCBRAMQ} + 80$	mA

Notes:

1. Use the Xilinx Power Estimator (XPE) spreadsheet tool (download at <http://www.xilinx.com/power>) to calculate maximum power-on currents.
2. Typical values are specified at nominal voltage, 25°C.

Table 7: Power Supply Ramp Time

Symbol	Description	Conditions	Min	Max	Units
T_{VCCINT}	Ramp time from GND to 90% of V_{CCINT}		0.2	50	ms
T_{VCCO}	Ramp time from GND to 90% of V_{CCO}		0.2	50	ms
T_{VCCAUX}	Ramp time from GND to 90% of V_{CCAUX}		0.2	50	ms
$T_{VCCBRAM}$	Ramp time from GND to 90% of V_{CCBRAM}		0.2	50	ms
$T_{VCCO2VCCAUX}$	Allowed time per power cycle for $V_{CCO} - V_{CCAUX} > 2.625V$	$T_J = 100^{\circ}\text{C}^{(1)}$	—	500	ms
		$T_J = 85^{\circ}\text{C}^{(1)}$	—	800	
$T_{MGTAVCC}$	Ramp time from GND to 90% of $V_{MGTAVCC}$		0.2	50	ms
$T_{MGTAVTT}$	Ramp time from GND to 90% of $V_{MGTAVTT}$		0.2	50	ms

Notes:

1. Based on 240,000 power cycles with nominal V_{CCO} of 3.3V or 36,500 power cycles with worst case V_{CCO} of 3.465V.

DC Input and Output Levels

Values for V_{IL} and V_{IH} are recommended input voltages. Values for I_{OL} and I_{OH} are guaranteed over the recommended operating conditions at the V_{OL} and V_{OH} test points. Only selected standards are tested. These are chosen to ensure that all standards meet their specifications. The selected standards are tested at a minimum V_{CCO} with the respective V_{OL} and V_{OH} voltage levels shown. Other standards are sample tested.

Table 8: SelectIO DC Input and Output Levels⁽¹⁾⁽²⁾

I/O Standard	V_{IL}		V_{IH}		V_{OL}	V_{OH}	I_{OL}	I_{OH}
	V , Min	V , Max	V , Min	V , Max	V , Max	V , Min	mA, Max	mA, Min
HSTL_I	-0.300	$V_{REF} - 0.100$	$V_{REF} + 0.100$	$V_{CCO} + 0.300$	0.400	$V_{CCO} - 0.400$	8.00	-8.00
HSTL_I_18	-0.300	$V_{REF} - 0.100$	$V_{REF} + 0.100$	$V_{CCO} + 0.300$	0.400	$V_{CCO} - 0.400$	8.00	-8.00
HSTL_II	-0.300	$V_{REF} - 0.100$	$V_{REF} + 0.100$	$V_{CCO} + 0.300$	0.400	$V_{CCO} - 0.400$	16.00	-16.00
HSTL_II_18	-0.300	$V_{REF} - 0.100$	$V_{REF} + 0.100$	$V_{CCO} + 0.300$	0.400	$V_{CCO} - 0.400$	16.00	-16.00
HSUL_12	-0.300	$V_{REF} - 0.130$	$V_{REF} + 0.130$	$V_{CCO} + 0.300$	20% V_{CCO}	80% V_{CCO}	0.10	-0.10
LVCMOS12	-0.300	35% V_{CCO}	65% V_{CCO}	$V_{CCO} + 0.300$	0.400	$V_{CCO} - 0.400$	Note 3	Note 3
LVCMOS15	-0.300	35% V_{CCO}	65% V_{CCO}	$V_{CCO} + 0.300$	25% V_{CCO}	75% V_{CCO}	Note 4	Note 4
LVCMOS18	-0.300	35% V_{CCO}	65% V_{CCO}	$V_{CCO} + 0.300$	0.450	$V_{CCO} - 0.450$	Note 5	Note 5
LVCMOS25	-0.300	0.7	1.700	$V_{CCO} + 0.300$	0.400	$V_{CCO} - 0.400$	Note 4	Note 4
LVCMOS33	-0.300	0.8	2.000	3.450	0.400	$V_{CCO} - 0.400$	Note 4	Note 4
LVTTL	-0.300	0.8	2.000	3.450	0.400	2.400	Note 5	Note 5
MOBILE_DDR	-0.300	20% V_{CCO}	80% V_{CCO}	$V_{CCO} + 0.300$	10% V_{CCO}	90% V_{CCO}	0.10	-0.10
PCI33_3	-0.500	30% V_{CCO}	50% V_{CCO}	$V_{CCO} + 0.500$	10% V_{CCO}	90% V_{CCO}	1.50	-0.50
SSTL135	-0.300	$V_{REF} - 0.090$	$V_{REF} + 0.090$	$V_{CCO} + 0.300$	$V_{CCO}/2 - 0.150$	$V_{CCO}/2 + 0.150$	13.00	-13.00
SSTL135_R	-0.300	$V_{REF} - 0.090$	$V_{REF} + 0.090$	$V_{CCO} + 0.300$	$V_{CCO}/2 - 0.150$	$V_{CCO}/2 + 0.150$	8.90	-8.90
SSTL15	-0.300	$V_{REF} - 0.100$	$V_{REF} + 0.100$	$V_{CCO} + 0.300$	$V_{CCO}/2 - 0.175$	$V_{CCO}/2 + 0.175$	13.00	-13.00
SSTL15_R	-0.300	$V_{REF} - 0.100$	$V_{REF} + 0.100$	$V_{CCO} + 0.300$	$V_{CCO}/2 - 0.175$	$V_{CCO}/2 + 0.175$	8.90	-8.90
SSTL18_I	-0.300	$V_{REF} - 0.125$	$V_{REF} + 0.125$	$V_{CCO} + 0.300$	$V_{CCO}/2 - 0.470$	$V_{CCO}/2 + 0.470$	8.00	-8.00
SSTL18_II	-0.300	$V_{REF} - 0.125$	$V_{REF} + 0.125$	$V_{CCO} + 0.300$	$V_{CCO}/2 - 0.600$	$V_{CCO}/2 + 0.600$	13.40	-13.40

Notes:

- Tested according to relevant specifications.
- 3.3V and 2.5V standards are only supported in 3.3V I/O banks.
- Supported drive strengths of 4, 8, or 12 mA in HR I/O banks.
- Supported drive strengths of 4, 8, 12, or 16 mA in HR I/O banks.
- Supported drive strengths of 4, 8, 12, 16, or 24 mA in HR I/O banks.
- For detailed interface specific DC voltage levels, see [UG471: 7 Series FPGAs SelectIO Resources User Guide](#).

Table 9: Differential SelectIO DC Input and Output Levels

I/O Standard	V _{ICM} ⁽¹⁾			V _{ID} ⁽²⁾			V _{OCM} ⁽³⁾			V _{OD} ⁽⁴⁾		
	V, Min	V, Typ	V, Max	V, Min	V, Typ	V, Max	V, Min	V, Typ	V, Max	V, Min	V, Typ	V, Max
BLVDS_25	0.300	1.200	1.425	0.100	—	—	—	1.250	—	Note 5		
MINI_LVDS_25	0.300	1.200	V _{CCAUX}	0.200	0.400	0.600	1.000	1.200	1.400	0.300	0.450	0.600
PPDS_25	0.200	0.900	V _{CCAUX}	0.100	0.250	0.400	0.500	0.950	1.400	0.100	0.250	0.400
RSDS_25	0.300	0.900	1.500	0.100	0.350	0.600	1.000	1.200	1.400	0.100	0.350	0.600
TMDS_33	2.700	2.965	3.230	0.150	0.675	1.200	V _{CCO} –0.405	V _{CCO} –0.300	V _{CCO} –0.190	0.400	0.600	0.800

Notes:

1. V_{ICM} is the input common mode voltage.
2. V_{ID} is the input differential voltage (Q – \bar{Q}).
3. V_{OCM} is the output common mode voltage.
4. V_{OD} is the output differential voltage (Q – \bar{Q}).
5. V_{OD} for BLVDS will vary significantly depending on topology and loading.

Table 10: Complementary Differential SelectIO DC Input and Output Levels

I/O Standard	V _{ICM} ⁽¹⁾			V _{ID} ⁽²⁾		V _{OL} ⁽³⁾		V _{OH} ⁽⁴⁾		I _{OL}	I _{OH}
	V, Min	V, Typ	V, Max	V, Min	V, Max	V, Max	V, Min	mA, Max	mA, Min		
DIFF_HSTL_I	0.300	0.750	1.125	0.100	—	0.400	V _{CCO} –0.400	8.00	–8.00		
DIFF_HSTL_I_18	0.300	0.900	1.425	0.100	—	0.400	V _{CCO} –0.400	8.00	–8.00		
DIFF_HSTL_II	0.300	0.750	1.125	0.100	—	0.400	V _{CCO} –0.400	16.00	–16.00		
DIFF_HSTL_II_18	0.300	0.900	1.425	0.100	—	0.400	V _{CCO} –0.400	16.00	–16.00		
DIFF_HSUL_12	0.300	0.600	0.850	0.100	—	20% V _{CCO}	80% V _{CCO}	0.100	–0.100		
DIFF_MOBILE_DDR	0.300	0.900	1.425	0.100	—	10% V _{CCO}	90% V _{CCO}	0.100	–0.100		
DIFF_SSTL135	0.300	0.675	1.000	0.100	—	(V _{CCO} /2) – 0.150	(V _{CCO} /2) + 0.150	13.0	–13.0		
DIFF_SSTL135_R	0.300	0.675	1.000	0.100	—	(V _{CCO} /2) – 0.150	(V _{CCO} /2) + 0.150	8.9	–8.9		
DIFF_SSTL15	0.300	0.750	1.125	0.100	—	(V _{CCO} /2) – 0.175	(V _{CCO} /2) + 0.175	13.0	–13.0		
DIFF_SSTL15_R	0.300	0.750	1.125	0.100	—	(V _{CCO} /2) – 0.175	(V _{CCO} /2) + 0.175	8.9	–8.9		
DIFF_SSTL18_I	0.300	0.900	1.425	0.100	—	(V _{CCO} /2) – 0.470	(V _{CCO} /2) + 0.470	8.00	–8.00		
DIFF_SSTL18_II	0.300	0.900	1.425	0.100	—	(V _{CCO} /2) – 0.600	(V _{CCO} /2) + 0.600	13.4	–13.4		

Notes:

1. V_{ICM} is the input common mode voltage.
2. V_{ID} is the input differential voltage (Q – \bar{Q}).
3. V_{OL} is the single-ended low-output voltage.
4. V_{OH} is the single-ended high-output voltage.

LVDS DC Specifications (LVDS_25)

See [UG471: 7 Series FPGAs SelectIO Resources User Guide](#) for more information on the LVDS_25 standard in the HR I/O banks.

Table 11: LVDS_25 DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
V_{CCO}	Supply Voltage		2.375	2.500	2.625	V
V_{OH}	Output High Voltage for Q and \bar{Q}	$R_T = 100 \Omega$ across Q and \bar{Q} signals	–	–	1.675	V
V_{OL}	Output Low Voltage for Q and \bar{Q}	$R_T = 100 \Omega$ across Q and \bar{Q} signals	0.700	–	–	V
V_{ODIFF}	Differential Output Voltage ($Q - \bar{Q}$), Q = High ($\bar{Q} - Q$), \bar{Q} = High	$R_T = 100 \Omega$ across Q and \bar{Q} signals	247	350	600	mV
V_{OCM}	Output Common-Mode Voltage	$R_T = 100 \Omega$ across Q and \bar{Q} signals	1.000	1.250	1.425	V
V_{IDIFF}	Differential Input Voltage ($Q - \bar{Q}$), Q = High ($\bar{Q} - Q$), \bar{Q} = High		100	350	600	mV
V_{ICM}	Input Common-Mode Voltage		0.300	1.200	1.425	V

AC Switching Characteristics

All values represented in this data sheet are based on the speed specifications in v1.07 from the 14.4/2012.4 device pack for ISE® Design Suite14.4 and Vivado® Design Suite 2012.4 for the -3, -2, -2L (1.0V), and -1 speed grades and v1.05 from the 14.4/2012.4 device pack for the -2L (0.9V) speed grade.

Switching characteristics are specified on a per-speed-grade basis and can be designated as Advance, Preliminary, or Production. Each designation is defined as follows:

Advance Product Specification

These specifications are based on simulations only and are typically available soon after device design specifications are frozen. Although speed grades with this designation are considered relatively stable and conservative, some under-reporting might still occur.

Preliminary Product Specification

These specifications are based on complete ES (engineering sample) silicon characterization. Devices and speed grades with this designation are intended to give a better indication of the expected performance of production silicon. The probability of under-reporting delays is greatly reduced as compared to Advance data.

Production Product Specification

These specifications are released once enough production silicon of a particular device family member has been characterized to provide full correlation between specifications and devices over numerous production lots. There is no under-reporting of delays, and customers receive formal notification of any subsequent changes. Typically, the slowest speed grades transition to Production before faster speed grades.

Testing of AC Switching Characteristics

Internal timing parameters are derived from measuring internal test patterns. All AC switching characteristics are representative of worst-case supply voltage and junction temperature conditions.

For more specific, more precise, and worst-case guaranteed data, use the values reported by the static timing analyzer and back-annotate to the simulation net list. Unless otherwise noted, values apply to all Artix-7 FPGAs.

Performance Characteristics

This section provides the performance characteristics of some common functions and designs implemented in Artix-7 devices. The numbers reported here are worst-case values; they have all been fully characterized. These values are subject to the same guidelines as the [AC Switching Characteristics, page 9](#).

Table 14: Networking Applications Interface Performances

Description	Speed Grade				Units	
	1.0V		0.9V			
	-3	-2/-2L	-1	-2L		
SDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 8)	680	680	600	600	Mb/s	
DDR LVDS transmitter (using OSERDES; DATA_WIDTH = 4 to 14)	1250	1250	950	950	Mb/s	
SDR LVDS receiver (SFI-4.1) ⁽¹⁾	680	680	600	600	Mb/s	
DDR LVDS receiver (SPI-4.2) ⁽¹⁾	1250	1250	950	950	Mb/s	

Notes:

- LVDS receivers are typically bounded with certain applications where specific dynamic phase-alignment (DPA) algorithms dominate deterministic performance.

Table 15: Maximum Physical Interface (PHY) Rate for Memory Interfaces⁽¹⁾⁽²⁾

Memory Standard	Speed Grade				Units	
	1.0V		0.9V			
	-3	-2/-2L	-1	-2L		
4:1 Memory Controllers						
DDR3	1066	800	800	800	Mb/s	
DDR3L	800	800	667	667	Mb/s	
DDR2	800	800	667	667	Mb/s	
LPDDR2	667	667	533	533	Mb/s	
2:1 Memory Controllers						
DDR3	800	700	620	620	Mb/s	
DDR3L	800	700	620	620	Mb/s	
DDR2	800	700	620	620	Mb/s	

Notes:

- V_{REF} tracking is required. For more information, see [UG586, 7 Series FPGAs Memory Interface Solutions User Guide](#).
- When using the internal V_{REF} the maximum data rate is 800 Mb/s (400 MHz).

Table 16: 3.3V IOB High Range (HR) Switching Characteristics (Cont'd)

I/O Standard	T _{IOPI}				T _{IOOP}				T _{IOTP}				Units	
	Speed Grade				Speed Grade				Speed Grade					
	1.0V		0.9V		1.0V		0.9V		1.0V		0.9V			
	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L	-3	-2/-2L	-1	-2L		
HSTL_II_F	0.65	0.73	0.80	0.85	1.12	1.24	1.49	1.71	1.69	1.90	2.32	2.36	ns	
HSTL_I_18_F	0.67	0.75	0.82	0.87	1.13	1.26	1.51	1.72	1.70	1.92	2.34	2.37	ns	
HSTL_II_18_F	0.66	0.75	0.81	0.87	1.12	1.24	1.49	1.71	1.69	1.90	2.32	2.36	ns	
DIFF_HSTL_I_F	0.68	0.76	0.83	0.85	1.18	1.30	1.56	1.77	1.75	1.96	2.39	2.42	ns	
DIFF_HSTL_II_F	0.68	0.76	0.83	0.85	1.21	1.33	1.59	1.77	1.78	1.99	2.42	2.42	ns	
DIFF_HSTL_I_18_F	0.71	0.79	0.86	0.87	1.21	1.33	1.59	1.77	1.78	1.99	2.42	2.42	ns	
DIFF_HSTL_II_18_F	0.70	0.78	0.85	0.87	1.21	1.33	1.59	1.77	1.78	1.99	2.42	2.42	ns	
LVCMOS33_S4	1.26	1.34	1.41	1.62	3.80	3.93	4.18	4.41	4.37	4.59	5.01	5.06	ns	
LVCMOS33_S8	1.26	1.34	1.41	1.62	3.52	3.65	3.90	4.13	4.09	4.31	4.73	4.78	ns	
LVCMOS33_S12	1.26	1.34	1.41	1.62	3.09	3.21	3.46	3.69	3.65	3.87	4.29	4.34	ns	
LVCMOS33_S16	1.26	1.34	1.41	1.62	3.40	3.52	3.77	4.00	3.97	4.18	4.60	4.65	ns	
LVCMOS33_F4	1.26	1.34	1.41	1.62	3.26	3.38	3.64	3.86	3.83	4.04	4.46	4.51	ns	
LVCMOS33_F8	1.26	1.34	1.41	1.62	2.74	2.87	3.12	3.35	3.31	3.52	3.95	4.00	ns	
LVCMOS33_F12	1.26	1.34	1.41	1.62	2.55	2.68	2.93	3.16	3.12	3.34	3.76	3.81	ns	
LVCMOS33_F16	1.26	1.34	1.41	1.62	2.55	2.68	2.93	3.16	3.12	3.34	3.76	3.81	ns	
LVCMOS25_S4	1.12	1.20	1.27	1.43	3.13	3.26	3.51	3.72	3.70	3.91	4.34	4.37	ns	
LVCMOS25_S8	1.12	1.20	1.27	1.43	2.88	3.01	3.26	3.49	3.45	3.67	4.09	4.14	ns	
LVCMOS25_S12	1.12	1.20	1.27	1.43	2.48	2.60	2.85	3.08	3.05	3.26	3.68	3.73	ns	
LVCMOS25_S16	1.12	1.20	1.27	1.43	2.82	2.94	3.20	3.43	3.39	3.60	4.03	4.08	ns	
LVCMOS25_F4	1.12	1.20	1.27	1.43	2.74	2.87	3.12	3.35	3.31	3.52	3.95	4.00	ns	
LVCMOS25_F8	1.12	1.20	1.27	1.43	2.18	2.30	2.56	2.79	2.75	2.96	3.39	3.44	ns	
LVCMOS25_F12	1.12	1.20	1.27	1.43	2.16	2.29	2.54	2.77	2.73	2.95	3.37	3.42	ns	
LVCMOS25_F16	1.12	1.20	1.27	1.43	2.01	2.13	2.39	2.61	2.58	2.79	3.21	3.26	ns	
LVCMOS18_S4	0.74	0.83	0.89	0.94	1.62	1.74	1.99	2.19	2.19	2.40	2.82	2.84	ns	
LVCMOS18_S8	0.74	0.83	0.89	0.94	2.18	2.30	2.56	2.79	2.75	2.96	3.39	3.44	ns	
LVCMOS18_S12	0.74	0.83	0.89	0.94	2.18	2.30	2.56	2.79	2.75	2.96	3.39	3.44	ns	
LVCMOS18_S16	0.74	0.83	0.89	0.94	1.52	1.65	1.90	2.13	2.09	2.31	2.73	2.78	ns	
LVCMOS18_S24	0.74	0.83	0.89	0.94	1.60	1.72	1.98	2.21	2.17	2.38	2.81	2.86	ns	
LVCMOS18_F4	0.74	0.83	0.89	0.94	1.45	1.57	1.82	2.05	2.01	2.23	2.65	2.70	ns	
LVCMOS18_F8	0.74	0.83	0.89	0.94	1.68	1.80	2.06	2.29	2.25	2.46	2.89	2.94	ns	
LVCMOS18_F12	0.74	0.83	0.89	0.94	1.68	1.80	2.06	2.29	2.25	2.46	2.89	2.94	ns	
LVCMOS18_F16	0.74	0.83	0.89	0.94	1.40	1.52	1.77	2.00	1.97	2.18	2.60	2.65	ns	
LVCMOS18_F24	0.74	0.83	0.89	0.94	1.34	1.46	1.71	1.94	1.90	2.12	2.54	2.59	ns	
LVCMOS15_S4	0.77	0.86	0.93	0.98	2.05	2.18	2.43	2.50	2.62	2.84	3.26	3.15	ns	
LVCMOS15_S8	0.77	0.86	0.93	0.98	2.09	2.21	2.46	2.69	2.65	2.87	3.29	3.34	ns	
LVCMOS15_S12	0.77	0.86	0.93	0.98	1.59	1.71	1.96	2.19	2.15	2.37	2.79	2.84	ns	
LVCMOS15_S16	0.77	0.86	0.93	0.98	1.59	1.71	1.96	2.19	2.15	2.37	2.79	2.84	ns	

Input/Output Logic Switching Characteristics

Table 18: ILOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ICE1CK/T_{ICKCE1}}	CE1 pin setup/hold with respect to CLK	0.48/0.02	0.54/0.02	0.76/0.02	0.40/-0.07	ns
T _{ISRCK/T_{ICKSR}}	SR pin setup/hold with respect to CLK	0.60/0.01	0.70/0.01	1.13/0.01	0.88/-0.35	ns
T _{IDOCK/T_{IOCKD}}	D pin setup/hold with respect to CLK without Delay	0.01/0.27	0.01/0.29	0.01/0.33	0.01/0.33	ns
T _{IDOCKD/T_{IOCKDD}}	DDLY pin setup/hold with respect to CLK (using IDELAY)	0.02/0.27	0.02/0.29	0.02/0.33	0.01/0.33	ns
Combinatorial						
T _{IDI}	D pin to O pin propagation delay, no Delay	0.11	0.11	0.13	0.14	ns
T _{IDID}	DDLY pin to O pin propagation delay (using IDELAY)	0.11	0.12	0.14	0.15	ns
Sequential Delays						
T _{IDLO}	D pin to Q1 pin using flip-flop as a latch without Delay	0.41	0.44	0.51	0.54	ns
T _{IDLOD}	DDLY pin to Q1 pin using flip-flop as a latch (using IDELAY)	0.41	0.44	0.51	0.55	ns
T _{ICKQ}	CLK to Q outputs	0.53	0.57	0.66	0.71	ns
T _{RQ_ILOGIC}	SR pin to OQ/TQ out	0.96	1.08	1.32	1.32	ns
T _{GSRQ_ILOGIC}	Global set/reset to Q outputs	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_ILOGIC}	Minimum pulse width, SR inputs	0.61	0.72	0.72	0.68	ns, Min

Table 19: OLOGIC Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
Setup/Hold						
T _{ODCK/T_{OCKD}}	D1/D2 pins setup/hold with respect to CLK	0.67/-0.11	0.71/-0.11	0.84/-0.11	0.60/-0.18	ns
T _{OOCCK/T_{OCKOCE}}	OCE pin setup/hold with respect to CLK	0.32/0.58	0.34/0.58	0.51/0.58	0.21/-0.10	ns
T _{OSRCK/T_{OCKSR}}	SR pin setup/hold with respect to CLK	0.37/0.21	0.44/0.21	0.80/0.21	0.62/-0.25	ns
T _{OTCK/T_{OCKT}}	T1/T2 pins setup/hold with respect to CLK	0.69/-0.14	0.73/-0.14	0.89/-0.14	0.60/-0.18	ns
T _{TOTCECK/T_{OCKTCE}}	TCE pin setup/hold with respect to CLK	0.32/0.01	0.34/0.01	0.51/0.01	0.22/-0.10	ns
Combinatorial						
T _{ODQ}	D1 to OQ out or T1 to TQ out	0.83	0.96	1.16	1.36	ns
Sequential Delays						
T _{OCKQ}	CLK to OQ/TQ out	0.47	0.49	0.56	0.63	ns
T _{RQ_OLOGIC}	SR pin to OQ/TQ out	0.72	0.80	0.95	1.12	ns
T _{GSRQ_OLOGIC}	Global set/reset to Q outputs	7.60	7.60	10.51	11.39	ns
Set/Reset						
T _{RPW_OLOGIC}	Minimum pulse width, SR inputs	0.64	0.74	0.74	0.68	ns, Min

Input Serializer/Deserializer Switching Characteristics

Table 20: ISERDES Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
Setup/Hold for Control Lines						
T _{ISCCCK_BITSILIP} /T _{ISCKC_BITSILIP}	BITSLIP pin setup/hold with respect to CLKDIV	0.01/0.14	0.02/0.15	0.02/0.17	0.02/0.21	ns
T _{ISCCCK_CE} / T _{ISCKC_CE} ⁽²⁾	CE pin setup/hold with respect to CLK (for CE1)	0.45/-0.01	0.50/-0.01	0.72/-0.01	0.35/-0.11	ns
T _{ISCCCK_CE2} / T _{ISCKC_CE2} ⁽²⁾	CE pin setup/hold with respect to CLKDIV (for CE2)	-0.10/0.33	-0.10/0.36	-0.10/0.40	-0.17/0.40	ns
Setup/Hold for Data Lines						
T _{ISDCK_D} /T _{ISCKD_D}	D pin setup/hold with respect to CLK	-0.02/0.12	-0.02/0.14	-0.02/0.17	-0.04/0.19	ns
T _{ISDCK_DDLY} /T _{ISCKD_DDLY}	DDLY pin setup/hold with respect to CLK (using IDELAY) ⁽¹⁾	-0.02/0.12	-0.02/0.14	-0.02/0.17	-0.03/0.19	ns
T _{ISDCK_D_DDR} /T _{ISCKD_D_DDR}	D pin setup/hold with respect to CLK at DDR mode	-0.02/0.12	-0.02/0.14	-0.02/0.17	-0.04/0.19	ns
T _{ISDCK_DDLY_DDR} /T _{ISCKD_DDLY_DDR}	D pin setup/hold with respect to CLK at DDR mode (using IDELAY) ⁽¹⁾	0.12/0.12	0.14/0.14	0.17/0.17	0.19/0.19	ns
Sequential Delays						
T _{ISCKO_Q}	CLKDIV to out at Q pin	0.53	0.54	0.66	0.67	ns
Propagation Delays						
T _{ISDO_DO}	D input to DO output pin	0.11	0.11	0.13	0.14	ns

Notes:

1. Recorded at 0 tap value.
2. T_{ISCCCK_CE2} and T_{ISCKC_CE2} are reported as T_{ISCCCK_CE}/T_{ISCKC_CE} in TRACE report.

Input/Output Delay Switching Characteristics

Table 22: Input/Output Delay Switching Characteristics

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
IDELAYCTRL						
T_DLYCCO_RDY	Reset to ready for IDELAYCTRL	3.67	3.67	3.67	3.22	μs
F_IDELAYCTRL_REF	Attribute REFCLK frequency = 200.00 ⁽¹⁾	200.00	200.00	200.00	200.00	MHz
	Attribute REFCLK frequency = 300.00 ⁽¹⁾	300.00	300.00	N/A	N/A	MHz
IDELAYCTRL_REF_PRECISION	REFCLK precision	±10	±10	±10	±10	MHz
T_IDELAYCTRL_RPW	Minimum Reset pulse width	59.28	59.28	59.28	52.00	ns
IDELAY						
T_IDELAYRESOLUTION	IDELAY chain delay resolution	1/(32 x 2 x F _{REF})				ps
T_IDELAYPAT_JIT	Pattern dependent period jitter in delay chain for clock pattern. ⁽²⁾	0	0	0	0	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23) ⁽³⁾	±5	±5	±5	±5	ps per tap
	Pattern dependent period jitter in delay chain for random data pattern (PRBS 23) ⁽⁴⁾	±9	±9	±9	±9	ps per tap
T_IDELAY_CLK_MAX	Maximum frequency of CLK input to IDELAY	680.00	680.00	600.00	520.00	MHz
T_IDCCK_CE / T_IDCKC_CE	CE pin setup/hold with respect to C for IDELAY	0.12/0.11	0.16/0.13	0.21/0.16	0.14/0.16	ns
T_IDCCK_INC / T_IDCKC_INC	INC pin setup/hold with respect to C for IDELAY	0.12/0.16	0.14/0.18	0.16/0.22	0.10/0.23	ns
T_IDCCK_RST / T_IDCKC_RST	RST pin setup/hold with respect to C for IDELAY	0.15/0.09	0.16/0.11	0.18/0.14	0.22/0.19	ns
T_IDDO_IDATAIN	Propagation delay through IDELAY	Note 5	Note 5	Note 5	Note 5	ps

Notes:

1. Average Tap Delay at 200 MHz = 78 ps, at 300 MHz = 52 ps.
2. When HIGH_PERFORMANCE mode is set to TRUE or FALSE.
3. When HIGH_PERFORMANCE mode is set to TRUE.
4. When HIGH_PERFORMANCE mode is set to FALSE.
5. Delay depends on IDELAY tap setting. See TRACE report for actual values.

Table 27: Block RAM and FIFO Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
T _{RCKC_RSTRAM} /T _{RCKC_RSTRAM}	Synchronous RSTRAM input	0.32/0.42	0.34/0.43	0.36/0.46	0.40/0.47	ns, Min
T _{RCKC_WEA} /T _{RCKC_WEA}	Write enable (WE) input (block RAM only)	0.44/0.18	0.48/0.19	0.54/0.20	0.64/0.23	ns, Min
T _{RCKC_WREN} /T _{RCKC_WREN}	WREN FIFO inputs	0.46/0.30	0.46/0.35	0.47/0.43	0.77/0.44	ns, Min
T _{RCKC_RDEN} /T _{RCKC_RDEN}	RDEN FIFO inputs	0.42/0.30	0.43/0.35	0.43/0.43	0.71/0.44	ns, Min
Reset Delays						
T _{RCO_FLAGS}	Reset RST to FIFO flags/pointers ⁽¹⁰⁾	0.90	0.98	1.10	1.25	ns, Max
T _{RREC_RST} /T _{RREM_RST}	FIFO reset recovery and removal timing ⁽¹¹⁾	1.87/-0.81	2.07/-0.81	2.37/-0.81	2.44/-0.71	ns, Max
Maximum Frequency						
F _{MAX_BRAM_WF_NC}	Block RAM (write first and no change modes) when not in SDP RF mode	509.68	460.83	388.20	315.66	MHz
F _{MAX_BRAM_RF_PERFORMANCE}	Block RAM (read first, performance mode) when in SDP RF mode but no address overlap between port A and port B	509.68	460.83	388.20	315.66	MHz
F _{MAX_BRAM_RF_DELAYED_WRITE}	Block RAM (read first, delayed write mode) when in SDP RF mode and there is possibility of overlap between port A and port B addresses	447.63	404.53	339.67	268.96	MHz
F _{MAX_CAS_WF_NC}	Block RAM cascade (write first, no change mode) when cascade but not in RF mode	467.07	418.59	345.78	273.30	MHz
F _{MAX_CAS_RF_PERFORMANCE}	Block RAM cascade (read first, performance mode) when in cascade with RF mode and no possibility of address overlap/one port is disabled	467.07	418.59	345.78	273.30	MHz
F _{MAX_CAS_RF_DELAYED_WRITE}	When in cascade RF mode and there is a possibility of address overlap between port A and port B	405.35	362.19	297.35	226.60	MHz
F _{MAX_FIFO}	FIFO in all modes without ECC	509.68	460.83	388.20	315.66	MHz
F _{MAX_ECC}	Block RAM and FIFO in ECC configuration	410.34	365.10	297.53	215.38	MHz

Notes:

1. TRACE will report all of these parameters as T_{RCKO_DO}.
2. T_{RCKO_DOR} includes T_{RCKO_DOW}, T_{RCKO_DOPR}, and T_{RCKO_DOPW} as well as the B port equivalent timing parameters.
3. These parameters also apply to synchronous FIFO with DO_REG = 0.
4. T_{RCKO_DO} includes T_{RCKO_DOP} as well as the B port equivalent timing parameters.
5. These parameters also apply to multirate (asynchronous) and synchronous FIFO with DO_REG = 1.
6. T_{RCKO_FLAGS} includes the following parameters: T_{RCKO_AEMPTY}, T_{RCKO_AFULL}, T_{RCKO_EMPTY}, T_{RCKO_FULL}, T_{RCKO_RDERR}, T_{RCKO_WRERR}.
7. T_{RCKO_POINTERS} includes both T_{RCKO_RDCOUNT} and T_{RCKO_WRCOUNT}.
8. The ADDR setup and hold must be met when EN is asserted (even when WE is deasserted). Otherwise, block RAM data corruption is possible.
9. These parameters include both A and B inputs as well as the parity inputs of A and B.
10. T_{RCO_FLAGS} includes the following flags: AEMPTY, AFULL, EMPTY, FULL, RDERR, WRERR, RDCOUNT, and WRCOUNT.
11. RDEN and WREN must be held Low prior to and during reset. The FIFO reset must be asserted for at least five positive clock edges of the slowest clock (WRCLK or RDCLK).

Table 28: DSP48E1 Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
Setup and Hold Times of the RST Pins						
$T_{DSPDCK_RSTA; RSTB_AREG; BREG}/T_{DSPCKD_RSTA; RSTB_AREG; BREG}$	{RSTA, RSTB} input to {A, B} register CLK	0.41/ 0.11	0.46/ 0.13	0.55/ 0.15	0.63/ 0.40	ns
$T_{DSPDCK_RSTC_CREG}/T_{DSPCKD_RSTC_CREG}$	RSTC input to C register CLK	0.07/ 0.10	0.08/ 0.11	0.09/ 0.12	0.13/ 0.11	ns
$T_{DSPDCK_RSTD_DREG}/T_{DSPCKD_RSTD_DREG}$	RSTD input to D register CLK	0.44/ 0.07	0.50/ 0.08	0.59/ 0.09	0.67/ 0.08	ns
$T_{DSPDCK_RSTM_MREG}/T_{DSPCKD_RSTM_MREG}$	RSTM input to M register CLK	0.21/ 0.22	0.23/ 0.24	0.27/ 0.28	0.28/ 0.35	ns
$T_{DSPDCK_RSTP_PREG}/T_{DSPCKD_RSTP_PREG}$	RSTP input to P register CLK	0.27/ 0.01	0.30/ 0.01	0.35/ 0.01	0.43/ 0.00	ns
Combinatorial Delays from Input Pins to Output Pins						
$T_{DSPDO_A_CARRYOUT_MULT}$	A input to CARRYOUT output using multiplier	3.79	4.35	5.18	6.61	ns
$T_{DSPDO_D_P_MULT}$	D input to P output using multiplier	3.72	4.26	5.07	6.41	ns
$T_{DSPDO_B_P}$	B input to P output not using multiplier	1.53	1.75	2.08	2.48	ns
$T_{DSPDO_C_P}$	C input to P output	1.33	1.53	1.82	2.22	ns
Combinatorial Delays from Input Pins to Cascading Output Pins						
$T_{DSPDO_A; B}_ACOUT; BCOUT}$	{A, B} input to {ACOUT, BCOUT} output	0.55	0.63	0.74	0.87	ns
$T_{DSPDO_A, B}_CARRYCASOUT_MULT}$	{A, B} input to CARRYCASOUT output using multiplier	4.06	4.65	5.54	7.03	ns
$T_{DSPDO_D}_CARRYCASOUT_MULT$	D input to CARRYCASOUT output using multiplier	3.97	4.54	5.40	6.81	ns
$T_{DSPDO_A, B}_CARRYCASOUT$	{A, B} input to CARRYCASOUT output not using multiplier	1.77	2.03	2.41	2.88	ns
$T_{DSPDO_C}_CARRYCASOUT$	C input to CARRYCASOUT output	1.58	1.81	2.15	2.62	ns
Combinatorial Delays from Cascading Input Pins to All Output Pins						
$T_{DSPDO_ACIN_P_MULT}$	ACIN input to P output using multiplier	3.65	4.19	5.00	6.40	ns
$T_{DSPDO_ACIN_P}$	ACIN input to P output not using multiplier	1.37	1.57	1.88	2.44	ns
$T_{DSPDO_ACIN_ACOUT}$	ACIN input to ACOUT output	0.38	0.44	0.53	0.63	ns
$T_{DSPDO_ACIN}_CARRYCASOUT_MULT$	ACIN input to CARRYCASOUT output using multiplier	3.90	4.47	5.33	6.79	ns
$T_{DSPDO_ACIN}_CARRYCASOUT$	ACIN input to CARRYCASOUT output not using multiplier	1.61	1.85	2.21	2.84	ns
$T_{DSPDO_PCIN_P}$	PCIN input to P output	1.11	1.28	1.52	1.82	ns
$T_{DSPDO_PCIN}_CARRYCASOUT$	PCIN input to CARRYCASOUT output	1.36	1.56	1.85	2.21	ns
Clock to Outs from Output Register Clock to Output Pins						
$T_{DSPCKO_P_PREG}$	CLK PREG to P output	0.33	0.37	0.44	0.54	ns
$T_{DSPCKO}_CARRYCASOUT_PREG$	CLK PREG to CARRYCASOUT output	0.52	0.59	0.69	0.84	ns

Table 34: MMCM Specification (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
MMCM_F_BANDWIDTH	Low MMCM bandwidth at typical ⁽¹⁾	1.00	1.00	1.00	1.00	MHz
	High MMCM bandwidth at typical ⁽¹⁾	4.00	4.00	4.00	4.00	MHz
MMCM_T_STATPHAOFFSET	Static phase offset of the MMCM outputs ⁽²⁾	0.12	0.12	0.12	0.12	ns
MMCM_T_OUTJITTER	MMCM output jitter	Note 3				
MMCM_T_OUTDUTY	MMCM output clock duty-cycle precision ⁽⁴⁾	0.20	0.20	0.20	0.25	ns
MMCM_T_LOCKMAX	MMCM maximum lock time	100.00	100.00	100.00	100.00	μs
MMCM_F_OUTMAX	MMCM maximum output frequency	800.00	800.00	800.00	800.00	MHz
MMCM_F_OUTMIN	MMCM minimum output frequency ⁽⁵⁾⁽⁶⁾	4.69	4.69	4.69	4.69	MHz
MMCM_T_EXTFDVAR	External clock feedback variation	< 20% of clock input period or 1 ns Max				
MMCM_RST_MINPULSE	Minimum reset pulse width	5.00	5.00	5.00	5.00	ns
MMCM_F_PFDMAX	Maximum frequency at the phase frequency detector	550.00	500.00	450.00	450.00	MHz
MMCM_F_PFDMIN	Minimum frequency at the phase frequency detector	10.00	10.00	10.00	10.00	MHz
MMCM_T_FBDelay	Maximum delay in the feedback path	3 ns Max or one CLKIN cycle				
MMCM Switching Characteristics Setup and Hold						
T_MMCM_DCK_PSEN/ T_MMCM_CKD_PSEN	Setup and hold of phase-shift enable	1.04/0.00	1.04/0.00	1.04/0.00	1.04/0.00	ns
T_MMCM_DCK_PSINCDEC/ T_MMCM_CKD_PSINCDEC	Setup and hold of phase-shift increment/decrement	1.04/0.00	1.04/0.00	1.04/0.00	1.04/0.00	ns
T_MMCM_CKO_PSDONE	Phase shift clock-to-out of PSDONE	0.59	0.68	0.81	0.78	ns
Dynamic Reconfiguration Port (DRP) for MMCM Before and After DCLK						
T_MMCM_DCK_DADDR/ T_MMCM_CKD_DADDR	DADDR setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T_MMCM_DCK_DI/ T_MMCM_CKD_DI	DI setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T_MMCM_DCK_DEN/ T_MMCM_CKD_DEN	DEN setup/hold	1.76/0.00	1.97/0.00	2.29/0.00	2.40/0.00	ns, Min
T_MMCM_DCK_DWE/ T_MMCM_CKD_DWE	DWE setup/hold	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T_MMCM_CKO_DRDY	CLK to out of DRDY	0.65	0.72	0.99	0.70	ns, Max
F_DCK	DCLK frequency	200.00	200.00	200.00	100.00	MHz, Max

Notes:

- The MMCM does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
- The static offset is measured between any MMCM outputs with identical phase.
- Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
- Includes global clock buffer.
- Calculated as $F_{VCO}/128$ assuming output duty cycle is 50%.
- When CLKOUT4_CASCADE = TRUE, MMCM_F_OUTMIN is 0.036 MHz.

PLL Switching Characteristics

Table 35: PLL Specification

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
PLL_F _{INMAX}	Maximum input clock frequency	800.00	800.00	800.00	800.00	MHz
PLL_F _{INMIN}	Minimum input clock frequency	19.00	19.00	19.00	19.00	MHz
PLL_F _{INJITTER}	Maximum input clock period jitter	< 20% of clock input period or 1 ns Max				
PLL_F _{INDUTY}	Allowable input duty cycle: 19—49 MHz	25	25	25	25	%
	Allowable input duty cycle: 50—199 MHz	30	30	30	30	%
	Allowable input duty cycle: 200—399 MHz	35	35	35	35	%
	Allowable input duty cycle: 400—499 MHz	40	40	40	40	%
	Allowable input duty cycle: >500 MHz	45	45	45	45	%
PLL_F _{VCOMIN}	Minimum PLL VCO frequency	800.00	800.00	800.00	800.00	MHz
PLL_F _{VCOMAX}	Maximum PLL VCO frequency	2133.00	1866.00	1600.00	1600.00	MHz
PLL_F _{BANDWIDTH}	Low PLL bandwidth at typical ⁽¹⁾	1.00	1.00	1.00	1.00	MHz
	High PLL bandwidth at typical ⁽¹⁾	4.00	4.00	4.00	4.00	MHz
PLL_T _{STATPHAOFFSET}	Static phase offset of the PLL outputs ⁽²⁾	0.12	0.12	0.12	0.12	ns
PLL_T _{OUTJITTER}	PLL output jitter	Note 3				
PLL_T _{OUTDUTY}	PLL output clock duty-cycle precision ⁽⁴⁾	0.20	0.20	0.20	0.25	ns
PLL_T _{LOCKMAX}	PLL maximum lock time	100.00	100.00	100.00	100.00	μs
PLL_F _{OUTMAX}	PLL maximum output frequency	800.00	800.00	800.00	800.00	MHz
PLL_F _{OUTMIN}	PLL minimum output frequency ⁽⁵⁾	6.25	6.25	6.25	6.25	MHz
PLL_T _{EXTFDVAR}	External clock feedback variation	< 20% of clock input period or 1 ns Max				
PLL_RST _{MINPULSE}	Minimum reset pulse width	5.00	5.00	5.00	5.00	ns
PLL_F _{PFDMAX}	Maximum frequency at the phase frequency detector	550.00	500.00	450.00	450.00	MHz
PLL_F _{PFDMIN}	Minimum frequency at the phase frequency detector	19.00	19.00	19.00	19.00	MHz
PLL_T _{FBDELAY}	Maximum delay in the feedback path	3 ns Max or one CLKIN cycle				

Dynamic Reconfiguration Port (DRP) for PLL Before and After DCLK

T _{PLLDCK_DADDR} /T _{PLLCKD_DADDR}	Setup and hold of D address	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{PLLDCK_DI} /T _{PLLCKD_DI}	Setup and hold of D input	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{PLLDCK_DEN} /T _{PLLCKD_DEN}	Setup and hold of D enable	1.76/0.00	1.97/0.00	2.29/0.00	2.40/0.00	ns, Min
T _{PLLDCK_DWE} /T _{PLLCKD_DWE}	Setup and hold of D write enable	1.25/0.15	1.40/0.15	1.63/0.15	1.43/0.00	ns, Min
T _{PLLCKO_DRDY}	CLK to out of DRDY	0.65	0.72	0.99	0.99	ns, Max
F _{DCK}	DCLK frequency	200.00	200.00	200.00	100.00	MHz, Max

Notes:

1. The PLL does not filter typical spread-spectrum input clocks because they are usually far below the bandwidth filter frequencies.
2. The static offset is measured between any PLL outputs with identical phase.
3. Values for this parameter are available in the Clocking Wizard.
See http://www.xilinx.com/products/intellectual-property/clocking_wizard.htm.
4. Includes global clock buffer.
5. Calculated as F_{VCO}/128 assuming output duty cycle is 50%.

Table 44: Data Input Setup and Hold Times Relative to a Forwarded Clock Input Pin Using BUFIO

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
Input Setup and Hold Time Relative to a Forwarded Clock Input Pin Using BUFIO for SSTL15 Standard.						
T _{PSCS} /T _{PHCS}	Setup and hold of I/O clock	-0.38/1.31	-0.38/1.46	-0.38/1.76	-0.16/1.89	ns

Table 45: Sample Window

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
T _{SAMP}	Sampling error at receiver pins ⁽¹⁾	0.59	0.64	0.70	0.70	ns
T _{SAMP_BUFI0}	Sampling error at receiver pins using BUFIO ⁽²⁾	0.35	0.40	0.46	0.46	ns

Notes:

1. This parameter indicates the total sampling error of the Artix-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the MMCM to capture the DDR input registers' edges of operation. These measurements include:
 - CLKO MMCM jitter
 - MMCM accuracy (phase offset)
 - MMCM phase shift resolution
 These measurements do not include package or clock tree skew.
2. This parameter indicates the total sampling error of the Artix-7 FPGAs DDR input registers, measured across voltage, temperature, and process. The characterization methodology uses the BUFIO clock network and IDELAY to capture the DDR input registers' edges of operation. These measurements do not include package or clock tree skew.

Additional Package Parameter Guidelines

The parameters in this section provide the necessary values for calculating timing budgets for Artix-7 FPGA clock transmitter and receiver data-valid windows.

Table 46: Package Skew

Symbol	Description	Device	Package	Value	Units
T _{PKGSKEW}	Package skew ⁽¹⁾	XC7A100T	CSG324	113	ps
			FTG256	120	ps
			FGG484	144	ps
			FGG676	153	ps
		XC7A200T	SBG484	111	ps
			FBG484	109	ps
			FBG676	121	ps
			FFG1156	151	ps

Notes:

1. These values represent the worst-case skew between any two SelectIO resources in the package: shortest delay to longest delay from die pad to ball.
2. Package delay information is available for these device/package combinations. This information can be used to deskew the package.

GTP Transceiver Specifications

GTP Transceiver DC Input and Output Levels

Table 47 summarizes the DC output specifications of the GTP transceivers in Artix-7 FPGAs. Consult [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) for further details.

Table 47: GTP Transceiver DC Specifications

Symbol	DC Parameter	Conditions	Min	Typ	Max	Units
DV_{PPOUT}	Differential peak-to-peak output voltage ⁽¹⁾	Transmitter output swing is set to maximum setting	—	—	1000	mV
$V_{CMOUTDC}$	DC common mode output voltage	Equation based	$V_{MGTAVTT} - DV_{PPOUT}/4$			mV
R_{OUT}	Differential output resistance		—	100	—	Ω
$V_{CMOUTAC}$	Common mode output voltage: AC coupled		$1/2 V_{MGTAVTT}$			mV
T_{OSKEW}	Transmitter output pair (TXP and TXN) intra-pair skew (FFG, FBG, SBG packages)		—	—	10	ps
	Transmitter output pair (TXP and TXN) intra-pair skew (FGG, FTG, CSG packages)		—	—	12	ps
DV_{PPIN}	Differential peak-to-peak input voltage	External AC coupled	150	—	2000	mV
V_{IN}	Absolute input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	-200	—	$V_{MGTAVTT}$	mV
V_{CMIN}	Common mode input voltage	DC coupled $V_{MGTAVTT} = 1.2V$	—	$2/3 V_{MGTAVTT}$	—	mV
R_{IN}	Differential input resistance		—	100	—	Ω
C_{EXT}	Recommended external AC coupling capacitor ⁽²⁾		—	100	—	nF

Notes:

- The output swing and preemphasis levels are programmable using the attributes discussed in [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) and can result in values lower than reported in this table.
- Other values can be used as appropriate to conform to specific protocols and standards.

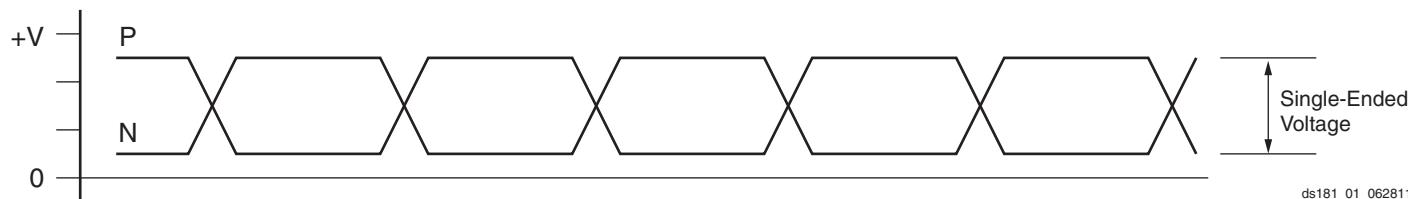


Figure 1: Single-Ended Peak-to-Peak Voltage

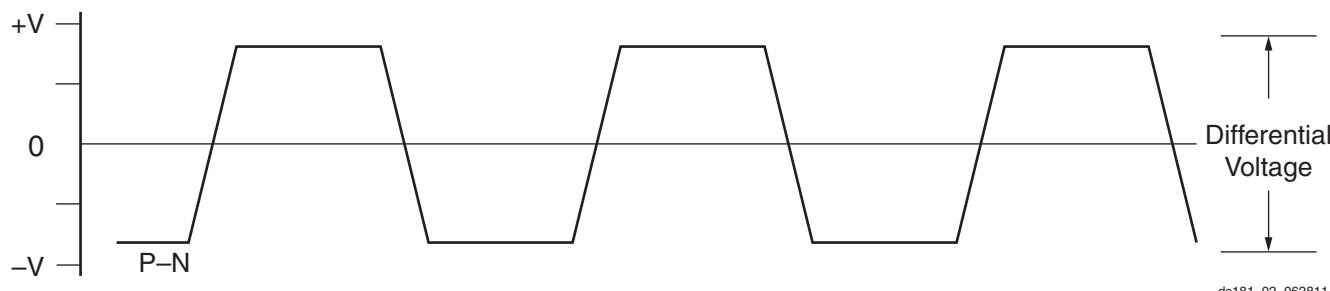


Figure 2: Differential Peak-to-Peak Voltage

Table 48 summarizes the DC specifications of the clock input of the GTP transceiver. Consult [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) for further details.

Table 48: GTP Transceiver Clock DC Input Level Specification

Symbol	DC Parameter	Min	Typ	Max	Units
V_{IDIFF}	Differential peak-to-peak input voltage	350	–	2000	mV
R_{IN}	Differential input resistance	–	100	–	Ω
C_{EXT}	Required external AC coupling capacitor	–	100	–	nF

GTP Transceiver Switching Characteristics

Consult [UG482: 7 Series FPGAs GTP Transceiver User Guide](#) for further information.

Table 49: GTP Transceiver Performance

Symbol	Description	Output Divider	Speed Grade								Units	
			1.0V				0.9V					
			-3		-2/-2L		-1		-2L			
			Package Type									
			FFG FBG SBG	FGG FTG CSG	FFG FBG SBG	FGG FTG CSG	FFG FBG SBG	FGG FTG CSG	FFG FBG SBG	FGG FTG CSG		
F_{GTPMAX}	Maximum GTP transceiver data rate		6.6	5.4	6.6	5.4	3.75	3.75	3.75	3.75	Gb/s	
F_{GTPMIN}	Minimum GTP transceiver data rate		0.500	0.500	0.500	0.500	0.500	0.500	0.500	0.500	Gb/s	
$F_{GTPRANGE}$	PLL line rate range	1	3.2–6.6		3.2–6.6		3.2–3.75		3.2–3.75		Gb/s	
		2	1.6–3.3		1.6–3.3		1.6–3.2		1.6–3.2		Gb/s	
		4	0.8–1.65		0.8–1.65		0.8–1.6		0.8–1.6		Gb/s	
		8	0.5–0.825		0.5–0.825		0.5–0.8		0.5–0.8		Gb/s	
$F_{GTPPLL RANGE}$	GTP transceiver PLL frequency range		1.6–3.3		1.6–3.3		1.6–3.3		1.6–3.3		GHz	

Table 50: GTP Transceiver Dynamic Reconfiguration Port (DRP) Switching Characteristics

Symbol	Description	Speed Grade				Units	
		1.0V		0.9V			
		-3	-2/-2L	-1	-2L		
$F_{GTPDRPCLK}$	GTPDRPCLK maximum frequency	175	175	156	125	MHz	

Table 51: GTP Transceiver Reference Clock Switching Characteristics

Symbol	Description	Conditions	All Speed Grades			Units
			Min	Typ	Max	
F_{GCLK}	Reference clock frequency range		60	–	660	MHz
T_{RCLK}	Reference clock rise time	20% – 80%	–	200	–	ps
T_{FCLK}	Reference clock fall time	20% – 80%	–	200	–	ps
T_{DCREF}	Reference clock duty cycle	Transceiver PLL only	40	–	60	%

Table 54: GTP Transceiver Transmitter Switching Characteristics

Symbol	Description	Condition	Min	Typ	Max	Units
F_{GTPTX}	Serial data rate range		0.500	—	F_{GTPMAX}	Gb/s
T_{RTX}	TX rise time	20%–80%	—	50	—	ps
T_{FTX}	TX fall time	20%–80%	—	50	—	ps
T_{LLSKEW}	TX lane-to-lane skew ⁽¹⁾		—	—	500	ps
$V_{TXOOBVDPDPP}$	Electrical idle amplitude		—	—	20	mV
$T_{TXOOBTTRANSITION}$	Electrical idle transition time		—	—	140	ns
$TJ_{6.6}$	Total Jitter ⁽²⁾⁽³⁾	6.6 Gb/s	—	—	0.30	UI
$DJ_{6.6}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.15	UI
$TJ_{5.0}$	Total Jitter ⁽²⁾⁽³⁾	5.0 Gb/s	—	—	0.30	UI
$DJ_{5.0}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.15	UI
$TJ_{4.25}$	Total Jitter ⁽²⁾⁽³⁾	4.25 Gb/s	—	—	0.30	UI
$DJ_{4.25}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.15	UI
$TJ_{3.75}$	Total Jitter ⁽²⁾⁽³⁾	3.75 Gb/s	—	—	0.30	UI
$DJ_{3.75}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.15	UI
$TJ_{3.2}$	Total Jitter ⁽²⁾⁽³⁾	3.20 Gb/s ⁽⁴⁾	—	—	0.2	UI
$DJ_{3.2}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.1	UI
$TJ_{3.2L}$	Total Jitter ⁽²⁾⁽³⁾	3.20 Gb/s ⁽⁵⁾	—	—	0.32	UI
$DJ_{3.2L}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.16	UI
$TJ_{2.5}$	Total Jitter ⁽²⁾⁽³⁾	2.5 Gb/s ⁽⁶⁾	—	—	0.20	UI
$DJ_{2.5}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.08	UI
$TJ_{1.25}$	Total Jitter ⁽²⁾⁽³⁾	1.25 Gb/s ⁽⁷⁾	—	—	0.15	UI
$DJ_{1.25}$	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.06	UI
TJ_{500}	Total Jitter ⁽²⁾⁽³⁾	500 Mb/s	—	—	0.1	UI
DJ_{500}	Deterministic Jitter ⁽²⁾⁽³⁾		—	—	0.03	UI

Notes:

1. Using same REFCLK input with TX phase alignment enabled for up to four consecutive transmitters (one fully populated GTP Quad).
2. Using PLL[0/1]_FBDIV = 2, 20-bit internal data width. These values are NOT intended for protocol specific compliance determinations.
3. All jitter values are based on a bit-error ratio of $1e^{-12}$.
4. PLL frequency at 3.2 GHz and TXOUT_DIV = 2.
5. PLL frequency at 1.6 GHz and TXOUT_DIV = 1.
6. PLL frequency at 2.5 GHz and TXOUT_DIV = 2.
7. PLL frequency at 2.5 GHz and TXOUT_DIV = 4.

Table 63: Configuration Switching Characteristics (Cont'd)

Symbol	Description	Speed Grade				Units
		1.0V		0.9V		
		-3	-2/-2L	-1	-2L	
Internal Configuration Access Port						
F _{ICAPCK}	Internal configuration access port (ICAPE2) clock frequency	100.00	100.00	100.00	70.00	MHz, Max
Master/Slave Serial Mode Programming Switching						
T _{DCCCK/T_{CCKD}}	DIN setup/hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{CCO}	DOUT clock to out	8.00	8.00	8.00	9.00	ns, Max
SelectMAP Mode Programming Switching						
T _{SMDCCK/T_{SMCCKD}}	D[31:00] setup/hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
T _{SMCSCCK/T_{SMCCKCS}}	CSI_B setup/hold	4.00/0.00	4.00/0.00	4.00/0.00	5.00/0.00	ns, Min
T _{SMWCCK/T_{SMCCKW}}	RDWR_B setup/hold	10.00/0.00	10.00/0.00	10.00/0.00	12.00/0.00	ns, Min
T _{SMCKCSO}	CSO_B clock to out (330 Ω pull-up resistor required)	7.00	7.00	7.00	8.00	ns, Max
T _{SMCO}	D[31:00] clock to out in readback	8.00	8.00	8.00	10.00	ns, Max
F _{RBCCK}	Readback frequency	100.00	100.00	100.00	70.00	MHz, Max
Boundary-Scan Port Timing Specifications						
T _{TAPTCK/T_{TCKTAP}}	TMS and TDI setup/hold	3.00/2.00	3.00/2.00	3.00/2.00	3.00/2.00	ns, Min
T _{TCKTDO}	TCK falling edge to TDO output	7.00	7.00	7.00	8.50	ns, Max
F _{TCK}	TCK frequency	66.00	66.00	66.00	50.00	MHz, Max
BPI Flash Master Mode Programming Switching						
T _{BPICCO⁽²⁾}	A[28:00], RS[1:0], FCS_B, FOE_B, FWE_B, ADV_B clock to out	8.50	8.50	8.50	10.00	ns, Max
T _{BPIDCC/T_{BPICCD}}	D[15:00] setup/hold	4.00/0.00	4.00/0.00	4.00/0.00	4.50/0.00	ns, Min
SPI Flash Master Mode Programming Switching						
T _{SPIDCC/T_{SPICCD}}	D[03:00] setup/hold	3.00/0.00	3.00/0.00	3.00/0.00	3.00/0.00	ns, Min
T _{SPICCM}	MOSI clock to out	8.00	8.00	8.00	9.00	ns, Max
T _{SPICCFC}	FCS_B clock to out	8.00	8.00	8.00	9.00	ns, Max

Notes:

1. To support longer delays in configuration, use the design solutions described in [UG470: 7 Series FPGA Configuration User Guide](#).
2. Only during configuration, the last edge is determined by a weak pull-up/pull-down resistor in the I/O.

eFUSE Programming Conditions

Table 64 lists the programming conditions specifically for eFUSE. For more information, see [UG470: 7 Series FPGA Configuration User Guide](#).

Table 64: eFUSE Programming Conditions⁽¹⁾

Symbol	Description	Min	Typ	Max	Units
I _{FS}	V _{CCAUX} supply current	–	–	115	mA
t _j	Temperature range	15	–	125	°C

Notes:

1. The FPGA must not be configured during eFUSE programming.

Notice of Disclaimer

The information disclosed to you hereunder (the "Materials") is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available "AS IS" and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials, or to advise you of any corrections or update. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

AUTOMOTIVE APPLICATIONS DISCLAIMER

XILINX PRODUCTS ARE NOT DESIGNED OR INTENDED TO BE FAIL-SAFE, OR FOR USE IN ANY APPLICATION REQUIRING FAIL-SAFE PERFORMANCE, SUCH AS APPLICATIONS RELATED TO: (I) THE DEPLOYMENT OF AIRBAGS, (II) CONTROL OF A VEHICLE, UNLESS THERE IS A FAIL-SAFE OR REDUNDANCY FEATURE (WHICH DOES NOT INCLUDE USE OF SOFTWARE IN THE XILINX DEVICE TO IMPLEMENT THE REDUNDANCY) AND A WARNING SIGNAL UPON FAILURE TO THE OPERATOR, OR (III) USES THAT COULD LEAD TO DEATH OR PERSONAL INJURY. CUSTOMER ASSUMES THE SOLE RISK AND LIABILITY OF ANY USE OF XILINX PRODUCTS IN SUCH APPLICATIONS.