


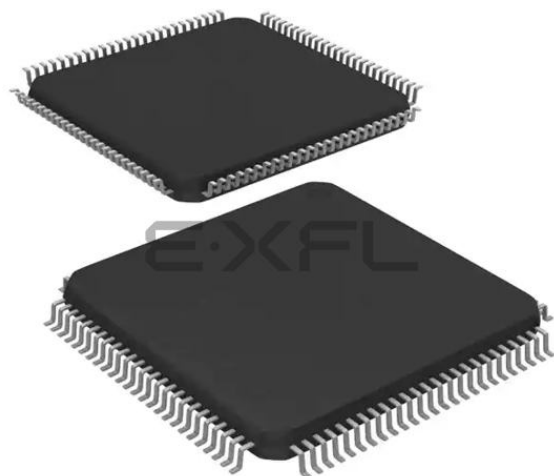

Welcome to [E-XFL.COM](#)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                               |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Discontinued at Digi-Key                                                                                                                                      |
| Core Processor             | ARM® Cortex®-M4F                                                                                                                                              |
| Core Size                  | 32-Bit Single-Core                                                                                                                                            |
| Speed                      | 48MHz                                                                                                                                                         |
| Connectivity               | EBI/EMI, I <sup>2</sup> C, IrDA, SmartCard, SPI, UART/USART                                                                                                   |
| Peripherals                | Brown-out Detect/Reset, DMA, I <sup>2</sup> S, LCD, POR, PWM, WDT                                                                                             |
| Number of I/O              | 85                                                                                                                                                            |
| Program Memory Size        | 256KB (256K x 8)                                                                                                                                              |
| Program Memory Type        | FLASH                                                                                                                                                         |
| EEPROM Size                | -                                                                                                                                                             |
| RAM Size                   | 32K x 8                                                                                                                                                       |
| Voltage - Supply (Vcc/Vdd) | 1.98V ~ 3.8V                                                                                                                                                  |
| Data Converters            | A/D 8x12b; D/A 2x12b                                                                                                                                          |
| Oscillator Type            | Internal                                                                                                                                                      |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                             |
| Mounting Type              | Surface Mount                                                                                                                                                 |
| Package / Case             | 100-LQFP                                                                                                                                                      |
| Supplier Device Package    | 100-LQFP (14x14)                                                                                                                                              |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/silicon-labs/efm32wg880f256-qfp100">https://www.e-xfl.com/product-detail/silicon-labs/efm32wg880f256-qfp100</a> |

| Module   | Configuration                             | Pin Connections                                                                                                                                                                      |
|----------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CMU      | Full configuration                        | CMU_OUT0, CMU_OUT1                                                                                                                                                                   |
| WDOG     | Full configuration                        | NA                                                                                                                                                                                   |
| PRS      | Full configuration                        | NA                                                                                                                                                                                   |
| EBI      | Full configuration                        | EBI_A[27:0], EBI_AD[15:0], EBI_ARDY,<br>EBI_ALE, EBI_BL[1:0], EBI_CS[3:0],<br>EBI_CSTFT, EBI_DCLK, EBI_DTEN,<br>EBI_HSNc, EBI_NANDREn,<br>EBI_NANDWEn, EBI_REn, EBI_VSNc,<br>EBI_WEn |
| I2C0     | Full configuration                        | I2C0_SDA, I2C0_SCL                                                                                                                                                                   |
| I2C1     | Full configuration                        | I2C1_SDA, I2C1_SCL                                                                                                                                                                   |
| USART0   | Full configuration with IrDA              | US0_TX, US0_RX, US0_CLK, US0_CS                                                                                                                                                      |
| USART1   | Full configuration with I2S               | US1_TX, US1_RX, US1_CLK, US1_CS                                                                                                                                                      |
| USART2   | Full configuration with I2S               | US2_TX, US2_RX, US2_CLK, US2_CS                                                                                                                                                      |
| UART0    | Full configuration                        | U0_TX, U0_RX                                                                                                                                                                         |
| UART1    | Full configuration                        | U1_TX, U1_RX                                                                                                                                                                         |
| LEUART0  | Full configuration                        | LEU0_TX, LEU0_RX                                                                                                                                                                     |
| LEUART1  | Full configuration                        | LEU1_TX, LEU1_RX                                                                                                                                                                     |
| TIMER0   | Full configuration with DTI               | TIM0_CC[2:0], TIM0_CDTI[2:0]                                                                                                                                                         |
| TIMER1   | Full configuration                        | TIM1_CC[2:0]                                                                                                                                                                         |
| TIMER2   | Full configuration                        | TIM2_CC[2:0]                                                                                                                                                                         |
| TIMER3   | Full configuration                        | TIM3_CC[2:0]                                                                                                                                                                         |
| RTC      | Full configuration                        | NA                                                                                                                                                                                   |
| BURTC    | Full configuration                        | NA                                                                                                                                                                                   |
| LETIMER0 | Full configuration                        | LET0_O[1:0]                                                                                                                                                                          |
| PCNT0    | Full configuration, 16-bit count register | PCNT0_S[1:0]                                                                                                                                                                         |
| PCNT1    | Full configuration, 8-bit count register  | PCNT1_S[1:0]                                                                                                                                                                         |
| PCNT2    | Full configuration, 8-bit count register  | PCNT2_S[1:0]                                                                                                                                                                         |
| ACMP0    | Full configuration                        | ACMP0_CH[7:0], ACMP0_O                                                                                                                                                               |
| ACMP1    | Full configuration                        | ACMP1_CH[7:0], ACMP1_O                                                                                                                                                               |
| VCMP     | Full configuration                        | NA                                                                                                                                                                                   |
| ADC0     | Full configuration                        | ADC0_CH[7:0]                                                                                                                                                                         |
| DAC0     | Full configuration                        | DAC0_OUT[1:0], DAC0_OUTxALT                                                                                                                                                          |
| OPAMP    | Full configuration                        | Outputs: OPAMP_OUTx,<br>OPAMP_OUTxALT, Inputs:<br>OPAMP_Px, OPAMP_Nx                                                                                                                 |
| AES      | Full configuration                        | NA                                                                                                                                                                                   |
| GPIO     | 85 pins                                   | Available pins are shown in<br>Table 4.3 (p. 70)                                                                                                                                     |
| LCD      | Full configuration                        | LCD_SEG[35:0], LCD_COM[7:0],<br>LCD_BCAP_P, LCD_BCAP_N,<br>LCD_BEXT                                                                                                                  |

## 3 Electrical Characteristics

### 3.1 Test Conditions

#### 3.1.1 Typical Values

The typical data are based on  $T_{AMB}=25^{\circ}\text{C}$  and  $V_{DD}=3.0\text{ V}$ , as defined in Table 3.2 (p. 10), by simulation and/or technology characterisation unless otherwise specified.

#### 3.1.2 Minimum and Maximum Values

The minimum and maximum values represent the worst conditions of ambient temperature, supply voltage and frequencies, as defined in Table 3.2 (p. 10), by simulation and/or technology characterisation unless otherwise specified.

### 3.2 Absolute Maximum Ratings

The absolute maximum ratings are stress ratings, and functional operation under such conditions are not guaranteed. Stress beyond the limits specified in Table 3.1 (p. 10) may affect the device reliability or cause permanent damage to the device. Functional operating conditions are given in Table 3.2 (p. 10).

**Table 3.1. Absolute Maximum Ratings**

| Symbol      | Parameter                     | Condition                           | Min  | Typ | Max              | Unit               |
|-------------|-------------------------------|-------------------------------------|------|-----|------------------|--------------------|
| $T_{STG}$   | Storage temperature range     |                                     | -40  |     | 150 <sup>1</sup> | $^{\circ}\text{C}$ |
| $T_S$       | Maximum soldering temperature | Latest IPC/JEDEC J-STD-020 Standard |      |     | 260              | $^{\circ}\text{C}$ |
| $V_{DDMAX}$ | External main supply voltage  |                                     | 0    |     | 3.8              | V                  |
| $V_{IOPIN}$ | Voltage on any I/O pin        |                                     | -0.3 |     | $V_{DD}+0.3$     | V                  |

<sup>1</sup>Based on programmed devices tested for 10000 hours at  $150^{\circ}\text{C}$ . Storage temperature affects retention of preprogrammed calibration values stored in flash. Please refer to the Flash section in the Electrical Characteristics for information on flash data retention for different temperatures.


### 3.3 General Operating Conditions

#### 3.3.1 General Operating Conditions


**Table 3.2. General Operating Conditions**

| Symbol     | Parameter                    | Min  | Typ | Max | Unit               |
|------------|------------------------------|------|-----|-----|--------------------|
| $T_{AMB}$  | Ambient temperature range    | -40  |     | 85  | $^{\circ}\text{C}$ |
| $V_{DDOP}$ | Operating supply voltage     | 1.98 |     | 3.8 | V                  |
| $f_{APB}$  | Internal APB clock frequency |      |     | 48  | MHz                |
| $f_{AHB}$  | Internal AHB clock frequency |      |     | 48  | MHz                |

**Figure 3.5. EM1 Current consumption with all peripheral clocks disabled and HFRCO running at 11MHz**

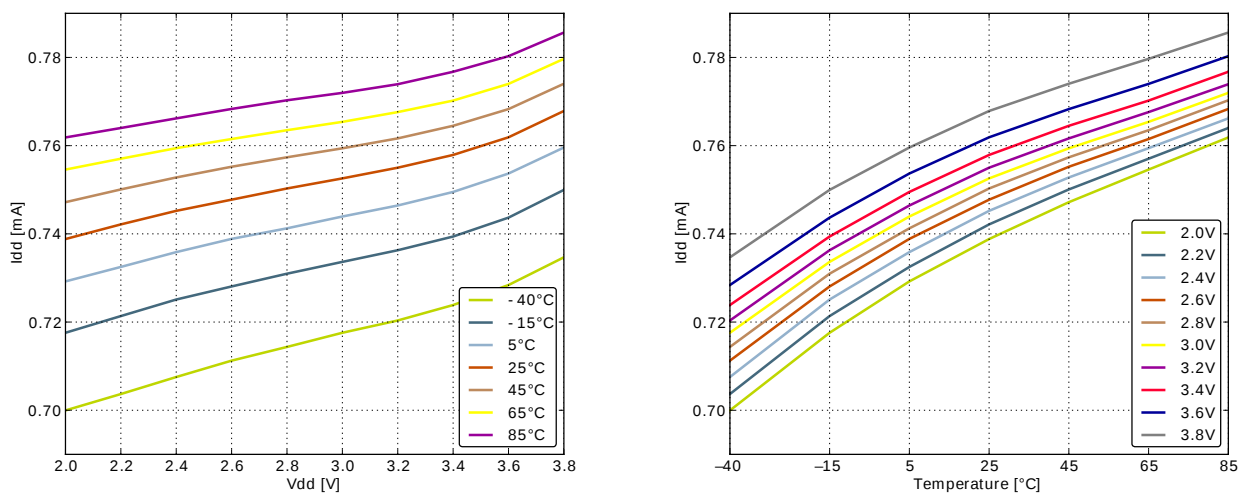

**Figure 3.6. EM1 Current consumption with all peripheral clocks disabled and HFRCO running at 6.6MHz**

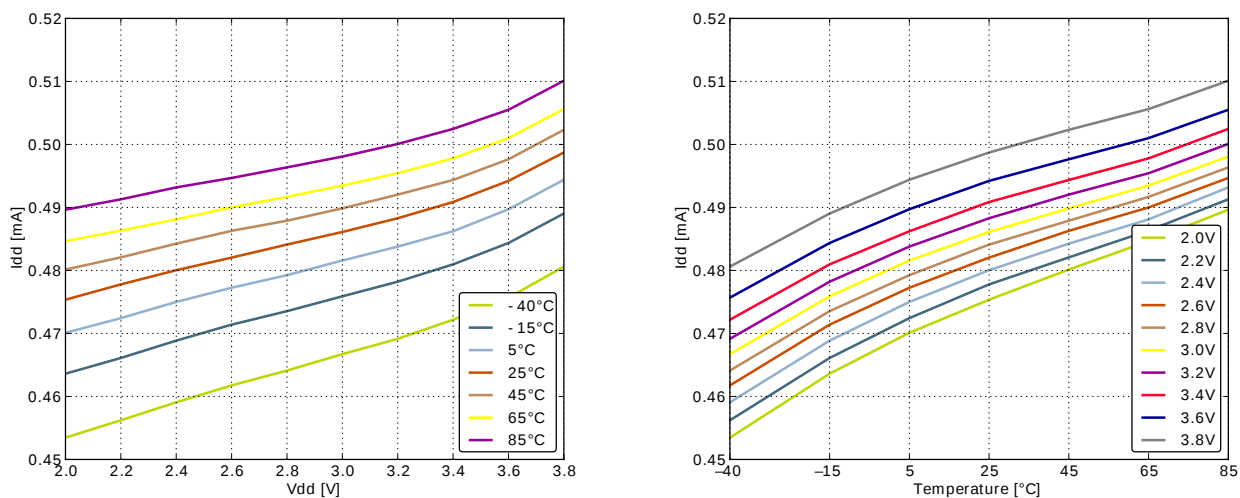


## 3.8 General Purpose Input Output


**Table 3.8. GPIO**

| Symbol            | Parameter                                                                    | Condition                                                                 | Min                 | Typ                 | Max                 | Unit |
|-------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------|---------------------|---------------------|---------------------|------|
| V <sub>IOIL</sub> | Input low voltage                                                            |                                                                           |                     |                     | 0.30V <sub>DD</sub> | V    |
| V <sub>IOIH</sub> | Input high voltage                                                           |                                                                           | 0.70V <sub>DD</sub> |                     |                     | V    |
| V <sub>IOOH</sub> | Output high voltage (Production test condition = 3.0V, DRIVEMODE = STANDARD) | Sourcing 0.1 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = LOWEST |                     | 0.80V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sourcing 0.1 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = LOWEST  |                     | 0.90V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sourcing 1 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = LOW      |                     | 0.85V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sourcing 1 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = LOW       |                     | 0.90V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sourcing 6 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = STANDARD | 0.75V <sub>DD</sub> |                     |                     | V    |
|                   |                                                                              | Sourcing 6 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = STANDARD  | 0.85V <sub>DD</sub> |                     |                     | V    |
|                   |                                                                              | Sourcing 20 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = HIGH    | 0.60V <sub>DD</sub> |                     |                     | V    |
|                   |                                                                              | Sourcing 20 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = HIGH     | 0.80V <sub>DD</sub> |                     |                     | V    |
| V <sub>IOOL</sub> | Output low voltage (Production test condition = 3.0V, DRIVEMODE = STANDARD)  | Sinking 0.1 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = LOWEST  |                     | 0.20V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sinking 0.1 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = LOWEST   |                     | 0.10V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sinking 1 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = LOW       |                     | 0.10V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sinking 1 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = LOW        |                     | 0.05V <sub>DD</sub> |                     | V    |
|                   |                                                                              | Sinking 6 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = STANDARD  |                     |                     | 0.30V <sub>DD</sub> | V    |
|                   |                                                                              | Sinking 6 mA, V <sub>DD</sub> =3.0 V, GPIO_Px_CTRL DRIVEMODE = STANDARD   |                     |                     | 0.20V <sub>DD</sub> | V    |
|                   |                                                                              | Sinking 20 mA, V <sub>DD</sub> =1.98 V, GPIO_Px_CTRL DRIVEMODE = HIGH     |                     |                     | 0.35V <sub>DD</sub> | V    |


Figure 3.11. Typical Low-Level Output Current, 2V Supply Voltage

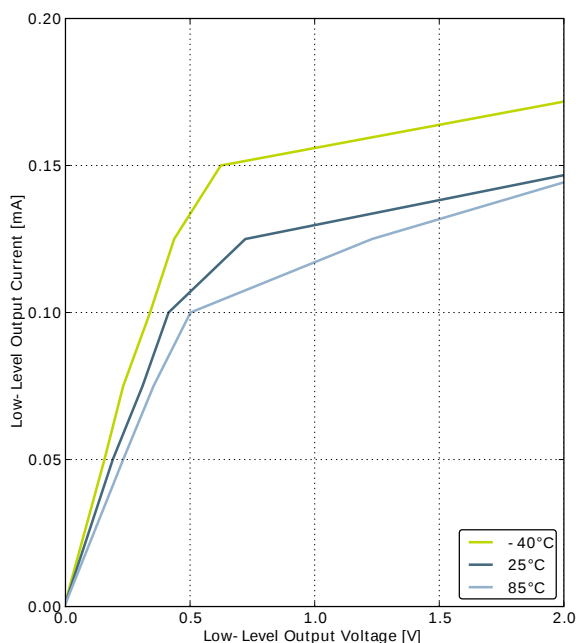


GPIO\_Px\_CTRL DRIVEMODE = LOWEST

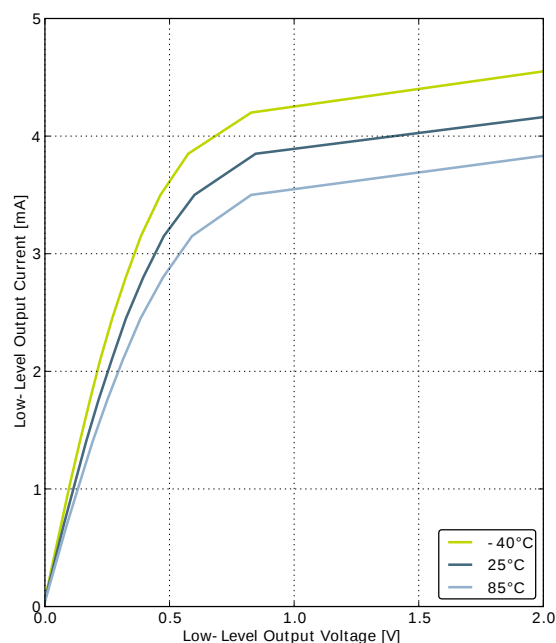


GPIO\_Px\_CTRL DRIVEMODE = LOW

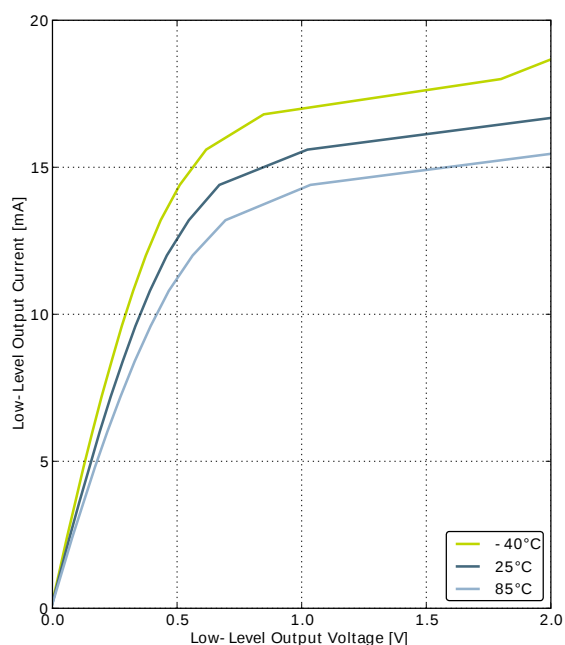


GPIO\_Px\_CTRL DRIVEMODE = STANDARD

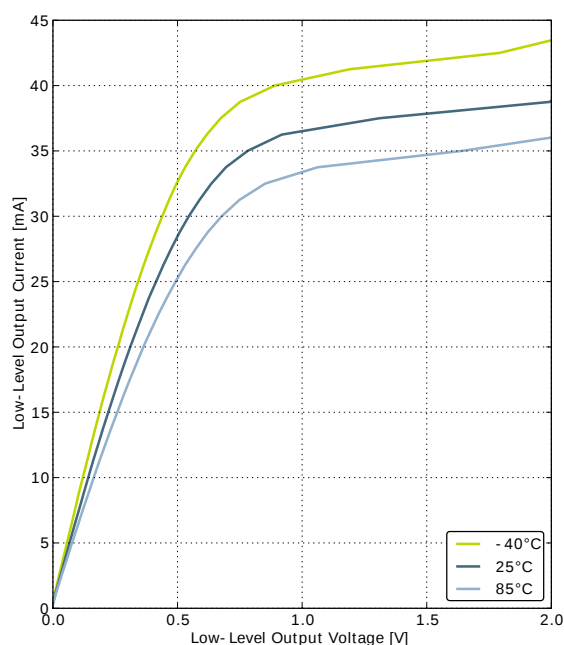


GPIO\_Px\_CTRL DRIVEMODE = HIGH

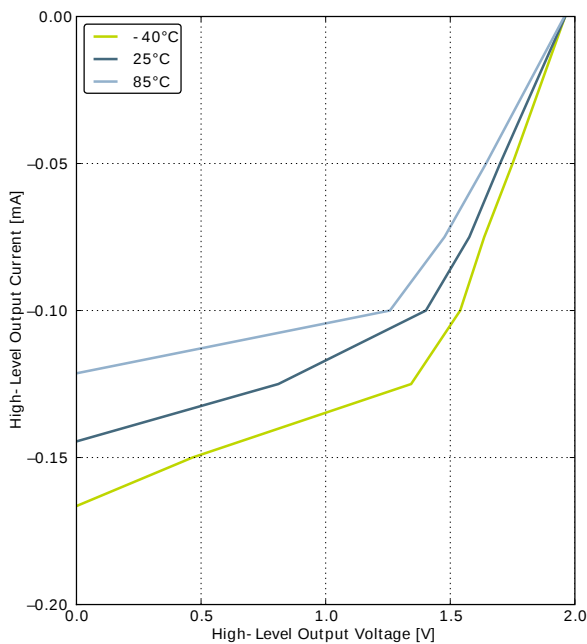**Figure 3.12. Typical High-Level Output Current, 2V Supply Voltage**


GPIO\_Px\_CTRL DRIVEMODE = LOWEST

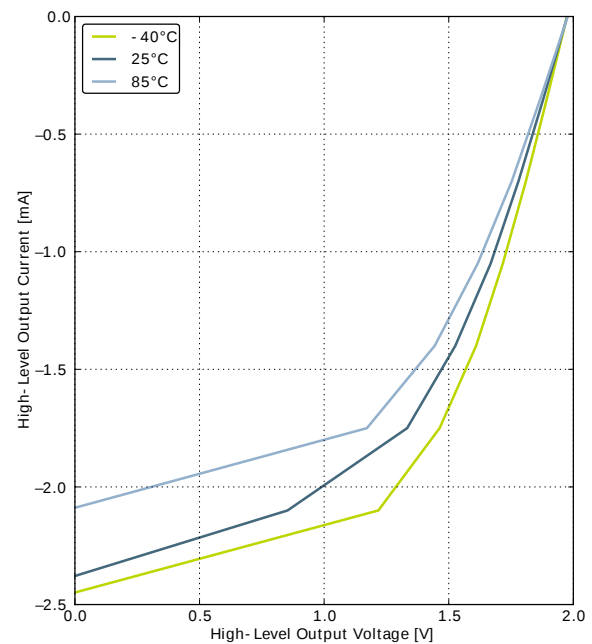


GPIO\_Px\_CTRL DRIVEMODE = LOW

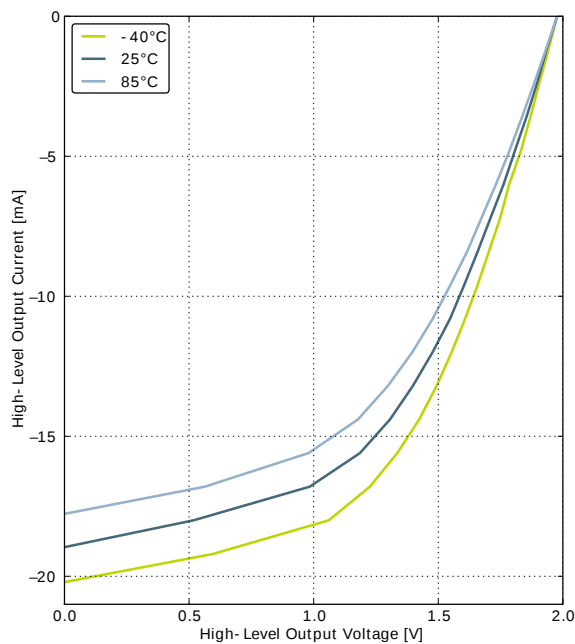


GPIO\_Px\_CTRL DRIVEMODE = STANDARD

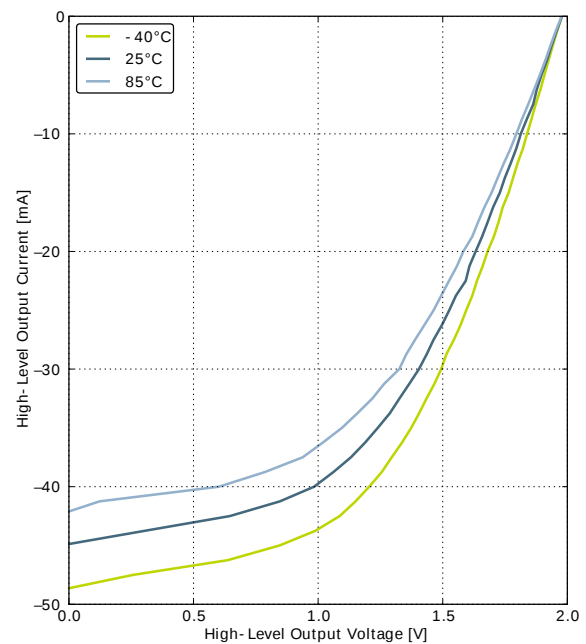


GPIO\_Px\_CTRL DRIVEMODE = HIGH

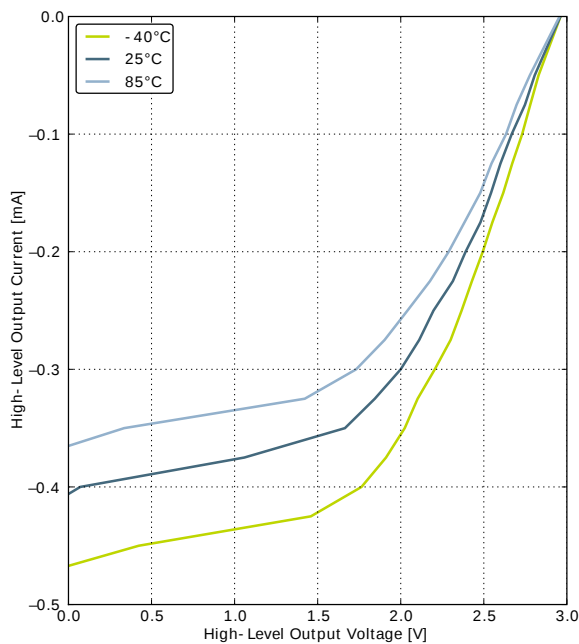**Figure 3.14. Typical High-Level Output Current, 3V Supply Voltage**


GPIO\_Px\_CTRL DRIVEMODE = LOWEST

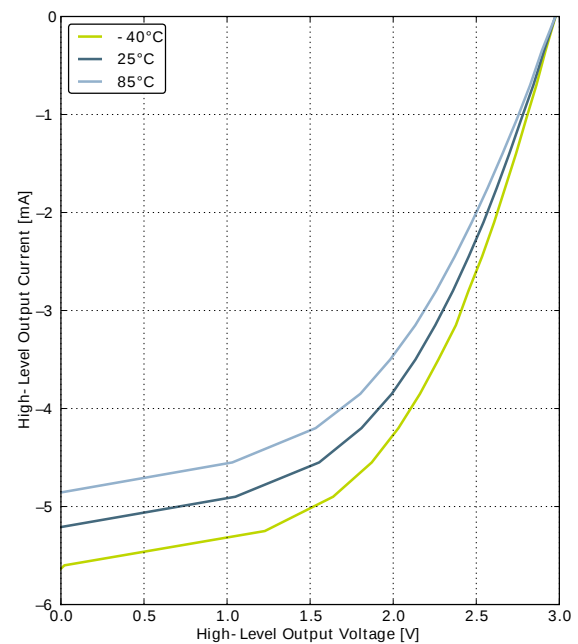

GPIO\_Px\_CTRL DRIVEMODE = LOW

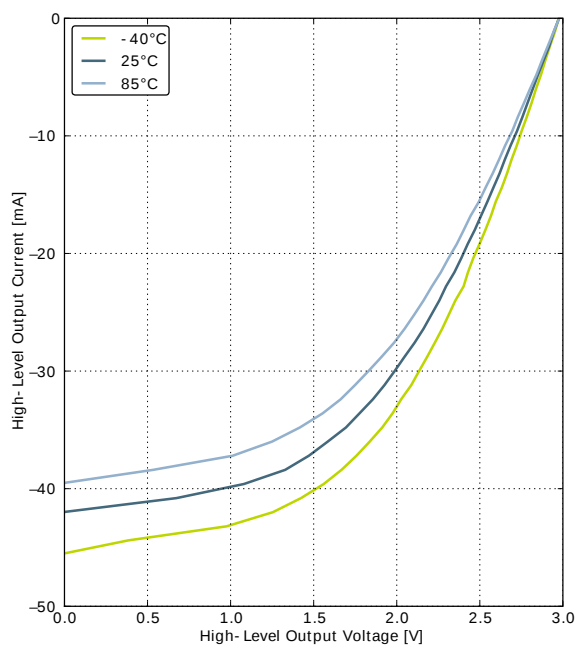

GPIO\_Px\_CTRL DRIVEMODE = STANDARD

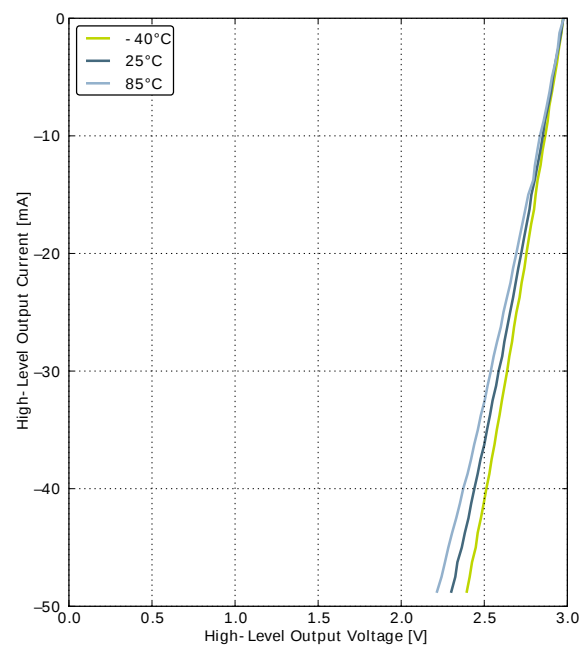

GPIO\_Px\_CTRL DRIVEMODE = HIGH


### 3.9.4 HFRCO

**Table 3.12. HFRCO**

| Symbol                           | Parameter                                                                                    | Condition                            | Min  | Typ     | Max  | Unit          |
|----------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------|------|---------|------|---------------|
| $f_{\text{HFRCO}}$               | Oscillation frequency, $V_{\text{DD}} = 3.0 \text{ V}$ , $T_{\text{AMB}} = 25^\circ\text{C}$ | 28 MHz frequency band                | 27.5 | 28.0    | 28.5 | MHz           |
|                                  |                                                                                              | 21 MHz frequency band                | 20.6 | 21.0    | 21.4 | MHz           |
|                                  |                                                                                              | 14 MHz frequency band                | 13.7 | 14.0    | 14.3 | MHz           |
|                                  |                                                                                              | 11 MHz frequency band                | 10.8 | 11.0    | 11.2 | MHz           |
|                                  |                                                                                              | 7 MHz frequency band                 | 6.48 | 6.60    | 6.72 | MHz           |
|                                  |                                                                                              | 1 MHz frequency band                 | 1.15 | 1.20    | 1.25 | MHz           |
| $t_{\text{HFRCO\_settling}}$     | Settling time after start-up                                                                 | $f_{\text{HFRCO}} = 14 \text{ MHz}$  |      | 0.6     |      | Cycles        |
| $I_{\text{HFRCO}}$               | Current consumption                                                                          | $f_{\text{HFRCO}} = 28 \text{ MHz}$  |      | 165     | 215  | $\mu\text{A}$ |
|                                  |                                                                                              | $f_{\text{HFRCO}} = 21 \text{ MHz}$  |      | 134     | 175  | $\mu\text{A}$ |
|                                  |                                                                                              | $f_{\text{HFRCO}} = 14 \text{ MHz}$  |      | 106     | 140  | $\mu\text{A}$ |
|                                  |                                                                                              | $f_{\text{HFRCO}} = 11 \text{ MHz}$  |      | 94      | 125  | $\mu\text{A}$ |
|                                  |                                                                                              | $f_{\text{HFRCO}} = 6.6 \text{ MHz}$ |      | 77      | 105  | $\mu\text{A}$ |
|                                  |                                                                                              | $f_{\text{HFRCO}} = 1.2 \text{ MHz}$ |      | 25      | 40   | $\mu\text{A}$ |
| $\text{DC}_{\text{HFRCO}}$       | Duty cycle                                                                                   | $f_{\text{HFRCO}} = 14 \text{ MHz}$  | 48.5 | 50      | 51   | %             |
| $\text{TUNESTEP}_{\text{HFRCO}}$ | Frequency step for LSB change in TUNING value                                                |                                      |      | $0.3^1$ |      | %             |

<sup>1</sup>The TUNING field in the CMU\_HFRCOCTRL register may be used to adjust the HFRCO frequency. There is enough adjustment range to ensure that the frequency bands above 7 MHz will always have some overlap across supply voltage and temperature. By using a stable frequency reference such as the LFXO or HFXO, a firmware calibration routine can vary the TUNING bits and the frequency band to maintain the HFRCO frequency at any arbitrary value between 7 MHz and 28 MHz across operating conditions.

**Figure 3.18. Calibrated HFRCO 1 MHz Band Frequency vs Supply Voltage and Temperature**

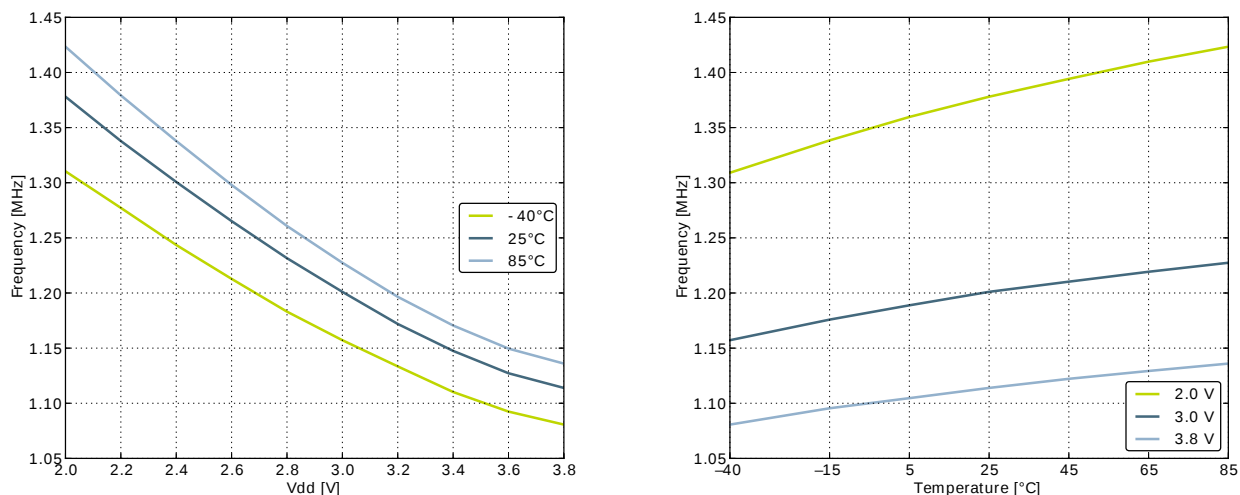

### 3.9.5 AUXHFRCO

**Table 3.13. AUXHFRCO**

| Symbol                              | Parameter                                                                                    | Condition                              | Min  | Typ     | Max  | Unit   |
|-------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------|------|---------|------|--------|
| $f_{\text{AUXHFRCO}}$               | Oscillation frequency, $V_{\text{DD}} = 3.0 \text{ V}$ , $T_{\text{AMB}} = 25^\circ\text{C}$ | 28 MHz frequency band                  | 27.5 | 28.0    | 28.5 | MHz    |
|                                     |                                                                                              | 21 MHz frequency band                  | 20.6 | 21.0    | 21.4 | MHz    |
|                                     |                                                                                              | 14 MHz frequency band                  | 13.7 | 14.0    | 14.3 | MHz    |
|                                     |                                                                                              | 11 MHz frequency band                  | 10.8 | 11.0    | 11.2 | MHz    |
|                                     |                                                                                              | 7 MHz frequency band                   | 6.48 | 6.60    | 6.72 | MHz    |
|                                     |                                                                                              | 1 MHz frequency band                   | 1.15 | 1.20    | 1.25 | MHz    |
| $t_{\text{AUXHFRCO\_settling}}$     | Settling time after start-up                                                                 | $f_{\text{AUXHFRCO}} = 14 \text{ MHz}$ |      | 0.6     |      | Cycles |
| $\text{DC}_{\text{AUXHFRCO}}$       | Duty cycle                                                                                   | $f_{\text{AUXHFRCO}} = 14 \text{ MHz}$ | 48.5 | 50      | 51   | %      |
| $\text{TUNESTEP}_{\text{AUXHFRCO}}$ | Frequency step for LSB change in TUNING value                                                |                                        |      | $0.3^1$ |      | %      |

<sup>1</sup>The TUNING field in the CMU\_AUXHFRCTRL register may be used to adjust the AUXHFRCO frequency. There is enough adjustment range to ensure that the frequency bands above 7 MHz will always have some overlap across supply voltage and temperature. By using a stable frequency reference such as the LFXO or HFXO, a firmware calibration routine can vary the TUNING bits and the frequency band to maintain the AUXHFRCO frequency at any arbitrary value between 7 MHz and 28 MHz across operating conditions.

### 3.9.6 ULFRCO

**Table 3.14. ULFRCO**

| Symbol                      | Parameter                  | Condition               | Min | Typ   | Max  | Unit                |
|-----------------------------|----------------------------|-------------------------|-----|-------|------|---------------------|
| $f_{\text{ULFRCO}}$         | Oscillation frequency      | $25^\circ\text{C}$ , 3V | 0.7 |       | 1.75 | kHz                 |
| $\text{TC}_{\text{ULFRCO}}$ | Temperature coefficient    |                         |     | 0.05  |      | %/ $^\circ\text{C}$ |
| $\text{VC}_{\text{ULFRCO}}$ | Supply voltage coefficient |                         |     | -18.2 |      | %/V                 |

## 3.10 Analog Digital Converter (ADC)

**Table 3.15. ADC**

| Symbol                     | Parameter                                                                | Condition                 | Min                 | Typ | Max                   | Unit |
|----------------------------|--------------------------------------------------------------------------|---------------------------|---------------------|-----|-----------------------|------|
| $V_{\text{ADCIN}}$         | Input voltage range                                                      | Single ended              | 0                   |     | $V_{\text{REF}}$      | V    |
|                            |                                                                          | Differential              | $-V_{\text{REF}}/2$ |     | $V_{\text{REF}}/2$    | V    |
| $V_{\text{ADCREFIN}}$      | Input range of external reference voltage, single ended and differential |                           | 1.25                |     | $V_{\text{DD}}$       | V    |
| $V_{\text{ADCREFIN\_CH7}}$ | Input range of external negative reference voltage on channel 7          | See $V_{\text{ADCREFIN}}$ | 0                   |     | $V_{\text{DD}} - 1.1$ | V    |
| $V_{\text{ADCREFIN\_CH6}}$ | Input range of external positive ref-                                    | See $V_{\text{ADCREFIN}}$ | 0.625               |     | $V_{\text{DD}}$       | V    |

| Symbol                 | Parameter                                      | Condition                                                         | Min                 | Typ               | Max                | Unit         |
|------------------------|------------------------------------------------|-------------------------------------------------------------------|---------------------|-------------------|--------------------|--------------|
|                        |                                                | 200 kSamples/s, 12 bit, differential, internal 1.25V reference    |                     | 79                |                    | dBc          |
|                        |                                                | 200 kSamples/s, 12 bit, differential, internal 2.5V reference     |                     | 79                |                    | dBc          |
|                        |                                                | 200 kSamples/s, 12 bit, differential, 5V reference                |                     | 78                |                    | dBc          |
|                        |                                                | 200 kSamples/s, 12 bit, differential, V <sub>DD</sub> reference   | 68                  | 79                |                    | dBc          |
|                        |                                                | 200 kSamples/s, 12 bit, differential, 2xV <sub>DD</sub> reference |                     | 79                |                    | dBc          |
| V <sub>ADCOFFSET</sub> | Offset voltage                                 | After calibration, single ended                                   | -3.5                | 0.3               | 3                  | mV           |
|                        |                                                | After calibration, differential                                   |                     | 0.3               |                    | mV           |
| TGRAD <sub>ADCTH</sub> | Thermometer output gradient                    |                                                                   |                     | -1.92             |                    | mV/°C        |
|                        |                                                |                                                                   |                     | -6.3              |                    | ADC Codes/°C |
| DNL <sub>ADC</sub>     | Differential non-linearity (DNL)               |                                                                   | -1                  | ±0.7              | 4                  | LSB          |
| INL <sub>ADC</sub>     | Integral non-linearity (INL), End point method |                                                                   |                     | ±1.2              | ±3                 | LSB          |
| MC <sub>ADC</sub>      | No missing codes                               |                                                                   | 11.999 <sup>1</sup> | 12                |                    | bits         |
| GAIN <sub>ED</sub>     | Gain error drift                               | 1.25V reference                                                   |                     | 0.01 <sup>2</sup> | 0.033 <sup>3</sup> | %/°C         |
|                        |                                                | 2.5V reference                                                    |                     | 0.01 <sup>2</sup> | 0.03 <sup>3</sup>  | %/°C         |
| OFFSET <sub>ED</sub>   | Offset error drift                             | 1.25V reference                                                   |                     | 0.2 <sup>2</sup>  | 0.7 <sup>3</sup>   | LSB/°C       |
|                        |                                                | 2.5V reference                                                    |                     | 0.2 <sup>2</sup>  | 0.62 <sup>3</sup>  | LSB/°C       |

<sup>1</sup>On the average every ADC will have one missing code, most likely to appear around 2048 +/- n\*512 where n can be a value in the set {-3, -2, -1, 1, 2, 3}. There will be no missing code around 2048, and in spite of the missing code the ADC will be monotonic at all times so that a response to a slowly increasing input will always be a slowly increasing output. Around the one code that is missing, the neighbour codes will look wider in the DNL plot. The spectra will show spurs on the level of -78dBc for a full scale input for chips that have the missing code issue.


<sup>2</sup>Typical numbers given by  $\text{abs}(\text{Mean}) / (85 - 25)$ .

<sup>3</sup>Max number given by  $(\text{abs}(\text{Mean}) + 3 \times \text{stddev}) / (85 - 25)$ .


The integral non-linearity (INL) and differential non-linearity parameters are explained in Figure 3.24 (p. 37) and Figure 3.25 (p. 37) , respectively.

### 3.10.1 Typical performance


Figure 3.26. ADC Frequency Spectrum,  $V_{dd} = 3V$ , Temp = 25°C

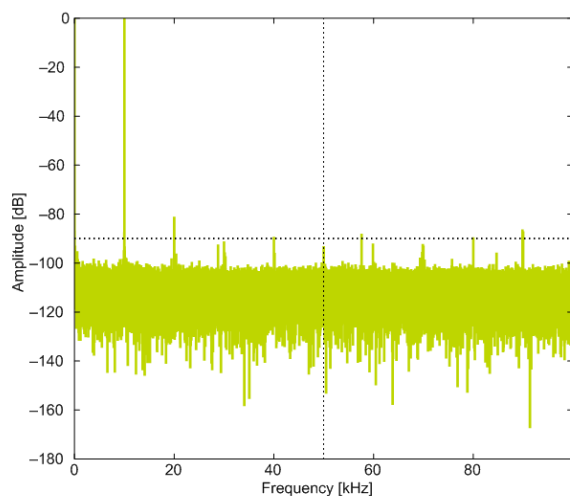


1.25V Reference

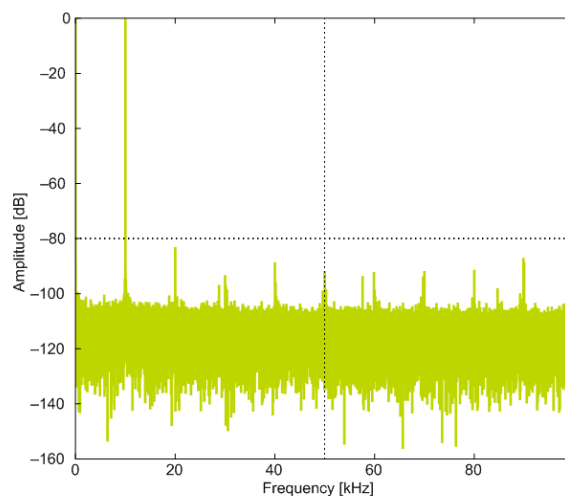


2.5V Reference

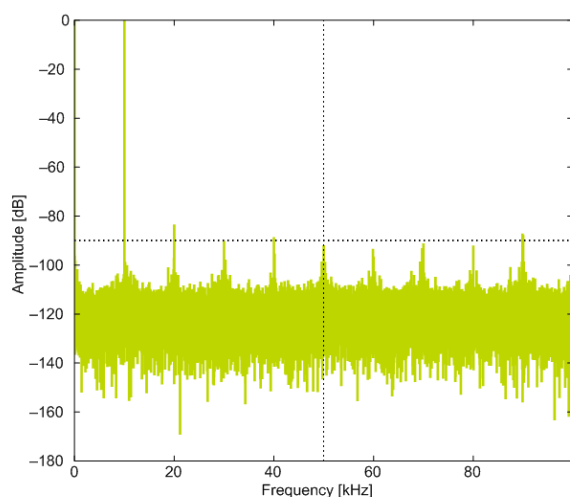






2XVDDVSS Reference

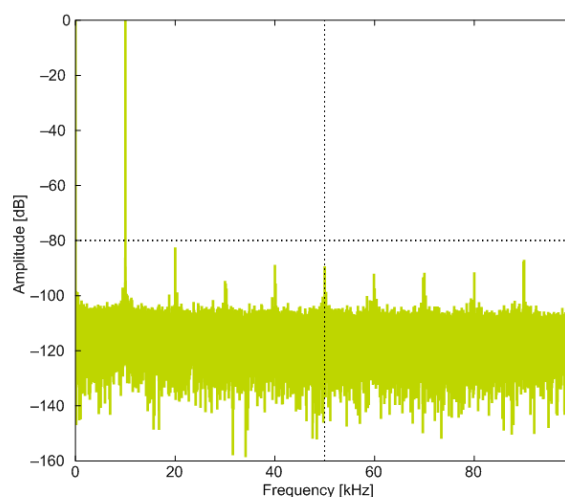


5VDIFF Reference

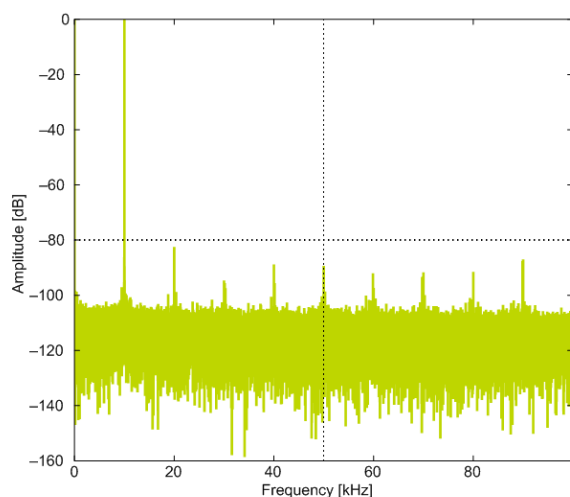

VDD Reference

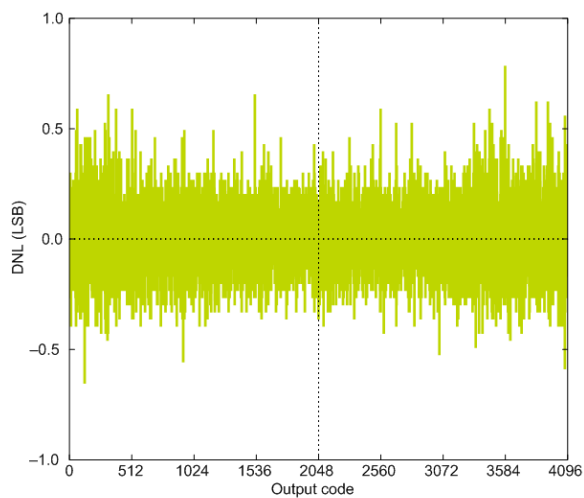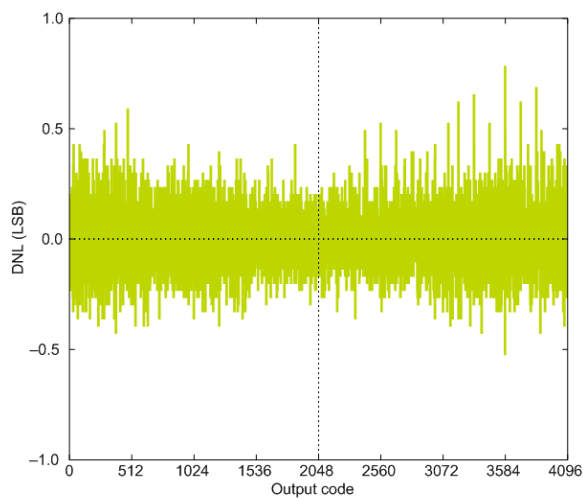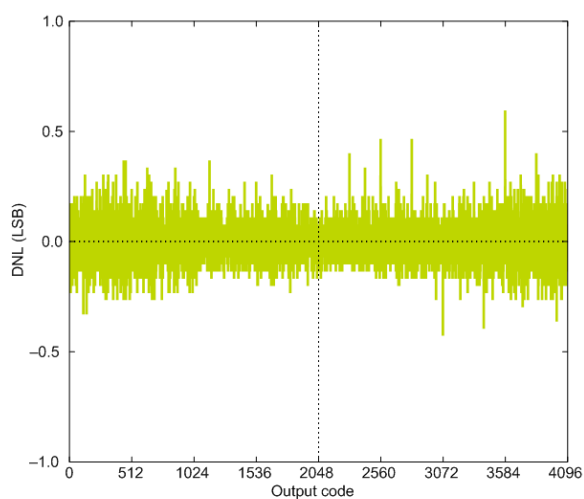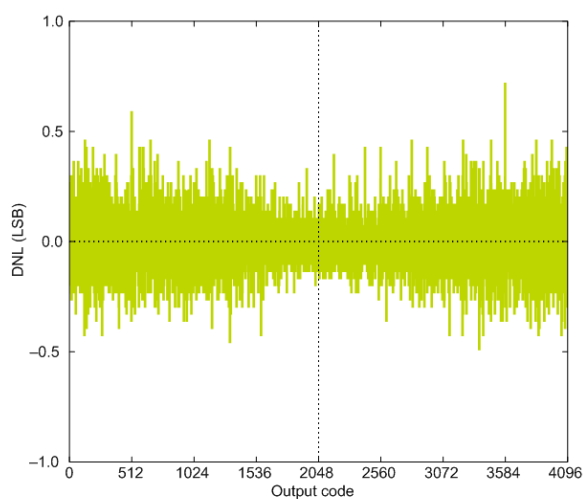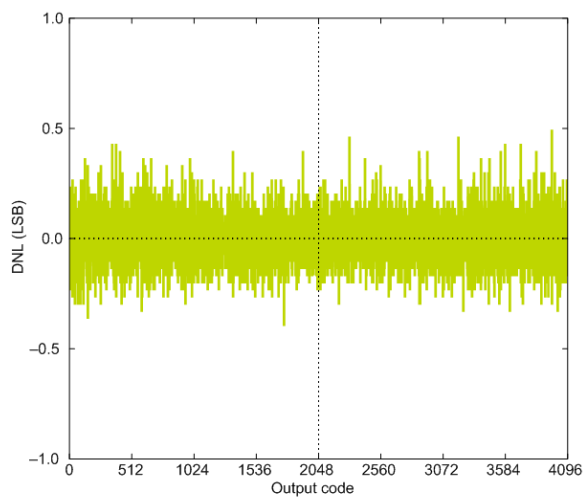**Figure 3.28. ADC Differential Linearity Error vs Code, V<sub>dd</sub> = 3V, Temp = 25°C****1.25V Reference****2.5V Reference****2XVDDVSS Reference****5VDIFF Reference****VDD Reference**

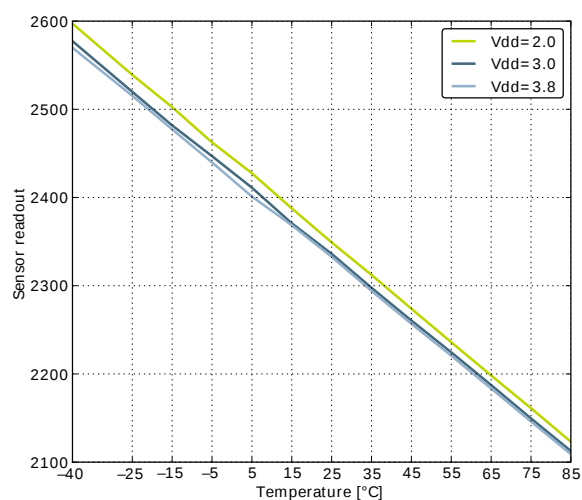**Figure 3.31. ADC Temperature sensor readout**

## 3.11 Digital Analog Converter (DAC)

**Table 3.16. DAC**

| Symbol          | Parameter                                          | Condition                                                      | Min       | Typ              | Max      | Unit       |
|-----------------|----------------------------------------------------|----------------------------------------------------------------|-----------|------------------|----------|------------|
| $V_{DACOUT}$    | Output voltage range                               | VDD voltage reference, single ended                            | 0         |                  | $V_{DD}$ | V          |
|                 |                                                    | VDD voltage reference, differential                            | $-V_{DD}$ |                  | $V_{DD}$ | V          |
| $V_{DACCM}$     | Output common mode voltage range                   |                                                                | 0         |                  | $V_{DD}$ | V          |
| $I_{DAC}$       | Active current including references for 2 channels | 500 kSamples/s, 12 bit                                         |           | 400 <sup>1</sup> |          | μA         |
|                 |                                                    | 100 kSamples/s, 12 bit                                         |           | 200 <sup>1</sup> |          | μA         |
|                 |                                                    | 1 kSamples/s 12 bit NORMAL                                     |           | 17 <sup>1</sup>  |          | μA         |
| $SR_{DAC}$      | Sample rate                                        |                                                                |           |                  | 500      | ksamples/s |
| $f_{DAC}$       | DAC clock frequency                                | Continuous Mode                                                |           |                  | 1000     | kHz        |
|                 |                                                    | Sample/Hold Mode                                               |           |                  | 250      | kHz        |
|                 |                                                    | Sample/Off Mode                                                |           |                  | 250      | kHz        |
| $CYC_{DACCONV}$ | Clock cycles per conversion                        |                                                                |           | 2                |          |            |
| $t_{DACCONV}$   | Conversion time                                    |                                                                | 2         |                  |          | μs         |
| $t_{DACSETTLE}$ | Settling time                                      |                                                                |           | 5                |          | μs         |
| $SNR_{DAC}$     | Signal to Noise Ratio (SNR)                        | 500 kSamples/s, 12 bit, single ended, internal 1.25V reference |           | 58               |          | dB         |
|                 |                                                    | 500 kSamples/s, 12 bit, single ended, internal 2.5V reference  |           | 59               |          | dB         |
|                 |                                                    | 500 kSamples/s, 12 bit, differential, internal 1.25V reference |           | 58               |          | dB         |

### 3.13 Analog Comparator (ACMP)

**Table 3.18. ACMP**

| Symbol           | Parameter                                         | Condition                                                           | Min | Typ  | Max      | Unit    |
|------------------|---------------------------------------------------|---------------------------------------------------------------------|-----|------|----------|---------|
| $V_{ACMPIN}$     | Input voltage range                               |                                                                     | 0   |      | $V_{DD}$ | V       |
| $V_{ACMPCM}$     | ACMP Common Mode voltage range                    |                                                                     | 0   |      | $V_{DD}$ | V       |
| $I_{ACMP}$       | Active current                                    | BIASPROG=0b0000, FULL-BIAS=0 and HALFBIAS=1 in ACMPn_CTRL register  |     | 0.1  | 0.4      | $\mu A$ |
|                  |                                                   | BIASPROG=0b1111, FULL-BIAS=0 and HALFBIAS=0 in ACMPn_CTRL register  |     | 2.87 | 15       | $\mu A$ |
|                  |                                                   | BIASPROG=0b1111, FULL-BIAS=1 and HALFBIAS=0 in ACMPn_CTRL register  |     | 195  | 520      | $\mu A$ |
| $I_{ACMPREF}$    | Current consumption of internal voltage reference | Internal voltage reference off. Using external voltage reference    |     | 0    |          | $\mu A$ |
|                  |                                                   | Internal voltage reference                                          |     | 5    |          | $\mu A$ |
| $V_{ACMPOFFSET}$ | Offset voltage                                    | BIASPROG= 0b1010, FULL-BIAS=0 and HALFBIAS=0 in ACMPn_CTRL register | -12 | 0    | 12       | mV      |
| $V_{ACMPHYST}$   | ACMP hysteresis                                   | Programmable                                                        |     | 17   |          | mV      |
| $R_{CSRES}$      | Capacitive Sense Internal Resistance              | CSRESSEL=0b00 in ACMPn_INPUTSEL                                     |     | 39   |          | kOhm    |
|                  |                                                   | CSRESSEL=0b01 in ACMPn_INPUTSEL                                     |     | 71   |          | kOhm    |
|                  |                                                   | CSRESSEL=0b10 in ACMPn_INPUTSEL                                     |     | 104  |          | kOhm    |
|                  |                                                   | CSRESSEL=0b11 in ACMPn_INPUTSEL                                     |     | 136  |          | kOhm    |
| $t_{ACMPSTART}$  | Startup time                                      |                                                                     |     |      | 10       | $\mu s$ |

The total ACMP current is the sum of the contributions from the ACMP and its internal voltage reference as given in Equation 3.1 (p. 47) .  $I_{ACMPREF}$  is zero if an external voltage reference is used.

#### Total ACMP Active Current

$$I_{ACMPTOTAL} = I_{ACMP} + I_{ACMPREF} \quad (3.1)$$

## 3.14 Voltage Comparator (VCMP)

**Table 3.19. VCMP**

| Symbol                  | Parameter                        | Condition                                                       | Min | Typ             | Max | Unit |
|-------------------------|----------------------------------|-----------------------------------------------------------------|-----|-----------------|-----|------|
| V <sub>VCMPIN</sub>     | Input voltage range              |                                                                 |     | V <sub>DD</sub> |     | V    |
| V <sub>VCMPCM</sub>     | VCMP Common Mode voltage range   |                                                                 |     | V <sub>DD</sub> |     | V    |
| I <sub>VCMP</sub>       | Active current                   | BIASPROG=0b0000 and HALFBIAS=1 in VCMPn_CTRL register           |     | 0.3             | 0.6 | μA   |
|                         |                                  | BIASPROG=0b1111 and HALFBIAS=0 in VCMPn_CTRL register. LPREF=0. |     | 22              | 35  | μA   |
| t <sub>VCMPREF</sub>    | Startup time reference generator | NORMAL                                                          |     | 10              |     | μs   |
| V <sub>VCMPOFFSET</sub> | Offset voltage                   | Single ended                                                    |     | 10              |     | mV   |
|                         |                                  | Differential                                                    |     | 10              |     | mV   |
| V <sub>VCMPHYST</sub>   | VCMP hysteresis                  |                                                                 |     | 61              | 210 | mV   |
| t <sub>VCMPSTART</sub>  | Startup time                     |                                                                 |     |                 | 10  | μs   |


The V<sub>DD</sub> trigger level can be configured by setting the TRIGLEVEL field of the VCMP\_CTRL register in accordance with the following equation:

### VCMP Trigger Level as a Function of Level Setting

$$V_{DD} \text{ Trigger Level} = 1.667V + 0.034 \times \text{TRIGLEVEL} \quad (3.2)$$

## 3.15 EBI

**Figure 3.38. EBI Write Enable Timing**

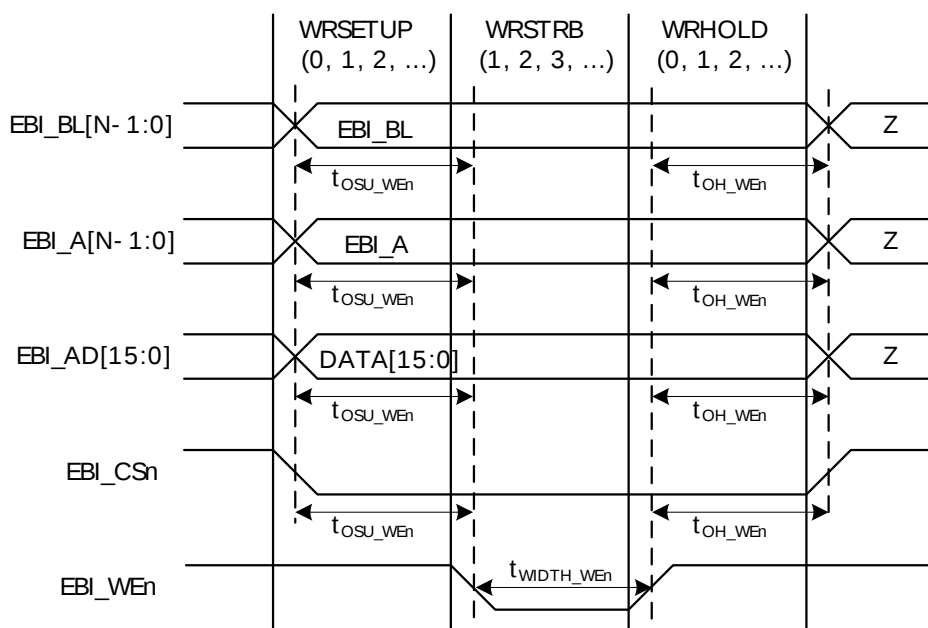

## 3.17 I2C

**Table 3.26. I2C Standard-mode (Sm)**

| Symbol              | Parameter                                          | Min | Typ | Max                 | Unit |
|---------------------|----------------------------------------------------|-----|-----|---------------------|------|
| f <sub>SCL</sub>    | SCL clock frequency                                | 0   |     | 100 <sup>1</sup>    | kHz  |
| t <sub>LOW</sub>    | SCL clock low time                                 | 4.7 |     |                     | μs   |
| t <sub>HIGH</sub>   | SCL clock high time                                | 4.0 |     |                     | μs   |
| t <sub>SU,DAT</sub> | SDA set-up time                                    | 250 |     |                     | ns   |
| t <sub>HD,DAT</sub> | SDA hold time                                      | 8   |     | 3450 <sup>2,3</sup> | ns   |
| t <sub>SU,STA</sub> | Repeated START condition set-up time               | 4.7 |     |                     | μs   |
| t <sub>HD,STA</sub> | (Repeated) START condition hold time               | 4.0 |     |                     | μs   |
| t <sub>SU,STO</sub> | STOP condition set-up time                         | 4.0 |     |                     | μs   |
| t <sub>BUF</sub>    | Bus free time between a STOP and a START condition | 4.7 |     |                     | μs   |

<sup>1</sup>For the minimum HPERCLK frequency required in Standard-mode, see the I2C chapter in the EFM32WG Reference Manual.

<sup>2</sup>The maximum SDA hold time (t<sub>HD,DAT</sub>) needs to be met only when the device does not stretch the low time of SCL (t<sub>LOW</sub>).

<sup>3</sup>When transmitting data, this number is guaranteed only when  $I2Cn\_CLKDIV < ((3450 \cdot 10^{-9} [s] \cdot f_{HPERCLK} [Hz]) - 4)$ .

**Table 3.27. I2C Fast-mode (Fm)**

| Symbol              | Parameter                                          | Min | Typ | Max                | Unit |
|---------------------|----------------------------------------------------|-----|-----|--------------------|------|
| f <sub>SCL</sub>    | SCL clock frequency                                | 0   |     | 400 <sup>1</sup>   | kHz  |
| t <sub>LOW</sub>    | SCL clock low time                                 | 1.3 |     |                    | μs   |
| t <sub>HIGH</sub>   | SCL clock high time                                | 0.6 |     |                    | μs   |
| t <sub>SU,DAT</sub> | SDA set-up time                                    | 100 |     |                    | ns   |
| t <sub>HD,DAT</sub> | SDA hold time                                      | 8   |     | 900 <sup>2,3</sup> | ns   |
| t <sub>SU,STA</sub> | Repeated START condition set-up time               | 0.6 |     |                    | μs   |
| t <sub>HD,STA</sub> | (Repeated) START condition hold time               | 0.6 |     |                    | μs   |
| t <sub>SU,STO</sub> | STOP condition set-up time                         | 0.6 |     |                    | μs   |
| t <sub>BUF</sub>    | Bus free time between a STOP and a START condition | 1.3 |     |                    | μs   |

<sup>1</sup>For the minimum HPERCLK frequency required in Fast-mode, see the I2C chapter in the EFM32WG Reference Manual.

<sup>2</sup>The maximum SDA hold time (t<sub>HD,DAT</sub>) needs to be met only when the device does not stretch the low time of SCL (t<sub>LOW</sub>).

<sup>3</sup>When transmitting data, this number is guaranteed only when  $I2Cn\_CLKDIV < ((900 \cdot 10^{-9} [s] \cdot f_{HPERCLK} [Hz]) - 4)$ .

| Symbol                        | Parameter          | Min                             | Typ | Max                              | Unit |
|-------------------------------|--------------------|---------------------------------|-----|----------------------------------|------|
| $t_{\text{SCLK\_hi}}^{12}$    | SCLK high period   | $3 * t_{\text{HFPER-CLK}}$      |     |                                  | ns   |
| $t_{\text{SCLK\_lo}}^{12}$    | SCLK low period    | $3 * t_{\text{HFPER-CLK}}$      |     |                                  | ns   |
| $t_{\text{CS\_ACT\_MI}}^{12}$ | CS active to MISO  | 5.00                            |     | 35.00                            | ns   |
| $t_{\text{CS\_DIS\_MI}}^{12}$ | CS disable to MISO | 5.00                            |     | 35.00                            | ns   |
| $t_{\text{SU\_MO}}^{12}$      | MOSI setup time    | 5.00                            |     |                                  | ns   |
| $t_{\text{H\_MO}}^{12}$       | MOSI hold time     | $2 + 2 * t_{\text{HF- PERCLK}}$ |     |                                  | ns   |
| $t_{\text{SCLK\_MI}}^{12}$    | SCLK to MISO       | $-264 + t_{\text{HF- PERCLK}}$  |     | $-234 + 2 * t_{\text{HFPERCLK}}$ | ns   |

<sup>1</sup>Applies for both CLKPHA = 0 and CLKPHA = 1 (figure only shows CLKPHA = 0)

<sup>2</sup>Measurement done at 10% and 90% of  $V_{\text{DD}}$  (figure shows 50% of  $V_{\text{DD}}$ )

## 3.19 Digital Peripherals

**Table 3.33. Digital Peripherals**

| Symbol               | Parameter       | Condition                           | Min | Typ   | Max | Unit                     |
|----------------------|-----------------|-------------------------------------|-----|-------|-----|--------------------------|
| $I_{\text{USART}}$   | USART current   | USART idle current, clock enabled   |     | 4.0   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{UART}}$    | UART current    | UART idle current, clock enabled    |     | 3.8   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{LEUART}}$  | LEUART current  | LEUART idle current, clock enabled  |     | 194.0 |     | nA                       |
| $I_{\text{I2C}}$     | I2C current     | I2C idle current, clock enabled     |     | 7.6   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{TIMER}}$   | TIMER current   | TIMER_0 idle current, clock enabled |     | 6.5   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{LETIMER}}$ | LETIMER current | LETIMER idle current, clock enabled |     | 85.8  |     | nA                       |
| $I_{\text{PCNT}}$    | PCNT current    | PCNT idle current, clock enabled    |     | 91.4  |     | nA                       |
| $I_{\text{RTC}}$     | RTC current     | RTC idle current, clock enabled     |     | 54.6  |     | nA                       |
| $I_{\text{LCD}}$     | LCD current     | LCD idle current, clock enabled     |     | 72.7  |     | nA                       |
| $I_{\text{AES}}$     | AES current     | AES idle current, clock enabled     |     | 1.8   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{GPIO}}$    | GPIO current    | GPIO idle current, clock enabled    |     | 3.4   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{EBI}}$     | EBI current     | EBI idle current, clock enabled     |     | 6.5   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{PRS}}$     | PRS current     | PRS idle current                    |     | 3.9   |     | $\mu\text{A}/\text{MHz}$ |
| $I_{\text{DMA}}$     | DMA current     | Clock enable                        |     | 10.9  |     | $\mu\text{A}/\text{MHz}$ |


| Alternate     | LOCATION |      |      |   |   |   |   |                                                                                                 |
|---------------|----------|------|------|---|---|---|---|-------------------------------------------------------------------------------------------------|
| Functionality | 0        | 1    | 2    | 3 | 4 | 5 | 6 | Description                                                                                     |
|               |          |      |      |   |   |   |   | Note that this function is not enabled after reset, and must be enabled by software to be used. |
| EBI_A00       | PA12     | PA12 | PA12 |   |   |   |   | External Bus Interface (EBI) address output pin 00.                                             |
| EBI_A01       | PA13     | PA13 | PA13 |   |   |   |   | External Bus Interface (EBI) address output pin 01.                                             |
| EBI_A02       | PA14     | PA14 | PA14 |   |   |   |   | External Bus Interface (EBI) address output pin 02.                                             |
| EBI_A03       | PB9      | PB9  | PB9  |   |   |   |   | External Bus Interface (EBI) address output pin 03.                                             |
| EBI_A04       | PB10     | PB10 | PB10 |   |   |   |   | External Bus Interface (EBI) address output pin 04.                                             |
| EBI_A05       | PC6      | PC6  | PC6  |   |   |   |   | External Bus Interface (EBI) address output pin 05.                                             |
| EBI_A06       | PC7      | PC7  | PC7  |   |   |   |   | External Bus Interface (EBI) address output pin 06.                                             |
| EBI_A07       | PE0      | PE0  | PE0  |   |   |   |   | External Bus Interface (EBI) address output pin 07.                                             |
| EBI_A08       | PE1      | PE1  | PE1  |   |   |   |   | External Bus Interface (EBI) address output pin 08.                                             |
| EBI_A09       | PE2      | PC9  | PC9  |   |   |   |   | External Bus Interface (EBI) address output pin 09.                                             |
| EBI_A10       | PE3      | PC10 | PC10 |   |   |   |   | External Bus Interface (EBI) address output pin 10.                                             |
| EBI_A11       | PE4      | PE4  | PE4  |   |   |   |   | External Bus Interface (EBI) address output pin 11.                                             |
| EBI_A12       | PE5      | PE5  | PE5  |   |   |   |   | External Bus Interface (EBI) address output pin 12.                                             |
| EBI_A13       | PE6      | PE6  | PE6  |   |   |   |   | External Bus Interface (EBI) address output pin 13.                                             |
| EBI_A14       | PE7      | PE7  | PE7  |   |   |   |   | External Bus Interface (EBI) address output pin 14.                                             |
| EBI_A15       | PC8      | PC8  | PC8  |   |   |   |   | External Bus Interface (EBI) address output pin 15.                                             |
| EBI_A16       | PB0      | PB0  | PB0  |   |   |   |   | External Bus Interface (EBI) address output pin 16.                                             |
| EBI_A17       | PB1      | PB1  | PB1  |   |   |   |   | External Bus Interface (EBI) address output pin 17.                                             |
| EBI_A18       | PB2      | PB2  | PB2  |   |   |   |   | External Bus Interface (EBI) address output pin 18.                                             |
| EBI_A19       | PB3      | PB3  | PB3  |   |   |   |   | External Bus Interface (EBI) address output pin 19.                                             |
| EBI_A20       | PB4      | PB4  | PB4  |   |   |   |   | External Bus Interface (EBI) address output pin 20.                                             |
| EBI_A21       | PB5      | PB5  | PB5  |   |   |   |   | External Bus Interface (EBI) address output pin 21.                                             |
| EBI_A22       | PB6      | PB6  | PB6  |   |   |   |   | External Bus Interface (EBI) address output pin 22.                                             |
| EBI_A23       | PC0      | PC0  | PC0  |   |   |   |   | External Bus Interface (EBI) address output pin 23.                                             |
| EBI_A24       | PC1      | PC1  | PC1  |   |   |   |   | External Bus Interface (EBI) address output pin 24.                                             |
| EBI_A25       | PC2      | PC2  | PC2  |   |   |   |   | External Bus Interface (EBI) address output pin 25.                                             |
| EBI_A26       | PC4      | PC4  | PC4  |   |   |   |   | External Bus Interface (EBI) address output pin 26.                                             |
| EBI_A27       | PD2      | PD2  | PD2  |   |   |   |   | External Bus Interface (EBI) address output pin 27.                                             |
| EBI_AD00      | PE8      | PE8  | PE8  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 00.                            |
| EBI_AD01      | PE9      | PE9  | PE9  |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 01.                            |
| EBI_AD02      | PE10     | PE10 | PE10 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 02.                            |
| EBI_AD03      | PE11     | PE11 | PE11 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 03.                            |
| EBI_AD04      | PE12     | PE12 | PE12 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 04.                            |
| EBI_AD05      | PE13     | PE13 | PE13 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 05.                            |
| EBI_AD06      | PE14     | PE14 | PE14 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 06.                            |
| EBI_AD07      | PE15     | PE15 | PE15 |   |   |   |   | External Bus Interface (EBI) address and data input / output pin 07.                            |

## 6 Chip Marking, Revision and Errata

### 6.1 Chip Marking

In the illustration below package fields and position are shown.

**Figure 6.1. Example Chip Marking (top view)**

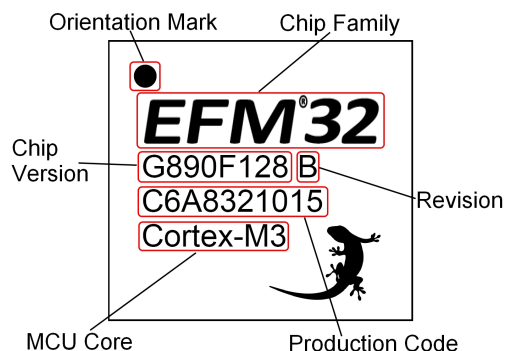

### 6.2 Revision

The revision of a chip can be determined from the "Revision" field in Figure 6.1 (p. 76) .

### 6.3 Errata

Please see the errata document for EFM32WG880 for description and resolution of device erratas. This document is available in Simplicity Studio and online at:

<http://www.silabs.com/support/pages/document-library.aspx?p=MCUs--32-bit>

## List of Tables

|                                                                    |    |
|--------------------------------------------------------------------|----|
| 1.1. Ordering Information .....                                    | 2  |
| 2.1. Configuration Summary .....                                   | 7  |
| 3.1. Absolute Maximum Ratings .....                                | 10 |
| 3.2. General Operating Conditions .....                            | 10 |
| 3.3. Environmental .....                                           | 11 |
| 3.4. Current Consumption .....                                     | 11 |
| 3.5. Energy Modes Transitions .....                                | 17 |
| 3.6. Power Management .....                                        | 18 |
| 3.7. Flash .....                                                   | 18 |
| 3.8. GPIO .....                                                    | 19 |
| 3.9. LFXO .....                                                    | 27 |
| 3.10. HFXO .....                                                   | 27 |
| 3.11. LFRCO .....                                                  | 28 |
| 3.12. HFRCO .....                                                  | 29 |
| 3.13. AUXHFRCO .....                                               | 32 |
| 3.14. ULFRCO .....                                                 | 32 |
| 3.15. ADC .....                                                    | 32 |
| 3.16. DAC .....                                                    | 42 |
| 3.17. OPAMP .....                                                  | 43 |
| 3.18. ACMP .....                                                   | 47 |
| 3.19. VCMP .....                                                   | 49 |
| 3.20. EBI Write Enable Timing .....                                | 50 |
| 3.21. EBI Address Latch Enable Related Output Timing .....         | 50 |
| 3.22. EBI Read Enable Related Output Timing .....                  | 51 |
| 3.23. EBI Read Enable Related Timing Requirements .....            | 52 |
| 3.24. EBI Ready/Wait Related Timing Requirements .....             | 52 |
| 3.25. LCD .....                                                    | 53 |
| 3.26. I2C Standard-mode (Sm) .....                                 | 54 |
| 3.27. I2C Fast-mode (Fm) .....                                     | 54 |
| 3.28. I2C Fast-mode Plus (Fm+) .....                               | 55 |
| 3.29. SPI Master Timing .....                                      | 55 |
| 3.30. SPI Master Timing with SSSEARLY and SMSDELAY .....           | 56 |
| 3.31. SPI Slave Timing .....                                       | 56 |
| 3.32. SPI Slave Timing with SSSEARLY and SMSDELAY .....            | 56 |
| 3.33. Digital Peripherals .....                                    | 57 |
| 4.1. Device Pinout .....                                           | 58 |
| 4.2. Alternate functionality overview .....                        | 62 |
| 4.3. GPIO Pinout .....                                             | 70 |
| 4.4. LQFP100 (Dimensions in mm) .....                              | 72 |
| 5.1. QFP100 PCB Land Pattern Dimensions (Dimensions in mm) .....   | 73 |
| 5.2. QFP100 PCB Solder Mask Dimensions (Dimensions in mm) .....    | 74 |
| 5.3. QFP100 PCB Stencil Design Dimensions (Dimensions in mm) ..... | 75 |