



Welcome to [E-XFL.COM](http://E-XFL.COM)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                      |
| Core Processor             | MIPS32® M4K™                                                                                                                                                                |
| Core Size                  | 32-Bit Single-Core                                                                                                                                                          |
| Speed                      | 40MHz                                                                                                                                                                       |
| Connectivity               | I <sup>2</sup> C, IrDA, LINbus, PMP, SPI, UART/USART, USB OTG                                                                                                               |
| Peripherals                | Brown-out Detect/Reset, DMA, I <sup>2</sup> S, POR, PWM, WDT                                                                                                                |
| Number of I/O              | 19                                                                                                                                                                          |
| Program Memory Size        | 64KB (64K x 8)                                                                                                                                                              |
| Program Memory Type        | FLASH                                                                                                                                                                       |
| EEPROM Size                | -                                                                                                                                                                           |
| RAM Size                   | 16K x 8                                                                                                                                                                     |
| Voltage - Supply (Vcc/Vdd) | 2.3V ~ 3.6V                                                                                                                                                                 |
| Data Converters            | A/D 9x10b                                                                                                                                                                   |
| Oscillator Type            | Internal                                                                                                                                                                    |
| Operating Temperature      | -40°C ~ 105°C (TA)                                                                                                                                                          |
| Mounting Type              | Surface Mount                                                                                                                                                               |
| Package / Case             | 28-SSOP (0.209", 5.30mm Width)                                                                                                                                              |
| Supplier Device Package    | 28-SSOP                                                                                                                                                                     |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic32mx230f064b-v-ss">https://www.e-xfl.com/product-detail/microchip-technology/pic32mx230f064b-v-ss</a> |

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

**TABLE 2: PIC32MX2XX 28/36/44-PIN USB FAMILY FEATURES**

| Device                          | Pins | Program Memory (KB) <sup>(1)</sup> | Data Memory (KB) | Remappable Peripherals |                                        |      |                      |                                    | Analog Comparators | USB On-The-Go (OTG) | I <sup>2</sup> C | PMP | DMA Channels<br>(Programmable/Dedicated) | CTMU | 10-bit 1 Msps ADC (Channels) | RTCC | I/O Pins | JTAG | Packages                        |
|---------------------------------|------|------------------------------------|------------------|------------------------|----------------------------------------|------|----------------------|------------------------------------|--------------------|---------------------|------------------|-----|------------------------------------------|------|------------------------------|------|----------|------|---------------------------------|
|                                 |      |                                    |                  | Remappable Pins        | Timers <sup>(2)</sup> /Capture/Compare | UART | SPI/I <sup>2</sup> S | External Interrupts <sup>(3)</sup> |                    |                     |                  |     |                                          |      |                              |      |          |      |                                 |
| PIC32MX210F016B                 | 28   | 16+3                               | 4                | 19                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 9                            | Y    | 19       | Y    | SOIC,<br>SSOP,<br>SPDIP,<br>QFN |
| PIC32MX210F016C                 | 36   | 16+3                               | 4                | 23                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 12                           | Y    | 25       | Y    | VTLA                            |
| PIC32MX210F016D                 | 44   | 16+3                               | 4                | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |
| PIC32MX220F032B                 | 28   | 32+3                               | 8                | 19                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 9                            | Y    | 19       | Y    | SOIC,<br>SSOP,<br>SPDIP,<br>QFN |
| PIC32MX220F032C                 | 36   | 32+3                               | 8                | 23                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 12                           | Y    | 23       | Y    | VTLA                            |
| PIC32MX220F032D                 | 44   | 32+3                               | 8                | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |
| PIC32MX230F064B                 | 28   | 64+3                               | 16               | 19                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 9                            | Y    | 19       | Y    | SOIC,<br>SSOP,<br>SPDIP,<br>QFN |
| PIC32MX230F064C                 | 36   | 64+3                               | 16               | 23                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 12                           | Y    | 23       | Y    | VTLA                            |
| PIC32MX230F064D                 | 44   | 64+3                               | 16               | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |
| PIC32MX250F128B                 | 28   | 128+3                              | 32               | 19                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 9                            | Y    | 19       | Y    | SOIC,<br>SSOP,<br>SPDIP,<br>QFN |
| PIC32MX250F128C                 | 36   | 128+3                              | 32               | 23                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 12                           | Y    | 23       | Y    | VTLA                            |
| PIC32MX250F128D                 | 44   | 128+3                              | 32               | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |
| PIC32MX230F256B                 | 28   | 256+3                              | 16               | 20                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 9                            | Y    | 19       | Y    | SOIC,<br>SSOP,<br>SPDIP,<br>QFN |
| PIC32MX230F256D                 | 44   | 256+3                              | 16               | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |
| PIC32MX270F256B                 | 28   | 256+3                              | 64               | 19                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 9                            | Y    | 19       | Y    | SOIC,<br>SSOP,<br>SPDIP,<br>QFN |
| PIC32MX270F256D                 | 44   | 256+3                              | 64               | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |
| PIC32MX270F256DB <sup>(4)</sup> | 44   | 256+3                              | 64               | 31                     | 5/5/5                                  | 2    | 2                    | 5                                  | 3                  | Y                   | 2                | Y   | 4/2                                      | Y    | 13                           | Y    | 33       | Y    | VTLA,<br>TQFP,<br>QFN           |

**Note 1:** This device features 3 KB of boot Flash memory.


**2:** Four out of five timers are remappable.

**3:** Four out of five external interrupts are remappable.

**4:** This PIC32 device is targeted to specific audio software packages that are tracked for licensing royalty purposes. All peripherals and electrical characteristics are identical to their corresponding base part numbers.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

**FIGURE 2-1: RECOMMENDED MINIMUM CONNECTION**

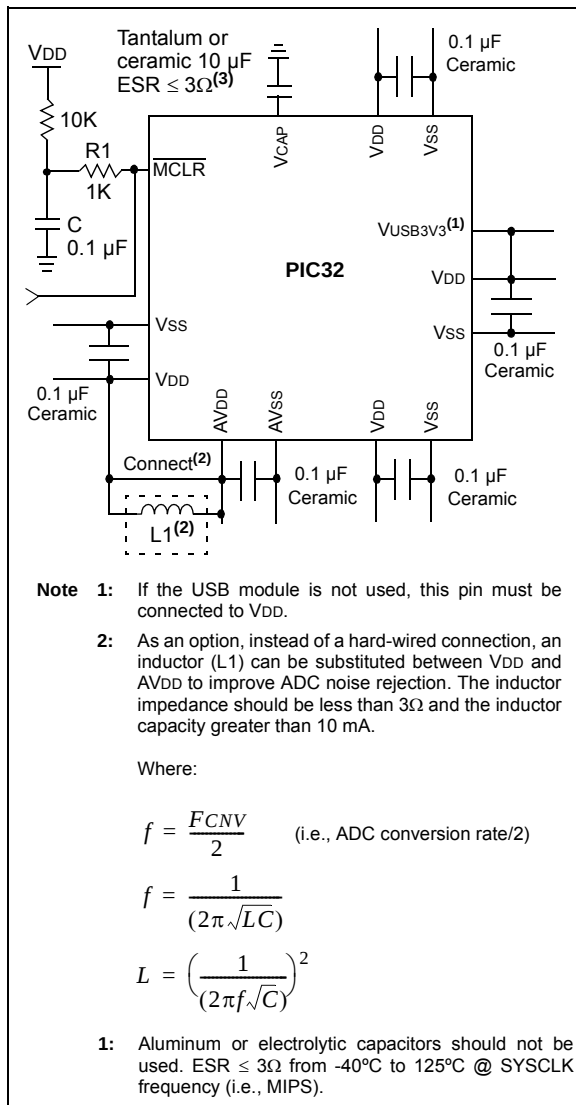

## 2.2.1 BULK CAPACITORS

The use of a bulk capacitor is recommended to improve power supply stability. Typical values range from 4.7 μF to 47 μF. This capacitor should be located as close to the device as possible.

## 2.3 Capacitor on Internal Voltage Regulator (VCAP)

### 2.3.1 INTERNAL REGULATOR MODE

A low-ESR (3 ohm) capacitor is required on the VCAP pin, which is used to stabilize the internal voltage regulator output. The VCAP pin must not be connected to VDD, and must have a CEFC capacitor, with at least a 6V rating, connected to ground. The type can be ceramic or tantalum. Refer to **30.0 “Electrical Characteristics”** for additional information on CEFC specifications.

## 2.4 Master Clear (MCLR) Pin

The MCLR pin provides two specific device functions:


- Device Reset
- Device programming and debugging

Pulling The MCLR pin low generates a device Reset. Figure 2-2 illustrates a typical MCLR circuit. During device programming and debugging, the resistance and capacitance that can be added to the pin must be considered. Device programmers and debuggers drive the MCLR pin. Consequently, specific voltage levels (V<sub>IH</sub> and V<sub>IL</sub>) and fast signal transitions must not be adversely affected. Therefore, specific values of R and C will need to be adjusted based on the application and PCB requirements.

For example, as illustrated in Figure 2-2, it is recommended that the capacitor C, be isolated from the MCLR pin during programming and debugging operations.

Place the components illustrated in Figure 2-2 within one-quarter inch (6 mm) from the MCLR pin.

**FIGURE 2-2: EXAMPLE OF MCLR PIN CONNECTIONS**

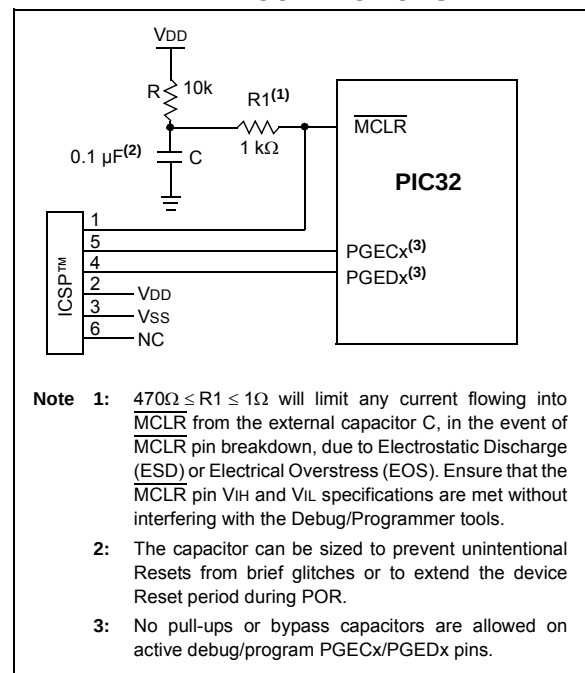

## 2.5 ICSP Pins

The PGECx and PGEDx pins are used for ICSP and debugging purposes. It is recommended to keep the trace length between the ICSP connector and the ICSP pins on the device as short as possible. If the ICSP connector is expected to experience an ESD event, a series resistor is recommended, with the value in the range of a few tens of Ohms, not to exceed 100 Ohms.

## 6.1 Reset Control Registers

**TABLE 6-1: RESET CONTROL REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register<br>Name <sup>(1)</sup> | Bit Range | Bits  |       |       |       |       |       |      |       |      |      |      |      |       |      |      |       | All Resets          |
|-----------------------------|---------------------------------|-----------|-------|-------|-------|-------|-------|-------|------|-------|------|------|------|------|-------|------|------|-------|---------------------|
|                             |                                 |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8  | 23/7 | 22/6 | 21/5 | 20/4 | 19/3  | 18/2 | 17/1 | 16/0  |                     |
| F600                        | RCON                            | 31:16     | —     | —     | —     | —     | —     | —     | —    | —     | —    | —    | —    | —    | —     | —    | —    | —     | 0000                |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | CMR  | VREGS | EXTR | SWR  | —    | WDTO | SLEEP | IDLE | BOR  | POR   | xxxx <sup>(2)</sup> |
| F610                        | RSWRST                          | 31:16     | —     | —     | —     | —     | —     | —     | —    | —     | —    | —    | —    | —    | —     | —    | —    | —     | 0000                |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —     | —    | —    | —    | —    | —     | —    | —    | SWRST | 0000                |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table have corresponding CLR, SET and INV registers at their virtual addresses, plus offsets of 0x4, 0x8 and 0xC, respectively. See **Section 11.2 “CLR, SET and INV Registers”** for more information.

**2:** Reset values are dependent on the DEVCFGx Configuration bits and the type of reset.

TABLE 10-1: USB REGISTER MAP (CONTINUED)

| Virtual Address<br>(BF88_#) | Register<br>Name <sup>(1)</sup> | Bit Range | Bits  |       |       |       |       |       |      |              |       |          |      |          |           |        |         |        | All Resets |
|-----------------------------|---------------------------------|-----------|-------|-------|-------|-------|-------|-------|------|--------------|-------|----------|------|----------|-----------|--------|---------|--------|------------|
|                             |                                 |           | 31/15 | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9 | 24/8         | 23/7  | 22/6     | 21/5 | 20/4     | 19/3      | 18/2   | 17/1    | 16/0   |            |
| 5280                        | U1FRML <sup>(3)</sup>           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | FRML<7:0>    |       |          |      |          |           |        |         |        |            |
| 5290                        | U1FRMH <sup>(3)</sup>           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | FRMH<2:0> |        |         |        | 0000       |
| 52A0                        | U1TOK                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | PID<3:0>     |       |          |      |          | EP<3:0>   |        |         |        |            |
| 52B0                        | U1SOF                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | CNT<7:0>     |       |          |      |          |           |        |         | 0000   |            |
| 52C0                        | U1BDTP2                         | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | BDTPTRH<7:0> |       |          |      |          |           |        |         |        |            |
| 52D0                        | U1BDTP3                         | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | BDTPTRU<7:0> |       |          |      |          |           |        |         |        |            |
| 52E0                        | U1CNFG1                         | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | UTEYE | UOEMON   | —    | USBSIDL  | —         | —      | —       | —      | UASUSPND   |
| 5300                        | U1EP0                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | LSPD  | RETRYDIS | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5310                        | U1EP1                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5320                        | U1EP2                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5330                        | U1EP3                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5340                        | U1EP4                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5350                        | U1EP5                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5360                        | U1EP6                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5370                        | U1EP7                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |
| 5380                        | U1EP8                           | 31:16     | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | —        | —         | —      | —       | —      | 0000       |
|                             |                                 | 15:0      | —     | —     | —     | —     | —     | —     | —    | —            | —     | —        | —    | EPCONDIS | EPRXEN    | EPTXEN | EPSTALL | EPHSHK | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

- Note** 1: With the exception of those noted, all registers in this table (except as noted) have corresponding CLR, SET and INV registers at their virtual address, plus an offset of 0x4, 0x8, and 0xC respectively. See **Section 11.2 "CLR, SET and INV Registers"** for more information.
- 2: This register does not have associated SET and INV registers.
- 3: This register does not have associated CLR, SET and INV registers.
- 4: Reset value for this bit is undefined.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

---

## REGISTER 10-8: U1EIR: USB ERROR INTERRUPT STATUS REGISTER (CONTINUED)

- bit 1     **CRC5EF:** CRC5 Host Error Flag bit<sup>(4)</sup>  
          1 = Token packet rejected due to CRC5 error  
          0 = Token packet accepted  
          **EOFEF:** EOF Error Flag bit<sup>(3,5)</sup>  
          1 = An EOF error condition was detected  
          0 = No EOF error condition was detected
- bit 0     **PIDEF:** PID Check Failure Flag bit  
          1 = PID check failed  
          0 = PID check passed

- Note 1:** This type of error occurs when the module's request for the DMA bus is not granted in time to service the module's demand for memory, resulting in an overflow or underflow condition, and/or the allocated buffer size is not sufficient to store the received data packet causing it to be truncated.
- 2:** This type of error occurs when more than 16-bit-times of Idle from the previous End-of-Packet (EOP) has elapsed.
- 3:** This type of error occurs when the module is transmitting or receiving data and the SOF counter has reached zero.
- 4:** Device mode.
- 5:** Host mode.


# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

TABLE 11-2: OUTPUT PIN SELECTION

| RPn Port Pin | RPnR SFR | RPnR bits   | RPnR Value to Peripheral Selection                                                                                                                                                       |
|--------------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RPA0         | RPA0R    | RPA0R<3:0>  | 0000 = No Connect<br>0001 = U1TX<br>0010 = U2RTS<br>0011 = SS1<br>0100 = Reserved<br>0101 = OC1<br>0110 = Reserved<br>0111 = C2OUT<br>1000 = Reserved<br>.<br>.<br>1111 = Reserved       |
| RPB3         | RPB3R    | RPB3R<3:0>  |                                                                                                                                                                                          |
| RPB4         | RPB4R    | RPB4R<3:0>  |                                                                                                                                                                                          |
| RPB15        | RPB15R   | RPB15R<3:0> |                                                                                                                                                                                          |
| RPB7         | RPB7R    | RPB7R<3:0>  |                                                                                                                                                                                          |
| RPC7         | RPC7R    | RPC7R<3:0>  |                                                                                                                                                                                          |
| RPC0         | RPC0R    | RPC0R<3:0>  |                                                                                                                                                                                          |
| RPC5         | RPC5R    | RPC5R<3:0>  |                                                                                                                                                                                          |
| RPA1         | RPA1R    | RPA1R<3:0>  | 0000 = No Connect<br>0001 = Reserved<br>0010 = Reserved<br>0011 = SDO1<br>0100 = SDO2<br>0101 = OC2<br>0110 = Reserved<br>0111 = C3OUT<br>.<br>.<br>.<br>1111 = Reserved                 |
| RPB5         | RPB5R    | RPB5R<3:0>  |                                                                                                                                                                                          |
| RPB1         | RPB1R    | RPB1R<3:0>  |                                                                                                                                                                                          |
| RPB11        | RPB11R   | RPB11R<3:0> |                                                                                                                                                                                          |
| RPB8         | RPB8R    | RPB8R<3:0>  |                                                                                                                                                                                          |
| RPA8         | RPA8R    | RPA8R<3:0>  |                                                                                                                                                                                          |
| RPC8         | RPC8R    | RPC8R<3:0>  |                                                                                                                                                                                          |
| RPA9         | RPA9R    | RPA9R<3:0>  |                                                                                                                                                                                          |
| RPA2         | RPA2R    | RPA2R<3:0>  | 0000 = No Connect<br>0001 = Reserved<br>0010 = Reserved<br>0011 = SDO1<br>0100 = SDO2<br>0101 = OC4<br>0110 = OC5<br>0111 = REFCLKO<br>1000 = Reserved<br>.<br>.<br>.<br>1111 = Reserved |
| RPB6         | RPB6R    | RPB6R<3:0>  |                                                                                                                                                                                          |
| RPA4         | RPA4R    | RPA4R<3:0>  |                                                                                                                                                                                          |
| RPB13        | RPB13R   | RPB13R<3:0> |                                                                                                                                                                                          |
| RPB2         | RPB2R    | RPB2R<3:0>  |                                                                                                                                                                                          |
| RPC6         | RPC6R    | RPC6R<3:0>  |                                                                                                                                                                                          |
| RPC1         | RPC1R    | RPC1R<3:0>  |                                                                                                                                                                                          |
| RPC3         | RPC3R    | RPC3R<3:0>  |                                                                                                                                                                                          |
| RPA3         | RPA3R    | RPA3R<3:0>  | 0000 = No Connect<br>0001 = U1RTS<br>0010 = U2TX<br>0011 = Reserved<br>0100 = SS2<br>0101 = OC3<br>0110 = Reserved<br>0111 = C1OUT<br>1000 = Reserved<br>.<br>.<br>.<br>1111 = Reserved  |
| RPB14        | RPB14R   | RPB14R<3:0> |                                                                                                                                                                                          |
| RPB0         | RPB0R    | RPB0R<3:0>  |                                                                                                                                                                                          |
| RPB10        | RPB10R   | RPB10R<3:0> |                                                                                                                                                                                          |
| RPB9         | RPB9R    | RPB9R<3:0>  |                                                                                                                                                                                          |
| RPC9         | RPC9R    | RPC9R<3:0>  |                                                                                                                                                                                          |
| RPC2         | RPC2R    | RPC2R<3:0>  |                                                                                                                                                                                          |
| RPC4         | RPC4R    | RPC4R<3:0>  |                                                                                                                                                                                          |

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

**FIGURE 13-2: TIMER2/3, TIMER4/5 BLOCK DIAGRAM (32-BIT)**

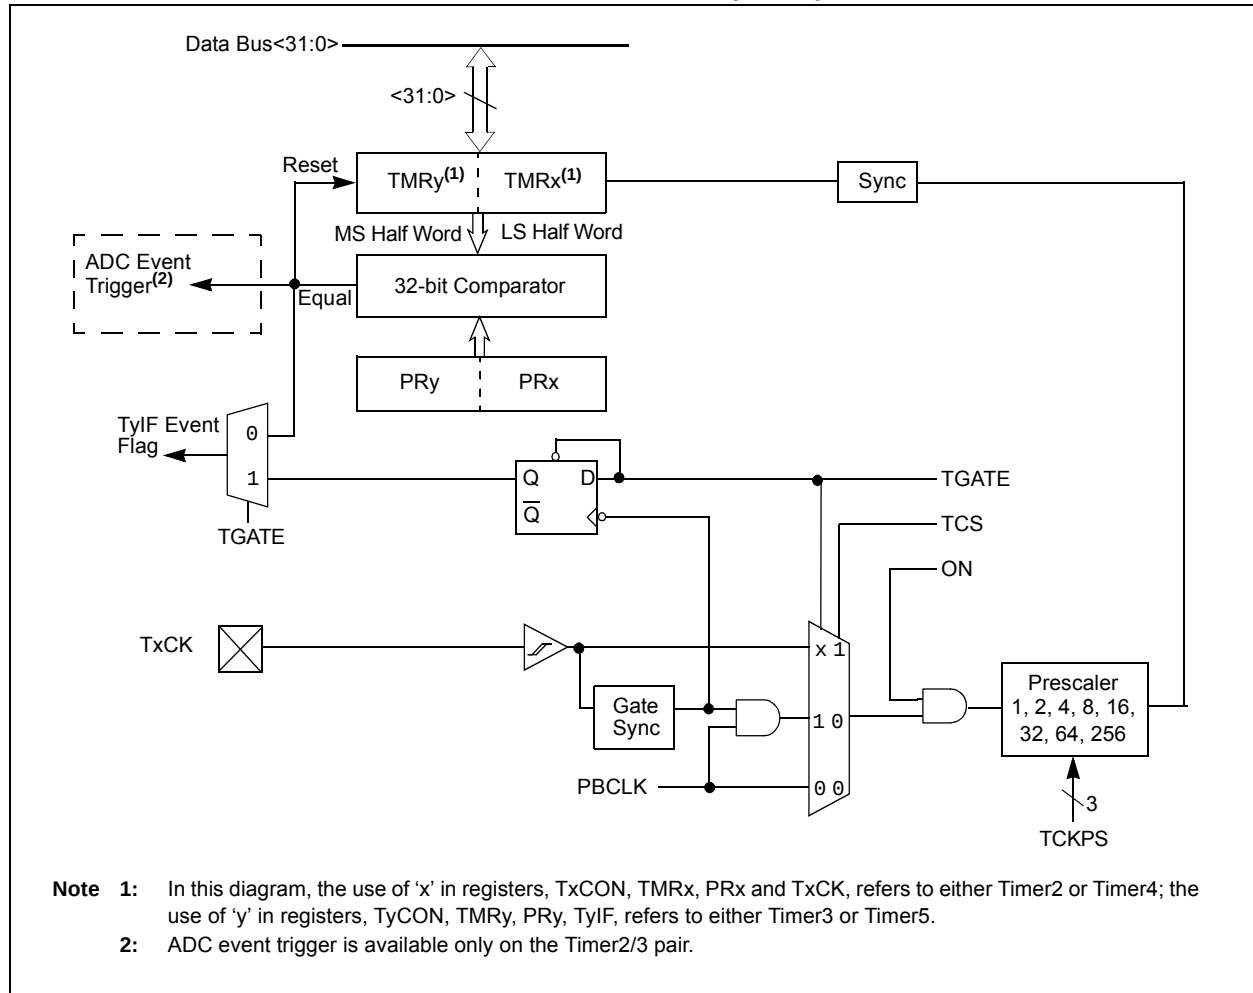

## 15.1 Input Capture Control Registers

**TABLE 15-1: INPUT CAPTURE 1-INPUT CAPTURE 5 REGISTER MAP**

| Virtual Address<br>(BF80..#) | Register<br>Name      | Bit Range | Bits         |       |       |       |       |       |       |      |       |          |      |      |       |          |      | All Resets |      |
|------------------------------|-----------------------|-----------|--------------|-------|-------|-------|-------|-------|-------|------|-------|----------|------|------|-------|----------|------|------------|------|
|                              |                       |           | 31/15        | 30/14 | 29/13 | 28/12 | 27/11 | 26/10 | 25/9  | 24/8 | 23/7  | 22/6     | 21/5 | 20/4 | 19/3  | 18/2     | 17/1 |            | 16/0 |
| 2000                         | IC1CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —     | —    | —     | —        | —    | —    | —     | —        | —    | —          | 0000 |
|                              |                       | 15:0      | ON           | —     | SIDL  | —     | —     | —     | FEDGE | C32  | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      |            | 0000 |
| 2010                         | IC1BUF                | 31:16     | IC1BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
|                              |                       | 15:0      | IC1BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
| 2200                         | IC2CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —     | —    | —     | —        | —    | —    | —     | —        | —    | —          | 0000 |
|                              |                       | 15:0      | ON           | —     | SIDL  | —     | —     | —     | FEDGE | C32  | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      |            | 0000 |
| 2210                         | IC2BUF                | 31:16     | IC2BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
|                              |                       | 15:0      | IC2BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
| 2400                         | IC3CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —     | —    | —     | —        | —    | —    | —     | —        | —    | —          | 0000 |
|                              |                       | 15:0      | ON           | —     | SIDL  | —     | —     | —     | FEDGE | C32  | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      |            | 0000 |
| 2410                         | IC3BUF                | 31:16     | IC3BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
|                              |                       | 15:0      | IC3BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
| 2600                         | IC4CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —     | —    | —     | —        | —    | —    | —     | —        | —    | —          | 0000 |
|                              |                       | 15:0      | ON           | —     | SIDL  | —     | —     | —     | FEDGE | C32  | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      |            | 0000 |
| 2610                         | IC4BUF                | 31:16     | IC4BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
|                              |                       | 15:0      | IC4BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
| 2800                         | IC5CON <sup>(1)</sup> | 31:16     | —            | —     | —     | —     | —     | —     | —     | —    | —     | —        | —    | —    | —     | —        | —    | —          | 0000 |
|                              |                       | 15:0      | ON           | —     | SIDL  | —     | —     | —     | FEDGE | C32  | ICTMR | ICI<1:0> |      | ICOV | ICBNE | ICM<2:0> |      |            | 0000 |
| 2810                         | IC5BUF                | 31:16     | IC5BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |
|                              |                       | 15:0      | IC5BUF<31:0> |       |       |       |       |       |       |      |       |          |      |      |       |          |      | xxxx       |      |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET and INV registers at its virtual address, plus an offset of 0x4, 0x8 and 0xC, respectively. See **Section 11.2 “CLR, SET and INV Registers”** for more information.

## 18.1 I2C Control Registers

**TABLE 18-1: I2C1 AND I2C2 REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register<br>Name <sup>(1)</sup> | Bit Range | Bits    |        |       |        |        |                              |                       |                   |       |       |       |       |      |      |      |      | All Resets |
|-----------------------------|---------------------------------|-----------|---------|--------|-------|--------|--------|------------------------------|-----------------------|-------------------|-------|-------|-------|-------|------|------|------|------|------------|
|                             |                                 |           | 31/15   | 30/14  | 29/13 | 28/12  | 27/11  | 26/10                        | 25/9                  | 24/8              | 23/7  | 22/6  | 21/5  | 20/4  | 19/3 | 18/2 | 17/1 | 16/0 |            |
| 5000                        | I2C1CON                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | ON      | —      | SIDL  | SCLREL | STRICT | A10M                         | DISSLW                | SMEN              | GCEN  | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 1000       |
| 5010                        | I2C1STAT                        | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | ACKSTAT | TRSTAT | —     | —      | —      | BCL                          | GCSTAT                | ADD10             | IWCOL | I2COV | D_A   | P     | S    | R_W  | RBF  | TBF  | 0000       |
| 5020                        | I2C1ADD                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | Address Register      |                   |       |       |       |       |      |      |      |      | 0000       |
| 5030                        | I2C1MSK                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | Address Mask Register |                   |       |       |       |       |      |      |      |      | 0000       |
| 5040                        | I2C1BRG                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | Baud Rate Generator Register |                       |                   |       |       |       |       |      |      |      | 0000 |            |
| 5050                        | I2C1TRN                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | Transmit Register     |                   |       |       |       |       |      |      |      |      | 0000       |
| 5060                        | I2C1RCV                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | —                     | Receive Register  |       |       |       |       |      |      |      |      |            |
| 5100                        | I2C2CON                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | ON      | —      | SIDL  | SCLREL | STRICT | A10M                         | DISSLW                | SMEN              | GCEN  | STREN | ACKDT | ACKEN | RCEN | PEN  | RSEN | SEN  | 1000       |
| 5110                        | I2C2STAT                        | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | ACKSTAT | TRSTAT | —     | —      | —      | BCL                          | GCSTAT                | ADD10             | IWCOL | I2COV | D_A   | P     | S    | R_W  | RBF  | TBF  | 0000       |
| 5120                        | I2C2ADD                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | Address Register      |                   |       |       |       |       |      |      |      |      | 0000       |
| 5130                        | I2C2MSK                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | Address Mask Register |                   |       |       |       |       |      |      |      |      | 0000       |
| 5140                        | I2C2BRG                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | Baud Rate Generator Register |                       |                   |       |       |       |       |      |      |      | 0000 |            |
| 5150                        | I2C2TRN                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | —                     | Transmit Register |       |       |       |       |      |      |      |      |            |
| 5160                        | I2C2RCV                         | 31:16     | —       | —      | —     | —      | —      | —                            | —                     | —                 | —     | —     | —     | —     | —    | —    | —    | —    | 0000       |
|                             |                                 | 15:0      | —       | —      | —     | —      | —      | —                            | —                     | Receive Register  |       |       |       |       |      |      |      |      |            |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** All registers in this table except I2CxRCV have corresponding CLR, SET and INV registers at their virtual addresses, plus offsets of 0x4, 0x8 and 0xC, respectively. See Section 11.2 "CLR, SET and INV Registers" for more information.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

---

## REGISTER 19-2: UxSTA: UARTx STATUS AND CONTROL REGISTER (CONTINUED)

- bit 7-6 **URXISEL<1:0>**: Receive Interrupt Mode Selection bit  
11 = Reserved; do not use  
10 = Interrupt flag bit is asserted while receive buffer is 3/4 or more full (i.e., has 6 or more data characters)  
01 = Interrupt flag bit is asserted while receive buffer is 1/2 or more full (i.e., has 4 or more data characters)  
00 = Interrupt flag bit is asserted while receive buffer is not empty (i.e., has at least 1 data character)
- bit 5 **ADDEN**: Address Character Detect bit (bit 8 of received data = 1)  
1 = Address Detect mode is enabled. If 9-bit mode is not selected, this control bit has no effect.  
0 = Address Detect mode is disabled
- bit 4 **RIDLE**: Receiver Idle bit (read-only)  
1 = Receiver is Idle  
0 = Data is being received
- bit 3 **PERR**: Parity Error Status bit (read-only)  
1 = Parity error has been detected for the current character  
0 = Parity error has not been detected
- bit 2 **FERR**: Framing Error Status bit (read-only)  
1 = Framing error has been detected for the current character  
0 = Framing error has not been detected
- bit 1 **OERR**: Receive Buffer Overrun Error Status bit.  
This bit is set in hardware and can only be cleared (= 0) in software. Clearing a previously set OERR bit resets the receiver buffer and the RSR to an empty state.  
1 = Receive buffer has overflowed  
0 = Receive buffer has not overflowed
- bit 0 **URXDA**: Receive Buffer Data Available bit (read-only)  
1 = Receive buffer has data, at least one more character can be read  
0 = Receive buffer is empty

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

---

## REGISTER 20-2: PMMODE: PARALLEL PORT MODE REGISTER (CONTINUED)

bit 1-0    **WAITE<1:0>**: Data Hold After Read/Write Strobe Wait States bits<sup>(1)</sup>

11 = Wait of 4 TPB  
10 = Wait of 3 TPB  
01 = Wait of 2 TPB  
00 = Wait of 1 TPB (default)

For Read operations:

11 = Wait of 3 TPB  
10 = Wait of 2 TPB  
01 = Wait of 1 TPB  
00 = Wait of 0 TPB (default)

**Note 1:** Whenever WAITM<3:0> = 0000, WAITB and WAITE bits are ignored and forced to 1 TPBCLK cycle for a write operation; WAITB = 1 TPBCLK cycle, WAITE = 0 TPBCLK cycles for a read operation.

**2:** Address bit A14 is not subject to auto-increment/decrement if configured as Chip Select CS1.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

---

## REGISTER 21-2: RTCALRM: RTC ALARM CONTROL REGISTER (CONTINUED)

bit 7-0 **ARPT<7:0>**: Alarm Repeat Counter Value bits<sup>(2)</sup>

11111111 = Alarm will trigger 256 times

•  
•  
•

00000000 = Alarm will trigger one time

The counter decrements on any alarm event. The counter only rolls over from 0x00 to 0xFF if CHIME = 1.

- Note 1:** Hardware clears the ALRMEN bit anytime the alarm event occurs, when ARPT<7:0> = 00 and CHIME = 0.
- 2:** This field should not be written when the RTCC ON bit = '1' (RTCCON<15>) and ALRMSYNC = 1.
- 3:** This assumes a CPU read will execute in less than 32 PBCLKs.

|                                                                     |
|---------------------------------------------------------------------|
| <b>Note:</b> This register is reset only on a Power-on Reset (POR). |
|---------------------------------------------------------------------|

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

## 22.0 10-BIT ANALOG-TO-DIGITAL CONVERTER (ADC)

**Note:** This data sheet summarizes the features of the PIC32MX1XX/2XX 28/36/44-pin Family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **Section 17. “10-bit Analog-to-Digital Converter (ADC)”** (DS60001104), which is available from the *Documentation > Reference Manual* section of the Microchip PIC32 web site ([www.microchip.com/pic32](http://www.microchip.com/pic32)).


The 10-bit Analog-to-Digital Converter (ADC) includes the following features:

- Successive Approximation Register (SAR) conversion
- Up to 1 Msps conversion speed

- Up to 13 analog input pins
- External voltage reference input pins
- One unipolar, differential Sample and Hold Amplifier (SHA)
- Automatic Channel Scan mode
- Selectable conversion trigger source
- 16-word conversion result buffer
- Selectable buffer fill modes
- Eight conversion result format options
- Operation during Sleep and Idle modes

A block diagram of the 10-bit ADC is illustrated in Figure 22-1. Figure 22-2 illustrates a block diagram of the ADC conversion clock period. The 10-bit ADC has up to 13 analog input pins, designated AN0-AN12. In addition, there are two analog input pins for external voltage reference connections. These voltage reference inputs may be shared with other analog input pins and may be common to other analog module references.

**FIGURE 22-1: ADC1 MODULE BLOCK DIAGRAM**

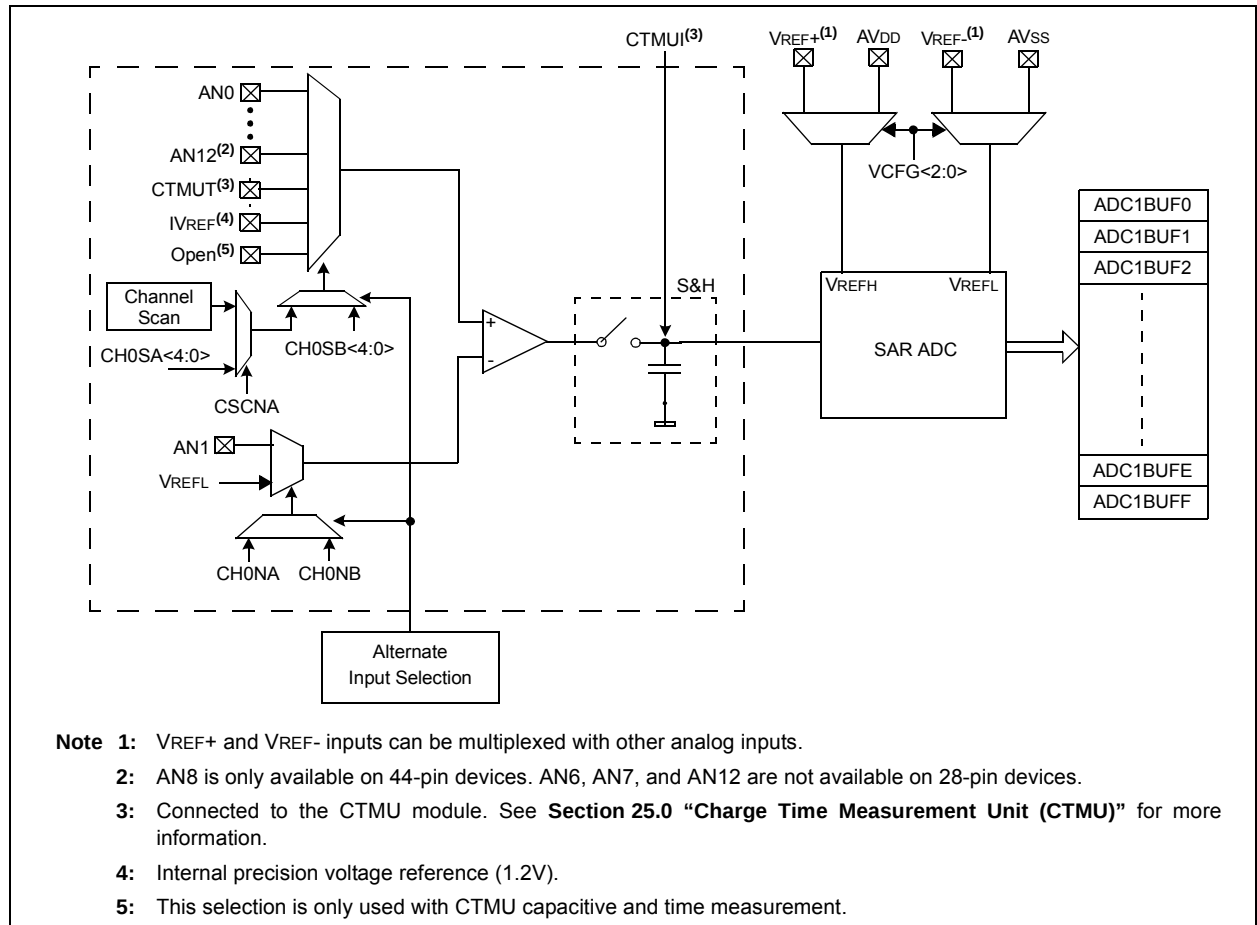

## 22.1 ADC Control Registers

**TABLE 22-1: ADC REGISTER MAP**

| Virtual Address<br>(BF80_#) | Register Name          | Bit Range | Bits                               |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | All Resets |
|-----------------------------|------------------------|-----------|------------------------------------|--------|--------|-----------|------------|-----------|-------|-------|-----------|-------|-----------|---------|------------|-------|-------|-------|------------|
|                             |                        |           | 31/15                              | 30/14  | 29/13  | 28/12     | 27/11      | 26/10     | 25/9  | 24/8  | 23/7      | 22/6  | 21/5      | 20/4    | 19/3       | 18/2  | 17/1  | 16/0  |            |
| 9000                        | AD1CON1 <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | ON                                 | —      | SIDL   | —         | —          | FORM<2:0> |       |       | SSRC<2:0> |       |           | CLRASAM | —          | ASAM  | SAMP  | DONE  | 0000       |
| 9010                        | AD1CON2 <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | VCFG<2:0>                          |        |        | OFFCAL    | —          | CSCNA     | —     | —     | BUFS      | —     | SMPI<3:0> |         |            |       | BUFM  | ALTS  | 0000       |
| 9020                        | AD1CON3 <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | ADRC                               | —      | —      | SAMC<4:0> |            |           |       |       | ADCS<7:0> |       |           |         |            |       |       |       | 0000       |
| 9040                        | AD1CHS <sup>(1)</sup>  | 31:16     | CH0NB                              | —      | —      | —         | CH0SB<3:0> |           |       |       | CH0NA     | —     | —         | —       | CH0SA<3:0> |       |       |       | 0000       |
|                             |                        | 15:0      | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
| 9050                        | AD1CSSL <sup>(1)</sup> | 31:16     | —                                  | —      | —      | —         | —          | —         | —     | —     | —         | —     | —         | —       | —          | —     | —     | —     | 0000       |
|                             |                        | 15:0      | CSSL15                             | CSSL14 | CSSL13 | CSSL12    | CSSL11     | CSSL10    | CSSL9 | CSSL8 | CSSL7     | CSSL6 | CSSL5     | CSSL4   | CSSL3      | CSSL2 | CSSL1 | CSSL0 | 0000       |
| 9070                        | ADC1BUF0               | 31:16     | ADC Result Word 0 (ADC1BUF0<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9080                        | ADC1BUF1               | 31:16     | ADC Result Word 1 (ADC1BUF1<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9090                        | ADC1BUF2               | 31:16     | ADC Result Word 2 (ADC1BUF2<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90A0                        | ADC1BUF3               | 31:16     | ADC Result Word 3 (ADC1BUF3<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90B0                        | ADC1BUF4               | 31:16     | ADC Result Word 4 (ADC1BUF4<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90C0                        | ADC1BUF5               | 31:16     | ADC Result Word 5 (ADC1BUF5<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90D0                        | ADC1BUF6               | 31:16     | ADC Result Word 6 (ADC1BUF6<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90E0                        | ADC1BUF7               | 31:16     | ADC Result Word 7 (ADC1BUF7<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 90F0                        | ADC1BUF8               | 31:16     | ADC Result Word 8 (ADC1BUF8<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9100                        | ADC1BUF9               | 31:16     | ADC Result Word 9 (ADC1BUF9<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
| 9110                        | ADC1BUFA               | 31:16     | ADC Result Word A (ADC1BUFA<31:0>) |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |
|                             |                        | 15:0      |                                    |        |        |           |            |           |       |       |           |       |           |         |            |       |       |       | 0000       |

**Legend:** x = unknown value on Reset; — = unimplemented, read as '0'. Reset values are shown in hexadecimal.

**Note 1:** This register has corresponding CLR, SET and INV registers at its virtual address, plus offsets of 0x4, 0x8 and 0xC, respectively. See **Section 11.2 “CLR, SET and INV Registers”** for details.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

**REGISTER 24-1: CVRCON: COMPARATOR VOLTAGE REFERENCE CONTROL REGISTER**

| Bit Range | Bit 31/23/15/7    | Bit 30/22/14/6 | Bit 29/21/13/5 | Bit 28/20/12/4 | Bit 27/19/11/3 | Bit 26/18/10/2 | Bit 25/17/9/1 | Bit 24/16/8/0 |
|-----------|-------------------|----------------|----------------|----------------|----------------|----------------|---------------|---------------|
| 31:24     | U-0               | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —                 | —              | —              | —              | —              | —              | —             | —             |
| 23:16     | U-0               | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | —                 | —              | —              | —              | —              | —              | —             | —             |
| 15:8      | R/W-0             | U-0            | U-0            | U-0            | U-0            | U-0            | U-0           | U-0           |
|           | ON <sup>(1)</sup> | —              | —              | —              | —              | —              | —             | —             |
| 7:0       | U-0               | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0          | R/W-0         | R/W-0         |
|           | —                 | CVROE          | CVRR           | CVRSS          | CVR<3:0>       |                |               |               |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31-16 **Unimplemented:** Read as '0'

bit 15 **ON:** Comparator Voltage Reference On bit<sup>(1)</sup>

1 = Module is enabled

Setting this bit does not affect other bits in the register.

0 = Module is disabled and does not consume current.

Clearing this bit does not affect the other bits in the register.

bit 14-7 **Unimplemented:** Read as '0'

bit 6 **CVROE:** CVREFOUT Enable bit

1 = Voltage level is output on CVREFOUT pin

0 = Voltage level is disconnected from CVREFOUT pin

bit 5 **CVRR:** CVREF Range Selection bit

1 = 0 to 0.67 CVRSRC, with CVRSRC/24 step size

0 = 0.25 CVRSRC to 0.75 CVRSRC, with CVRSRC/32 step size

bit 4 **CVRSS:** CVREF Source Selection bit

1 = Comparator voltage reference source, CVRSRC = (VREF+) – (VREF-)

0 = Comparator voltage reference source, CVRSRC = AVDD – AVSS

bit 3-0 **CVR<3:0>:** CVREF Value Selection  $0 \leq \text{CVR}<3:0> \leq 15$  bits

When CVRR = 1:

$\text{CVREF} = (\text{CVR}<3:0>/24) \cdot (\text{CVRSRC})$

When CVRR = 0:

$\text{CVREF} = 1/4 \cdot (\text{CVRSRC}) + (\text{CVR}<3:0>/32) \cdot (\text{CVRSRC})$

**Note 1:** When using 1:1 PBCLK divisor, the user's software should not read/write the peripheral's SFRs in the SYSCLK cycle immediately following the instruction that clears the module's ON bit.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

**REGISTER 25-1: CTMUCON: CTMU CONTROL REGISTER**

| Bit Range  | Bit 31/23/15/7   | Bit 30/22/14/6   | Bit 29/21/13/5    | Bit 28/20/12/4               | Bit 27/19/11/3 | Bit 26/18/10/2    | Bit 25/17/9/1                   | Bit 24/16/8/0     |
|------------|------------------|------------------|-------------------|------------------------------|----------------|-------------------|---------------------------------|-------------------|
| 31:24      | R/W-0<br>EDG1MOD | R/W-0<br>EDG1POL | EDG1SEL<3:0>      |                              |                |                   | R/W-0<br>EDG2STAT               | R/W-0<br>EDG1STAT |
| 23:16      | R/W-0<br>EDG2MOD | R/W-0<br>EDG2POL | EDG2SEL<3:0>      |                              |                |                   | U-0<br>—                        | U-0<br>—          |
| 15:8       | R/W-0<br>ON      | U-0<br>—         | R/W-0<br>CTMUSIDL | R/W-0<br>TGEN <sup>(4)</sup> | R/W-0<br>EDGEN | R/W-0<br>EDGSEQEN | R/W-0<br>IDISSEN <sup>(2)</sup> | R/W-0<br>CTTRIG   |
| 7:0        | R/W-0            | R/W-0            | R/W-0             | R/W-0                        | R/W-0          | R/W-0             | R/W-0                           | R/W-0             |
| ITRIM<5:0> |                  |                  |                   |                              |                |                   | IRNG<1:0>                       |                   |

**Legend:**

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR

'1' = Bit is set

'0' = Bit is cleared

x = Bit is unknown

bit 31 **EDG1MOD:** Edge1 Edge Sampling Select bit

1 = Input is edge-sensitive

0 = Input is level-sensitive

bit 30 **EDG1POL:** Edge 1 Polarity Select bit

1 = Edge1 programmed for a positive edge response

0 = Edge1 programmed for a negative edge response

bit 29-26 **EDG1SEL<3:0>:** Edge 1 Source Select bits

1111 = C3OUT pin is selected

1110 = C2OUT pin is selected

1101 = C1OUT pin is selected

1100 = IC3 Capture Event is selected

1011 = IC2 Capture Event is selected

1010 = IC1 Capture Event is selected

1001 = CTED8 pin is selected

1000 = CTED7 pin is selected

0111 = CTED6 pin is selected

0110 = CTED5 pin is selected

0101 = CTED4 pin is selected

0100 = CTED3 pin is selected

0011 = CTED1 pin is selected

0010 = CTED2 pin is selected

0001 = OC1 Compare Event is selected

0000 = Timer1 Event is selected

bit 25 **EDG2STAT:** Edge2 Status bit

Indicates the status of Edge2 and can be written to control edge source

1 = Edge2 has occurred

0 = Edge2 has not occurred

**Note 1:** When this bit is set for Pulse Delay Generation, the EDG2SEL<3:0> bits must be set to '1110' to select C2OUT.

**2:** The ADC module Sample and Hold capacitor is not automatically discharged between sample/conversion cycles. Software using the ADC as part of a capacitive measurement, must discharge the ADC capacitor before conducting the measurement. The IDISSEN bit, when set to '1', performs this function. The ADC module must be sampling while the IDISSEN bit is active to connect the discharge sink to the capacitor array.

**3:** Refer to the CTMU Current Source Specifications (Table 30-41) in **Section 30.0 "Electrical Characteristics"** for current values.

**4:** This bit setting is not available for the CTMU temperature diode.

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

## 31.0 50 MHz ELECTRICAL CHARACTERISTICS

This section provides an overview of the PIC32MX1XX/2XX 28/36/44-pin Family electrical characteristics for devices operating at 50 MHz.

The specifications for 50 MHz are identical to those shown in **Section 30.0 “Electrical Characteristics”**, with the exception of the parameters listed in this chapter.

Parameters in this chapter begin with the letter “M”, which denotes 50 MHz operation. For example, parameter DC29a in **Section 30.0 “Electrical Characteristics”**, is the up to 40 MHz operation equivalent for MDC29a.

Absolute maximum ratings for the PIC32MX1XX/2XX 28/36/44-pin Family 50 MHz devices are listed below. Exposure to these maximum rating conditions for extended periods may affect device reliability. Functional operation of the device at these or any other conditions, above the parameters indicated in the operation listings of this specification, is not implied.

### Absolute Maximum Ratings

(See Note 1)

|                                                                                            |                           |
|--------------------------------------------------------------------------------------------|---------------------------|
| Ambient temperature under bias .....                                                       | -40°C to +85°C            |
| Storage temperature .....                                                                  | -65°C to +150°C           |
| Voltage on VDD with respect to VSS .....                                                   | -0.3V to +4.0V            |
| Voltage on any pin that is not 5V tolerant, with respect to VSS ( <b>Note 3</b> ) .....    | -0.3V to (VDD + 0.3V)     |
| Voltage on any 5V tolerant pin with respect to VSS when VDD ≥ 2.3V ( <b>Note 3</b> ) ..... | -0.3V to +5.5V            |
| Voltage on any 5V tolerant pin with respect to VSS when VDD < 2.3V ( <b>Note 3</b> ) ..... | -0.3V to +3.6V            |
| Voltage on D+ or D- pin with respect to VUSB3V3 .....                                      | -0.3V to (VUSB3V3 + 0.3V) |
| Voltage on VBUS with respect to VSS .....                                                  | -0.3V to +5.5V            |
| Maximum current out of VSS pin(s) .....                                                    | 300 mA                    |
| Maximum current into VDD pin(s) ( <b>Note 2</b> ) .....                                    | 300 mA                    |
| Maximum output current sunk by any I/O pin .....                                           | 15 mA                     |
| Maximum output current sourced by any I/O pin .....                                        | 15 mA                     |
| Maximum current sunk by all ports .....                                                    | 200 mA                    |
| Maximum current sourced by all ports ( <b>Note 2</b> ) .....                               | 200 mA                    |

**Note 1:** Stresses above those listed under “**Absolute Maximum Ratings**” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions, above those indicated in the operation listings of this specification, is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**2:** Maximum allowable current is a function of device maximum power dissipation (see Table 30-2).

**3:** See the “**Pin Diagrams**” section for the 5V tolerant pins.

32.0 DC AND AC DEVICE CHARACTERISTICS GRAPHS

**Note:** The graphs provided following this note are a statistical summary based on a limited number of samples and are provided for design guidance purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore, outside the warranted range.

FIGURE 32-1: I/O OUTPUT VOLTAGE HIGH (VOH)


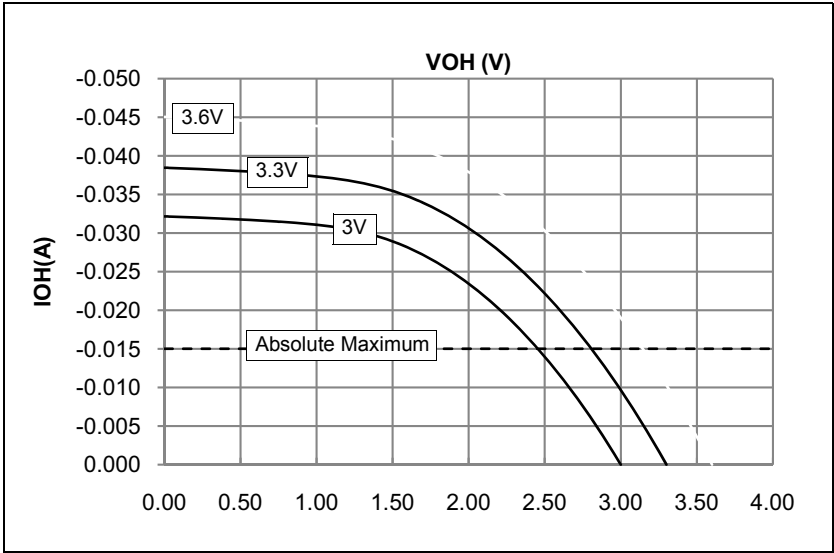



FIGURE 32-2: I/O OUTPUT VOLTAGE LOW (VOL)

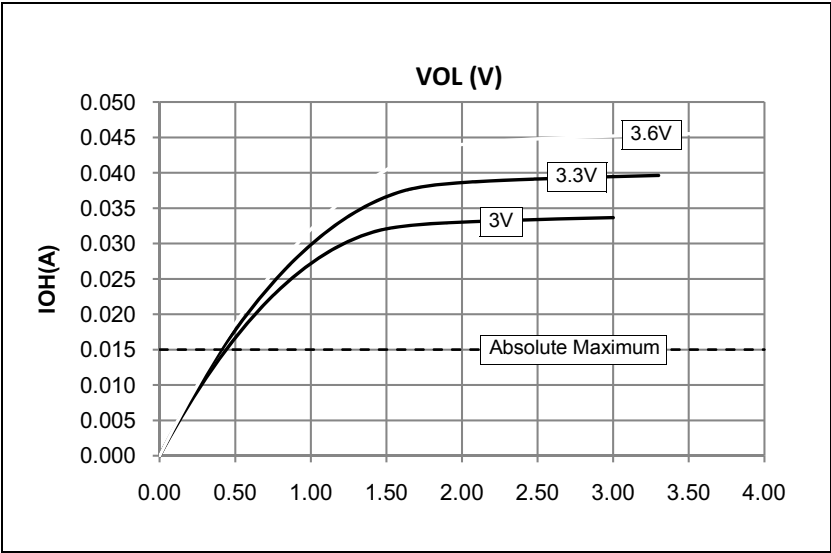

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

## 44-Lead Plastic Quad Flat, No Lead Package (ML) – 8x8 mm Body [QFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

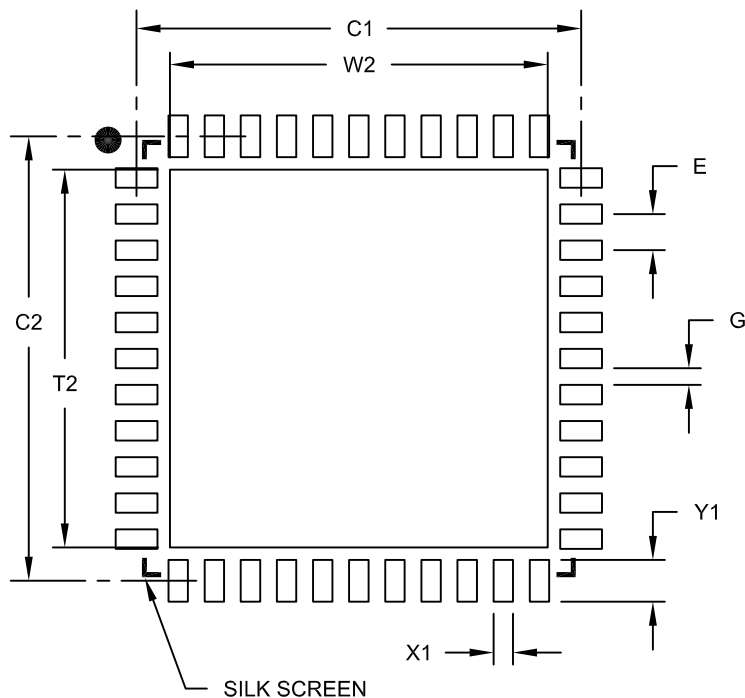

RECOMMENDED LAND PATTERN

| Units                      |    | MILLIMETERS |      |      |
|----------------------------|----|-------------|------|------|
| Dimension Limits           |    | MIN         | NOM  | MAX  |
| Contact Pitch              | E  | 0.65 BSC    |      |      |
| Optional Center Pad Width  | W2 |             |      | 6.80 |
| Optional Center Pad Length | T2 |             |      | 6.80 |
| Contact Pad Spacing        | C1 |             | 8.00 |      |
| Contact Pad Spacing        | C2 |             | 8.00 |      |
| Contact Pad Width (X44)    | X1 |             |      | 0.35 |
| Contact Pad Length (X44)   | Y1 |             |      | 0.80 |
| Distance Between Pads      | G  | 0.25        |      |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2103A

# PIC32MX1XX/2XX 28/36/44-PIN FAMILY

|                                                         |        |                                                     |     |
|---------------------------------------------------------|--------|-----------------------------------------------------|-----|
| (64 KB RAM, 256 KB Flash) .....                         | 42     | DCHxSPTR (DMA Channel 'x' Source Pointer).....      | 99  |
| Memory Organization .....                               | 37     | DCHxSSA (DMA Channel 'x' Source Start Address) ..   | 97  |
| Microchip Internet Web Site .....                       | 341    | DCHxSSIZ (DMA Channel 'x' Source Size).....         | 98  |
| MPLAB ASM30 Assembler, Linker, Librarian .....          | 254    | DCRCON (DMA CRC Control).....                       | 90  |
| MPLAB Integrated Development Environment Software ..    | 253    | DCRCDATA (DMA CRC Data) .....                       | 92  |
| MPLAB PM3 Device Programmer.....                        | 255    | DCRCXOR (DMA CRCXOR Enable) .....                   | 92  |
| MPLAB REAL ICE In-Circuit Emulator System.....          | 255    | DEVCFG0 (Device Configuration Word 0) .....         | 241 |
| MPLINK Object Linker/MPLIB Object Librarian .....       | 254    | DEVCFG1 (Device Configuration Word 1) .....         | 243 |
| <b>O</b>                                                |        | DEVCFG2 (Device Configuration Word 2) .....         | 245 |
| Oscillator Configuration .....                          | 73     | DEVCFG3 (Device Configuration Word 3) .....         | 247 |
| Output Compare.....                                     | 161    | DEVID (Device and Revision ID).....                 | 249 |
| <b>P</b>                                                |        | DMAADDR (DMA Address).....                          | 89  |
| Packaging .....                                         | 311    | DMACON (DMA Controller Control) .....               | 88  |
| Details .....                                           | 313    | DMASTAT (DMA Status).....                           | 89  |
| Marking .....                                           | 311    | I2CxCON (I2C Control).....                          | 176 |
| Parallel Master Port (PMP) .....                        | 189    | I2CxSTAT (I2C Status) .....                         | 178 |
| PIC32 Family USB Interface Diagram.....                 | 104    | ICxCON (Input Capture 'x' Control) .....            | 159 |
| Pinout I/O Descriptions (table) .....                   | 20     | IECx (Interrupt Enable Control) .....               | 70  |
| Power-on Reset (POR)                                    |        | IFxSx (Interrupt Flag Status) .....                 | 70  |
| and On-Chip Voltage Regulator .....                     | 250    | INTCON (Interrupt Control).....                     | 68  |
| Power-Saving Features.....                              | 233    | INTSTAT (Interrupt Status).....                     | 69  |
| CPU Halted Methods .....                                | 233    | IPCx (Interrupt Priority Control) .....             | 71  |
| Operation .....                                         | 233    | IPTMR (Interrupt Proximity Timer).....              | 69  |
| with CPU Running.....                                   | 233    | NVMADDR (Flash Address) .....                       | 56  |
| <b>R</b>                                                |        | NVMCON (Programming Control) .....                  | 55  |
| Real-Time Clock and Calendar (RTCC).....                | 199    | NVMDATA (Flash Program Data).....                   | 57  |
| Register Maps .....                                     | 45--?? | NVMKEY (Programming Unlock).....                    | 56  |
| Registers                                               |        | NVMSRCADDR (Source Data Address) .....              | 57  |
| [ <i>pin name</i> ]R (Peripheral Pin Select Input)..... | 141    | OCxCON (Output Compare 'x' Control).....            | 163 |
| AD1CHS (ADC Input Select) .....                         | 217    | OSCCON (Oscillator Control) .....                   | 76  |
| AD1CON1 (ADC Control 1) .....                           | 213    | OSCTUN (FRC Tuning).....                            | 79  |
| AD1CON2 (ADC Control 2) .....                           | 215    | PMADDR (Parallel Port Address).....                 | 195 |
| AD1CON3 (ADC Control 3) .....                           | 216    | PMAEN (Parallel Port Pin Enable).....               | 196 |
| AD1CSSL (ADC Input Scan Select) .....                   | 218    | PMCON (Parallel Port Control).....                  | 191 |
| ALRMDATE (Alarm Date Value) .....                       | 208    | PMODE (Parallel Port Mode).....                     | 193 |
| ALRMTIME (Alarm Time Value) .....                       | 207    | PMSTAT (Parallel Port Status (Slave Modes Only)) .. | 197 |
| BMXBOOTSZ (Boot Flash (IFM) Size) .....                 | 51     | REFOCON (Reference Oscillator Control) .....        | 80  |
| BMXCON (Bus Matrix Configuration) .....                 | 46     | REFOTRIM (Reference Oscillator Trim).....           | 82  |
| BMXDKPBA (Data RAM Kernel Program                       |        | RPnR (Peripheral Pin Select Output) .....           | 141 |
| Base Address) .....                                     | 47     | RSWRST (Software Reset) .....                       | 62  |
| BMXDRMSZ (Data RAM Size Register) .....                 | 50     | RTCALRM (RTC Alarm Control).....                    | 203 |
| BMXDUDBA (Data RAM User Data Base Address) ...          | 48     | RTCCON (RTC Control).....                           | 201 |
| BMXDUPBA (Data RAM User Program                         |        | RTCDATE (RTC Date Value) .....                      | 206 |
| Base Address) .....                                     | 49     | RTCTIME (RTC Time Value).....                       | 205 |
| BMXPFMSZ (Program Flash (PFM) Size) .....               | 51     | SPIxCON (SPI Control) .....                         | 167 |
| BMXPUPBA (Program Flash (PFM) User Program              |        | SPIxCON2 (SPI Control 2) .....                      | 170 |
| Base Address) .....                                     | 50     | SPIxSTAT (SPI Status).....                          | 171 |
| CFGCON (Configuration Control) .....                    | 248    | T1CON (Type A Timer Control).....                   | 145 |
| CM1CON (Comparator 1 Control) .....                     | 221    | TxCON (Type B Timer Control).....                   | 150 |
| CMSTAT (Comparator Status Register) .....               | 222    | U1ADDR (USB Address).....                           | 121 |
| CNCONx (Change Notice Control for PORTx) .....          | 142    | U1BDTP1 (USB BDT Page 1) .....                      | 123 |
| CTMUCON (CTMU Control) .....                            | 229    | U1BDTP2 (USB BDT Page 2) .....                      | 124 |
| CVRCON (Comparator Voltage Reference Control) ..        | 225    | U1BDTP3 (USB BDT Page 3) .....                      | 124 |
| DCHxCON (DMA Channel 'x' Control).....                  | 93     | U1CNFG1 (USB Configuration 1).....                  | 125 |
| DCHxCPTR (DMA Channel 'x' Cell Pointer).....            | 100    | U1CON (USB Control).....                            | 119 |
| DCHxCSIZ (DMA Channel 'x' Cell-Size).....               | 100    | U1EIE (USB Error Interrupt Enable).....             | 117 |
| DCHxDAT (DMA Channel 'x' Pattern Data).....             | 101    | U1EIR (USB Error Interrupt Status).....             | 115 |
| DCHxDPTR (Channel 'x' Destination Pointer) .....        | 99     | U1EP0-U1EP15 (USB Endpoint Control) .....           | 126 |
| DCHxDSA (DMA Channel 'x' Destination                    |        | U1FRMH (USB Frame Number High) .....                | 122 |
| Start Address) .....                                    | 97     | U1FRML (USB Frame Number Low).....                  | 121 |
| DCHxDSIZ (DMA Channel 'x' Destination Size) .....       | 98     | U1IE (USB Interrupt Enable) .....                   | 114 |
| DCHxECON (DMA Channel 'x' Event Control) .....          | 94     | U1IR (USB Interrupt) .....                          | 113 |
| DCHxINT (DMA Channel 'x' Interrupt Control).....        | 95     | U1OTGCON (USB OTG Control) .....                    | 111 |
|                                                         |        | U1OTGIE (USB OTG Interrupt Enable).....             | 109 |
|                                                         |        | U1OTGIR (USB OTG Interrupt Status).....             | 108 |