


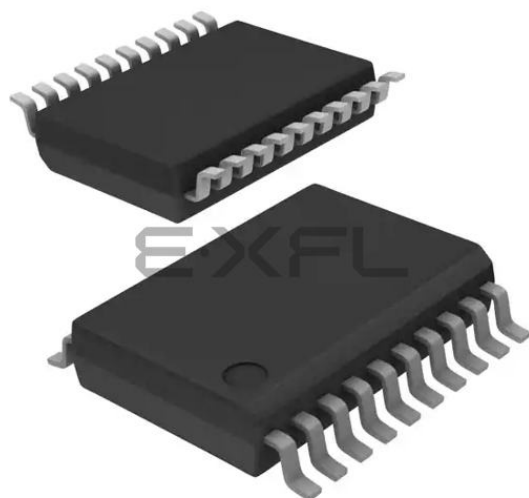

Welcome to [E-XFL.COM](https://www.e-xfl.com)

### What is "[Embedded - Microcontrollers](#)"?

"[Embedded - Microcontrollers](#)" refer to small, integrated circuits designed to perform specific tasks within larger systems. These microcontrollers are essentially compact computers on a single chip, containing a processor core, memory, and programmable input/output peripherals. They are called "embedded" because they are embedded within electronic devices to control various functions, rather than serving as standalone computers. Microcontrollers are crucial in modern electronics, providing the intelligence and control needed for a wide range of applications.

### Applications of "[Embedded - Microcontrollers](#)"

#### Details

|                            |                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status             | Active                                                                                                                                                                |
| Core Processor             | PIC                                                                                                                                                                   |
| Core Size                  | 8-Bit                                                                                                                                                                 |
| Speed                      | 4MHz                                                                                                                                                                  |
| Connectivity               | -                                                                                                                                                                     |
| Peripherals                | Brown-out Detect/Reset, PWM, WDT                                                                                                                                      |
| Number of I/O              | 13                                                                                                                                                                    |
| Program Memory Size        | 3.5KB (2K x 14)                                                                                                                                                       |
| Program Memory Type        | OTP                                                                                                                                                                   |
| EEPROM Size                | -                                                                                                                                                                     |
| RAM Size                   | 128 x 8                                                                                                                                                               |
| Voltage - Supply (Vcc/Vdd) | 2.5V ~ 5.5V                                                                                                                                                           |
| Data Converters            | A/D 4x8b                                                                                                                                                              |
| Oscillator Type            | External                                                                                                                                                              |
| Operating Temperature      | -40°C ~ 85°C (TA)                                                                                                                                                     |
| Mounting Type              | Surface Mount                                                                                                                                                         |
| Package / Case             | 20-SSOP (0.209", 5.30mm Width)                                                                                                                                        |
| Supplier Device Package    | 20-SSOP                                                                                                                                                               |
| Purchase URL               | <a href="https://www.e-xfl.com/product-detail/microchip-technology/pic16lc715-04i-ss">https://www.e-xfl.com/product-detail/microchip-technology/pic16lc715-04i-ss</a> |

# PIC16C71X


## 4.2.2.4    PIE1 REGISTER

|                           |     |    |     |     |
|---------------------------|-----|----|-----|-----|
| <b>Applicable Devices</b> | 710 | 71 | 711 | 715 |
|---------------------------|-----|----|-----|-----|

**Note:** Bit PEIE (INTCON<6>) must be set to enable any peripheral interrupt.

This register contains the individual enable bits for the Peripheral interrupts.

**FIGURE 4-10: PIE1 REGISTER (ADDRESS 8Ch)**

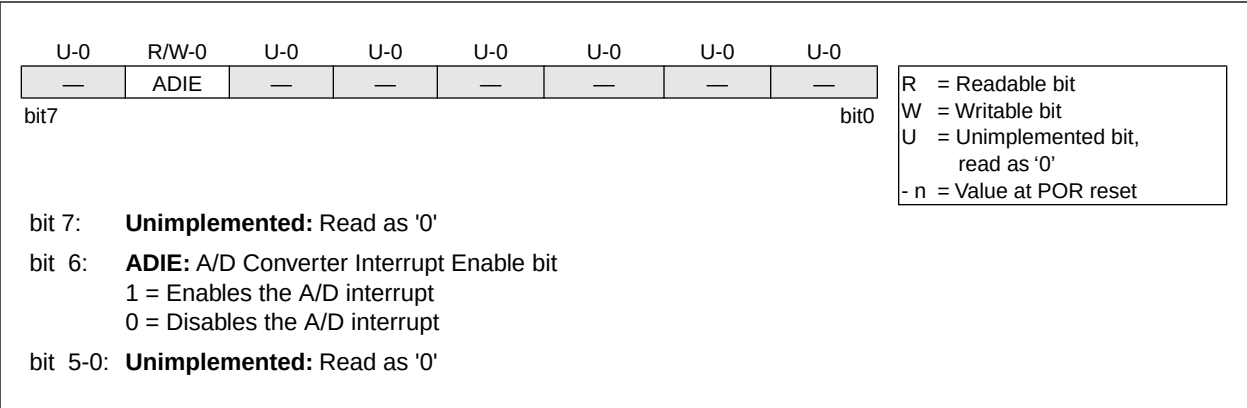

# PIC16C71X

## 4.2.2.6 PCON REGISTER

**Applicable Devices** 710 71 711 715

The Power Control (PCON) register contains a flag bit to allow differentiation between a Power-on Reset (POR) to an external  $\overline{\text{MCLR}}$  Reset or WDT Reset. Those devices with brown-out detection circuitry contain an additional bit to differentiate a Brown-out Reset (BOR) condition from a Power-on Reset condition. For the PIC16C715 the PCON register also contains status bits MPEEN and PER. MPEEN reflects the value of the MPEEN bit in the configuration word. PER indicates a parity error reset has occurred.

**Note:**  $\overline{\text{BOR}}$  is unknown on Power-on Reset. It must then be set by the user and checked on subsequent resets to see if BOR is clear, indicating a brown-out has occurred. The  $\overline{\text{BOR}}$  status bit is a don't care and is not necessarily predictable if the brown-out circuit is disabled (by clearing the BODEN bit in the Configuration word).

**FIGURE 4-12: PCON REGISTER (ADDRESS 8Eh), PIC16C710/711**

| U-0  | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-q                   |
|------|-----|-----|-----|-----|-----|-------|-------------------------|
| —    | —   | —   | —   | —   | —   | POR   | $\overline{\text{BOR}}$ |
| bit7 |     |     |     |     |     | bit0  |                         |

R = Readable bit  
W = Writable bit  
U = Unimplemented bit, read as '0'  
- n = Value at POR reset

bit 7-2: **Unimplemented:** Read as '0'

bit 1:  **$\overline{\text{POR}}$ :** Power-on Reset Status bit  
1 = No Power-on Reset occurred  
0 = A Power-on Reset occurred (must be set in software after a Power-on Reset occurs)

bit 0:  **$\overline{\text{BOR}}$ :** Brown-out Reset Status bit  
1 = No Brown-out Reset occurred  
0 = A Brown-out Reset occurred (must be set in software after a Brown-out Reset occurs)

**FIGURE 4-13: PCON REGISTER (ADDRESS 8Eh), PIC16C715**

| R-U   | U-0 | U-0 | U-0 | U-0 | R/W-1 | R/W-0 | R/W-q                         |
|-------|-----|-----|-----|-----|-------|-------|-------------------------------|
| MPEEN | —   | —   | —   | —   | PER   | POR   | $\overline{\text{BOR}}^{(1)}$ |
| bit7  |     |     |     |     | bit0  |       |                               |

R = Readable bit  
W = Writable bit  
U = Unimplemented bit, read as '0'  
- n = Value at POR reset

bit 7: **MPEEN:** Memory Parity Error Circuitry Status bit  
Reflects the value of configuration word bit, MPEEN

bit 6-3: **Unimplemented:** Read as '0'

bit 2:  **$\overline{\text{PER}}$ :** Memory Parity Error Reset Status bit  
1 = No Error occurred  
0 = Program Memory Fetch Parity Error occurred (must be set in software after a Parity Error Reset)

bit 1:  **$\overline{\text{POR}}$ :** Power-on Reset Status bit  
1 = No Power-on Reset occurred  
0 = A Power-on Reset occurred (must be set in software after a Power-on Reset occurs)

bit 0:  **$\overline{\text{BOR}}$ :** Brown-out Reset Status bit  
1 = No Brown-out Reset occurred  
0 = A Brown-out Reset occurred (must be set in software after a Brown-out Reset occurs)

## 6.0 TIMER0 MODULE

| Applicable Devices | 710 | 71 | 711 | 715 |
|--------------------|-----|----|-----|-----|
|--------------------|-----|----|-----|-----|

The Timer0 module timer/counter has the following features:

- 8-bit timer/counter
- Readable and writable
- 8-bit software programmable prescaler
- Internal or external clock select
- Interrupt on overflow from FFh to 00h
- Edge select for external clock

Figure 6-1 is a simplified block diagram of the Timer0 module.

Timer mode is selected by clearing bit T0CS (OPTION<5>). In timer mode, the Timer0 module will increment every instruction cycle (without prescaler). If the TMR0 register is written, the increment is inhibited for the following two instruction cycles (Figure 6-2 and Figure 6-3). The user can work around this by writing an adjusted value to the TMR0 register.

Counter mode is selected by setting bit T0CS (OPTION<5>). In counter mode, Timer0 will increment either on every rising or falling edge of pin RA4/T0CKI. The incrementing edge is determined by the Timer0 Source Edge Select bit T0SE (OPTION<4>). Clearing


bit T0SE selects the rising edge. Restrictions on the external clock input are discussed in detail in Section 6.2.

The prescaler is mutually exclusively shared between the Timer0 module and the Watchdog Timer. The prescaler assignment is controlled in software by control bit PSA (OPTION<3>). Clearing bit PSA will assign the prescaler to the Timer0 module. The prescaler is not readable or writable. When the prescaler is assigned to the Timer0 module, prescale values of 1:2, 1:4, ..., 1:256 are selectable. Section 6.3 details the operation of the prescaler.


### 6.1 Timer0 Interrupt

The TMR0 interrupt is generated when the TMR0 register overflows from FFh to 00h. This overflow sets bit T0IF (INTCON<2>). The interrupt can be masked by clearing bit T0IE (INTCON<5>). Bit T0IF must be cleared in software by the Timer0 module interrupt service routine before re-enabling this interrupt. The TMR0 interrupt cannot awaken the processor from SLEEP since the timer is shut off during SLEEP. See Figure 6-4 for Timer0 interrupt timing.

**FIGURE 6-1: TIMER0 BLOCK DIAGRAM**

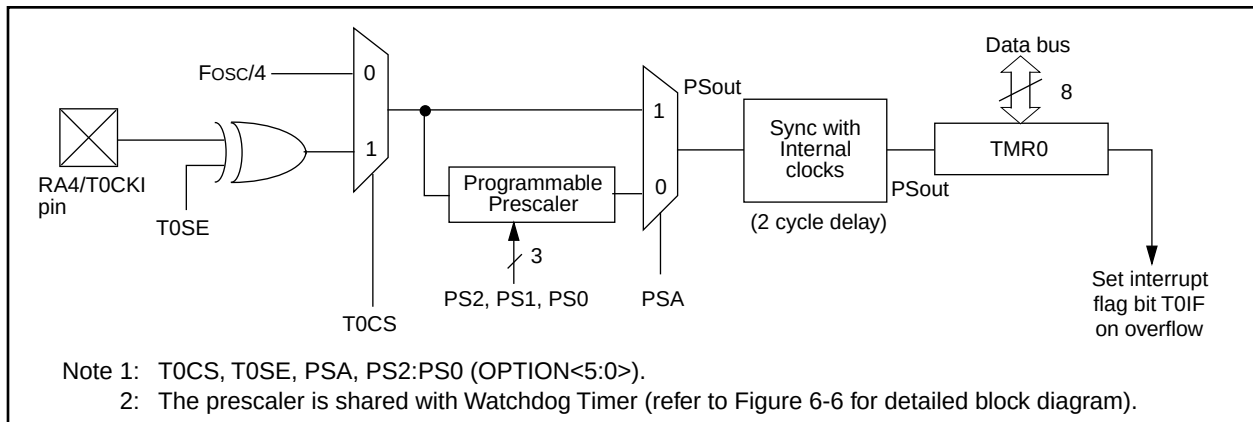

**FIGURE 6-2: TIMER0 TIMING: INTERNAL CLOCK/NO PRESCALE**

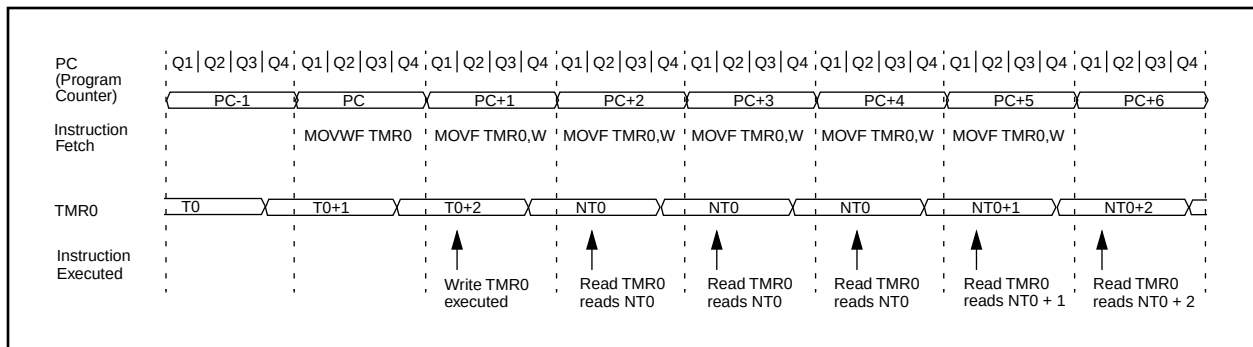

---

|  |
|--|
|  |
|--|

\_\_\_\_\_



## 8.0 SPECIAL FEATURES OF THE CPU

|                           |     |    |     |     |
|---------------------------|-----|----|-----|-----|
| <b>Applicable Devices</b> | 710 | 71 | 711 | 715 |
|---------------------------|-----|----|-----|-----|

What sets a microcontroller apart from other processors are special circuits to deal with the needs of real-time applications. The PIC16CXX family has a host of such features intended to maximize system reliability, minimize cost through elimination of external components, provide power saving operating modes and offer code protection. These are:

- Oscillator selection
- Reset
  - Power-on Reset (POR)
  - Power-up Timer (PWRT)
  - Oscillator Start-up Timer (OST)
  - Brown-out Reset (BOR) (PIC16C710/711/715)
  - Parity Error Reset (PER) (PIC16C715)
- Interrupts
- Watchdog Timer (WDT)
- SLEEP
- Code protection
- ID locations
- In-circuit serial programming

The PIC16CXX has a Watchdog Timer which can be shut off only through configuration bits. It runs off its own RC oscillator for added reliability. There are two timers that offer necessary delays on power-up. One is the Oscillator Start-up Timer (OST), intended to keep the chip in reset until the crystal oscillator is stable. The other is the Power-up Timer (PWRT), which provides a

fixed delay of 72 ms (nominal) on power-up only, designed to keep the part in reset while the power supply stabilizes. With these two timers on-chip, most applications need no external reset circuitry.


SLEEP mode is designed to offer a very low current power-down mode. The user can wake-up from SLEEP through external reset, Watchdog Timer Wake-up, or through an interrupt. Several oscillator options are also made available to allow the part to fit the application. The RC oscillator option saves system cost while the LP crystal option saves power. A set of configuration bits are used to select various options.

### 8.1 Configuration Bits

The configuration bits can be programmed (read as '0') or left unprogrammed (read as '1') to select various device configurations. These bits are mapped in program memory location 2007h.

The user will note that address 2007h is beyond the user program memory space. In fact, it belongs to the special test/configuration memory space (2000h - 3FFFh), which can be accessed only during programming.

**FIGURE 8-1: CONFIGURATION WORD FOR PIC16C71**

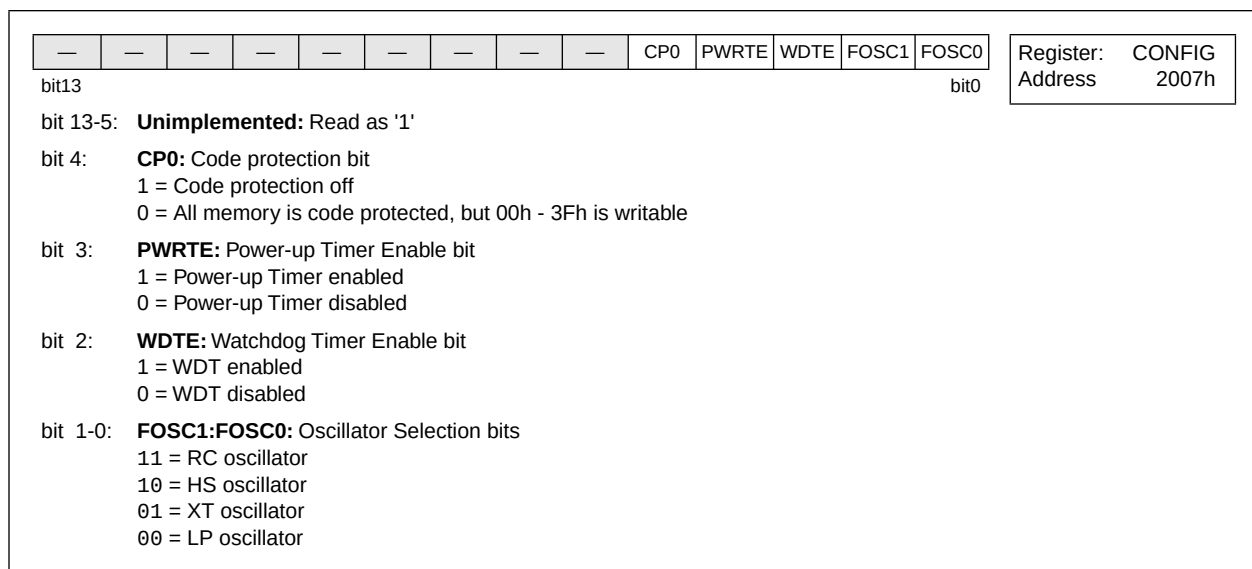

# PIC16C71X

**TABLE 8-3: CERAMIC RESONATORS,  
PIC16C710/711/715**

| Ranges Tested:                                                          |                        |             |             |
|-------------------------------------------------------------------------|------------------------|-------------|-------------|
| Mode                                                                    | Freq                   | OSC1        | OSC2        |
| XT                                                                      | 455 kHz                | 68 - 100 pF | 68 - 100 pF |
|                                                                         | 2.0 MHz                | 15 - 68 pF  | 15 - 68 pF  |
|                                                                         | 4.0 MHz                | 15 - 68 pF  | 15 - 68 pF  |
| HS                                                                      | 8.0 MHz                | 10 - 68 pF  | 10 - 68 pF  |
|                                                                         | 16.0 MHz               | 10 - 22 pF  | 10 - 22 pF  |
| These values are for design guidance only. See notes at bottom of page. |                        |             |             |
| Resonators Used:                                                        |                        |             |             |
| 455 kHz                                                                 | Panasonic EFO-A455K04B | ± 0.3%      |             |
| 2.0 MHz                                                                 | Murata Erie CSA2.00MG  | ± 0.5%      |             |
| 4.0 MHz                                                                 | Murata Erie CSA4.00MG  | ± 0.5%      |             |
| 8.0 MHz                                                                 | Murata Erie CSA8.00MT  | ± 0.5%      |             |
| 16.0 MHz                                                                | Murata Erie CSA16.00MX | ± 0.5%      |             |
| All resonators used did not have built-in capacitors.                   |                        |             |             |

**TABLE 8-4: CAPACITOR SELECTION  
FOR CRYSTAL OSCILLATOR,  
PIC16C710/711/715**

| Osc Type                                                                | Crystal Freq           | Cap. Range C1 | Cap. Range C2 |
|-------------------------------------------------------------------------|------------------------|---------------|---------------|
| LP                                                                      | 32 kHz                 | 33 pF         | 33 pF         |
|                                                                         | 200 kHz                | 15 pF         | 15 pF         |
| XT                                                                      | 200 kHz                | 47-68 pF      | 47-68 pF      |
|                                                                         | 1 MHz                  | 15 pF         | 15 pF         |
|                                                                         | 4 MHz                  | 15 pF         | 15 pF         |
| HS                                                                      | 4 MHz                  | 15 pF         | 15 pF         |
|                                                                         | 8 MHz                  | 15-33 pF      | 15-33 pF      |
|                                                                         | 20 MHz                 | 15-33 pF      | 15-33 pF      |
| These values are for design guidance only. See notes at bottom of page. |                        |               |               |
| Crystals Used                                                           |                        |               |               |
| 32 kHz                                                                  | Epson C-001R32.768K-A  | ± 20 PPM      |               |
| 200 kHz                                                                 | STD XTL 200.000KHz     | ± 20 PPM      |               |
| 1 MHz                                                                   | ECS ECS-10-13-1        | ± 50 PPM      |               |
| 4 MHz                                                                   | ECS ECS-40-20-1        | ± 50 PPM      |               |
| 8 MHz                                                                   | EPSON CA-301 8.000M-C  | ± 30 PPM      |               |
| 20 MHz                                                                  | EPSON CA-301 20.000M-C | ± 30 PPM      |               |

- Note 1: Recommended values of C1 and C2 are identical to the ranges tested table.
- 2: Higher capacitance increases the stability of oscillator but also increases the start-up time.
- 3: Since each resonator/crystal has its own characteristics, the user should consult the resonator/crystal manufacturer for appropriate values of external components.
- 4: Rs may be required in HS mode as well as XT mode to avoid overdriving crystals with low drive level specification.

## 8.5 Interrupts

|                           |     |    |     |     |
|---------------------------|-----|----|-----|-----|
| <b>Applicable Devices</b> | 710 | 71 | 711 | 715 |
|---------------------------|-----|----|-----|-----|

The PIC16C71X family has 4 sources of interrupt.

| Interrupt Sources                      |
|----------------------------------------|
| External interrupt RB0/INT             |
| TMR0 overflow interrupt                |
| PORTB change interrupts (pins RB7:RB4) |
| A/D Interrupt                          |

The interrupt control register (INTCON) records individual interrupt requests in flag bits. It also has individual and global interrupt enable bits.

**Note:** Individual interrupt flag bits are set regardless of the status of their corresponding mask bit or the GIE bit.

A global interrupt enable bit, GIE (INTCON<7>) enables (if set) all un-masked interrupts or disables (if cleared) all interrupts. When bit GIE is enabled, and an interrupt's flag bit and mask bit are set, the interrupt will vector immediately. Individual interrupts can be disabled through their corresponding enable bits in various registers. Individual interrupt bits are set regardless of the status of the GIE bit. The GIE bit is cleared on reset.

The "return from interrupt" instruction, RETFIE, exits the interrupt routine as well as sets the GIE bit, which re-enables interrupts.

The RB0/INT pin interrupt, the RB port change interrupt and the TMR0 overflow interrupt flags are contained in the INTCON register.

The peripheral interrupt flags are contained in the special function registers PIR1 and PIR2. The corresponding interrupt enable bits are contained in special function registers PIE1 and PIE2, and the peripheral interrupt enable bit is contained in special function register INTCON.

When an interrupt is responded to, the GIE bit is cleared to disable any further interrupt, the return address is pushed onto the stack and the PC is loaded with 0004h. Once in the interrupt service routine the source(s) of the interrupt can be determined by polling the interrupt flag bits. The interrupt flag bit(s) must be cleared in software before re-enabling interrupts to avoid recursive interrupts.

For external interrupt events, such as the INT pin or PORTB change interrupt, the interrupt latency will be three or four instruction cycles. The exact latency depends when the interrupt event occurs (Figure 8-19). The latency is the same for one or two cycle instructions. Individual interrupt flag bits are set regardless of the status of their corresponding mask bit or the GIE bit.

**Note:** For the PIC16C71  
If an interrupt occurs while the Global Interrupt Enable (GIE) bit is being cleared, the GIE bit may unintentionally be re-enabled by the user's Interrupt Service Routine (the RETFIE instruction). The events that would cause this to occur are:

1. An instruction clears the GIE bit while an interrupt is acknowledged.
2. The program branches to the Interrupt vector and executes the Interrupt Service Routine.
3. The Interrupt Service Routine completes with the execution of the RETFIE instruction. This causes the GIE bit to be set (enables interrupts), and the program returns to the instruction after the one which was meant to disable interrupts.

Perform the following to ensure that interrupts are globally disabled:

```

LOOP BCF    INTCON, GIE    ; Disable global
                               ; interrupt bit
      BTFSC INTCON, GIE    ; Global interrupt
                               ; disabled?
      GOTO  LOOP           ; NO, try again
      :                   ; Yes, continue
                               ; with program
                               ; flow

```



# PIC16C71X

---

NOTES:

| NOP               |                      | No Operation |      |      |  |
|-------------------|----------------------|--------------|------|------|--|
| Syntax:           | [ <i>label</i> ] NOP |              |      |      |  |
| Operands:         | None                 |              |      |      |  |
| Operation:        | No operation         |              |      |      |  |
| Status Affected:  | None                 |              |      |      |  |
| Encoding:         | 00                   | 0000         | 0xx0 | 0000 |  |
| Description:      | No operation.        |              |      |      |  |
| Words:            | 1                    |              |      |      |  |
| Cycles:           | 1                    |              |      |      |  |
| Q Cycle Activity: | Q1                   | Q2           | Q3   | Q4   |  |
|                   | Decode               | NOP          | NOP  | NOP  |  |
| Example           | NOP                  |              |      |      |  |

| RETFIE            |                                                                                                                                                                                                    | Return from Interrupt |                 |                    |    |      |      |      |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------|--------------------|----|------|------|------|
| Syntax:           | [ <i>label</i> ]    RETFIE                                                                                                                                                                         |                       |                 |                    |    |      |      |      |
| Operands:         | None                                                                                                                                                                                               |                       |                 |                    |    |      |      |      |
| Operation:        | TOS → PC,<br>1 → GIE                                                                                                                                                                               |                       |                 |                    |    |      |      |      |
| Status Affected:  | None                                                                                                                                                                                               |                       |                 |                    |    |      |      |      |
| Encoding:         | <table><tr><td>00</td><td>0000</td><td>0000</td><td>1001</td></tr></table>                                                                                                                         |                       |                 |                    | 00 | 0000 | 0000 | 1001 |
| 00                | 0000                                                                                                                                                                                               | 0000                  | 1001            |                    |    |      |      |      |
| Description:      | Return from Interrupt. Stack is POPed and Top of Stack (TOS) is loaded in the PC. Interrupts are enabled by setting Global Interrupt Enable bit, GIE (INTCON<7>). This is a two cycle instruction. |                       |                 |                    |    |      |      |      |
| Words:            | 1                                                                                                                                                                                                  |                       |                 |                    |    |      |      |      |
| Cycles:           | 2                                                                                                                                                                                                  |                       |                 |                    |    |      |      |      |
| Q Cycle Activity: | Q1                                                                                                                                                                                                 | Q2                    | Q3              | Q4                 |    |      |      |      |
| 1st Cycle         | Decode                                                                                                                                                                                             | NOP                   | Set the GIE bit | Pop from the Stack |    |      |      |      |
| 2nd Cycle         | NOP                                                                                                                                                                                                | NOP                   | NOP             | NOP                |    |      |      |      |

Example                      RETFIE

After Interrupt

PC = TOS

GIE = 1

| OPTION           | Load Option Register                                                                                                                                                                                                           |      |      |      |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|
| Syntax:          | [ <i>label</i> ]    OPTION                                                                                                                                                                                                     |      |      |      |
| Operands:        | None                                                                                                                                                                                                                           |      |      |      |
| Operation:       | (W) → OPTION                                                                                                                                                                                                                   |      |      |      |
| Status Affected: | None                                                                                                                                                                                                                           |      |      |      |
| Encoding:        | 00                                                                                                                                                                                                                             | 0000 | 0110 | 0010 |
| Description:     | The contents of the W register are loaded in the OPTION register. This instruction is supported for code compatibility with PIC16C5X products. Since OPTION is a readable/writable register, the user can directly address it. |      |      |      |
| Words:           | 1                                                                                                                                                                                                                              |      |      |      |
| Cycles:          | 1                                                                                                                                                                                                                              |      |      |      |
| Example          | <div><b>To maintain upward compatibility with future PIC16CXX products, do not use this instruction.</b></div>                                                                                                                 |      |      |      |

## SUBWF Subtract W from f

Syntax: [ *label* ] SUBWF f,d

Operands:  $0 \leq f \leq 127$   
 $d \in [0,1]$

Operation:  $(f) - (W) \rightarrow (\text{dest})$

Status Affected: C, DC, Z

Encoding:

|    |      |      |      |
|----|------|------|------|
| 00 | 0010 | dfff | ffff |
|----|------|------|------|

Description: Subtract (2's complement method) W register from register 'f'. If 'd' is 0 the result is stored in the W register. If 'd' is 1 the result is stored back in register 'f'.

Words: 1

Cycles: 1

Q Cycle Activity:

| Q1     | Q2                | Q3           | Q4            |
|--------|-------------------|--------------|---------------|
| Decode | Read register 'f' | Process data | Write to dest |

Example 1: SUBWF REG1, 1

Before Instruction

|      |   |   |
|------|---|---|
| REG1 | = | 3 |
| W    | = | 2 |
| C    | = | ? |
| Z    | = | ? |

After Instruction

|      |   |                       |
|------|---|-----------------------|
| REG1 | = | 1                     |
| W    | = | 2                     |
| C    | = | 1; result is positive |
| Z    | = | 0                     |

Example 2: Before Instruction

|      |   |   |
|------|---|---|
| REG1 | = | 2 |
| W    | = | 2 |
| C    | = | ? |
| Z    | = | ? |

After Instruction

|      |   |                   |
|------|---|-------------------|
| REG1 | = | 0                 |
| W    | = | 2                 |
| C    | = | 1; result is zero |
| Z    | = | 1                 |

Example 3: Before Instruction

|      |   |   |
|------|---|---|
| REG1 | = | 1 |
| W    | = | 2 |
| C    | = | ? |
| Z    | = | ? |

After Instruction

|      |   |                       |
|------|---|-----------------------|
| REG1 | = | 0xFF                  |
| W    | = | 2                     |
| C    | = | 0; result is negative |
| Z    | = | 0                     |

## SWAPF Swap Nibbles in f

Syntax: [ *label* ] SWAPF f,d

Operands:  $0 \leq f \leq 127$   
 $d \in [0,1]$

Operation:  $(f<3:0>) \rightarrow (\text{dest}<7:4>)$ ,  
 $(f<7:4>) \rightarrow (\text{dest}<3:0>)$

Status Affected: None

Encoding:

|    |      |      |      |
|----|------|------|------|
| 00 | 1110 | dfff | ffff |
|----|------|------|------|

Description: The upper and lower nibbles of register 'f' are exchanged. If 'd' is 0 the result is placed in W register. If 'd' is 1 the result is placed in register 'f'.

Words: 1

Cycles: 1

Q Cycle Activity:

| Q1     | Q2                | Q3           | Q4            |
|--------|-------------------|--------------|---------------|
| Decode | Read register 'f' | Process data | Write to dest |

Example SWAPF REG, 0

Before Instruction

|      |   |      |
|------|---|------|
| REG1 | = | 0xA5 |
|------|---|------|

After Instruction

|      |   |      |
|------|---|------|
| REG1 | = | 0xA5 |
| W    | = | 0x5A |

## TRIS Load TRIS Register

Syntax: [ *label* ] TRIS f

Operands:  $5 \leq f \leq 7$

Operation:  $(W) \rightarrow \text{TRIS register } f$ ;

Status Affected: None

Encoding:

|    |      |      |      |
|----|------|------|------|
| 00 | 0000 | 0110 | 0fff |
|----|------|------|------|

Description: The instruction is supported for code compatibility with the PIC16C5X products. Since TRIS registers are readable and writable, the user can directly address them.

Words: 1

Cycles: 1

Example

**To maintain upward compatibility with future PIC16CXX products, do not use this instruction.**

| Applicable Devices | 710 | 71 | 711 | 715 |
|--------------------|-----|----|-----|-----|
|--------------------|-----|----|-----|-----|

| <b>DC CHARACTERISTICS</b><br><b>Standard Operating Conditions (unless otherwise stated)</b><br>Operating temperature 0°C ≤ TA ≤ +70°C (commercial)<br>-40°C ≤ TA ≤ +85°C (industrial)<br>-40°C ≤ TA ≤ +125°C (extended)<br>Operating voltage VDD range as described in DC spec Section 11.1 and Section 11.2. |                                                  |       |           |       |     |       |                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------|-----------|-------|-----|-------|-------------------------------------------------------------------|
| Param No.                                                                                                                                                                                                                                                                                                     | Characteristic                                   | Sym   | Min       | Typ † | Max | Units | Conditions                                                        |
| D080                                                                                                                                                                                                                                                                                                          | <b>Output Low Voltage</b><br>I/O ports           | VOL   | -         | -     | 0.6 | V     | IOL = 8.5 mA, VDD = 4.5V, -40°C to +85°C                          |
| D080A                                                                                                                                                                                                                                                                                                         |                                                  |       | -         | -     | 0.6 | V     | IOL = 7.0 mA, VDD = 4.5V, -40°C to +125°C                         |
| D083                                                                                                                                                                                                                                                                                                          | OSC2/CLKOUT (RC osc config)                      |       | -         | -     | 0.6 | V     | IOL = 1.6 mA, VDD = 4.5V, -40°C to +85°C                          |
| D083A                                                                                                                                                                                                                                                                                                         |                                                  |       | -         | -     | 0.6 | V     | IOL = 1.2 mA, VDD = 4.5V, -40°C to +125°C                         |
| D090                                                                                                                                                                                                                                                                                                          | <b>Output High Voltage</b><br>I/O ports (Note 3) | VOH   | VDD - 0.7 | -     | -   | V     | IOH = -3.0 mA, VDD = 4.5V, -40°C to +85°C                         |
| D090A                                                                                                                                                                                                                                                                                                         |                                                  |       | VDD - 0.7 | -     | -   | V     | IOH = -2.5 mA, VDD = 4.5V, -40°C to +125°C                        |
| D092                                                                                                                                                                                                                                                                                                          | OSC2/CLKOUT (RC osc config)                      |       | VDD - 0.7 | -     | -   | V     | IOH = -1.3 mA, VDD = 4.5V, -40°C to +85°C                         |
| D092A                                                                                                                                                                                                                                                                                                         |                                                  |       | VDD - 0.7 | -     | -   | V     | IOH = -1.0 mA, VDD = 4.5V, -40°C to +125°C                        |
| D130*                                                                                                                                                                                                                                                                                                         | <b>Open-Drain High Voltage</b>                   | VOD   | -         | -     | 14  | V     | RA4 pin                                                           |
| <b>Capacitive Loading Specs on Output Pins</b>                                                                                                                                                                                                                                                                |                                                  |       |           |       |     |       |                                                                   |
| D100                                                                                                                                                                                                                                                                                                          | OSC2 pin                                         | COSC2 | -         | -     | 15  | pF    | In XT, HS and LP modes when external clock is used to drive OSC1. |
| D101                                                                                                                                                                                                                                                                                                          | All I/O pins and OSC2 (in RC mode)               | CIO   | -         | -     | 50  | pF    |                                                                   |

\* These parameters are characterized but not tested.

† Data in "Typ" column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

Note 1: In RC oscillator configuration, the OSC1/CLKIN pin is a Schmitt Trigger input. It is not recommended that the PIC16C7X be driven with external clock in RC mode.

2: The leakage current on the  $\overline{\text{MCLR}}$  pin is strongly dependent on the applied voltage level. The specified levels represent normal operating conditions. Higher leakage current may be measured at different input voltages.

3: Negative current is defined as current sourced by the pin.

# PIC16C71X

Applicable Devices 710 71 711 715

TABLE 13-1: CROSS REFERENCE OF DEVICE SPECS FOR OSCILLATOR CONFIGURATIONS  
AND FREQUENCIES OF OPERATION (COMMERCIAL DEVICES)

| OSC | PIC16C715-04                                                                                                       | PIC16C715-10                                                                                       | PIC16C715-20                                                                                       | PIC16LC715-04                                                                                                    | PIC16C715/JW                                                                                                     |
|-----|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| RC  | VDD: 4.0V to 5.5V<br>IDD: 5 mA max. at 5.5V<br>IPD: 21 $\mu$ A max. at 4V<br>Freq: 4 MHz max.                      | VDD: 4.5V to 5.5V<br>IDD: 2.7 mA typ. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4V<br>Freq: 4 MHz max.   | VDD: 4.5V to 5.5V<br>IDD: 2.7 mA typ. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4V<br>Freq: 4 MHz max.   | VDD: 2.5V to 5.5V<br>IDD: 2.0 mA typ. at 3.0V<br>IPD: 0.9 $\mu$ A typ. at 3V<br>Freq: 4 MHz max.                 | VDD: 4.0V to 5.5V<br>IDD: 5 mA max. at 5.5V<br>IPD: 21 $\mu$ A max. at 4V<br>Freq: 4 MHz max.                    |
| XT  | VDD: 4.0V to 5.5V<br>IDD: 5 mA max. at 5.5V<br>IPD: 21 $\mu$ A max. at 4V<br>Freq: 4 MHz max.                      | VDD: 4.5V to 5.5V<br>IDD: 2.7 mA typ. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4V<br>Freq: 4 MHz max.   | VDD: 4.5V to 5.5V<br>IDD: 2.7 mA typ. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4V<br>Freq: 4 MHz max.   | VDD: 2.5V to 5.5V<br>IDD: 2.0 mA typ. at 3.0V<br>IPD: 0.9 $\mu$ A typ. at 3V<br>Freq: 4 MHz max.                 | VDD: 4.0V to 5.5V<br>IDD: 5 mA max. at 5.5V<br>IPD: 21 $\mu$ A max. at 4V<br>Freq: 4 MHz max.                    |
| HS  | VDD: 4.5V to 5.5V<br>IDD: 13.5 mA typ. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4.5V<br>Freq: 4 MHz max.                | VDD: 4.5V to 5.5V<br>IDD: 30 mA max. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4.5V<br>Freq: 10 MHz max. | VDD: 4.5V to 5.5V<br>IDD: 30 mA max. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4.5V<br>Freq: 20 MHz max. | Do not use in HS mode                                                                                            | VDD: 4.5V to 5.5V<br>IDD: 30 mA max. at 5.5V<br>IPD: 1.5 $\mu$ A typ. at 4.5V<br>Freq: 10 MHz max.               |
| LP  | VDD: 4.0V to 5.5V<br>IDD: 52.5 $\mu$ A typ. at 32 kHz, 4.0V<br>IPD: 0.9 $\mu$ A typ. at 4.0V<br>Freq: 200 kHz max. | Do not use in LP mode                                                                              | Do not use in LP mode                                                                              | VDD: 2.5V to 5.5V<br>IDD: 48 $\mu$ A max. at 32 kHz, 3.0V<br>IPD: 5.0 $\mu$ A max. at 3.0V<br>Freq: 200 kHz max. | VDD: 2.5V to 5.5V<br>IDD: 48 $\mu$ A max. at 32 kHz, 3.0V<br>IPD: 5.0 $\mu$ A max. at 3.0V<br>Freq: 200 kHz max. |

The shaded sections indicate oscillator selections which are tested for functionality, but not for MIN/MAX specifications. It is recommended that the user select the device type that ensures the specifications required.

# PIC16C71X

Applicable Devices 710 71 711 715

## 13.2 DC Characteristics: PIC16LC715-04 (Commercial, Industrial)

| DC CHARACTERISTICS |                                                            |       |      |      |     |       | Standard Operating Conditions (unless otherwise stated)<br>Operating temperature 0°C ≤ TA ≤ +70°C (commercial)<br>-40°C ≤ TA ≤ +85°C (industrial) |
|--------------------|------------------------------------------------------------|-------|------|------|-----|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Param No.          | Characteristic                                             | Sym   | Min  | Typ† | Max | Units | Conditions                                                                                                                                        |
| D001               | Supply Voltage                                             | VDD   | 2.5  | -    | 5.5 | V     | LP, XT, RC osc configuration (DC - 4 MHz)                                                                                                         |
| D002*              | RAM Data Retention Voltage (Note 1)                        | VDR   | -    | 1.5  | -   | V     | Device in SLEEP mode                                                                                                                              |
| D003               | VDD start voltage to ensure internal Power-on Reset signal | VPOR  | -    | VSS  | -   | V     | See section on Power-on Reset for details                                                                                                         |
| D004*              | VDD rise rate to ensure internal Power-on Reset signal     | SVDD  | 0.05 | -    | -   | V/ms  | See section on Power-on Reset for details                                                                                                         |
| D005               | Brown-out Reset Voltage                                    | BVDD  | 3.7  | 4.0  | 4.3 | V     | BODEN configuration bit is enabled                                                                                                                |
| D010               | Supply Current (Note 2)                                    | IDD   | -    | 2.0  | 3.8 | mA    | XT, RC osc configuration<br>FOSC = 4 MHz, VDD = 3.0V (Note 4)                                                                                     |
| D010A              |                                                            |       | -    | 22.5 | 48  | μA    | LP osc configuration<br>FOSC = 32 kHz, VDD = 3.0V, WDT disabled                                                                                   |
| D015               | Brown-out Reset Current (Note 5)                           | ΔIBOR | -    | 300* | 500 | μA    | BOR enabled VDD = 5.0V                                                                                                                            |
| D020               | Power-down Current (Note 3)                                | IPD   | -    | 7.5  | 30  | μA    | VDD = 3.0V, WDT enabled, -40°C to +85°C                                                                                                           |
| D021               |                                                            |       | -    | 0.9  | 5   | μA    | VDD = 3.0V, WDT disabled, 0°C to +70°C                                                                                                            |
| D021A              |                                                            |       | -    | 0.9  | 5   | μA    | VDD = 3.0V, WDT disabled, -40°C to +85°C                                                                                                          |
| D023               | Brown-out Reset Current (Note 5)                           | ΔIBOR | -    | 300* | 500 | μA    | BOR enabled VDD = 5.0V                                                                                                                            |

\* These parameters are characterized but not tested.

† Data in "Typ" column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

Note 1: This is the limit to which VDD can be lowered in SLEEP mode without losing RAM data.

2: The supply current is mainly a function of the operating voltage and frequency. Other factors such as I/O pin loading and switching rate, oscillator type, internal code execution pattern, and temperature also have an impact on the current consumption.

The test conditions for all IDD measurements in active operation mode are:

OSC1 = external square wave, from rail to rail; all I/O pins tristated, pulled to VDD

MCLR = VDD; WDT enabled/disabled as specified.

3: The power-down current in SLEEP mode does not depend on the oscillator type. Power-down current is measured with the part in SLEEP mode, with all I/O pins in hi-impedance state and tied to VDD and VSS.


4: For RC osc configuration, current through Rext is not included. The current through the resistor can be estimated by the formula  $I_r = V_{DD}/2R_{ext}$  (mA) with Rext in kOhm.

5: The Δ current is the additional current consumed when this peripheral is enabled. This current should be added to the base IDD or IPD measurement.


# PIC16C71X

Applicable Devices 710 71 711 715


**FIGURE 14-3: TYPICAL  $I_{PD}$  vs.  $V_{DD}$  @ 25°C (WDT ENABLED, RC MODE)**

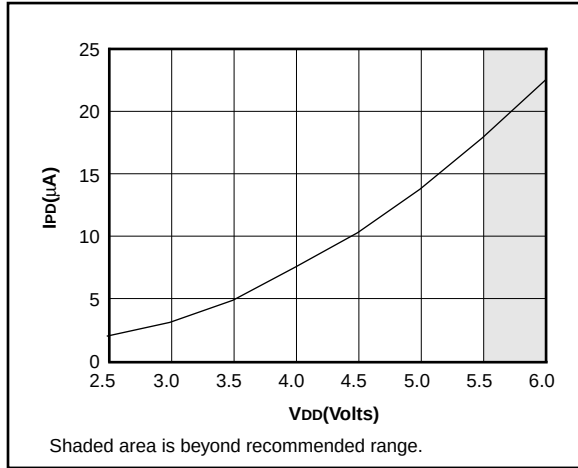


**FIGURE 14-4: MAXIMUM  $I_{PD}$  vs.  $V_{DD}$  (WDT ENABLED, RC MODE)**

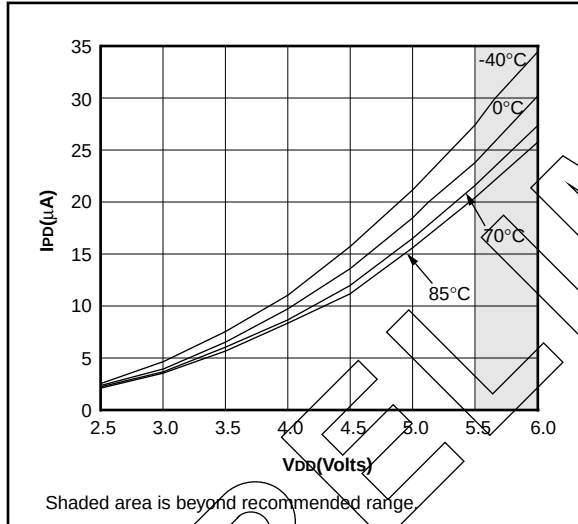


**FIGURE 14-5: TYPICAL RC OSCILLATOR FREQUENCY vs.  $V_{DD}$**

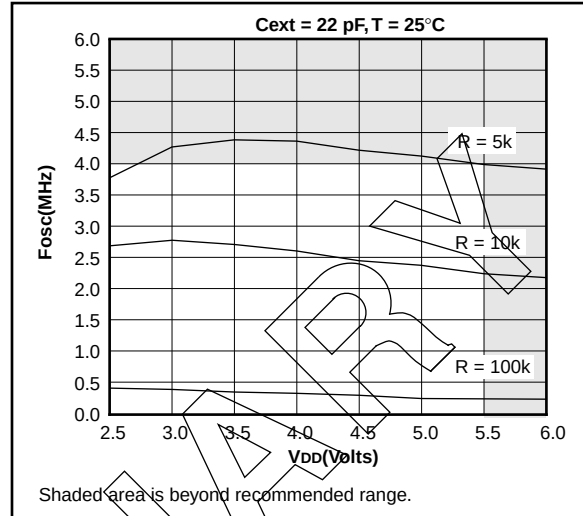

**FIGURE 14-6: TYPICAL RC OSCILLATOR FREQUENCY vs.  $V_{DD}$**

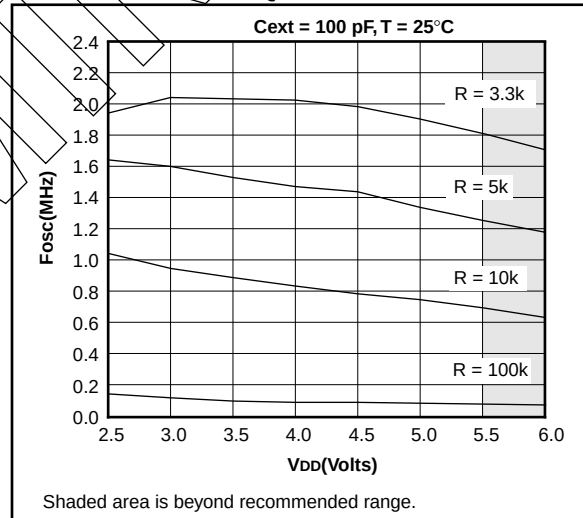

**FIGURE 14-7: TYPICAL RC OSCILLATOR FREQUENCY vs.  $V_{DD}$**

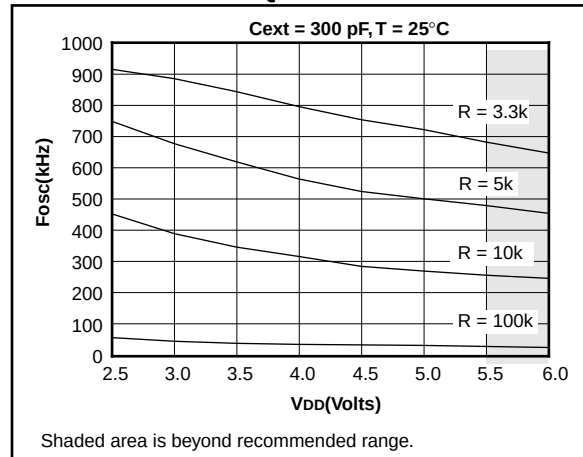

# PIC16C71X

Applicable Devices 710 71 711 715

FIGURE 14-16: TYPICAL I<sub>DD</sub> vs. FREQUENCY (RC MODE @ 300 pF, 25°C)



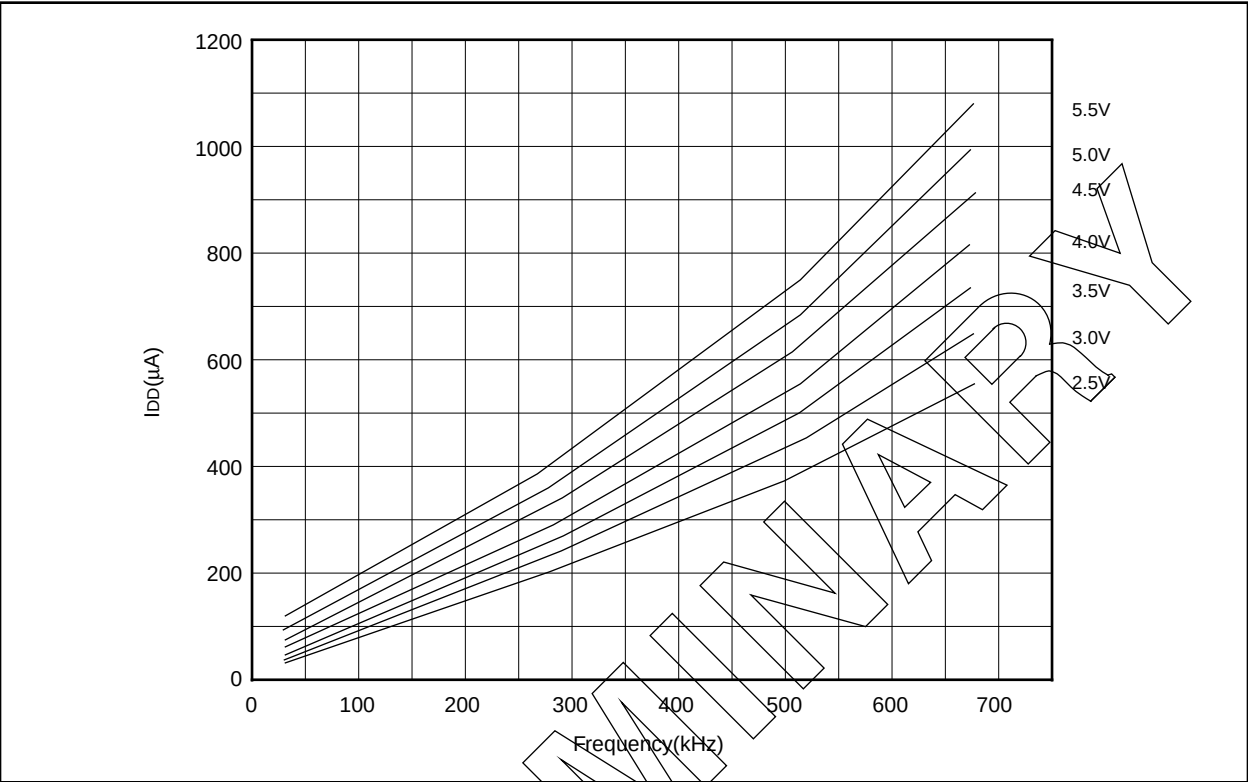


FIGURE 14-17: MAXIMUM I<sub>DD</sub> vs. FREQUENCY (RC MODE @ 300 pF, -40°C TO 85°C)




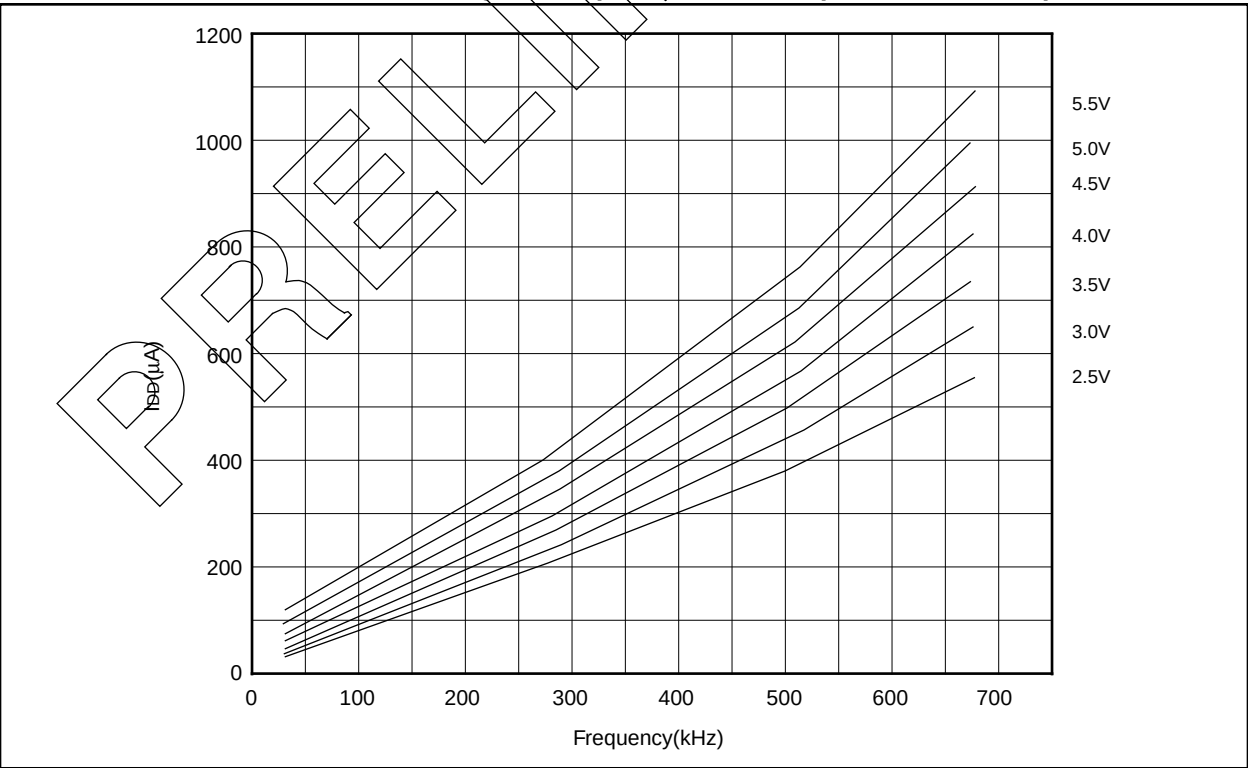


**FIGURE 14-25: TYPICAL  $I_{DD}$  vs. FREQUENCY  
(LP MODE, 25°C)**

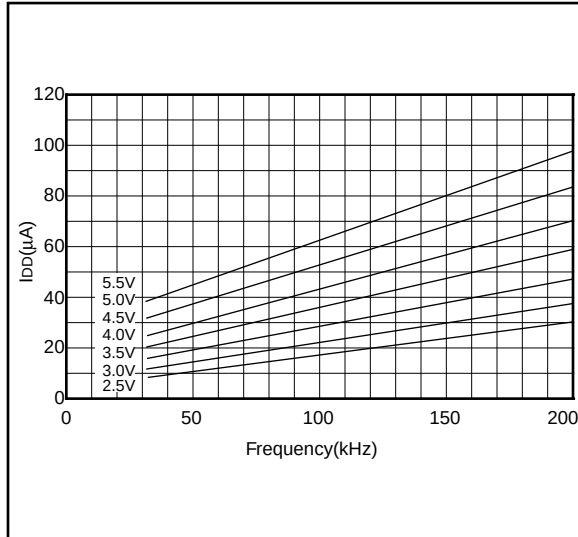


**FIGURE 14-27: TYPICAL  $I_{DD}$  vs. FREQUENCY  
(XT MODE, 25°C)**

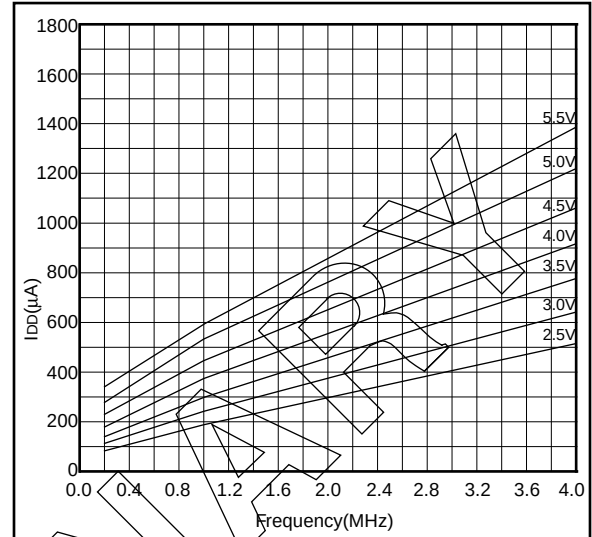

**FIGURE 14-26: MAXIMUM  $I_{DD}$  vs.  
FREQUENCY  
(LP MODE, 85°C TO -40°C)**

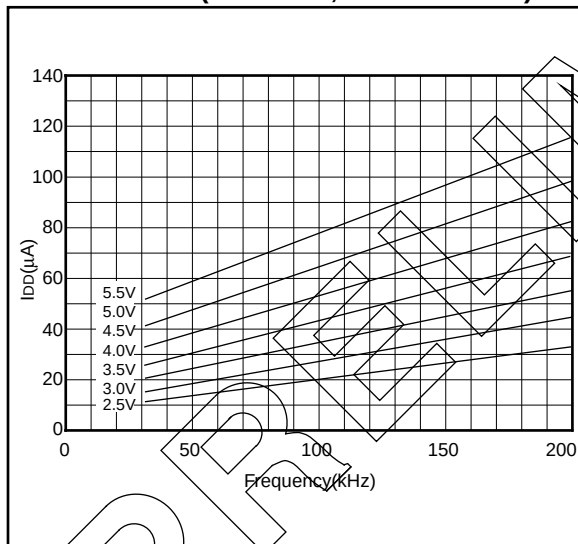


**FIGURE 14-28: MAXIMUM  $I_{DD}$  vs.  
FREQUENCY  
(XT MODE, -40°C TO 85°C)**

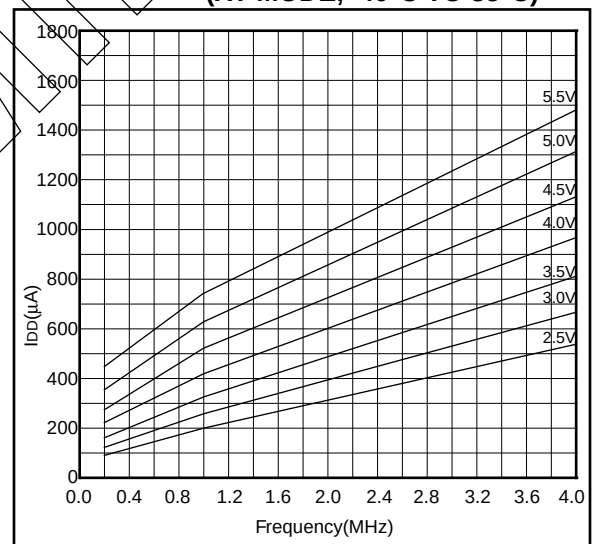

## 15.5 Timing Diagrams and Specifications

**FIGURE 15-2: EXTERNAL CLOCK TIMING**

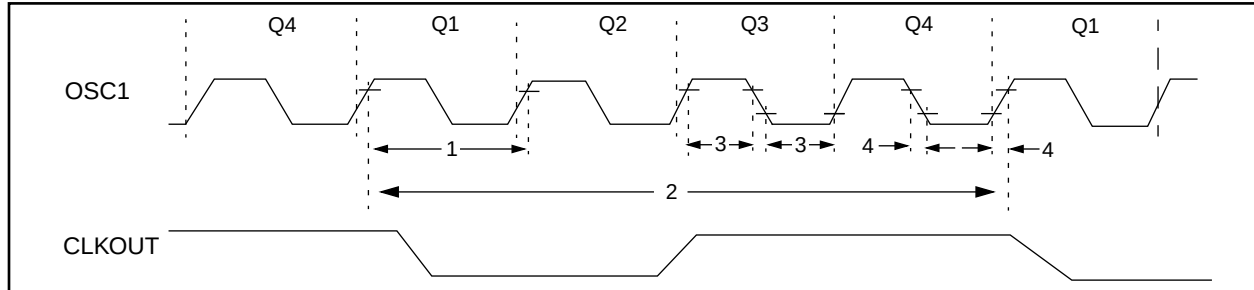

**TABLE 15-2: EXTERNAL CLOCK TIMING REQUIREMENTS**

| Parameter No. | Sym        | Characteristic                                    | Min | Typ† | Max    | Units | Conditions        |
|---------------|------------|---------------------------------------------------|-----|------|--------|-------|-------------------|
|               | Fosc       | <b>External CLKIN Frequency (Note 1)</b>          | DC  | —    | 4      | MHz   | XT osc mode       |
|               |            |                                                   | DC  | —    | 4      | MHz   | HS osc mode (-04) |
|               |            |                                                   | DC  | —    | 20     | MHz   | HS osc mode (-20) |
|               |            |                                                   | DC  | —    | 200    | kHz   | LP osc mode       |
|               |            | <b>Oscillator Frequency (Note 1)</b>              | DC  | —    | 4      | MHz   | RC osc mode       |
|               |            |                                                   | 0.1 | —    | 4      | MHz   | XT osc mode       |
|               |            |                                                   | 1   | —    | 4      | MHz   | HS osc mode       |
|               |            |                                                   | 1   | —    | 20     | MHz   | HS osc mode       |
| 1             | Tosc       | <b>External CLKIN Period (Note 1)</b>             | 250 | —    | —      | ns    | XT osc mode       |
|               |            |                                                   | 250 | —    | —      | ns    | HS osc mode (-04) |
|               |            |                                                   | 50  | —    | —      | ns    | HS osc mode (-20) |
|               |            |                                                   | 5   | —    | —      | μs    | LP osc mode       |
|               |            | <b>Oscillator Period (Note 1)</b>                 | 250 | —    | —      | ns    | RC osc mode       |
|               |            |                                                   | 250 | —    | 10,000 | ns    | XT osc mode       |
|               |            |                                                   | 250 | —    | 1,000  | ns    | HS osc mode (-04) |
|               |            |                                                   | 50  | —    | 1,000  | ns    | HS osc mode (-20) |
| 2             | Tcy        | <b>Instruction Cycle Time (Note 1)</b>            | 1.0 | Tcy  | DC     | μs    | Tcy = 4/Fosc      |
|               |            |                                                   | 1.0 | Tcy  | DC     | μs    | Tcy = 4/Fosc      |
| 3             | TosL, TosH | <b>External Clock in (OSC1) High or Low Time</b>  | 50  | —    | —      | ns    | XT oscillator     |
|               |            |                                                   | 2.5 | —    | —      | μs    | LP oscillator     |
|               |            |                                                   | 10  | —    | —      | ns    | HS oscillator     |
| 4             | TosR, TosF | <b>External Clock in (OSC1) Rise or Fall Time</b> | 25  | —    | —      | ns    | XT oscillator     |
|               |            |                                                   | 50  | —    | —      | ns    | LP oscillator     |
|               |            |                                                   | 15  | —    | —      | ns    | HS oscillator     |

† Data in "Typ" column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

Note 1: Instruction cycle period (Tcy) equals four times the input oscillator time-base period. All specified values are based on characterization data for that particular oscillator type under standard operating conditions with the device executing code. Exceeding these specified limits may result in an unstable oscillator operation and/or higher than expected current consumption. All devices are tested to operate at "min." values with an external clock applied to the OSC1/CLKIN pin. When an external clock input is used, the "Max." cycle time limit is "DC" (no clock) for all devices. OSC2 is disconnected (has no loading) for the PIC16C71.

# PIC16C71X

Applicable Devices 710 71 711 715

FIGURE 15-5: TIMER0 EXTERNAL CLOCK TIMINGS

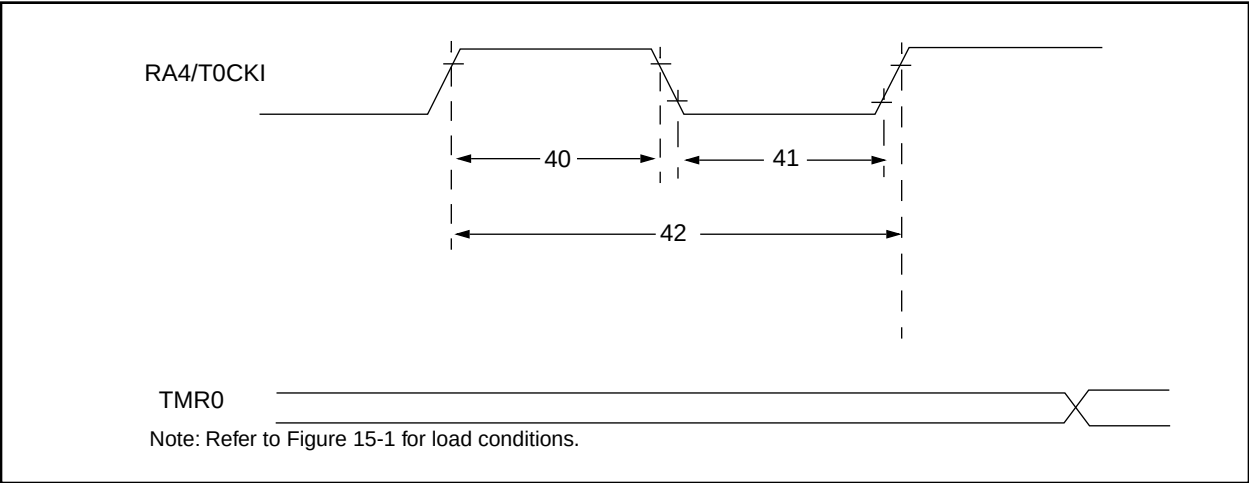


TABLE 15-5: TIMER0 EXTERNAL CLOCK REQUIREMENTS

| Param No. | Sym  | Characteristic         |                | Min                                                      | Typ† | Max | Units | Conditions                         |
|-----------|------|------------------------|----------------|----------------------------------------------------------|------|-----|-------|------------------------------------|
| 40*       | Tt0H | T0CKI High Pulse Width | No Prescaler   | $0.5T_{CY} + 20$                                         | —    | —   | ns    | Must also meet parameter 42        |
|           |      |                        | With Prescaler | 10                                                       | —    | —   | ns    |                                    |
| 41*       | Tt0L | T0CKI Low Pulse Width  | No Prescaler   | $0.5T_{CY} + 20$                                         | —    | —   | ns    | Must also meet parameter 42        |
|           |      |                        | With Prescaler | 10                                                       | —    | —   | ns    |                                    |
| 42*       | Tt0P | T0CKI Period           | No Prescaler   | $T_{CY} + 40$                                            | —    | —   | ns    | N = prescale value (2, 4,..., 256) |
|           |      |                        | With Prescaler | Greater of:<br>$20 \text{ ns or } \frac{T_{CY} + 40}{N}$ |      |     |       |                                    |

\* These parameters are characterized but not tested.


† Data in "Typ" column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested.

## 16.0 DC AND AC CHARACTERISTICS GRAPHS AND TABLES FOR PIC16C71


The graphs and tables provided in this section are for design guidance and are not tested or guaranteed. In some graphs or tables the data presented are outside specified operating range (e.g. outside specified  $V_{DD}$  range). This is for information only and devices are guaranteed to operate properly only within the specified range.

**Note:** The data presented in this section is a statistical summary of data collected on units from different lots over a period of time and matrix samples. 'Typical' represents the mean of the distribution while 'max' or 'min' represents (mean +  $3\sigma$ ) and (mean -  $3\sigma$ ) respectively where  $\sigma$  is standard deviation.


**FIGURE 16-1: TYPICAL RC OSCILLATOR FREQUENCY vs. TEMPERATURE**

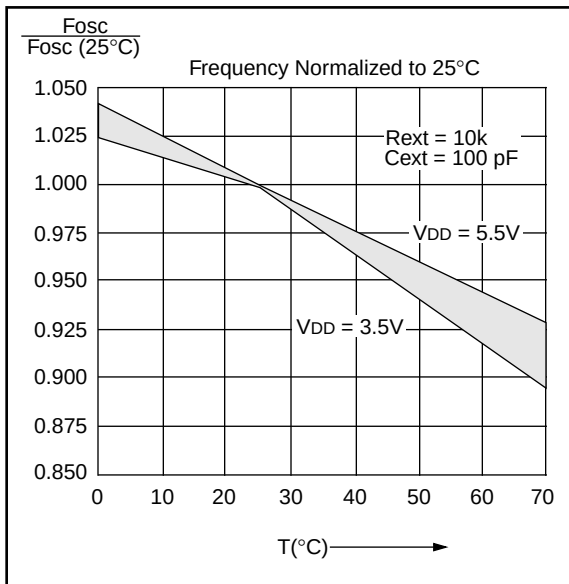

**FIGURE 16-2: TYPICAL RC OSCILLATOR FREQUENCY vs.  $V_{DD}$**

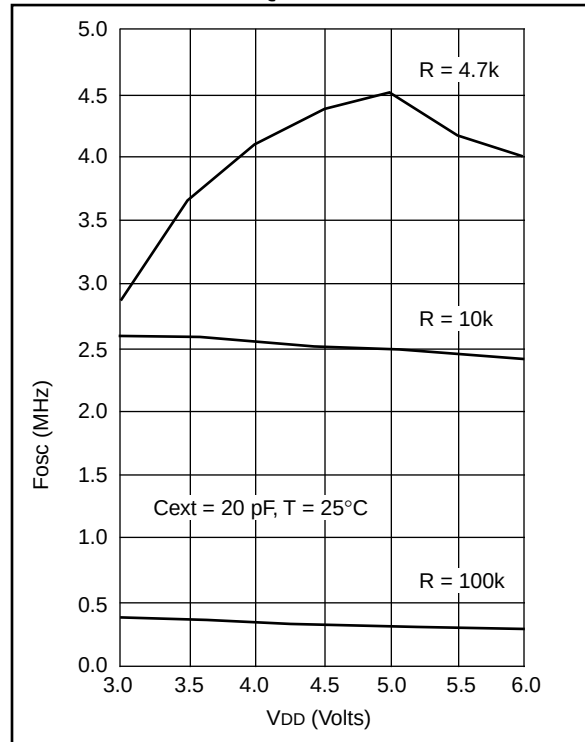

**FIGURE 16-3: TYPICAL RC OSCILLATOR FREQUENCY vs.  $V_{DD}$**

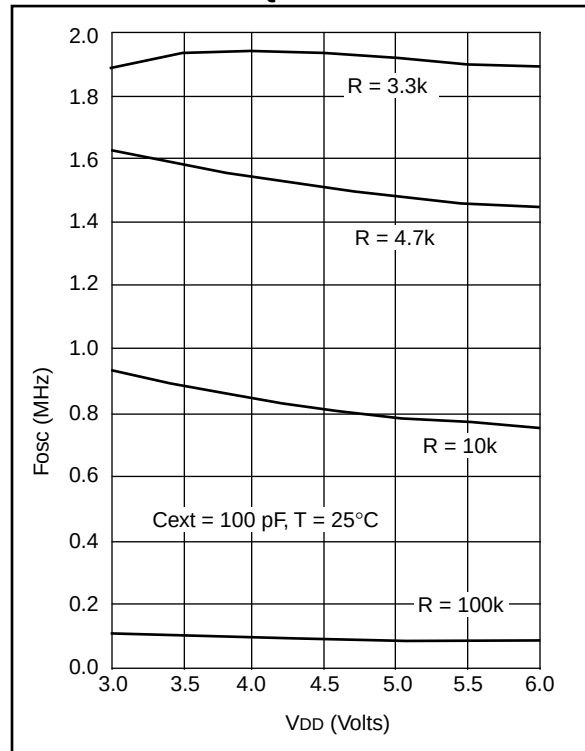

# PIC16C71X

Applicable Devices 710 71 711 715

FIGURE 16-21: IOL vs. VOL, VDD = 3V


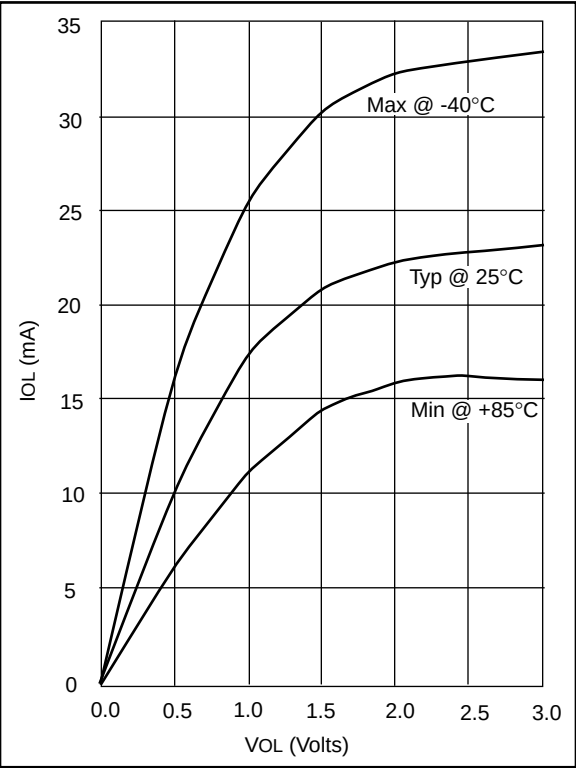


FIGURE 16-22: IOL vs. VOL, VDD = 5V

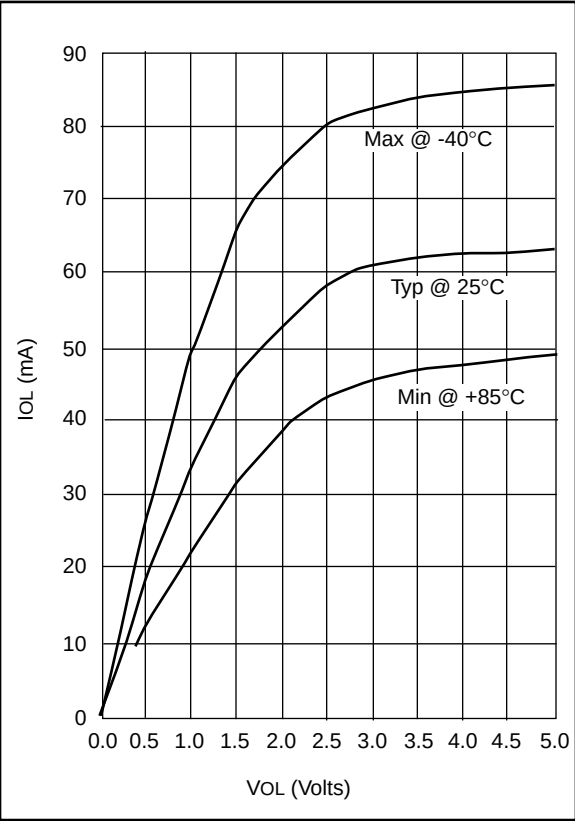

Data based on matrix samples. See first page of this section for details.