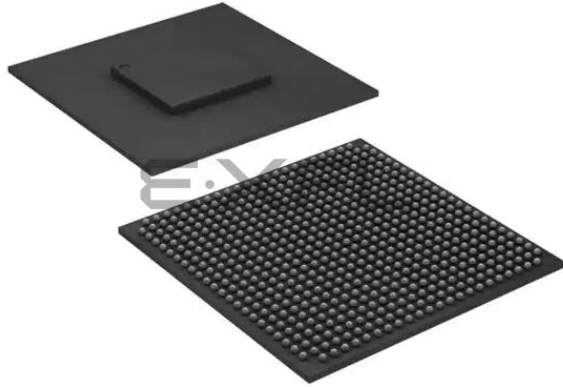




Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                     |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                            |
| Number of LABs/CLBs            | 1805                                                                                                                                |
| Number of Logic Elements/Cells | 42959                                                                                                                               |
| Total RAM Bits                 | 3517440                                                                                                                             |
| Number of I/O                  | 252                                                                                                                                 |
| Number of Gates                | -                                                                                                                                   |
| Voltage - Supply               | 0.87V ~ 0.93V                                                                                                                       |
| Mounting Type                  | Surface Mount                                                                                                                       |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                     |
| Package / Case                 | 572-BGA, FCBGA                                                                                                                      |
| Supplier Device Package        | 572-FBGA, FC (25x25)                                                                                                                |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/intel/ep2agx45df25c6n">https://www.e-xfl.com/product-detail/intel/ep2agx45df25c6n</a> |

The calibration accuracy for calibrated series and parallel OCTs are applicable at the moment of calibration. When process, voltage, and temperature (PVT) conditions change after calibration, the tolerance may change.

Table 1-13 lists the Arria II GZ OCT without calibration resistance tolerance to PVT changes.

**Table 1-13. OCT Without Calibration Resistance Tolerance Specifications for Arria II GZ Devices**

| Symbol                             | Description                                        | Conditions (V)               | Resistance Tolerance |       | Unit |
|------------------------------------|----------------------------------------------------|------------------------------|----------------------|-------|------|
|                                    |                                                    |                              | C3,I3                | C4,I4 |      |
| 25-Ω R <sub>S</sub><br>3.0 and 2.5 | 25-Ω internal series<br>OCT without<br>calibration | V <sub>CCIO</sub> = 3.0, 2.5 | ± 40                 | ± 40  | %    |
| 25-Ω R <sub>S</sub><br>1.8 and 1.5 | 25-Ω internal series<br>OCT without<br>calibration | V <sub>CCIO</sub> = 1.8, 1.5 | ± 40                 | ± 40  | %    |
| 25-Ω R <sub>S</sub><br>1.2         | 25-Ω internal series<br>OCT without<br>calibration | V <sub>CCIO</sub> = 1.2      | ± 50                 | ± 50  | %    |
| 50-Ω R <sub>S</sub><br>3.0 and 2.5 | 50-Ω internal series<br>OCT without<br>calibration | V <sub>CCIO</sub> = 3.0, 2.5 | ± 40                 | ± 40  | %    |
| 50-Ω R <sub>S</sub><br>1.8 and 1.5 | 50-Ω internal series<br>OCT without<br>calibration | V <sub>CCIO</sub> = 1.8, 1.5 | ± 40                 | ± 40  | %    |
| 50-Ω R <sub>S</sub><br>1.2         | 50-Ω internal series<br>OCT without<br>calibration | V <sub>CCIO</sub> = 1.2      | ± 50                 | ± 50  | %    |
| 100-Ω R <sub>D</sub><br>2.5        | 100-Ω internal<br>differential OCT                 | V <sub>CCIO</sub> = 2.5      | ± 25                 | ± 25  | %    |

OCT calibration is automatically performed at power up for OCT-enabled I/Os. When voltage and temperature conditions change after calibration, the resistance may change. Use Equation 1-1 and Table 1-14 to determine the OCT variation when voltage and temperature vary after power-up calibration for Arria II GX and GZ devices.

**Equation 1-1. OCT Variation (Note 1)**

$$R_{OCT} = R_{SCAL} \left( 1 + \left\langle \frac{dR}{dT} \times \Delta T \right\rangle \pm \left\langle \frac{dR}{dV} \times \Delta V \right\rangle \right)$$

**Notes to Equation 1-1:**

- (1) R<sub>OCT</sub> value calculated from Equation 1-1 shows the range of OCT resistance with the variation of temperature and V<sub>CCIO</sub>.

Table 1-17 lists the pin capacitance for Arria II GZ devices.

**Table 1-17. Pin Capacitance for Arria II GZ Devices**

| Symbol                                                    | Description                                                            | Typical | Unit |
|-----------------------------------------------------------|------------------------------------------------------------------------|---------|------|
| $C_{IOTB}$                                                | Input capacitance on the top and bottom I/O pins                       | 4       | pF   |
| $C_{IOLR}$                                                | Input capacitance on the left and right I/O pins                       | 4       | pF   |
| $C_{CLKTB}$                                               | Input capacitance on the top and bottom non-dedicated clock input pins | 4       | pF   |
| $C_{CLKLR}$                                               | Input capacitance on the left and right non-dedicated clock input pins | 4       | pF   |
| $C_{OUTFB}$                                               | Input capacitance on the dual-purpose clock output and feedback pins   | 5       | pF   |
| $C_{CLK1}$ , $C_{CLK3}$ , $C_{CLK8}$ ,<br>and $C_{CLK10}$ | Input capacitance for dedicated clock input pins                       | 2       | pF   |

### Internal Weak Pull-Up and Weak Pull-Down Resistors

Table 1-18 lists the weak pull-up and pull-down resistor values for Arria II GX devices.

**Table 1-18. Internal Weak Pull-up and Weak Pull-Down Resistors for Arria II GX Devices (Note 1)**

| Symbol   | Description                                                                                                                                     | Conditions                             | Min | Typ | Max | Unit       |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-----|-----|-----|------------|
| $R_{PU}$ | Value of I/O pin pull-up resistor before and during configuration, as well as user mode if the programmable pull-up resistor option is enabled. | $V_{CCIO} = 3.3 \text{ V} \pm 5\%$ (2) | 7   | 25  | 41  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 3.0 \text{ V} \pm 5\%$ (2) | 7   | 28  | 47  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 2.5 \text{ V} \pm 5\%$ (2) | 8   | 35  | 61  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 1.8 \text{ V} \pm 5\%$ (2) | 10  | 57  | 108 | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 1.5 \text{ V} \pm 5\%$ (2) | 13  | 82  | 163 | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 1.2 \text{ V} \pm 5\%$ (2) | 19  | 143 | 351 | k $\Omega$ |
| $R_{PD}$ | Value of TCK pin pull-down resistor                                                                                                             | $V_{CCIO} = 3.3 \text{ V} \pm 5\%$     | 6   | 19  | 29  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 3.0 \text{ V} \pm 5\%$     | 6   | 22  | 32  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 2.5 \text{ V} \pm 5\%$     | 6   | 25  | 42  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 1.8 \text{ V} \pm 5\%$     | 7   | 35  | 70  | k $\Omega$ |
|          |                                                                                                                                                 | $V_{CCIO} = 1.5 \text{ V} \pm 5\%$     | 8   | 50  | 112 | k $\Omega$ |

#### Notes to Table 1-18:

- (1) All I/O pins have an option to enable weak pull-up except configuration, test, and JTAG pins. The weak pull-down feature is only available for JTAG TCK.
- (2) Pin pull-up resistance values may be lower if an external source drives the pin higher than  $V_{CCIO}$ .

## I/O Standard Specifications

Table 1-22 through Table 1-35 list input voltage ( $V_{IH}$  and  $V_{IL}$ ), output voltage ( $V_{OH}$  and  $V_{OL}$ ), and current drive characteristics ( $I_{OH}$  and  $I_{OL}$ ) for various I/O standards supported by the Arria II device family. They also show the Arria II device family I/O standard specifications.  $V_{OL}$  and  $V_{OH}$  values are valid at the corresponding  $I_{OH}$  and  $I_{OL}$ , respectively.



For an explanation of terms used in Table 1-22 through Table 1-35, refer to “Glossary” on page 1-74.

Table 1-22 lists the single-ended I/O standards for Arria II GX devices.

**Table 1-22. Single-Ended I/O Standards for Arria II GX Devices**

| I/O Standard | $V_{CCIO}$ (V) |     |       | $V_{IL}$ (V) |                        | $V_{IH}$ (V)           |                  | $V_{OL}$ (V)           | $V_{OH}$ (V)           | $I_{OL}$ (mA) | $I_{OH}$ (mA) |
|--------------|----------------|-----|-------|--------------|------------------------|------------------------|------------------|------------------------|------------------------|---------------|---------------|
|              | Min            | Typ | Max   | Min          | Max                    | Min                    | Max              | Max                    | Min                    |               |               |
| 3.3 V LVTTTL | 3.135          | 3.3 | 3.465 | -0.3         | 0.8                    | 1.7                    | 3.6              | 0.45                   | 2.4                    | 4             | -4            |
| 3.3 V LVCMOS | 3.135          | 3.3 | 3.465 | -0.3         | 0.8                    | 1.7                    | 3.6              | 0.2                    | $V_{CCIO} - 0.2$       | 2             | -2            |
| 3.0 V LVTTTL | 2.85           | 3   | 3.15  | -0.3         | 0.8                    | 1.7                    | $V_{CCIO} + 0.3$ | 0.45                   | 2.4                    | 4             | -4            |
| 3.0 V LVCMOS | 2.85           | 3   | 3.15  | -0.3         | 0.8                    | 1.7                    | $V_{CCIO} + 0.3$ | 0.2                    | $V_{CCIO} - 0.2$       | 0.1           | -0.1          |
| 2.5 V LVCMOS | 2.375          | 2.5 | 2.625 | -0.3         | 0.7                    | 1.7                    | $V_{CCIO} + 0.3$ | 0.4                    | 2                      | 1             | -1            |
| 1.8 V LVCMOS | 1.71           | 1.8 | 1.89  | -0.3         | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | 0.45                   | $V_{CCIO} - 0.45$      | 2             | -2            |
| 1.5 V LVCMOS | 1.425          | 1.5 | 1.575 | -0.3         | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 2             | -2            |
| 1.2 V LVCMOS | 1.14           | 1.2 | 1.26  | -0.3         | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 2             | -2            |
| 3.0-V PCI    | 2.85           | 3   | 3.15  | —            | $0.3 \times V_{CCIO}$  | $0.5 \times V_{CCIO}$  | $V_{CCIO} + 0.3$ | $0.1 \times V_{CCIO}$  | $0.9 \times V_{CCIO}$  | 1.5           | -0.5          |
| 3.0-V PCI-X  | 2.85           | 3   | 3.15  | —            | $0.35 \times V_{CCIO}$ | $0.5 \times V_{CCIO}$  | $V_{CCIO} + 0.3$ | $0.1 \times V_{CCIO}$  | $0.9 \times V_{CCIO}$  | 1.5           | -0.5          |

Table 1-23 lists the single-ended I/O standards for Arria II GZ devices.

**Table 1-23. Single-Ended I/O Standards for Arria II GZ Devices (Part 1 of 2)**

| I/O Standard | $V_{CCIO}$ (V) |     |       | $V_{IL}$ (V) |                        | $V_{IH}$ (V)           |                  | $V_{OL}$ (V)           | $V_{OH}$ (V)           | $I_{OL}$ (mA) | $I_{OH}$ (mA) |
|--------------|----------------|-----|-------|--------------|------------------------|------------------------|------------------|------------------------|------------------------|---------------|---------------|
|              | Min            | Typ | Max   | Min          | Max                    | Min                    | Max              | Max                    | Min                    |               |               |
| LVTTTL       | 2.85           | 3   | 3.15  | -0.3         | 0.8                    | 1.7                    | 3.6              | 0.4                    | 2.4                    | 2             | -2            |
| LVCMOS       | 2.85           | 3   | 3.15  | -0.3         | 0.8                    | 1.7                    | 3.6              | 0.2                    | $V_{CCIO} - 0.2$       | 0.1           | -0.1          |
| 2.5 V        | 2.375          | 2.5 | 2.625 | -0.3         | 0.7                    | 1.7                    | 3.6              | 0.4                    | 2                      | 1             | -1            |
| 1.8 V        | 1.71           | 1.8 | 1.89  | -0.3         | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | 0.45                   | $V_{CCIO} - 0.45$      | 2             | -2            |
| 1.5 V        | 1.425          | 1.5 | 1.575 | -0.3         | $0.35 \times V_{CCIO}$ | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3$ | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 2             | -2            |

Table 1-26 lists the single-ended SSTL and HSTL I/O standard signal specifications for Arria II GX devices.

**Table 1-26. Single-Ended SSTL and HSTL I/O Standard Signal Specifications for Arria II GX Devices**

| I/O Standard     | $V_{IL(DC)} (V)$ |                   | $V_{IH(DC)} (V)$  |                   | $V_{IL(AC)} (V)$  | $V_{IH(AC)} (V)$  | $V_{OL} (V)$           | $V_{OH} (V)$           | $I_{OL} (mA)$ | $I_{OH} (mA)$ |
|------------------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|------------------------|------------------------|---------------|---------------|
|                  | Min              | Max               | Min               | Max               | Max               | Min               | Max                    | Min                    |               |               |
| SSTL-2 Class I   | -0.3             | $V_{REF} - 0.18$  | $V_{REF} + 0.18$  | $V_{CCIO} + 0.3$  | $V_{REF} - 0.35$  | $V_{REF} + 0.35$  | $V_{TT} - 0.57$        | $V_{TT} + 0.57$        | 8.1           | -8.1          |
| SSTL-2 Class II  | -0.3             | $V_{REF} - 0.18$  | $V_{REF} + 0.18$  | $V_{CCIO} + 0.3$  | $V_{REF} - 0.35$  | $V_{REF} + 0.35$  | $V_{TT} - 0.76$        | $V_{TT} + 0.76$        | 16.4          | -16.4         |
| SSTL-18 Class I  | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$  | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | $V_{TT} - 0.475$       | $V_{TT} + 0.475$       | 6.7           | -6.7          |
| SSTL-18 Class II | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$  | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | 0.28                   | $V_{CCIO} - 0.28$      | 13.4          | -13.4         |
| SSTL-15 Class I  | -0.3             | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | $V_{CCIO} + 0.3$  | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 \times V_{CCIO}$  | $0.8 \times V_{CCIO}$  | 8             | -8            |
| SSTL-15 Class II | -0.3             | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | $V_{CCIO} + 0.3$  | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 \times V_{CCIO}$  | $0.8 \times V_{CCIO}$  | 16            | -16           |
| HSTL-18 Class I  | -0.3             | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | $V_{CCIO} + 0.3$  | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 8             | -8            |
| HSTL-18 Class II | -0.3             | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | $V_{CCIO} + 0.3$  | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 16            | -16           |
| HSTL-15 Class I  | -0.3             | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | $V_{CCIO} + 0.3$  | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 8             | -8            |
| HSTL-15 Class II | -0.3             | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | $V_{CCIO} + 0.3$  | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 16            | -16           |
| HSTL-12 Class I  | -0.15            | $V_{REF} - 0.08$  | $V_{REF} + 0.08$  | $V_{CCIO} + 0.15$ | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 8             | -8            |
| HSTL-12 Class II | -0.15            | $V_{REF} - 0.08$  | $V_{REF} + 0.08$  | $V_{CCIO} + 0.15$ | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 14            | -14           |

Table 1-27 lists the single-ended SSTL and HSTL I/O standard signal specifications for Arria II GZ devices.

**Table 1-27. Single-Ended SSTL and HSTL I/O Standards Signal Specifications for Arria II GZ Devices (Part 1 of 2)**

| I/O Standard     | $V_{IL(DC)} (V)$ |                   | $V_{IH(DC)} (V)$  |                  | $V_{IL(AC)} (V)$  | $V_{IH(AC)} (V)$  | $V_{OL} (V)$          | $V_{OH} (V)$          | $I_{OL} (mA)$ | $I_{OH} (mA)$ |
|------------------|------------------|-------------------|-------------------|------------------|-------------------|-------------------|-----------------------|-----------------------|---------------|---------------|
|                  | Min              | Max               | Min               | Max              | Max               | Min               | Max                   | Min                   |               |               |
| SSTL-2 Class I   | -0.3             | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$  | $V_{REF} + 0.31$  | $V_{TT} - 0.57$       | $V_{TT} + 0.57$       | 8.1           | -8.1          |
| SSTL-2 Class II  | -0.3             | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$  | $V_{REF} + 0.31$  | $V_{TT} - 0.76$       | $V_{TT} + 0.76$       | 16.2          | -16.2         |
| SSTL-18 Class I  | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | $V_{TT} - 0.475$      | $V_{TT} + 0.475$      | 6.7           | -6.7          |
| SSTL-18 Class II | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | 0.28                  | $V_{CCIO} - 0.28$     | 13.4          | -13.4         |
| SSTL-15 Class I  | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 \times V_{CCIO}$ | $0.8 \times V_{CCIO}$ | 8             | -8            |

**Table 1-27. Single-Ended SSTL and HSTL I/O Standards Signal Specifications for Arria II GZ Devices (Part 2 of 2)**

| I/O Standard     | $V_{IL(DC)} (V)$ |                  | $V_{IH(DC)} (V)$ |                   | $V_{IL(AC)} (V)$  | $V_{IH(AC)} (V)$  | $V_{OL} (V)$           | $V_{OH} (V)$           | $I_{OL} (mA)$ | $I_{OH} (mA)$ |
|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|------------------------|------------------------|---------------|---------------|
|                  | Min              | Max              | Min              | Max               | Max               | Min               | Max                    | Min                    |               |               |
| SSTL-15 Class II | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 \times V_{CCIO}$  | $0.8 \times V_{CCIO}$  | 16            | -16           |
| HSTL-18 Class I  | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 8             | -8            |
| HSTL-18 Class II | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 16            | -16           |
| HSTL-15 Class I  | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 8             | -8            |
| HSTL-15 Class II | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$   | $V_{REF} + 0.2$   | 0.4                    | $V_{CCIO} - 0.4$       | 16            | -16           |
| HSTL-12 Class I  | -0.15            | $V_{REF} - 0.08$ | $V_{REF} + 0.08$ | $V_{CCIO} + 0.15$ | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 8             | -8            |
| HSTL-12 Class II | -0.15            | $V_{REF} - 0.08$ | $V_{REF} + 0.08$ | $V_{CCIO} + 0.15$ | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.25 \times V_{CCIO}$ | $0.75 \times V_{CCIO}$ | 16            | -16           |

Table 1-28 lists the differential SSTL I/O standards for Arria II GX devices.

**Table 1-28. Differential SSTL I/O Standards for Arria II GX Devices**

| I/O Standard        | $V_{CCIO} (V)$ |     |       | $V_{SWING(DC)} (V)$ |            | $V_{X(AC)} (V)$      |              |                      | $V_{SWING(AC)} (V)$ |            | $V_{OX(AC)} (V)$     |              |                      |
|---------------------|----------------|-----|-------|---------------------|------------|----------------------|--------------|----------------------|---------------------|------------|----------------------|--------------|----------------------|
|                     | Min            | Typ | Max   | Min                 | Max        | Min                  | Typ          | Max                  | Min                 | Max        | Min                  | Typ          | Max                  |
| SSTL-2 Class I, II  | 2.375          | 2.5 | 2.625 | 0.36                | $V_{CCIO}$ | $V_{CCIO}/2 - 0.2$   | —            | $V_{CCIO}/2 + 0.2$   | 0.7                 | $V_{CCIO}$ | $V_{CCIO}/2 - 0.15$  | —            | $V_{CCIO}/2 + 0.15$  |
| SSTL-18 Class I, II | 1.71           | 1.8 | 1.89  | 0.25                | $V_{CCIO}$ | $V_{CCIO}/2 - 0.175$ | —            | $V_{CCIO}/2 + 0.175$ | 0.5                 | $V_{CCIO}$ | $V_{CCIO}/2 - 0.125$ | —            | $V_{CCIO}/2 + 0.125$ |
| SSTL-15 Class I, II | 1.425          | 1.5 | 1.575 | 0.2                 | —          | —                    | $V_{CCIO}/2$ | —                    | 0.35                | —          | —                    | $V_{CCIO}/2$ | —                    |

Table 1-29 lists the differential SSTL I/O standards for Arria II GZ devices

**Table 1-29. Differential SSTL I/O Standards for Arria II GZ Devices**

| I/O Standard        | $V_{CCIO} (V)$ |     |       | $V_{SWING(DC)} (V)$ |                  | $V_{X(AC)} (V)$      |              |                      | $V_{SWING(AC)} (V)$ |                  | $V_{OX(AC)} (V)$     |              |                      |
|---------------------|----------------|-----|-------|---------------------|------------------|----------------------|--------------|----------------------|---------------------|------------------|----------------------|--------------|----------------------|
|                     | Min            | Typ | Max   | Min                 | Max              | Min                  | Typ          | Max                  | Min                 | Max              | Min                  | Typ          | Max                  |
| SSTL-2 Class I, II  | 2.375          | 2.5 | 2.625 | 0.3                 | $V_{CCIO} + 0.6$ | $V_{CCIO}/2 - 0.2$   | —            | $V_{CCIO}/2 + 0.2$   | 0.62                | $V_{CCIO} + 0.6$ | $V_{CCIO}/2 - 0.15$  | —            | $V_{CCIO}/2 + 0.15$  |
| SSTL-18 Class I, II | 1.71           | 1.8 | 1.89  | 0.25                | $V_{CCIO} + 0.6$ | $V_{CCIO}/2 - 0.175$ | —            | $V_{CCIO}/2 + 0.175$ | 0.5                 | $V_{CCIO} + 0.6$ | $V_{CCIO}/2 - 0.125$ | —            | $V_{CCIO}/2 + 0.125$ |
| SSTL-15 Class I, II | 1.425          | 1.5 | 1.575 | 0.2                 | —                | —                    | $V_{CCIO}/2$ | —                    | 0.35                | —                | —                    | $V_{CCIO}/2$ | —                    |

Table 1-30 lists the HSTL I/O standards for Arria II GX devices.

**Table 1-30. Differential HSTL I/O Standards for Arria II GX Devices**

| I/O Standard        | V <sub>CCIO</sub> (V) |     |       | V <sub>DIF(DC)</sub> (V) |     | V <sub>X(AC)</sub> (V) |                         |      | V <sub>CM(DC)</sub> (V)  |                         |                          | V <sub>DIF(AC)</sub> (V) |     |
|---------------------|-----------------------|-----|-------|--------------------------|-----|------------------------|-------------------------|------|--------------------------|-------------------------|--------------------------|--------------------------|-----|
|                     | Min                   | Typ | Max   | Min                      | Max | Min                    | Typ                     | Max  | Min                      | Typ                     | Max                      | Min                      | Max |
| HSTL-18 Class I     | 1.71                  | 1.8 | 1.89  | 0.2                      | —   | 0.85                   | —                       | 0.95 | 0.88                     | —                       | 0.95                     | 0.4                      | —   |
| HSTL-15 Class I, II | 1.425                 | 1.5 | 1.575 | 0.2                      | —   | 0.71                   | —                       | 0.79 | 0.71                     | —                       | 0.79                     | 0.4                      | —   |
| HSTL-12 Class I, II | 1.14                  | 1.2 | 1.26  | 0.16                     | —   | —                      | 0.5 × V <sub>CCIO</sub> | —    | 0.48 × V <sub>CCIO</sub> | 0.5 × V <sub>CCIO</sub> | 0.52 × V <sub>CCIO</sub> | 0.3                      | —   |

Table 1-31 lists the HSTL I/O standards for Arria II GZ devices.

**Table 1-31. Differential HSTL I/O Standards for Arria II GZ Devices**

| I/O Standard        | V <sub>CCIO</sub> (V) |     |       | V <sub>DIF(DC)</sub> (V) |                         | V <sub>X(AC)</sub> (V) |                         |      | V <sub>CM(DC)</sub> (V) |                         |                         | V <sub>DIF(AC)</sub> (V) |                          |
|---------------------|-----------------------|-----|-------|--------------------------|-------------------------|------------------------|-------------------------|------|-------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
|                     | Min                   | Typ | Max   | Min                      | Max                     | Min                    | Typ                     | Max  | Min                     | Typ                     | Max                     | Min                      | Max                      |
| HSTL-18 Class I     | 1.71                  | 1.8 | 1.89  | 0.2                      | —                       | 0.78                   | —                       | 1.12 | 0.78                    | —                       | 1.12                    | 0.4                      | —                        |
| HSTL-15 Class I, II | 1.425                 | 1.5 | 1.575 | 0.2                      | —                       | 0.68                   | —                       | 0.9  | 0.68                    | —                       | 0.9                     | 0.4                      | —                        |
| HSTL-12 Class I, II | 1.14                  | 1.2 | 1.26  | 0.16                     | V <sub>CCIO</sub> + 0.3 | —                      | 0.5 × V <sub>CCIO</sub> | —    | 0.4 × V <sub>CCIO</sub> | 0.5 × V <sub>CCIO</sub> | 0.6 × V <sub>CCIO</sub> | 0.3                      | V <sub>CCIO</sub> + 0.48 |

Table 1-32 lists the differential I/O standard specifications for Arria II GX devices.

**Table 1-32. Differential I/O Standard Specifications for Arria II GX Devices (Note 1)**

| I/O Standard  | V <sub>CCIO</sub> (V) |     |       | V <sub>ID</sub> (mV) |                          |     | V <sub>ICM</sub> (V) (2) |      | V <sub>OD</sub> (V) (3) |     |     | V <sub>OCM</sub> (V) |      |       |
|---------------|-----------------------|-----|-------|----------------------|--------------------------|-----|--------------------------|------|-------------------------|-----|-----|----------------------|------|-------|
|               | Min                   | Typ | Max   | Min                  | Cond.                    | Max | Min                      | Max  | Min                     | Typ | Max | Min                  | Typ  | Max   |
| 2.5 V LVDS    | 2.375                 | 2.5 | 2.625 | 100                  | V <sub>CM</sub> = 1.25 V | —   | 0.05                     | 1.80 | 0.247                   | —   | 0.6 | 1.125                | 1.25 | 1.375 |
| RSDS (4)      | 2.375                 | 2.5 | 2.625 | —                    | —                        | —   | —                        | —    | 0.1                     | 0.2 | 0.6 | 0.5                  | 1.2  | 1.4   |
| Mini-LVDS (4) | 2.375                 | 2.5 | 2.625 | —                    | —                        | —   | —                        | —    | 0.25                    | —   | 0.6 | 1                    | 1.2  | 1.4   |
| LVPECL (5)    | 2.375                 | 2.5 | 2.625 | 300                  | —                        | —   | 0.6                      | 1.8  | —                       | —   | —   | —                    | —    | —     |
| BLVDS (6)     | 2.375                 | 2.5 | 2.625 | 100                  | —                        | —   | —                        | —    | —                       | —   | —   | —                    | —    | —     |

**Notes to Table 1-32:**

- (1) The 1.5 V PCML transceiver I/O standard specifications are described in “Transceiver Performance Specifications” on page 1-21.
- (2) V<sub>IN</sub> range: 0 ≤ V<sub>IN</sub> ≤ 1.85 V.
- (3) R<sub>L</sub> range: 90 ≤ R<sub>L</sub> ≤ 110 Ω.
- (4) The RSDS and mini-LVDS I/O standards are only supported for differential outputs.
- (5) The LVPECL input standard is supported at the dedicated clock input pins (GCLK) only.
- (6) There are no fixed V<sub>ICM</sub>, V<sub>OD</sub>, and V<sub>OCM</sub> specifications for BLVDS. These specifications depend on the system topology.

Table 1–33 lists the differential I/O standard specifications for Arria II GZ devices.

**Table 1–33. Differential I/O Standard Specifications for Arria II GZ Devices (Note 1)**

| I/O Standard<br>(2) | V <sub>CCIO</sub> (V) |     |       | V <sub>ID</sub> (mV) |                          |     | V <sub>ICM(DC)</sub> (V) |           | V <sub>OD</sub> (V) (3) |     |     | V <sub>OCM</sub> (V) (3) |      |       |
|---------------------|-----------------------|-----|-------|----------------------|--------------------------|-----|--------------------------|-----------|-------------------------|-----|-----|--------------------------|------|-------|
|                     | Min                   | Typ | Max   | Min                  | Cond.                    | Max | Min                      | Max       | Min                     | Typ | Max | Min                      | Typ  | Max   |
| 2.5 V LVDS (HIO)    | 2.375                 | 2.5 | 2.625 | 100                  | V <sub>CM</sub> = 1.25 V | —   | 0.05                     | 1.8       | 0.247                   | —   | 0.6 | 1.125                    | 1.25 | 1.375 |
| 2.5 V LVDS (VIO)    | 2.375                 | 2.5 | 2.625 | 100                  | V <sub>CM</sub> = 1.25 V | —   | 0.05                     | 1.8       | 0.247                   | —   | 0.6 | 1                        | 1.25 | 1.5   |
| RSDS (HIO)          | 2.375                 | 2.5 | 2.625 | 100                  | V <sub>CM</sub> = 1.25 V | —   | 0.3                      | 1.4       | 0.1                     | 0.2 | 0.6 | 0.5                      | 1.2  | 1.4   |
| RSDS (VIO)          | 2.375                 | 2.5 | 2.625 | 100                  | V <sub>CM</sub> = 1.25 V | —   | 0.3                      | 1.4       | 0.1                     | 0.2 | 0.6 | 0.5                      | 1.2  | 1.5   |
| Mini-LVDS (HIO)     | 2.375                 | 2.5 | 2.625 | 200                  | —                        | 600 | 0.4                      | 1.32<br>5 | 0.25                    | —   | 0.6 | 1                        | 1.2  | 1.4   |
| Mini-LVDS (VIO)     | 2.375                 | 2.5 | 2.625 | 200                  | —                        | 600 | 0.4                      | 1.32<br>5 | 0.25                    | —   | 0.6 | 1                        | 1.2  | 1.5   |
| LVPECL              | 2.375                 | 2.5 | 2.625 | 300                  | —                        | —   | 0.6                      | 1.8       | —                       | —   | —   | —                        | —    | —     |
| BLVDS (4)           | 2.375                 | 2.5 | 2.625 | 100                  | —                        | —   | —                        | —         | —                       | —   | —   | —                        | —    | —     |

**Notes to Table 1–33:**

- (1) 1.4-V/1.5-V PCML transceiver I/O standard specifications are described in “Transceiver Performance Specifications” on page 1–21.
- (2) Vertical I/O (VIO) is top and bottom I/Os; horizontal I/O (HIO) is left and right I/Os.
- (3) R<sub>L</sub> range: 90 ≤ R<sub>L</sub> ≤ 110 Ω.
- (4) There are no fixed V<sub>ICM</sub>, V<sub>OD</sub>, and V<sub>OCM</sub> specifications for BLVDS. These specifications depend on the system topology.

## Power Consumption for the Arria II Device Family

Altera offers two ways to estimate power for a design:

- Using the Microsoft Excel-based Early Power Estimator
- Using the Quartus® II PowerPlay Power Analyzer feature

The interactive Microsoft Excel-based Early Power Estimator is typically used prior to designing the FPGA in order to get a magnitude estimate of the device power. The Quartus II PowerPlay Power Analyzer provides better quality estimates based on the specifics of the design after place-and-route is complete. The PowerPlay Power Analyzer can apply a combination of user-entered, simulation-derived, and estimated signal activities which, when combined with detailed circuit models, can yield very accurate power estimates.



For more information about power estimation tools, refer to the *PowerPlay Early Power Estimator User Guide* and the *PowerPlay Power Analysis* chapter in volume 3 of the *Quartus II Handbook*.

## Switching Characteristics

This section provides performance characteristics of the Arria II GX and GZ core and periphery blocks for commercial grade devices. The following tables are considered final and are based on actual silicon characterization and testing. These numbers reflect the actual performance of the device under worst-case silicon process, voltage, and junction temperature conditions.

### Transceiver Performance Specifications

Table 1–34 lists the Arria II GX transceiver specifications.

**Table 1–34. Transceiver Specifications for Arria II GX Devices (Note 1) (Part 1 of 7)**

| Symbol/<br>Description                     | Condition                                                               | I3   |     |        | C4   |     |        | C5 and I5 |     |        | C6   |     |        | Unit |
|--------------------------------------------|-------------------------------------------------------------------------|------|-----|--------|------|-----|--------|-----------|-----|--------|------|-----|--------|------|
|                                            |                                                                         | Min  | Typ | Max    | Min  | Typ | Max    | Min       | Typ | Max    | Min  | Typ | Max    |      |
| Reference Clock                            |                                                                         |      |     |        |      |     |        |           |     |        |      |     |        |      |
| Supported I/O Standards                    | 1.2-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS, and HCSL |      |     |        |      |     |        |           |     |        |      |     |        |      |
| Input frequency from REFCLK input pins     | —                                                                       | 50   | —   | 622.08 | 50   | —   | 622.08 | 50        | —   | 622.08 | 50   | —   | 622.08 | MHz  |
| Input frequency from PLD input             | —                                                                       | 50   | —   | 200    | 50   | —   | 200    | 50        | —   | 200    | 50   | —   | 200    | MHz  |
| Absolute V <sub>MAX</sub> for a REFCLK pin | —                                                                       | —    | —   | 2.2    | —    | —   | 2.2    | —         | —   | 2.2    | —    | —   | 2.2    | V    |
| Absolute V <sub>MIN</sub> for a REFCLK pin | —                                                                       | −0.3 | —   | —      | −0.3 | —   | —      | −0.3      | —   | —      | −0.3 | —   | —      | V    |
| Rise/fall time (2)                         | —                                                                       | —    | —   | 0.2    | —    | —   | 0.2    | —         | —   | 0.2    | —    | —   | 0.2    | UI   |
| Duty cycle                                 | —                                                                       | 45   | —   | 55     | 45   | —   | 55     | 45        | —   | 55     | 45   | —   | 55     | %    |
| Peak-to-peak differential input voltage    | —                                                                       | 200  | —   | 2000   | 200  | —   | 2000   | 200       | —   | 2000   | 200  | —   | 2000   | mV   |
| Spread-spectrum modulating clock frequency | PCIe                                                                    | 30   | —   | 33     | 30   | —   | 33     | 30        | —   | 33     | 30   | —   | 33     | kHz  |

**Table 1–34. Transceiver Specifications for Arria II GX Devices (Note 1) (Part 3 of 7)**

| Symbol/<br>Description                                                     | Condition                                                        | I3                  |     |      | C4                  |     |      | C5 and I5           |     |      | C6                  |     |      | Unit |
|----------------------------------------------------------------------------|------------------------------------------------------------------|---------------------|-----|------|---------------------|-----|------|---------------------|-----|------|---------------------|-----|------|------|
|                                                                            |                                                                  | Min                 | Typ | Max  | Min                 | Typ | Max  | Min                 | Typ | Max  | Min                 | Typ | Max  |      |
| fixedclk clock frequency                                                   | PCIe Receiver Detect                                             | —                   | 125 | —    | —                   | 125 | —    | —                   | 125 | —    | —                   | 125 | —    | MHz  |
| reconfig_clk clock frequency                                               | Dynamic reconfig. clock frequency                                | 2.5/<br>37.5<br>(4) | —   | 50   | 2.5/<br>37.5<br>(4) | —   | 50   | 2.5/<br>37.5<br>(4) | —   | 50   | 2.5/<br>37.5<br>(4) | —   | 50   | MHz  |
| Delta time between reconfig_clks (5)                                       | —                                                                | —                   | —   | 2    | —                   | —   | 2    | —                   | —   | 2    | —                   | —   | 2    | ms   |
| Transceiver block minimum power-down pulse width                           | —                                                                | —                   | 1   | —    | —                   | 1   | —    | —                   | 1   | —    | —                   | 1   | —    | μs   |
| <b>Receiver</b>                                                            |                                                                  |                     |     |      |                     |     |      |                     |     |      |                     |     |      |      |
| Supported I/O Standards                                                    | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, 2.5-V PCML, LVPECL, and LVDS |                     |     |      |                     |     |      |                     |     |      |                     |     |      |      |
| Data rate (13)                                                             | —                                                                | 600                 | —   | 6375 | 600                 | —   | 3750 | 600                 | —   | 3750 | 600                 | —   | 3125 | Mbps |
| Absolute V <sub>MAX</sub> for a receiver pin (6)                           | —                                                                | —                   | —   | 1.5  | —                   | —   | 1.5  | —                   | —   | 1.5  | —                   | —   | 1.5  | V    |
| Absolute V <sub>MIN</sub> for a receiver pin                               | —                                                                | -0.4                | —   | —    | -0.4                | —   | —    | -0.4                | —   | —    | -0.4                | —   | —    | V    |
| Maximum peak-to-peak differential input voltage V <sub>ID</sub> (diff p-p) | V <sub>ICM</sub> = 0.82 V setting                                | —                   | —   | 2.7  | —                   | —   | 2.7  | —                   | —   | 2.7  | —                   | —   | 2.7  | V    |
|                                                                            | V <sub>ICM</sub> = 1.1 V setting (7)                             | —                   | —   | 1.6  | —                   | —   | 1.6  | —                   | —   | 1.6  | —                   | —   | 1.6  | V    |

**Table 1–35. Transceiver Specifications for Arria II GZ Devices (Part 4 of 5)**

| Symbol/<br>Description                                           | Conditions                                                                                                                                                                                                                                                                                                                  | –C3 and –I3 (1) |     |      | –C4 and –I4 |     |      | Unit |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----|------|-------------|-----|------|------|
|                                                                  |                                                                                                                                                                                                                                                                                                                             | Min             | Typ | Max  | Min         | Typ | Max  |      |
| Transmitter                                                      |                                                                                                                                                                                                                                                                                                                             |                 |     |      |             |     |      |      |
| Supported I/O Standards                                          | 1.5-V PCML                                                                                                                                                                                                                                                                                                                  |                 |     |      |             |     |      |      |
| Data rate (14)                                                   | —                                                                                                                                                                                                                                                                                                                           | 600             | —   | 6375 | 600         | —   | 3750 | Mbps |
| V <sub>OCM</sub>                                                 | 0.65 V setting                                                                                                                                                                                                                                                                                                              | —               | 650 | —    | —           | 650 | —    | mV   |
| Differential on-chip termination resistors                       | 85–Ω setting                                                                                                                                                                                                                                                                                                                | 85 ± 15%        |     |      | 85 ± 15%    |     |      | Ω    |
|                                                                  | 100–Ω setting                                                                                                                                                                                                                                                                                                               | 100 ± 15%       |     |      | 100 ± 15%   |     |      | Ω    |
|                                                                  | 120–Ω setting                                                                                                                                                                                                                                                                                                               | 120 ± 15%       |     |      | 120 ± 15%   |     |      | Ω    |
|                                                                  | 150–Ω setting                                                                                                                                                                                                                                                                                                               | 150 ± 15%       |     |      | 150 ± 15%   |     |      | Ω    |
| Differential and common mode return loss                         | PCIe Gen1 and Gen2 (TX V <sub>OD</sub> =4), XAUI (TX V <sub>OD</sub> =6), HiGig+ (TX V <sub>OD</sub> =6), CEI SR/LR (TX V <sub>OD</sub> =8), SRIO SR (V <sub>OD</sub> =6), SRIO LR (V <sub>OD</sub> =8), CPRI LV (V <sub>OD</sub> =6), CPRI HV (V <sub>OD</sub> =2), OBSAI (V <sub>OD</sub> =6), SATA (V <sub>OD</sub> =4), | Compliant       |     |      |             |     |      | —    |
| Rise time (15)                                                   | —                                                                                                                                                                                                                                                                                                                           | 50              | —   | 200  | 50          | —   | 200  | ps   |
| Fall time (15)                                                   | —                                                                                                                                                                                                                                                                                                                           | 50              | —   | 200  | 50          | —   | 200  | ps   |
| Intra-differential pair skew                                     | —                                                                                                                                                                                                                                                                                                                           | —               | —   | 15   | —           | —   | 15   | ps   |
| Intra-transceiver block transmitter channel-to-channel skew      | ×4 PMA and PCS bonded mode<br>Example: XAUI, PCIe ×4, Basic ×4                                                                                                                                                                                                                                                              | —               | —   | 120  | —           | —   | 120  | ps   |
| Inter-transceiver block transmitter channel-to-channel skew      | ×8 PMA and PCS bonded mode<br>Example: PCIe ×8, Basic ×8                                                                                                                                                                                                                                                                    | —               | —   | 500  | —           | —   | 500  | ps   |
| CMU0 PLL and CMU1 PLL                                            |                                                                                                                                                                                                                                                                                                                             |                 |     |      |             |     |      |      |
| Supported Data Range                                             | —                                                                                                                                                                                                                                                                                                                           | 600             | —   | 6375 | 600         | —   | 3750 | Mbps |
| pll_powerdown minimum pulse width (tp <sub>pll_powerdown</sub> ) | —                                                                                                                                                                                                                                                                                                                           | 1               |     |      | 1           |     |      | μs   |
| CMU PLL lock time from pll_powerdown de-assertion                | —                                                                                                                                                                                                                                                                                                                           | —               | —   | 100  | —           | —   | 100  | μs   |

**Table 1–40. Transceiver Block Jitter Specifications for Arria II GX Devices (Note 1) (Part 2 of 10)**

| Symbol/<br>Description                   | Conditions                                         | I3     |     |      | C4     |     |      | C5, I5 |     |      | C6     |     |      | Unit |
|------------------------------------------|----------------------------------------------------|--------|-----|------|--------|-----|------|--------|-----|------|--------|-----|------|------|
|                                          |                                                    | Min    | Typ | Max  | Min    | Typ | Max  | Min    | Typ | Max  | Min    | Typ | Max  |      |
| Jitter tolerance at<br>2488.32 Mbps      | Jitter frequency =<br>0.06 KHz<br>Pattern = PRBS15 | > 15   |     |      | > 15   |     |      | > 15   |     |      | > 15   |     |      | UI   |
|                                          | Jitter frequency =<br>100 KHz<br>Pattern = PRBS15  | > 1.5  |     |      | > 1.5  |     |      | > 1.5  |     |      | > 1.5  |     |      | UI   |
|                                          | Jitter frequency =<br>1 MHz<br>Pattern = PRBS15    | > 0.15 |     |      | > 0.15 |     |      | > 0.15 |     |      | > 0.15 |     |      | UI   |
|                                          | Jitter frequency =<br>10 MHz<br>Pattern = PRBS15   | > 0.15 |     |      | > 0.15 |     |      | > 0.15 |     |      | > 0.15 |     |      | UI   |
| XAUI Transmit Jitter Generation (3)      |                                                    |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Total jitter at<br>3.125 Gbps            | Pattern = CJPAT                                    | —      | —   | 0.3  | —      | —   | 0.3  | —      | —   | 0.3  | —      | —   | 0.3  | UI   |
| Deterministic<br>jitter at<br>3.125 Gbps | Pattern = CJPAT                                    | —      | —   | 0.17 | —      | —   | 0.17 | —      | —   | 0.17 | —      | —   | 0.17 | UI   |
| XAUI Receiver Jitter Tolerance (3)       |                                                    |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Total jitter                             | —                                                  | > 0.65 |     |      | > 0.65 |     |      | > 0.65 |     |      | > 0.65 |     |      | UI   |
| Deterministic<br>jitter                  | —                                                  | > 0.37 |     |      | > 0.37 |     |      | > 0.37 |     |      | > 0.37 |     |      | UI   |
| Peak-to-peak<br>jitter                   | Jitter frequency =<br>22.1 KHz                     | > 8.5  |     |      | > 8.5  |     |      | > 8.5  |     |      | > 8.5  |     |      | UI   |
| Peak-to-peak<br>jitter                   | Jitter frequency =<br>1.875 MHz                    | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | UI   |
| Peak-to-peak<br>jitter                   | Jitter frequency =<br>20 MHz                       | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | UI   |
| PCIe Transmit Jitter Generation (4)      |                                                    |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Total jitter at<br>2.5 Gbps (Gen1)       | Compliance<br>pattern                              | —      | —   | 0.25 | —      | —   | 0.25 | —      | —   | 0.25 | —      | —   | 0.25 | UI   |

**Table 1–40. Transceiver Block Jitter Specifications for Arria II GX Devices (Note 1) (Part 3 of 10)**

| Symbol/<br>Description                                            | Conditions                                                                           | I3     |     |      | C4     |     |      | C5, I5 |     |      | C6     |     |      | Unit |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|-----|------|--------|-----|------|--------|-----|------|--------|-----|------|------|
|                                                                   |                                                                                      | Min    | Typ | Max  | Min    | Typ | Max  | Min    | Typ | Max  | Min    | Typ | Max  |      |
| PCIe Receiver Jitter Tolerance (4)                                |                                                                                      |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Total jitter at 2.5 Gbps (Gen1)                                   | Compliance pattern                                                                   | > 0.6  |     |      | > 0.6  |     |      | > 0.6  |     |      | > 0.6  |     |      | UI   |
| PCIe (Gen 1) Electrical Idle Detect Threshold (9)                 |                                                                                      |        |     |      |        |     |      |        |     |      |        |     |      |      |
| VRX-IDLE-DETDIFF (p-p)                                            | Compliance pattern                                                                   | 65     | —   | 175  | 65     | —   | 175  | 65     | —   | 175  | 65     | —   | 175  | mV   |
| Serial RapidIO® (SRIO) Transmit Jitter Generation (5)             |                                                                                      |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Deterministic jitter (peak-to-peak)                               | Data Rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT                                 | —      | —   | 0.17 | —      | —   | 0.17 | —      | —   | 0.17 | —      | —   | 0.17 | UI   |
| Total jitter (peak-to-peak)                                       | Data Rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT                                 | —      | —   | 0.35 | —      | —   | 0.35 | —      | —   | 0.35 | —      | —   | 0.35 | UI   |
| SRIO Receiver Jitter Tolerance (5)                                |                                                                                      |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Deterministic jitter tolerance (peak-to-peak)                     | Data Rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT                                 | > 0.37 |     |      | > 0.37 |     |      | > 0.37 |     |      | > 0.37 |     |      | UI   |
| Combined deterministic and random jitter tolerance (peak-to-peak) | Data Rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT                                 | > 0.55 |     |      | > 0.55 |     |      | > 0.55 |     |      | > 0.55 |     |      | UI   |
| Sinusoidal jitter tolerance (peak-to-peak)                        | Jitter frequency = 22.1 KHz<br>Data rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT  | > 8.5  |     |      | > 8.5  |     |      | > 8.5  |     |      | > 8.5  |     |      | UI   |
|                                                                   | Jitter frequency = 1.875 MHz<br>Data rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | UI   |
|                                                                   | Jitter frequency = 20 MHz<br>Data rate = 1.25, 2.5, 3.125 Gbps<br>Pattern = CJPAT    | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | > 0.1  |     |      | UI   |
| GIGE Transmit Jitter Generation (6)                               |                                                                                      |        |     |      |        |     |      |        |     |      |        |     |      |      |
| Deterministic jitter (peak-to-peak)                               | Pattern = CRPAT                                                                      | —      | —   | 0.14 | —      | —   | 0.14 | —      | —   | 0.14 | —      | —   | 0.14 | UI   |

**Table 1–40. Transceiver Block Jitter Specifications for Arria II GX Devices (Note 1) (Part 4 of 10)**

| Symbol/<br>Description                                                        | Conditions                                                                        | I3     |     |           | C4     |     |       | C5, I5 |     |       | C6     |     |       | Unit |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------|-----|-----------|--------|-----|-------|--------|-----|-------|--------|-----|-------|------|
|                                                                               |                                                                                   | Min    | Typ | Max       | Min    | Typ | Max   | Min    | Typ | Max   | Min    | Typ | Max   |      |
| Total jitter<br>(peak-to-peak)                                                | Pattern = CRPAT                                                                   | —      | —   | 0.27<br>9 | —      | —   | 0.279 | —      | —   | 0.279 | —      | —   | 0.279 | UI   |
| GIGE Receiver Jitter Tolerance (6)                                            |                                                                                   |        |     |           |        |     |       |        |     |       |        |     |       |      |
| Deterministic<br>jitter tolerance<br>(peak-to-peak)                           | Pattern = CJPAT                                                                   | > 0.4  |     |           | > 0.4  |     |       | > 0.4  |     |       | > 0.4  |     |       | UI   |
| Combined<br>deterministic and<br>random jitter<br>tolerance<br>(peak-to-peak) | Pattern = CJPAT                                                                   | > 0.66 |     |           | > 0.66 |     |       | > 0.66 |     |       | > 0.66 |     |       | UI   |
| HiGig Transmit Jitter Generation (7)                                          |                                                                                   |        |     |           |        |     |       |        |     |       |        |     |       |      |
| Deterministic<br>jitter<br>(peak-to-peak)                                     | Data rate =<br>3.75 Gbps<br>Pattern = CJPAT                                       | —      | —   | 0.17      | —      | —   | 0.17  | —      | —   | —     | —      | —   | —     | UI   |
| Total jitter<br>(peak-to-peak)                                                | Data rate =<br>3.75 Gbps<br>Pattern = CJPAT                                       | —      | —   | 0.35      | —      | —   | 0.35  | —      | —   | —     | —      | —   | —     | UI   |
| HiGig Receiver Jitter Tolerance (7)                                           |                                                                                   |        |     |           |        |     |       |        |     |       |        |     |       |      |
| Deterministic<br>jitter tolerance<br>(peak-to-peak)                           | Data rate =<br>3.75 Gbps<br>Pattern = CJPAT                                       | > 0.37 |     |           | > 0.37 |     |       | —      | —   | —     | —      | —   | —     | UI   |
| Combined<br>deterministic and<br>random jitter<br>tolerance<br>(peak-to-peak) | Data rate =<br>3.75 Gbps<br>Pattern = CJPAT                                       | > 0.65 |     |           | > 0.65 |     |       | —      | —   | —     | —      | —   | —     | UI   |
| Sinusoidal jitter<br>tolerance<br>(peak-to-peak)                              | Jitter frequency =<br>22.1 KHz<br><br>Data rate =<br>3.75 Gbps<br>Pattern = CJPAT | > 8.5  |     |           | > 8.5  |     |       | —      | —   | —     | —      | —   | —     | UI   |
|                                                                               | Jitter frequency =<br>1.875MHz<br><br>Data rate =<br>3.75 Gbps<br>Pattern = CJPAT | > 0.1  |     |           | > 0.1  |     |       | —      | —   | —     | —      | —   | —     | UI   |
|                                                                               | Jitter frequency =<br>20 MHz<br><br>Data rate =<br>3.75 Gbps<br>Pattern = CJPAT   | > 0.1  |     |           | > 0.1  |     |       | —      | —   | —     | —      | —   | —     | UI   |

**Table 1-40. Transceiver Block Jitter Specifications for Arria II GX Devices (Note 1) (Part 7 of 10)**

| Symbol/<br>Description                          | Conditions         | I3     |     |     | C4     |     |     | C5, I5 |     |     | C6     |     |     | Unit |
|-------------------------------------------------|--------------------|--------|-----|-----|--------|-----|-----|--------|-----|-----|--------|-----|-----|------|
|                                                 |                    | Min    | Typ | Max | Min    | Typ | Max | Min    | Typ | Max | Min    | Typ | Max |      |
| SSC modulation deviation at 1.5 Gbps (G1)       | Compliance pattern | 5700   |     |     | 5700   |     |     | 5700   |     |     | 5700   |     |     | ppm  |
| RX differential skew at 1.5 Gbps (G1)           | Compliance pattern | 80     |     |     | 80     |     |     | 80     |     |     | 80     |     |     | ps   |
| RX AC common mode voltage at 1.5 Gbps (G1)      | Compliance pattern | 150    |     |     | 150    |     |     | 150    |     |     | 150    |     |     | mV   |
| Total jitter tolerance at 3.0 Gbps (G2)         | Compliance pattern | > 0.65 |     |     | > 0.65 |     |     | > 0.65 |     |     | > 0.65 |     |     | UI   |
| Deterministic jitter tolerance at 3.0 Gbps (G2) | Compliance pattern | > 0.35 |     |     | > 0.35 |     |     | > 0.35 |     |     | > 0.35 |     |     | UI   |
| SSC modulation frequency at 3.0 Gbps (G2)       | Compliance pattern | 33     |     |     | 33     |     |     | 33     |     |     | 33     |     |     | kHz  |
| SSC modulation deviation at 3.0 Gbps (G2)       | Compliance pattern | 5700   |     |     | 5700   |     |     | 5700   |     |     | 5700   |     |     | ppm  |
| RX differential skew at 3.0 Gbps (G2)           | Compliance pattern | 75     |     |     | 75     |     |     | 75     |     |     | 75     |     |     | ps   |
| RX AC common mode voltage at 3.0 Gbps (G2)      | Compliance pattern | 150    |     |     | 150    |     |     | 150    |     |     | 150    |     |     | mV   |
| Total jitter tolerance at 6.0 Gbps (G3)         | Compliance pattern | > 0.60 |     |     | > 0.60 |     |     | > 0.60 |     |     | > 0.60 |     |     | UI   |
| Random jitter tolerance at 6.0 Gbps (G3)        | Compliance pattern | > 0.18 |     |     | > 0.18 |     |     | > 0.18 |     |     | > 0.18 |     |     | UI   |
| SSC modulation frequency at 6.0 Gbps (G3)       | Compliance pattern | 33     |     |     | 33     |     |     | 33     |     |     | 33     |     |     | kHz  |
| SSC modulation deviation at 6.0 Gbps (G3)       | Compliance pattern | 5700   |     |     | 5700   |     |     | 5700   |     |     | 5700   |     |     | ppm  |
| RX differential skew at 6.0 Gbps (G3)           | Compliance pattern | 30     |     |     | 30     |     |     | 30     |     |     | 30     |     |     | ps   |
| RX AC common mode voltage at 6.0 Gbps (G3)      | Compliance pattern | 100    |     |     | 100    |     |     | 100    |     |     | 100    |     |     | mV   |

**Table 1–40. Transceiver Block Jitter Specifications for Arria II GX Devices (Note 1) (Part 10 of 10)**

| Symbol/<br>Description                   | Conditions                                                 | I3    |     |     | C4    |     |     | C5, I5 |     |     | C6    |     |     | Unit |
|------------------------------------------|------------------------------------------------------------|-------|-----|-----|-------|-----|-----|--------|-----|-----|-------|-----|-----|------|
|                                          |                                                            | Min   | Typ | Max | Min   | Typ | Max | Min    | Typ | Max | Min   | Typ | Max |      |
| Sinusoidal jitter tolerance at 3072 Mbps | Jitter frequency = 21.8 KHz<br>Pattern = CJPAT             | > 8.5 |     |     | > 8.5 |     |     | > 8.5  |     |     | > 8.5 |     |     | UI   |
|                                          | Jitter frequency = 1843.2 KHz to 20 MHz<br>Pattern = CJPAT | > 0.1 |     |     | > 0.1 |     |     | > 0.1  |     |     | > 0.1 |     |     | UI   |

**Notes to Table 1–40:**

- (1) Dedicated `refclk` pins are used to drive the input reference clocks. The jitter numbers are valid for the stated conditions only.
- (2) The jitter numbers for SONET/SDH are compliant to the GR-253-CORE Issue 3 Specification.
- (3) The jitter numbers for XAUI are compliant to the IEEE802.3ae-2002 Specification.
- (4) The jitter numbers for PCIe are compliant to the PCIe Base Specification 2.0.
- (5) The jitter numbers for SRIO are compliant to the RapidIO Specification 1.3.
- (6) The jitter numbers for GIGE are compliant to the IEEE802.3-2002 Specification.
- (7) The jitter numbers for HiGig are compliant to the IEEE802.3ae-2002 Specification.
- (8) The HD-SDI and 3G-SDI jitter numbers are compliant to the SMPTE292M and SMPTE424M Specifications.
- (9) Arria II PCIe receivers are compliant to this specification provided the VTX\_CM-DC-ACTIVEIDLE-DELTA of the upstream transmitter is less than 50 mV.
- (10) The jitter numbers for Serial Advanced Technology Attachment (SATA) are compliant to the Serial ATA Revision 3.0 Specification.
- (11) The jitter numbers for Common Public Radio Interface (CPRI) are compliant to the CPRI Specification V3.0.
- (12) The jitter numbers for Open Base Station Architecture Initiative (OBSAI) are compliant to the OBSAI RP3 Specification V4.1.

Table 1–41 lists the transceiver jitter specifications for all supported protocols for Arria II GZ devices.

**Table 1–41. Transceiver Block Jitter Specifications for Arria II GZ Devices (Note 1), (2) (Part 1 of 7)**

| Symbol/<br>Description                   | Conditions                                      | –C3 and –I3 |     |      | –C4 and –I4 |     |      | Unit |
|------------------------------------------|-------------------------------------------------|-------------|-----|------|-------------|-----|------|------|
|                                          |                                                 | Min         | Typ | Max  | Min         | Typ | Max  |      |
| SONET/SDH Transmit Jitter Generation (3) |                                                 |             |     |      |             |     |      |      |
| Peak-to-peak jitter at 622.08 Mbps       | Pattern = PRBS15                                | —           | —   | 0.1  | —           | —   | 0.1  | UI   |
| RMS jitter at 622.08 Mbps                | Pattern = PRBS15                                | —           | —   | 0.01 | —           | —   | 0.01 | UI   |
| Peak-to-peak jitter at 2488.32 Mbps      | Pattern = PRBS15                                | —           | —   | 0.1  | —           | —   | 0.1  | UI   |
| RMS jitter at 2488.32 Mbps               | Pattern = PRBS15                                | —           | —   | 0.01 | —           | —   | 0.01 | UI   |
| SONET/SDH Receiver Jitter Tolerance (3)  |                                                 |             |     |      |             |     |      |      |
| Jitter tolerance at 622.08 Mbps          | Jitter frequency = 0.03 KHz<br>Pattern = PRBS15 | > 15        |     |      | > 15        |     |      | UI   |
|                                          | Jitter frequency = 25 KHZ<br>Pattern = PRBS15   | > 1.5       |     |      | > 1.5       |     |      | UI   |
|                                          | Jitter frequency = 250 KHz<br>Pattern = PRBS15  | > 0.15      |     |      | > 0.15      |     |      | UI   |

**Table 1–41. Transceiver Block Jitter Specifications for Arria II GZ Devices (Note 1), (2) (Part 6 of 7)**

| Symbol/<br>Description                                     | Conditions                                                          | –C3 and –I3 |     |       | –C4 and –I4 |     |       | Unit |
|------------------------------------------------------------|---------------------------------------------------------------------|-------------|-----|-------|-------------|-----|-------|------|
|                                                            |                                                                     | Min         | Typ | Max   | Min         | Typ | Max   |      |
| Deterministic jitter at 3.0 Gbps (G2)                      | Pattern = CJPAT                                                     | —           | —   | 0.35  | —           | —   | 0.35  | UI   |
| Total jitter at 6.0 Gbps (G3)                              | Pattern = CJPAT                                                     | —           | —   | 0.25  | —           | —   | 0.25  | UI   |
| Random jitter at 6.0 Gbps (G3)                             | Pattern = CJPAT                                                     | —           | —   | 0.15  | —           | —   | 0.15  | UI   |
| SAS Receiver Jitter Tolerance (13)                         |                                                                     |             |     |       |             |     |       |      |
| Total jitter tolerance at 1.5 Gbps (G1)                    | Pattern = CJPAT                                                     | —           | —   | 0.65  | —           | —   | 0.65  | UI   |
| Deterministic jitter tolerance at 1.5 Gbps (G1)            | Pattern = CJPAT                                                     | —           | —   | 0.35  | —           | —   | 0.35  | UI   |
| Sinusoidal jitter tolerance at 1.5 Gbps (G1)               | Jitter frequency = 900 KHz to 5 MHz<br>Pattern = CJTPAT BER = 1E-12 | > 0.1       |     |       | > 0.1       |     |       | UI   |
| CPRI Transmit Jitter Generation (14)                       |                                                                     |             |     |       |             |     |       |      |
| Total jitter                                               | E.6.HV, E.12.HV<br>Pattern = CJPAT                                  | —           | —   | 0.279 | —           | —   | 0.279 | UI   |
|                                                            | E.6.LV, E.12.LV, E.24.LV, E.30.LV<br>Pattern = CJPAT                | —           | —   | 0.35  | —           | —   | 0.35  | UI   |
| Deterministic jitter                                       | E.6.HV, E.12.HV<br>Pattern = CJPAT                                  | —           | —   | 0.14  | —           | —   | 0.14  | UI   |
|                                                            | E.6.LV, E.12.LV, E.24.LV, E.30.LV<br>Pattern = CJPAT                | —           | —   | 0.17  | —           | —   | 0.17  | UI   |
| CPRI Receiver Jitter Tolerance (14)                        |                                                                     |             |     |       |             |     |       |      |
| Total jitter tolerance                                     | E.6.HV, E.12.HV<br>Pattern = CJPAT                                  | > 0.66      |     |       | > 0.66      |     |       | UI   |
| Deterministic jitter tolerance                             | E.6.HV, E.12.HV<br>Pattern = CJPAT                                  | > 0.4       |     |       | > 0.4       |     |       | UI   |
| Total jitter tolerance                                     | E.6.LV, E.12.LV, E.24.LV, E.30.LV<br>Pattern = CJPAT                | > 0.65      |     |       | > 0.65      |     |       | UI   |
| Deterministic jitter tolerance                             | E.6.LV, E.12.LV, E.24.LV, E.30.LV<br>Pattern = CJPAT                | > 0.37      |     |       | > 0.37      |     |       | UI   |
| Combined deterministic and random jitter tolerance         | E.6.LV, E.12.LV, E.24.LV, E.30.LV<br>Pattern = CJPAT                | > 0.55      |     |       | > 0.55      |     |       | UI   |
| OBSAI Transmit Jitter Generation (15)                      |                                                                     |             |     |       |             |     |       |      |
| Total jitter at 768 Mbps, 1536 Mbps, and 3072 Mbps         | REFCLK = 153.6 MHz<br>Pattern CJPAT                                 | —           | —   | 0.35  | —           | —   | 0.35  | UI   |
| Deterministic jitter at 768 MBps, 1536 Mbps, and 3072 Mbps | REFCLK = 153.6 MHz<br>Pattern CJPAT                                 | —           | —   | 0.17  | —           | —   | 0.17  | UI   |

## Configuration

Table 1–50 lists the configuration mode specifications for Arria II GX and GZ devices.

**Table 1–50. Configuration Mode Specifications for Arria II Devices**

| Programming Mode                   | DCLK Frequency |     |     | Unit |
|------------------------------------|----------------|-----|-----|------|
|                                    | Min            | Typ | Max |      |
| Passive serial                     | —              | —   | 125 | MHz  |
| Fast passive parallel              | —              | —   | 125 | MHz  |
| Fast active serial (fast clock)    | 17             | 26  | 40  | MHz  |
| Fast active serial (slow clock)    | 8.5            | 13  | 20  | MHz  |
| Remote update only in fast AS mode | —              | —   | 10  | MHz  |

## JTAG Specifications

Table 1–51 lists the JTAG timing parameters and values for Arria II GX and GZ devices.

**Table 1–51. JTAG Timing Parameters and Values for Arria II Devices**

| Symbol          | Description                              | Min | Max | Unit |
|-----------------|------------------------------------------|-----|-----|------|
| $t_{JCP}$       | TCK clock period                         | 30  | —   | ns   |
| $t_{JCH}$       | TCK clock high time                      | 14  | —   | ns   |
| $t_{JCL}$       | TCK clock low time                       | 14  | —   | ns   |
| $t_{JPSU(TDI)}$ | TDI JTAG port setup time                 | 1   | —   | ns   |
| $t_{JPSU(TMS)}$ | TMS JTAG port setup time                 | 3   | —   | ns   |
| $t_{JPH}$       | JTAG port hold time                      | 5   | —   | ns   |
| $t_{JPCO}$      | JTAG port clock to output                | —   | 11  | ns   |
| $t_{JPZX}$      | JTAG port high impedance to valid output | —   | 14  | ns   |
| $t_{JPXZ}$      | JTAG port valid output to high impedance | —   | 14  | ns   |

## Chip-Wide Reset (Dev\_CLRn) Specifications

Table 1–52 lists the specifications for the chip-wide reset (Dev\_CLRn) for Arria II GX and GZ devices.

**Table 1–52. Chip-Wide Reset (Dev\_CLRn) Specifications for Arria II Devices**

| Description | Min | Typ | Max | Unit    |
|-------------|-----|-----|-----|---------|
| Dev_CLRn    | 500 | —   | —   | $\mu$ s |

**Table 1-54. High-Speed I/O Specifications for Arria II GZ Devices (Note 1), (2), (10) (Part 2 of 3)**

| Symbol                                                                                                  | Conditions                                                                       | C3, I3 |     |         | C4, I4 |     |         | Unit |
|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------|-----|---------|--------|-----|---------|------|
|                                                                                                         |                                                                                  | Min    | Typ | Max     | Min    | Typ | Max     |      |
| $f_{\text{HCLK\_OUT}}$ (output clock frequency)                                                         | —                                                                                | 5      | —   | 717 (7) | 5      | —   | 717 (7) | MHz  |
| <b>Transmitter</b>                                                                                      |                                                                                  |        |     |         |        |     |         |      |
| $f_{\text{HSDR}}$ (true LVDS output data rate)                                                          | SERDES factor, J = 3 to 10 (using dedicated SERDES) (8)                          | (4)    | —   | 1250    | (4)    | —   | 1250    | Mbps |
|                                                                                                         | SERDES factor J = 2, (using DDR registers)                                       | (4)    | —   | (5)     | (4)    | —   | (5)     | Mbps |
|                                                                                                         | SERDES factor J = 1, (uses an SDR register)                                      | (4)    | —   | (5)     | (4)    | —   | (5)     | Mbps |
| $f_{\text{HSDR}}$ (emulated LVDS_E_3R output data rate) (5)                                             | SERDES factor J = 4 to 10                                                        | (4)    | —   | 1152    | (4)    | —   | 800     | Mbps |
| $f_{\text{HSDR}}$ (emulated LVDS_E_1R output data rate)                                                 |                                                                                  | (4)    | —   | 200     | (4)    | —   | 200     | Mbps |
| $t_{\text{x Jitter}}$                                                                                   | Total jitter for data rate, 600 Mbps to 1.6 Gbps                                 | —      | —   | 160     | —      | —   | 160     | ps   |
|                                                                                                         | Total jitter for data rate, < 600 Mbps                                           | —      | —   | 0.1     | —      | —   | 0.1     | UI   |
| $t_{\text{x Jitter}}$ - emulated differential I/O standards with three external output resistor network | Total jitter for data rate, 600 Mbps to 1.25 Gbps                                | —      | —   | 300     | —      | —   | 325     | ps   |
|                                                                                                         | Total jitter for data rate < 600 Mbps                                            | —      | —   | 0.2     | —      | —   | 0.25    | UI   |
| $t_{\text{x Jitter}}$ - emulated differential I/O standards with one external output resistor network   | —                                                                                | —      | —   | 0.15    | —      | —   | 0.15    | UI   |
| $t_{\text{DUTY}}$                                                                                       | TX output clock duty cycle for both True and emulated differential I/O standards | 45     | 50  | 55      | 45     | 50  | 55      | %    |

**Table 1-55. DPA Lock Time Specifications for Arria II Devices (Note 1), (2), (3)**

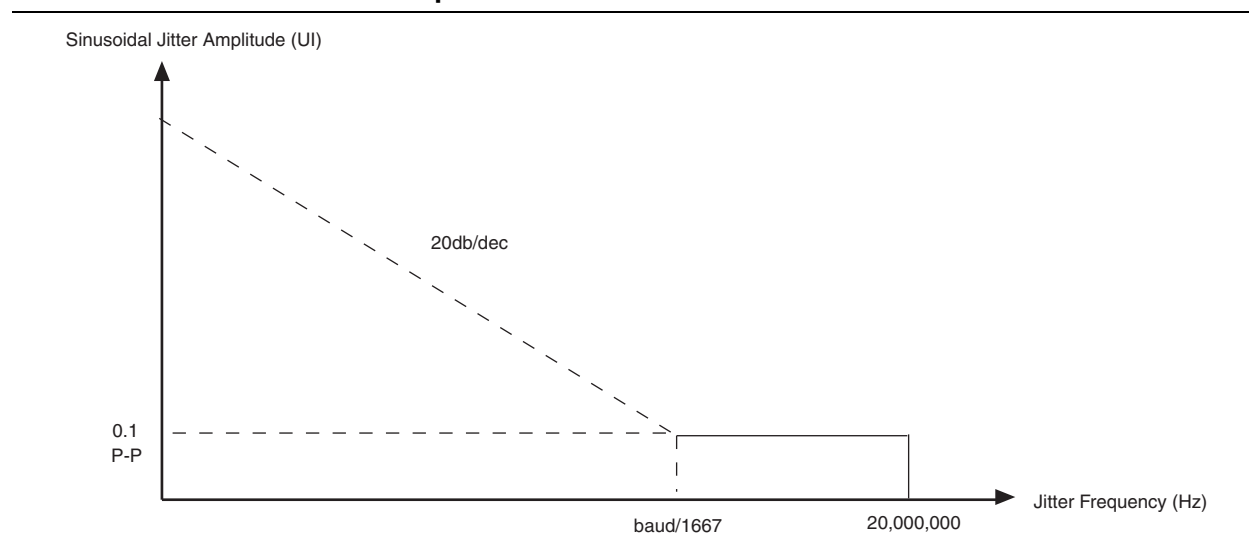
| Standard           | Training Pattern     | Number of Data Transitions in One Repetition of the Training Pattern | Number of Repetitions per 256 Data Transitions (4) | Maximum              |
|--------------------|----------------------|----------------------------------------------------------------------|----------------------------------------------------|----------------------|
| SPI-4              | 00000000001111111111 | 2                                                                    | 128                                                | 640 data transitions |
| Parallel Rapid I/O | 00001111             | 2                                                                    | 128                                                | 640 data transitions |
|                    | 10010000             | 4                                                                    | 64                                                 | 640 data transitions |
| Miscellaneous      | 10101010             | 8                                                                    | 32                                                 | 640 data transitions |
|                    | 01010101             | 8                                                                    | 32                                                 | 640 data transitions |

**Notes to Table 1-55:**

- (1) The DPA lock time is for one channel.
- (2) One data transition is defined as a 0-to-1 or 1-to-0 transition.
- (3) The DPA lock time stated in the table applies to both commercial and industrial grade.
- (4) This is the number of repetitions for the stated training pattern to achieve the 256 data transitions.

Figure 1-5 shows the LVDS soft-CDR/DPA sinusoidal jitter tolerance specification for Arria II GZ devices at a data rate less than 1.25 Gbps and all the Arria II GX devices.

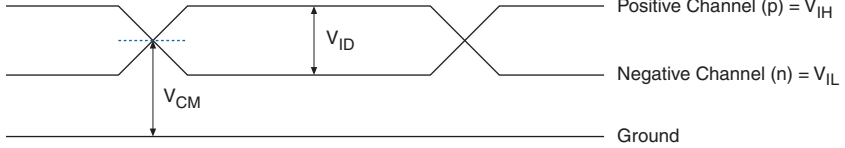
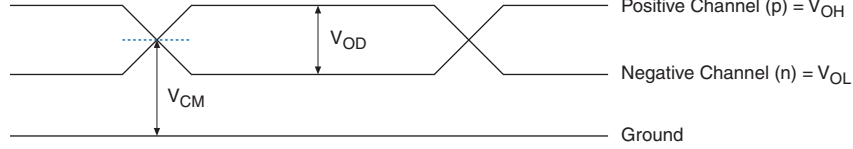
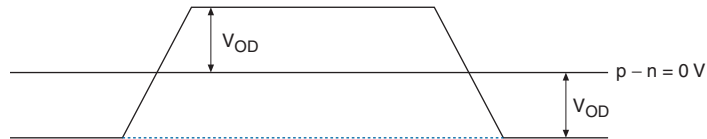
**Figure 1-5. LVDS Soft-CDR/DPA Sinusoidal Jitter Tolerance Specification for All Arria II GX Devices and for Arria II GZ Devices at a Data Rate less than 1.25 Gbps**



# Glossary

Table 1-68 lists the glossary for this chapter.

Table 1-68. Glossary (Part 1 of 4)

| Letter              | Subject                    | Definitions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A,<br>B,<br>C,<br>D | Differential I/O Standards | <p><i>Receiver Input Waveforms</i></p> <p><b>Single-Ended Waveform</b></p>  <p>Positive Channel (p) = <math>V_{IH}</math></p> <p>Negative Channel (n) = <math>V_{IL}</math></p> <p>Ground</p> <p><b>Differential Waveform</b></p>  <p><i>Transmitter Output Waveforms</i></p> <p><b>Single-Ended Waveform</b></p>  <p>Positive Channel (p) = <math>V_{OH}</math></p> <p>Negative Channel (n) = <math>V_{OL}</math></p> <p>Ground</p> <p><b>Differential Waveform</b></p>  |
|                     |                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                     |                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                     |                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| E,<br>F             | $f_{HSCLK}$                | Left/Right PLL input clock frequency.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                     | $f_{HSDR}$                 | High-speed I/O block: Maximum/minimum LVDS data transfer rate ( $f_{HSDR} = 1/TUI$ ), non-DPA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                     | $f_{HSRDPA}$               | High-speed I/O block: Maximum/minimum LVDS data transfer rate ( $f_{HSRDPA} = 1/TUI$ ), DPA.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |