



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding Embedded - FPGAs (Field Programmable Gate Array)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.


#### Details

|                                |                                                                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Active                                                                                                                                    |
| Number of LABs/CLBs            | 2816                                                                                                                                      |
| Number of Logic Elements/Cells | 25344                                                                                                                                     |
| Total RAM Bits                 | 589824                                                                                                                                    |
| Number of I/O                  | 161                                                                                                                                       |
| Number of Gates                | 1400000                                                                                                                                   |
| Voltage - Supply               | 1.14V ~ 1.26V                                                                                                                             |
| Mounting Type                  | Surface Mount                                                                                                                             |
| Operating Temperature          | -40°C ~ 100°C (TJ)                                                                                                                        |
| Package / Case                 | 256-LBGA                                                                                                                                  |
| Supplier Device Package        | 256-FTBGA (17x17)                                                                                                                         |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/xilinx/xc3s1400a-4ft256i">https://www.e-xfl.com/product-detail/xilinx/xc3s1400a-4ft256i</a> |



## Ordering Information

Spartan-3A FPGAs are available in both standard and Pb-free packaging options for all device/package combinations. The Pb-free packages include a 'G' character in the ordering code.

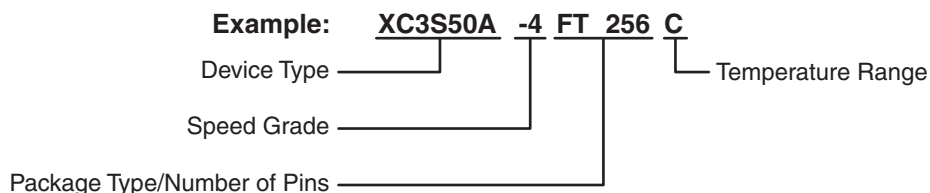

DS529-1\_05\_011309

| Device    | Speed Grade |                                       | Package Type / Number of Pins <sup>(1)</sup> |                                                  | Temperature Range (T <sub>J</sub> ) |                             |
|-----------|-------------|---------------------------------------|----------------------------------------------|--------------------------------------------------|-------------------------------------|-----------------------------|
| XC3S50A   | –4          | Standard Performance                  | VQ100/<br>VQG100                             | 100-pin Very Thin Quad Flat Pack (VQFP)          | C                                   | Commercial (0°C to 85°C)    |
| XC3S200A  | –5          | High Performance<br>(Commercial only) | TQ144/<br>TQG144                             | 144-pin Thin Quad Flat Pack (TQFP)               | I                                   | Industrial (–40°C to 100°C) |
| XC3S400A  |             |                                       | FT256/<br>FTG256                             | 256-ball Fine-Pitch Thin Ball Grid Array (FTBGA) |                                     |                             |
| XC3S700A  |             |                                       | FG320/<br>FGG320                             | 320-ball Fine-Pitch Ball Grid Array (FBGA)       |                                     |                             |
| XC3S1400A |             |                                       | FG400/<br>FGG400                             | 400-ball Fine-Pitch Ball Grid Array (FBGA)       |                                     |                             |
|           |             |                                       | FG484/<br>FGG484                             | 484-ball Fine-Pitch Ball Grid Array (FBGA)       |                                     |                             |
|           |             |                                       | FG676/<br>FGG676                             | 676-ball Fine-Pitch Ball Grid Array (FBGA)       |                                     |                             |

### Notes:

1. See [Table 2](#) for specific device/package combinations.
2. See [DS681](#) for the XA Automotive Spartan-3A FPGAs.

## Revision History

The following table shows the revision history for this document.

| Date     | Version | Revision                                                                                                                                                                                |
|----------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12/05/06 | 1.0     | Initial release.                                                                                                                                                                        |
| 02/02/07 | 1.1     | Promoted to Preliminary status. Updated maximum differential I/O count for XC3S50A in <a href="#">Table 1</a> . Updated differential input-only pin counts in <a href="#">Table 2</a> . |
| 03/16/07 | 1.2     | Minor formatting updates.                                                                                                                                                               |
| 04/23/07 | 1.3     | Added " <a href="#">Production Status</a> " section.                                                                                                                                    |
| 05/08/07 | 1.4     | Updated XC3S400A to Production.                                                                                                                                                         |
| 07/10/07 | 1.4.1   | Minor updates.                                                                                                                                                                          |
| 04/15/08 | 1.6     | Added VQ100 for XC3S50A and XC3S200A and extended FT256 to XC3S700A and XC3S1400A. Added reference to SCD 4103 for 750 Mbps performance.                                                |
| 05/28/08 | 1.7     | Added reference to <a href="#">XA Automotive</a> version.                                                                                                                               |
| 03/06/09 | 1.8     | Simplified Ordering Information. Added references to Extended Spartan-3A Family. Removed reference to SCD 4103.                                                                         |
| 08/19/10 | 2.0     | Updated <a href="#">Table 2</a> to clarify TQ/VQ size.                                                                                                                                  |

## Related Product Families

The Spartan-3AN nonvolatile FPGA family is architecturally identical to the Spartan-3A FPGA family, except that it has in-system flash memory and is offered in select pin-compatible package options.

- **DS557: Spartan-3AN Family Data Sheet**  
[www.xilinx.com/support/documentation/data\\_sheets/ds557.pdf](http://www.xilinx.com/support/documentation/data_sheets/ds557.pdf)

The compatible Spartan-3A DSP FPGA family replaces the 18-bit multiplier with the DSP48A block, while also increasing the block RAM capability and quantity. The two members of the Spartan-3A DSP FPGA family extend the Spartan-3A density range up to 37,440 and 53,712 logic cells.

- **DS610: Spartan-3A DSP FPGA Family Data Sheet**  
[www.xilinx.com/support/documentation/data\\_sheets/ds610.pdf](http://www.xilinx.com/support/documentation/data_sheets/ds610.pdf)
- **UG431: XtremeDSP DSP48A for Spartan-3A DSP FPGAs**  
[www.xilinx.com/support/documentation/user\\_guides/ug431.pdf](http://www.xilinx.com/support/documentation/user_guides/ug431.pdf)

## Revision History

The following table shows the revision history for this document.

| Date     | Version | Revision                                                      |
|----------|---------|---------------------------------------------------------------|
| 12/05/06 | 1.0     | Initial release.                                              |
| 02/02/07 | 1.1     | Promoted to Preliminary status.                               |
| 03/16/07 | 1.2     | Added cross-reference to nonvolatile Spartan-3AN FPGA family. |
| 04/23/07 | 1.3     | Added cross-reference to compatible Spartan-3A DSP family.    |
| 07/10/07 | 1.4     | Updated Starter Kit reference to new UG334.                   |
| 04/15/08 | 1.6     | Updated trademarks.                                           |
| 05/28/08 | 1.7     | Added reference to <a href="#">XA Automotive</a> version.     |
| 03/06/09 | 1.8     | Added link to DS706 on Extended Spartan-3A family.            |
| 08/19/10 | 2.0     | Updated link to sign up for Alerts.                           |

## Switching Characteristics

All Spartan-3A FPGAs ship in two speed grades: –4 and the higher performance –5. Switching characteristics in this document are designated as Advance, Preliminary, or Production, as shown in [Table 16](#). Each category is defined as follows:

**Advance:** These specifications are based on simulations only and are typically available soon after establishing FPGA specifications. Although speed grades with this designation are considered relatively stable and conservative, some under-reporting might still occur.

**Preliminary:** These specifications are based on complete early silicon characterization. Devices and speed grades with this designation are intended to give a better indication of the expected performance of production silicon. The probability of under-reporting preliminary delays is greatly reduced compared to Advance data.

**Production:** These specifications are approved once enough production silicon of a particular device has been characterized to provide full correlation between speed files and devices over numerous production lots. There is no under-reporting of delays, and customers receive formal notification of any subsequent changes. Typically, the slowest speed grades transition to Production before faster speed grades.

## Software Version Requirements

Production-quality systems must use FPGA designs compiled using a speed file designated as PRODUCTION status. FPGA designs using a less mature speed file designation should only be used during system prototyping or pre-production qualification. FPGA designs with speed files designated as Advance or Preliminary should not be used in a production-quality system.

Whenever a speed file designation changes, as a device matures toward Production status, rerun the latest Xilinx® ISE® software on the FPGA design to ensure that the FPGA design incorporates the latest timing information and software updates.

All parameter limits are representative of worst-case supply voltage and junction temperature conditions. **Unless otherwise noted, the published parameter values apply to all Spartan-3A devices. AC and DC characteristics are specified using the same numbers for both commercial and industrial grades.**

To create a Xilinx user account and sign up for automatic E-mail notification whenever this data sheet is updated:

- **Sign Up for Alerts**

[www.xilinx.com/support/answers/18683.htm](http://www.xilinx.com/support/answers/18683.htm)

Timing parameters and their representative values are selected for inclusion below either because they are important as general design requirements or they indicate fundamental device performance characteristics. The Spartan-3A FPGA speed files (v1.41), part of the Xilinx Development Software, are the original source for many but not all of the values. The speed grade designations for these files are shown in [Table 16](#). For more complete, more precise, and worst-case data, use the values reported by the Xilinx static timing analyzer (TRACE in the Xilinx development software) and back-annotated to the simulation netlist.

**Table 16: Spartan-3A v1.41 Speed Grade Designation**

| Device    | Advance | Preliminary | Production |
|-----------|---------|-------------|------------|
| XC3S50A   |         |             | -4, -5     |
| XC3S200A  |         |             | -4, -5     |
| XC3S400A  |         |             | -4, -5     |
| XC3S700A  |         |             | -4, -5     |
| XC3S1400A |         |             | -4, -5     |

[Table 17](#) provides the recent history of the Spartan-3A FPGA speed files.

**Table 17: Spartan-3A Speed File Version History**

| Version | ISE Release                                                              | Description                                                                                                                                                                                                                                 |
|---------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.41    | ISE 10.1.03                                                              | Updated Automotive output delays                                                                                                                                                                                                            |
| 1.40    | ISE 10.1.02                                                              | Updated Automotive input delays.                                                                                                                                                                                                            |
| 1.39    | ISE 10.1.01                                                              | Added <a href="#">Automotive</a> parts.                                                                                                                                                                                                     |
| 1.38    | ISE 9.2.03i                                                              | Added Absolute Minimum values.                                                                                                                                                                                                              |
| 1.37    | ISE 9.2.01i                                                              | Updated pin-to-pin setup and hold times ( <a href="#">Table 19</a> ), TMDs output adjustment ( <a href="#">Table 26</a> ) multiplier setup/hold times ( <a href="#">Table 34</a> ), and block RAM clock width ( <a href="#">Table 35</a> ). |
| 1.36    | ISE 9.2i; previously available via Answer Record <a href="#">AR24992</a> | XC3S400A, all speed grades and all temperature grades, upgraded to Production                                                                                                                                                               |
| 1.35    | Answer Record <a href="#">AR24992</a>                                    | XC3S50A, XC3S200A, XC3S700A, XC3S1400A, all speed grades and all temperature grades, upgraded to Production.                                                                                                                                |
| 1.34    | ISE 9.1.03i                                                              | XC3S700A and XC3S1400A -4 speed grade upgraded to Production. Updated pin-to-pin timing numbers.                                                                                                                                            |

## I/O Timing

### Pin-to-Pin Clock-to-Output Times

Table 18: Pin-to-Pin Clock-to-Output Times for the IOB Output Path

| Symbol                | Description                                                                                                                                                       | Conditions                                                                           | Device    | Speed Grade |      | Units |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------|-------------|------|-------|
|                       |                                                                                                                                                                   |                                                                                      |           | -5          | -4   |       |
|                       |                                                                                                                                                                   |                                                                                      |           | Max         | Max  |       |
| Clock-to-Output Times |                                                                                                                                                                   |                                                                                      |           |             |      |       |
| T <sub>ICKOFDCM</sub> | When reading from the Output Flip-Flop (OFF), the time from the active transition on the Global Clock pin to data appearing at the Output pin. The DCM is in use. | LVCMOS25 <sup>(2)</sup> , 12mA output drive, Fast slew rate, with DCM <sup>(3)</sup> | XC3S50A   | 3.18        | 3.42 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S200A  | 3.21        | 3.27 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S400A  | 2.97        | 3.33 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S700A  | 3.39        | 3.50 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S1400A | 3.51        | 3.99 | ns    |
| T <sub>ICKOF</sub>    | When reading from OFF, the time from the active transition on the Global Clock pin to data appearing at the Output pin. The DCM is not in use.                    | LVCMOS25 <sup>(2)</sup> , 12mA output drive, Fast slew rate, without DCM             | XC3S50A   | 4.59        | 5.02 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S200A  | 4.88        | 5.24 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S400A  | 4.68        | 5.12 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S700A  | 4.97        | 5.34 | ns    |
|                       |                                                                                                                                                                   |                                                                                      | XC3S1400A | 5.06        | 5.69 | ns    |

**Notes:**

1. The numbers in this table are tested using the methodology presented in [Table 27](#) and are based on the operating conditions set forth in [Table 8](#) and [Table 11](#).
2. This clock-to-output time requires adjustment whenever a signal standard other than LVCMOS25 is assigned to the Global Clock Input or a standard other than LVCMOS25 with 12 mA drive and Fast slew rate is assigned to the data Output. If the former is true, *add* the appropriate Input adjustment from [Table 23](#). If the latter is true, *add* the appropriate Output adjustment from [Table 26](#).
3. DCM output jitter is included in all measurements.

# Input Propagation Times

Table 22: Propagation Times for the IOB Input Path

| Symbol             | Description                                                                                             | Conditions              | DELAY_VALUE        | Device    | Speed Grade |      | Units |
|--------------------|---------------------------------------------------------------------------------------------------------|-------------------------|--------------------|-----------|-------------|------|-------|
|                    |                                                                                                         |                         |                    |           | -5          | -4   |       |
|                    |                                                                                                         |                         |                    |           | Max         | Max  |       |
| Propagation Times  |                                                                                                         |                         |                    |           |             |      |       |
| T <sub>IOPI</sub>  | The time it takes for data to travel from the Input pin to the I output with no input delay programmed  | LVCMOS25 <sup>(2)</sup> | IBUF_DELAY_VALUE=0 | XC3S50A   | 1.04        | 1.12 | ns    |
|                    |                                                                                                         |                         |                    | XC3S200A  | 0.87        | 0.87 | ns    |
|                    |                                                                                                         |                         |                    | XC3S400A  | 0.65        | 0.72 | ns    |
|                    |                                                                                                         |                         |                    | XC3S700A  | 0.92        | 0.92 | ns    |
|                    |                                                                                                         |                         |                    | XC3S1400A | 0.96        | 1.21 | ns    |
| T <sub>IOPID</sub> | The time it takes for data to travel from the Input pin to the I output with the input delay programmed | LVCMOS25 <sup>(2)</sup> | 1                  | XC3S50A   | 1.79        | 2.07 | ns    |
|                    |                                                                                                         |                         | 2                  |           | 2.13        | 2.46 | ns    |
|                    |                                                                                                         |                         | 3                  |           | 2.36        | 2.71 | ns    |
|                    |                                                                                                         |                         | 4                  |           | 2.88        | 3.21 | ns    |
|                    |                                                                                                         |                         | 5                  |           | 3.11        | 3.46 | ns    |
|                    |                                                                                                         |                         | 6                  |           | 3.45        | 3.84 | ns    |
|                    |                                                                                                         |                         | 7                  |           | 3.75        | 4.19 | ns    |
|                    |                                                                                                         |                         | 8                  |           | 4.00        | 4.47 | ns    |
|                    |                                                                                                         |                         | 9                  |           | 3.61        | 4.11 | ns    |
|                    |                                                                                                         |                         | 10                 |           | 3.95        | 4.50 | ns    |
|                    |                                                                                                         |                         | 11                 |           | 4.18        | 4.67 | ns    |
|                    |                                                                                                         |                         | 12                 |           | 4.75        | 5.20 | ns    |
|                    |                                                                                                         |                         | 13                 |           | 4.98        | 5.44 | ns    |
|                    |                                                                                                         |                         | 14                 |           | 5.31        | 5.95 | ns    |
|                    |                                                                                                         |                         | 15                 |           | 5.62        | 6.28 | ns    |
|                    |                                                                                                         |                         | 16                 |           | 5.86        | 6.57 | ns    |
|                    |                                                                                                         |                         | 1                  | XC3S200A  | 1.57        | 1.65 | ns    |
|                    |                                                                                                         |                         | 2                  |           | 1.87        | 1.97 | ns    |
|                    |                                                                                                         |                         | 3                  |           | 2.16        | 2.33 | ns    |
|                    |                                                                                                         |                         | 4                  |           | 2.68        | 2.96 | ns    |
|                    |                                                                                                         |                         | 5                  |           | 2.87        | 3.19 | ns    |
|                    |                                                                                                         |                         | 6                  |           | 3.20        | 3.60 | ns    |
|                    |                                                                                                         |                         | 7                  |           | 3.57        | 4.02 | ns    |
|                    |                                                                                                         |                         | 8                  |           | 3.79        | 4.26 | ns    |
|                    |                                                                                                         |                         | 9                  |           | 3.42        | 3.86 | ns    |
|                    |                                                                                                         |                         | 10                 |           | 3.79        | 4.25 | ns    |
|                    |                                                                                                         |                         | 11                 |           | 4.02        | 4.55 | ns    |
|                    |                                                                                                         |                         | 12                 |           | 4.62        | 5.24 | ns    |
|                    |                                                                                                         |                         | 13                 |           | 4.86        | 5.53 | ns    |
|                    |                                                                                                         |                         | 14                 |           | 5.18        | 5.94 | ns    |

Table 28: Equivalent V<sub>CCO</sub>/GND Pairs per Bank

| Device    | Package Style (including Pb-free) |       |       |       |       |       |       |
|-----------|-----------------------------------|-------|-------|-------|-------|-------|-------|
|           | VQ100                             | TQ144 | FT256 | FG320 | FG400 | FG484 | FG676 |
| XC3S50A   | 1                                 | 2     | 3     | —     | —     | —     | —     |
| XC3S200A  | 1                                 | —     | 4     | 4     | —     | —     | —     |
| XC3S400A  | —                                 | —     | 4     | 4     | 5     | —     | —     |
| XC3S700A  | —                                 | —     | 4     | —     | 5     | 5     | —     |
| XC3S1400A | —                                 | —     | 4     | —     | —     | 6     | 9     |

Table 29: Recommended Number of Simultaneously Switching Outputs per V<sub>CCO</sub>-GND Pair (V<sub>CCAUX</sub>=3.3V)

| Signal Standard (IOSTANDARD)  |         |    | Package Type            |                         |                                   |                         |  |
|-------------------------------|---------|----|-------------------------|-------------------------|-----------------------------------|-------------------------|--|
|                               |         |    | VQ100, TQ144            |                         | FT256, FG320, FG400, FG484, FG676 |                         |  |
|                               |         |    | Top, Bottom (Banks 0,2) | Left, Right (Banks 1,3) | Top, Bottom (Banks 0,2)           | Left, Right (Banks 1,3) |  |
| <b>Single-Ended Standards</b> |         |    |                         |                         |                                   |                         |  |
| LVTTTL                        | Slow    | 2  | 20                      | 20                      | 60                                | 60                      |  |
|                               |         | 4  | 10                      | 10                      | 41                                | 41                      |  |
|                               |         | 6  | 10                      | 10                      | 29                                | 29                      |  |
|                               |         | 8  | 6                       | 6                       | 22                                | 22                      |  |
|                               |         | 12 | 6                       | 6                       | 13                                | 13                      |  |
|                               |         | 16 | 5                       | 5                       | 11                                | 11                      |  |
|                               |         | 24 | 4                       | 4                       | 9                                 | 9                       |  |
|                               | Fast    | 2  | 10                      | 10                      | 10                                | 10                      |  |
|                               |         | 4  | 6                       | 6                       | 6                                 | 6                       |  |
|                               |         | 6  | 5                       | 5                       | 5                                 | 5                       |  |
|                               |         | 8  | 3                       | 3                       | 3                                 | 3                       |  |
|                               |         | 12 | 3                       | 3                       | 3                                 | 3                       |  |
|                               |         | 16 | 3                       | 3                       | 3                                 | 3                       |  |
|                               |         | 24 | 2                       | 2                       | 2                                 | 2                       |  |
|                               | QuietIO | 2  | 40                      | 40                      | 80                                | 80                      |  |
|                               |         | 4  | 24                      | 24                      | 48                                | 48                      |  |
|                               |         | 6  | 20                      | 20                      | 36                                | 36                      |  |
|                               |         | 8  | 16                      | 16                      | 27                                | 27                      |  |
|                               |         | 12 | 12                      | 12                      | 16                                | 16                      |  |
|                               |         | 16 | 9                       | 9                       | 13                                | 13                      |  |
|                               |         | 24 | 9                       | 9                       | 12                                | 12                      |  |

Table 29: Recommended Number of Simultaneously Switching Outputs per V<sub>CCO</sub>-GND Pair (V<sub>CCAUX</sub>=3.3V)(Continued)

| Signal Standard (IOSTANDARD) |         |    | Package Type            |                         |                                   |                         |  |
|------------------------------|---------|----|-------------------------|-------------------------|-----------------------------------|-------------------------|--|
|                              |         |    | VQ100, TQ144            |                         | FT256, FG320, FG400, FG484, FG676 |                         |  |
|                              |         |    | Top, Bottom (Banks 0,2) | Left, Right (Banks 1,3) | Top, Bottom (Banks 0,2)           | Left, Right (Banks 1,3) |  |
| LVCMOS33                     | Slow    | 2  | 24                      | 24                      | 76                                | 76                      |  |
|                              |         | 4  | 14                      | 14                      | 46                                | 46                      |  |
|                              |         | 6  | 11                      | 11                      | 27                                | 27                      |  |
|                              |         | 8  | 10                      | 10                      | 20                                | 20                      |  |
|                              |         | 12 | 9                       | 9                       | 13                                | 13                      |  |
|                              |         | 16 | 8                       | 8                       | 10                                | 10                      |  |
|                              |         | 24 | —                       | 8                       | —                                 | 9                       |  |
|                              | Fast    | 2  | 10                      | 10                      | 10                                | 10                      |  |
|                              |         | 4  | 8                       | 8                       | 8                                 | 8                       |  |
|                              |         | 6  | 5                       | 5                       | 5                                 | 5                       |  |
|                              |         | 8  | 4                       | 4                       | 4                                 | 4                       |  |
|                              |         | 12 | 4                       | 4                       | 4                                 | 4                       |  |
|                              |         | 16 | 2                       | 2                       | 2                                 | 2                       |  |
|                              |         | 24 | —                       | 2                       | —                                 | 2                       |  |
|                              | QuietIO | 2  | 36                      | 36                      | 76                                | 76                      |  |
|                              |         | 4  | 32                      | 32                      | 46                                | 46                      |  |
|                              |         | 6  | 24                      | 24                      | 32                                | 32                      |  |
|                              |         | 8  | 16                      | 16                      | 26                                | 26                      |  |
|                              |         | 12 | 16                      | 16                      | 18                                | 18                      |  |
|                              |         | 16 | 12                      | 12                      | 14                                | 14                      |  |
|                              |         | 24 | —                       | 10                      | —                                 | 10                      |  |

## Configurable Logic Block (CLB) Timing


Table 30: CLB (SLICEM) Timing

| Symbol                | Description                                                                                                                             | Speed Grade |      |      |      | Units |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------|------|------|------|-------|
|                       |                                                                                                                                         | -5          |      | -4   |      |       |
|                       |                                                                                                                                         | Min         | Max  | Min  | Max  |       |
| Clock-to-Output Times |                                                                                                                                         |             |      |      |      |       |
| T <sub>CKO</sub>      | When reading from the FFX (FFY) Flip-Flop, the time from the active transition at the CLK input to data appearing at the XQ (YQ) output | –           | 0.60 | –    | 0.68 | ns    |
| Setup Times           |                                                                                                                                         |             |      |      |      |       |
| T <sub>AS</sub>       | Time from the setup of data at the F or G input to the active transition at the CLK input of the CLB                                    | 0.18        | –    | 0.36 | –    | ns    |
| T <sub>DICK</sub>     | Time from the setup of data at the BX or BY input to the active transition at the CLK input of the CLB                                  | 1.58        | –    | 1.88 | –    | ns    |
| Hold Times            |                                                                                                                                         |             |      |      |      |       |
| T <sub>AH</sub>       | Time from the active transition at the CLK input to the point where data is last held at the F or G input                               | 0           | –    | 0    | –    | ns    |
| T <sub>CKDI</sub>     | Time from the active transition at the CLK input to the point where data is last held at the BX or BY input                             | 0           | –    | 0    | –    | ns    |
| Clock Timing          |                                                                                                                                         |             |      |      |      |       |
| T <sub>CH</sub>       | The High pulse width of the CLB's CLK signal                                                                                            | 0.63        | –    | 0.75 | –    | ns    |
| T <sub>CL</sub>       | The Low pulse width of the CLK signal                                                                                                   | 0.63        | –    | 0.75 | –    | ns    |
| F <sub>TOG</sub>      | Toggle frequency (for export control)                                                                                                   | 0           | 770  | 0    | 667  | MHz   |
| Propagation Times     |                                                                                                                                         |             |      |      |      |       |
| T <sub>ILO</sub>      | The time it takes for data to travel from the CLB's F (G) input to the X (Y) output                                                     | –           | 0.62 | –    | 0.71 | ns    |
| Set/Reset Pulse Width |                                                                                                                                         |             |      |      |      |       |
| T <sub>RPW_CLB</sub>  | The minimum allowable pulse width, High or Low, to the CLB's SR input                                                                   | 1.33        | –    | 1.61 | –    | ns    |

### Notes:

1. The numbers in this table are based on the operating conditions set forth in [Table 8](#).

## Serial Peripheral Interface (SPI) Configuration Timing

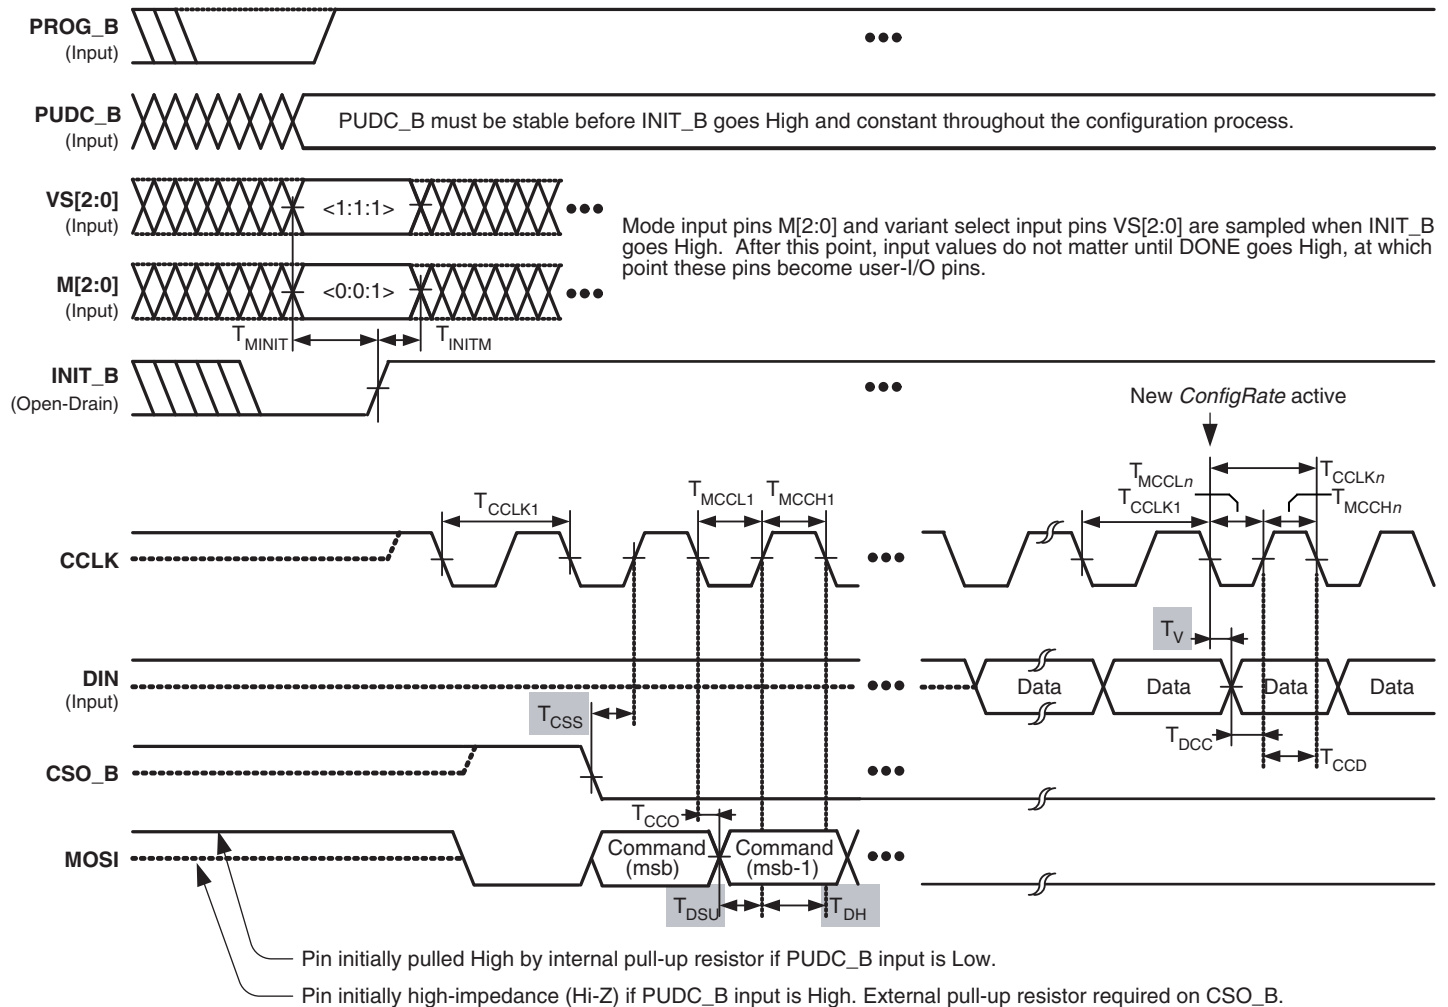

DS529-3\_06\_102506

Figure 14: Waveforms for Serial Peripheral Interface (SPI) Configuration

Table 52: Timing for Serial Peripheral Interface (SPI) Configuration Mode

| Symbol      | Description                                                                                     | Minimum      | Maximum | Units |
|-------------|-------------------------------------------------------------------------------------------------|--------------|---------|-------|
| $T_{CCLK1}$ | Initial CCLK clock period                                                                       | See Table 46 |         |       |
| $T_{CCLKn}$ | CCLK clock period after FPGA loads <b>ConfigRate</b> bitstream option setting                   | See Table 46 |         |       |
| $T_{MINIT}$ | Setup time on VS[2:0] variant-select pins and M[2:0] mode pins before the rising edge of INIT_B | 50           | —       | ns    |
| $T_{INITM}$ | Hold time on VS[2:0] variant-select pins and M[2:0] mode pins after the rising edge of INIT_B   | 0            | —       | ns    |
| $T_{CCO}$   | MOSI output valid delay after CCLK falling clock edge                                           | See Table 50 |         |       |
| $T_{DCC}$   | Setup time on the DIN data input before CCLK rising clock edge                                  | See Table 50 |         |       |
| $T_{CCD}$   | Hold time on the DIN data input after CCLK rising clock edge                                    | See Table 50 |         |       |

## User I/Os by Bank

Table 64 indicates how the 68 available user-I/O pins are distributed between the four I/O banks on the VQ100 package.

Table 64: User I/Os Per Bank for the XC3S50A and XC3S200A in the VQ100 Package

| Package Edge | I/O Bank | Maximum I/O | All Possible I/O Pins by Type |          |           |          |           |
|--------------|----------|-------------|-------------------------------|----------|-----------|----------|-----------|
|              |          |             | I/O                           | INPUT    | DUAL      | VREF     | CLK       |
| Top          | 0        | 15          | 3                             | 1        | 1         | 3        | 7         |
| Right        | 1        | 13          | 6                             | 0        | 0         | 1        | 6         |
| Bottom       | 2        | 26          | 2                             | 0        | 19        | 1        | 4         |
| Left         | 3        | 14          | 6                             | 1        | 0         | 1        | 6         |
| <b>TOTAL</b> |          | <b>68</b>   | <b>17</b>                     | <b>2</b> | <b>20</b> | <b>6</b> | <b>23</b> |

## Footprint Migration Differences

The XC3S50A and XC3S200 have common VQ100 pinouts except for some differences in alignment of differential I/O pairs.

### Differential I/O Alignment Differences

Some differential I/O pairs in the VQ100 on the XC3S50A FPGA are aligned differently than the corresponding pairs on the XC3S200A FPGAs, as shown in Table 65. All the mismatched pairs are in I/O Bank 2. These differences are indicated with the black diamond character (◆) in the footprint diagrams Figure 17 and Figure 18.

Table 65: Differential I/O Differences in VQ100

| VQ100 Pin | Bank | XC3S50A               | XC3S200A              |
|-----------|------|-----------------------|-----------------------|
| P29       | 2    | IIO_L04P_2/VS2        | IO_L03N_2/VS2         |
| P30       |      | IO_L03N_2/VS1         | IO_L04P_2/VS1         |
| P33       |      | IO_L06P_2             | IO_L05N_2             |
| P34       |      | IO_L05N_2/D7          | IO_L06P_2/D7          |
| P51       |      | IO_L11N_2/D0/DIN/MISO | IO_L12P_2/D0/DIN/MISO |
| P52       |      | IO_L12P_2/D1          | IO_L11N_2/D1          |

## TQ144: 144-lead Thin Quad Flat Package

The XC3S50A is available in the 144-lead thin quad flat package, TQ144.

Table 66 lists all the package pins. They are sorted by bank number and then by pin name. Pins that form a differential I/O pair appear together in the table. The table also shows the pin number for each pin and the pin type, as defined earlier.

The XC3S50A does not support the address output pins for the Byte-wide Peripheral Interface (BPI) configuration mode.

An electronic version of this package pinout table and footprint diagram is available for download from the Xilinx website at

[www.xilinx.com/support/documentation/data\\_sheets/s3a\\_pin.zip](http://www.xilinx.com/support/documentation/data_sheets/s3a_pin.zip)

### Pinout Table

Table 66: Spartan-3A TQ144 Pinout

| Bank | Pin Name         | Pin  | Type  |
|------|------------------|------|-------|
| 0    | IO_0             | P142 | I/O   |
| 0    | IO_L01N_0        | P111 | I/O   |
| 0    | IO_L01P_0        | P110 | I/O   |
| 0    | IO_L02N_0        | P113 | I/O   |
| 0    | IO_L02P_0/VREF_0 | P112 | VREF  |
| 0    | IO_L03N_0        | P117 | I/O   |
| 0    | IO_L03P_0        | P115 | I/O   |
| 0    | IO_L04N_0        | P116 | I/O   |
| 0    | IO_L04P_0        | P114 | I/O   |
| 0    | IO_L05N_0        | P121 | I/O   |
| 0    | IO_L05P_0        | P120 | I/O   |
| 0    | IO_L06N_0/GCLK5  | P126 | GCLK  |
| 0    | IO_L06P_0/GCLK4  | P124 | GCLK  |
| 0    | IO_L07N_0/GCLK7  | P127 | GCLK  |
| 0    | IO_L07P_0/GCLK6  | P125 | GCLK  |
| 0    | IO_L08N_0/GCLK9  | P131 | GCLK  |
| 0    | IO_L08P_0/GCLK8  | P129 | GCLK  |
| 0    | IO_L09N_0/GCLK11 | P132 | GCLK  |
| 0    | IO_L09P_0/GCLK10 | P130 | GCLK  |
| 0    | IO_L10N_0        | P135 | I/O   |
| 0    | IO_L10P_0        | P134 | I/O   |
| 0    | IO_L11N_0        | P139 | I/O   |
| 0    | IO_L11P_0        | P138 | I/O   |
| 0    | IO_L12N_0/PUDC_B | P143 | DUAL  |
| 0    | IO_L12P_0/VREF_0 | P141 | VREF  |
| 0    | IP_0             | P140 | INPUT |

Table 66: Spartan-3A TQ144 Pinout(Continued)

| Bank | Pin Name               | Pin  | Type  |
|------|------------------------|------|-------|
| 0    | IP_0/VREF_0            | P123 | VREF  |
| 0    | VCCO_0                 | P119 | VCCO  |
| 0    | VCCO_0                 | P136 | VCCO  |
| 1    | IO_1                   | P79  | I/O   |
| 1    | IO_L01N_1/LDC2         | P78  | DUAL  |
| 1    | IO_L01P_1/HDC          | P76  | DUAL  |
| 1    | IO_L02N_1/LDC0         | P77  | DUAL  |
| 1    | IO_L02P_1/LDC1         | P75  | DUAL  |
| 1    | IO_L03N_1              | P84  | I/O   |
| 1    | IO_L03P_1              | P82  | I/O   |
| 1    | IO_L04N_1/RHCLK1       | P85  | RHCLK |
| 1    | IO_L04P_1/RHCLK0       | P83  | RHCLK |
| 1    | IO_L05N_1/TRDY1/RHCLK3 | P88  | RHCLK |
| 1    | IO_L05P_1/RHCLK2       | P87  | RHCLK |
| 1    | IO_L06N_1/RHCLK5       | P92  | RHCLK |
| 1    | IO_L06P_1/RHCLK4       | P90  | RHCLK |
| 1    | IO_L07N_1/RHCLK7       | P93  | RHCLK |
| 1    | IO_L07P_1/IRDY1/RHCLK6 | P91  | RHCLK |
| 1    | IO_L08N_1              | P98  | I/O   |
| 1    | IO_L08P_1              | P96  | I/O   |
| 1    | IO_L09N_1              | P101 | I/O   |
| 1    | IO_L09P_1              | P99  | I/O   |
| 1    | IO_L10N_1              | P104 | I/O   |
| 1    | IO_L10P_1              | P102 | I/O   |
| 1    | IO_L11N_1              | P105 | I/O   |
| 1    | IO_L11P_1              | P103 | I/O   |
| 1    | IP_1/VREF_1            | P80  | VREF  |
| 1    | IP_1/VREF_1            | P97  | VREF  |
| 1    | VCCO_1                 | P86  | VCCO  |
| 1    | VCCO_1                 | P95  | VCCO  |
| 2    | IO_2/MOSI/CSI_B        | P62  | DUAL  |
| 2    | IO_L01N_2/M0           | P38  | DUAL  |
| 2    | IO_L01P_2/M1           | P37  | DUAL  |
| 2    | IO_L02N_2/CSO_B        | P41  | DUAL  |
| 2    | IO_L02P_2/M2           | P39  | DUAL  |
| 2    | IO_L03N_2/VS1          | P44  | DUAL  |
| 2    | IO_L03P_2/RDWR_B       | P42  | DUAL  |
| 2    | IO_L04N_2/VS0          | P45  | DUAL  |
| 2    | IO_L04P_2/VS2          | P43  | DUAL  |
| 2    | IO_L05N_2/D7           | P48  | DUAL  |

## TQ144 Footprint

Note pin 1 indicator in top-left corner and logo orientation.

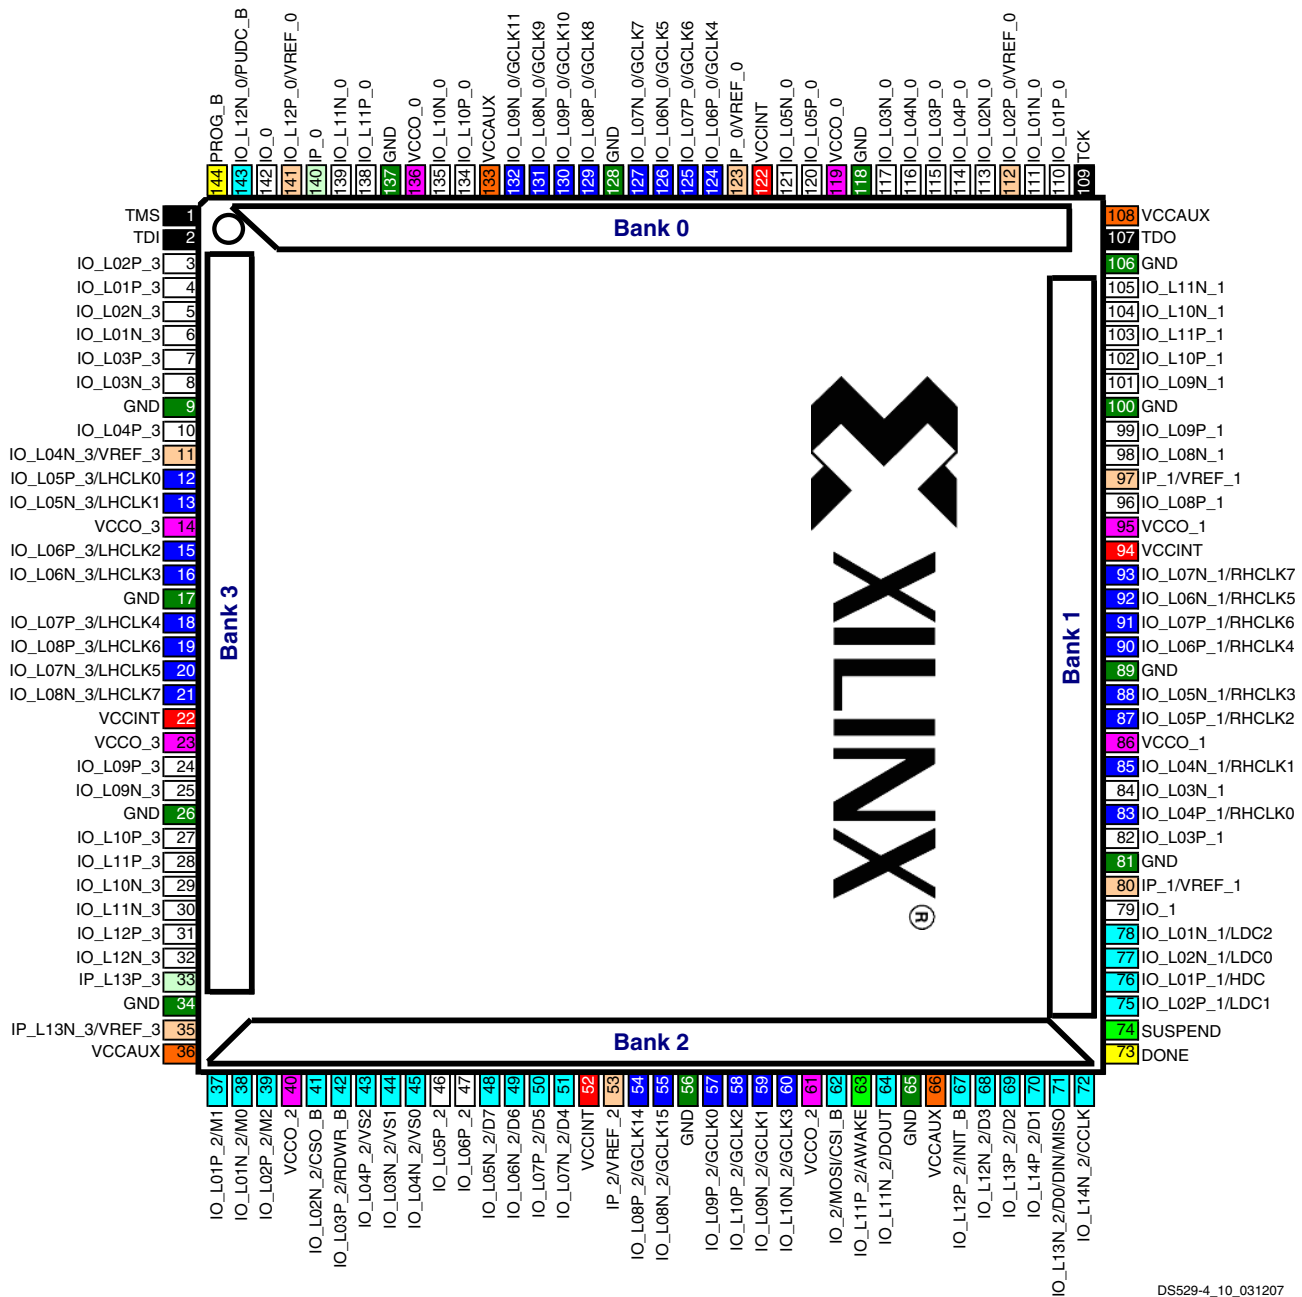


Figure 19: TQ144 Package Footprint (Top View)

|    |                                                                                |    |                                                         |   |                                                           |
|----|--------------------------------------------------------------------------------|----|---------------------------------------------------------|---|-----------------------------------------------------------|
| 42 | <b>I/O:</b> Unrestricted, general-purpose user I/O                             | 25 | <b>DUAL:</b> Configuration pins, then possible user I/O | 8 | <b>VREF:</b> User I/O or input voltage reference for bank |
| 2  | <b>INPUT:</b> Unrestricted, general-purpose input pin                          | 30 | <b>CLK:</b> User I/O, input, or global buffer input     | 8 | <b>VCCO:</b> Output voltage supply for bank               |
| 2  | <b>CONFIG:</b> Dedicated configuration pins                                    | 4  | <b>JTAG:</b> Dedicated JTAG port pins                   | 4 | <b>VCCINT:</b> Internal core supply voltage (+1.2V)       |
| 0  | <b>N.C.:</b> Not connected                                                     | 13 | <b>GND:</b> Ground                                      | 4 | <b>VCCAUX:</b> Auxiliary supply voltage                   |
| 2  | <b>SUSPEND:</b> Dedicated SUSPEND and dual-purpose AWAKE Power Management pins |    |                                                         |   |                                                           |

Table 81: Spartan-3A FG400 Pinout(Continued)

| Bank | Pin Name         | FG400 Ball | Type  |
|------|------------------|------------|-------|
| 1    | IP_1/VREF_1      | N14        | VREF  |
| 1    | IP_L04N_1/VREF_1 | P15        | VREF  |
| 1    | IP_L04P_1        | P14        | INPUT |
| 1    | IP_L11N_1/VREF_1 | M15        | VREF  |
| 1    | IP_L11P_1        | M16        | INPUT |
| 1    | IP_L15N_1        | M13        | INPUT |
| 1    | IP_L15P_1/VREF_1 | M14        | VREF  |
| 1    | IP_L19N_1        | L13        | INPUT |
| 1    | IP_L19P_1        | L14        | INPUT |
| 1    | IP_L23N_1        | K14        | INPUT |
| 1    | IP_L23P_1/VREF_1 | K15        | VREF  |
| 1    | IP_L27N_1        | J15        | INPUT |
| 1    | IP_L27P_1        | J16        | INPUT |
| 1    | IP_L31N_1        | J13        | INPUT |
| 1    | IP_L31P_1/VREF_1 | J14        | VREF  |
| 1    | IP_L35N_1        | H14        | INPUT |
| 1    | IP_L35P_1        | H15        | INPUT |
| 1    | IP_L39N_1        | G14        | INPUT |
| 1    | IP_L39P_1/VREF_1 | G15        | VREF  |
| 1    | VCCO_1           | D19        | VCCO  |
| 1    | VCCO_1           | H16        | VCCO  |
| 1    | VCCO_1           | K19        | VCCO  |
| 1    | VCCO_1           | N16        | VCCO  |
| 1    | VCCO_1           | T19        | VCCO  |
| 2    | IO_L01N_2/M0     | V4         | DUAL  |
| 2    | IO_L01P_2/M1     | U4         | DUAL  |
| 2    | IO_L02N_2/CSO_B  | Y2         | DUAL  |
| 2    | IO_L02P_2/M2     | W3         | DUAL  |
| 2    | IO_L03N_2        | W4         | I/O   |
| 2    | IO_L03P_2        | Y3         | I/O   |
| 2    | IO_L04N_2        | R7         | I/O   |
| 2    | IO_L04P_2        | T6         | I/O   |
| 2    | IO_L05N_2        | U5         | I/O   |
| 2    | IO_L05P_2        | V5         | I/O   |
| 2    | IO_L06N_2        | U6         | I/O   |
| 2    | IO_L06P_2        | T7         | I/O   |
| 2    | IO_L07N_2/VS2    | U7         | DUAL  |
| 2    | IO_L07P_2/RDWR_B | T8         | DUAL  |
| 2    | IO_L08N_2        | Y5         | I/O   |
| 2    | IO_L08P_2        | Y4         | I/O   |

Table 81: Spartan-3A FG400 Pinout(Continued)

| Bank | Pin Name             | FG400 Ball | Type     |
|------|----------------------|------------|----------|
| 2    | IO_L09N_2/VS0        | W6         | DUAL     |
| 2    | IO_L09P_2/VS1        | V6         | DUAL     |
| 2    | IO_L10N_2            | Y7         | I/O      |
| 2    | IO_L10P_2            | Y6         | I/O      |
| 2    | IO_L11N_2            | U9         | I/O      |
| 2    | IO_L11P_2            | T9         | I/O      |
| 2    | IO_L12N_2/D6         | W8         | DUAL     |
| 2    | IO_L12P_2/D7         | V7         | DUAL     |
| 2    | IO_L13N_2            | V9         | I/O      |
| 2    | IO_L13P_2            | V8         | I/O      |
| 2    | IO_L14N_2/D4         | T10        | DUAL     |
| 2    | IO_L14P_2/D5         | U10        | DUAL     |
| 2    | IO_L15N_2/GCLK13     | Y9         | GCLK     |
| 2    | IO_L15P_2/GCLK12     | W9         | GCLK     |
| 2    | IO_L16N_2/GCLK15     | W10        | GCLK     |
| 2    | IO_L16P_2/GCLK14     | V10        | GCLK     |
| 2    | IO_L17N_2/GCLK1      | V11        | GCLK     |
| 2    | IO_L17P_2/GCLK0      | Y11        | GCLK     |
| 2    | IO_L18N_2/GCLK3      | V12        | GCLK     |
| 2    | IO_L18P_2/GCLK2      | U11        | GCLK     |
| 2    | IO_L19N_2            | R12        | I/O      |
| 2    | IO_L19P_2            | T12        | I/O      |
| 2    | IO_L20N_2/MOSI/CSI_B | W12        | DUAL     |
| 2    | IO_L20P_2            | Y12        | I/O      |
| 2    | IO_L21N_2            | W13        | I/O      |
| 2    | IO_L21P_2            | Y13        | I/O      |
| 2    | IO_L22N_2/DOUT       | V13        | DUAL     |
| 2    | IO_L22P_2/AWAKE      | U13        | PWR MGMT |
| 2    | IO_L23N_2            | R13        | I/O      |
| 2    | IO_L23P_2            | T13        | I/O      |
| 2    | IO_L24N_2/D3         | W14        | DUAL     |
| 2    | IO_L24P_2/INIT_B     | Y14        | DUAL     |
| 2    | IO_L25N_2            | T14        | I/O      |
| 2    | IO_L25P_2            | V14        | I/O      |
| 2    | IO_L26N_2/D1         | V15        | DUAL     |
| 2    | IO_L26P_2/D2         | Y15        | DUAL     |
| 2    | IO_L27N_2            | T15        | I/O      |
| 2    | IO_L27P_2            | U15        | I/O      |
| 2    | IO_L28N_2            | W16        | I/O      |

## FG484: 484-ball Fine-pitch Ball Grid Array

The 484-ball fine-pitch ball grid array, FG484, supports both the XC3S700A and the XC3S1400A FPGAs. There are three pinout differences, as described in [Table 86](#).

[Table 83](#) lists all the FG484 package pins. They are sorted by bank number and then by pin name. Pairs of pins that form a differential I/O pair appear together in the table. The table also shows the pin number for each pin and the pin type, as defined earlier.

The shaded rows indicate pinout differences between the XC3S700A and the XC3S1400A FPGAs. The XC3S700A has three unconnected balls, indicated as N.C. (No Connection) in [Table 83](#) and with the black diamond character (◆) in [Table 83](#) and [Figure 25](#).

An electronic version of this package pinout table and footprint diagram is available for download from the Xilinx website at

[www.xilinx.com/support/documentation/data\\_sheets/s3a\\_pin.zip](http://www.xilinx.com/support/documentation/data_sheets/s3a_pin.zip).

### Pinout Table

Table 83: Spartan-3A FG484 Pinout

| Bank | Pin Name         | FG484 Ball | Type |
|------|------------------|------------|------|
| 0    | IO_L01N_0        | D18        | I/O  |
| 0    | IO_L01P_0        | E17        | I/O  |
| 0    | IO_L02N_0        | C19        | I/O  |
| 0    | IO_L02P_0/VREF_0 | D19        | VREF |
| 0    | IO_L03N_0        | A20        | I/O  |
| 0    | IO_L03P_0        | B20        | I/O  |
| 0    | IO_L04N_0        | F15        | I/O  |
| 0    | IO_L04P_0        | E15        | I/O  |
| 0    | IO_L05N_0        | A18        | I/O  |
| 0    | IO_L05P_0        | C18        | I/O  |
| 0    | IO_L06N_0        | A19        | I/O  |
| 0    | IO_L06P_0/VREF_0 | B19        | VREF |
| 0    | IO_L07N_0        | C17        | I/O  |
| 0    | IO_L07P_0        | D17        | I/O  |
| 0    | IO_L08N_0        | C16        | I/O  |
| 0    | IO_L08P_0        | D16        | I/O  |
| 0    | IO_L09N_0        | E14        | I/O  |
| 0    | IO_L09P_0        | C14        | I/O  |
| 0    | IO_L10N_0        | A17        | I/O  |
| 0    | IO_L10P_0        | B17        | I/O  |
| 0    | IO_L11N_0        | C15        | I/O  |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank | Pin Name         | FG484 Ball | Type |
|------|------------------|------------|------|
| 0    | IO_L11P_0        | D15        | I/O  |
| 0    | IO_L12N_0/VREF_0 | A15        | VREF |
| 0    | IO_L12P_0        | A16        | I/O  |
| 0    | IO_L13N_0        | A14        | I/O  |
| 0    | IO_L13P_0        | B15        | I/O  |
| 0    | IO_L14N_0        | E13        | I/O  |
| 0    | IO_L14P_0        | F13        | I/O  |
| 0    | IO_L15N_0        | C13        | I/O  |
| 0    | IO_L15P_0        | D13        | I/O  |
| 0    | IO_L16N_0        | A13        | I/O  |
| 0    | IO_L16P_0        | B13        | I/O  |
| 0    | IO_L17N_0/GCLK5  | E12        | GCLK |
| 0    | IO_L17P_0/GCLK4  | C12        | GCLK |
| 0    | IO_L18N_0/GCLK7  | A11        | GCLK |
| 0    | IO_L18P_0/GCLK6  | A12        | GCLK |
| 0    | IO_L19N_0/GCLK9  | C11        | GCLK |
| 0    | IO_L19P_0/GCLK8  | B11        | GCLK |
| 0    | IO_L20N_0/GCLK11 | E11        | GCLK |
| 0    | IO_L20P_0/GCLK10 | D11        | GCLK |
| 0    | IO_L21N_0        | C10        | I/O  |
| 0    | IO_L21P_0        | A10        | I/O  |
| 0    | IO_L22N_0        | A8         | I/O  |
| 0    | IO_L22P_0        | A9         | I/O  |
| 0    | IO_L23N_0        | E10        | I/O  |
| 0    | IO_L23P_0        | D10        | I/O  |
| 0    | IO_L24N_0/VREF_0 | C9         | VREF |
| 0    | IO_L24P_0        | B9         | I/O  |
| 0    | IO_L25N_0        | C8         | I/O  |
| 0    | IO_L25P_0        | B8         | I/O  |
| 0    | IO_L26N_0        | A6         | I/O  |
| 0    | IO_L26P_0        | A7         | I/O  |
| 0    | IO_L27N_0        | C7         | I/O  |
| 0    | IO_L27P_0        | D7         | I/O  |
| 0    | IO_L28N_0        | A5         | I/O  |
| 0    | IO_L28P_0        | B6         | I/O  |
| 0    | IO_L29N_0        | D6         | I/O  |
| 0    | IO_L29P_0        | C6         | I/O  |
| 0    | IO_L30N_0        | D8         | I/O  |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank | Pin Name         | FG484 Ball | Type  |
|------|------------------|------------|-------|
| 0    | IO_L30P_0        | E9         | I/O   |
| 0    | IO_L31N_0        | B4         | I/O   |
| 0    | IO_L31P_0        | A4         | I/O   |
| 0    | IO_L32N_0        | D5         | I/O   |
| 0    | IO_L32P_0        | C5         | I/O   |
| 0    | IO_L33N_0        | B3         | I/O   |
| 0    | IO_L33P_0        | A3         | I/O   |
| 0    | IO_L34N_0        | F8         | I/O   |
| 0    | IO_L34P_0        | E7         | I/O   |
| 0    | IO_L35N_0        | E6         | I/O   |
| 0    | IO_L35P_0        | F7         | I/O   |
| 0    | IO_L36N_0/PUDC_B | A2         | DUAL  |
| 0    | IO_L36P_0/VREF_0 | B2         | VREF  |
| 0    | IP_0             | E16        | INPUT |
| 0    | IP_0             | E8         | INPUT |
| 0    | IP_0             | F10        | INPUT |
| 0    | IP_0             | F12        | INPUT |
| 0    | IP_0             | F16        | INPUT |
| 0    | IP_0             | G10        | INPUT |
| 0    | IP_0             | G11        | INPUT |
| 0    | IP_0             | G12        | INPUT |
| 0    | IP_0             | G13        | INPUT |
| 0    | IP_0             | G14        | INPUT |
| 0    | IP_0             | G15        | INPUT |
| 0    | IP_0             | G16        | INPUT |
| 0    | IP_0             | G7         | INPUT |
| 0    | IP_0             | G9         | INPUT |
| 0    | IP_0             | H10        | INPUT |
| 0    | IP_0             | H13        | INPUT |
| 0    | IP_0             | H14        | INPUT |
| 0    | IP_0/VREF_0      | G8         | VREF  |
| 0    | IP_0/VREF_0      | H12        | VREF  |
| 0    | IP_0/VREF_0      | H9         | VREF  |
| 0    | VCCO_0           | B10        | VCCO  |
| 0    | VCCO_0           | B14        | VCCO  |
| 0    | VCCO_0           | B18        | VCCO  |
| 0    | VCCO_0           | B5         | VCCO  |
| 0    | VCCO_0           | F14        | VCCO  |
| 0    | VCCO_0           | F9         | VCCO  |
| 1    | IO_L01N_1/LDC2   | Y21        | DUAL  |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank | Pin Name               | FG484 Ball | Type  |
|------|------------------------|------------|-------|
| 1    | IO_L01P_1/HDC          | AA22       | DUAL  |
| 1    | IO_L02N_1/LDC0         | W20        | DUAL  |
| 1    | IO_L02P_1/LDC1         | W19        | DUAL  |
| 1    | IO_L03N_1/A1           | T18        | DUAL  |
| 1    | IO_L03P_1/A0           | T17        | DUAL  |
| 1    | IO_L05N_1              | W21        | I/O   |
| 1    | IO_L05P_1              | Y22        | I/O   |
| 1    | IO_L06N_1              | V20        | I/O   |
| 1    | IO_L06P_1              | V19        | I/O   |
| 1    | IO_L07N_1              | V22        | I/O   |
| 1    | IO_L07P_1              | W22        | I/O   |
| 1    | IO_L09N_1              | U21        | I/O   |
| 1    | IO_L09P_1              | U22        | I/O   |
| 1    | IO_L10N_1              | U19        | I/O   |
| 1    | IO_L10P_1              | U20        | I/O   |
| 1    | IO_L11N_1              | T22        | I/O   |
| 1    | IO_L11P_1              | T20        | I/O   |
| 1    | IO_L13N_1              | T19        | I/O   |
| 1    | IO_L13P_1              | R20        | I/O   |
| 1    | IO_L14N_1              | R22        | I/O   |
| 1    | IO_L14P_1              | R21        | I/O   |
| 1    | IO_L15N_1/VREF_1       | P22        | VREF  |
| 1    | IO_L15P_1              | P20        | I/O   |
| 1    | IO_L17N_1/A3           | P18        | DUAL  |
| 1    | IO_L17P_1/A2           | R19        | DUAL  |
| 1    | IO_L18N_1/A5           | N21        | DUAL  |
| 1    | IO_L18P_1/A4           | N22        | DUAL  |
| 1    | IO_L19N_1/A7           | N19        | DUAL  |
| 1    | IO_L19P_1/A6           | N20        | DUAL  |
| 1    | IO_L20N_1/A9           | N17        | DUAL  |
| 1    | IO_L20P_1/A8           | N18        | DUAL  |
| 1    | IO_L21N_1/RHCLK1       | L22        | RHCLK |
| 1    | IO_L21P_1/RHCLK0       | M22        | RHCLK |
| 1    | IO_L22N_1/TRDY1/RHCLK3 | L20        | RHCLK |
| 1    | IO_L22P_1/RHCLK2       | L21        | RHCLK |
| 1    | IO_L24N_1/RHCLK5       | M20        | RHCLK |
| 1    | IO_L24P_1/RHCLK4       | M18        | RHCLK |
| 1    | IO_L25N_1/RHCLK7       | K19        | RHCLK |
| 1    | IO_L25P_1/IRDY1/RHCLK6 | K20        | RHCLK |
| 1    | IO_L26N_1/A11          | J22        | DUAL  |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank | Pin Name               | FG484 Ball | Type  |
|------|------------------------|------------|-------|
| 2    | VCCO_2                 | AA18       | VCCO  |
| 2    | VCCO_2                 | AA5        | VCCO  |
| 2    | VCCO_2                 | AA9        | VCCO  |
| 2    | VCCO_2                 | U14        | VCCO  |
| 2    | VCCO_2                 | U9         | VCCO  |
| 3    | IO_L01N_3              | D2         | I/O   |
| 3    | IO_L01P_3              | C1         | I/O   |
| 3    | IO_L02N_3              | C2         | I/O   |
| 3    | IO_L02P_3              | B1         | I/O   |
| 3    | IO_L03N_3              | E4         | I/O   |
| 3    | IO_L03P_3              | D3         | I/O   |
| 3    | IO_L05N_3              | G5         | I/O   |
| 3    | IO_L05P_3              | G6         | I/O   |
| 3    | IO_L06N_3              | E1         | I/O   |
| 3    | IO_L06P_3              | D1         | I/O   |
| 3    | IO_L07N_3              | E3         | I/O   |
| 3    | IO_L07P_3              | F4         | I/O   |
| 3    | IO_L08N_3              | G4         | I/O   |
| 3    | IO_L08P_3              | F3         | I/O   |
| 3    | IO_L09N_3              | H6         | I/O   |
| 3    | IO_L09P_3              | H5         | I/O   |
| 3    | IO_L10N_3              | J5         | I/O   |
| 3    | IO_L10P_3              | K6         | I/O   |
| 3    | IO_L12N_3              | F1         | I/O   |
| 3    | IO_L12P_3              | F2         | I/O   |
| 3    | IO_L13N_3              | G1         | I/O   |
| 3    | IO_L13P_3              | G3         | I/O   |
| 3    | IO_L14N_3              | H3         | I/O   |
| 3    | IO_L14P_3              | H4         | I/O   |
| 3    | IO_L16N_3              | H1         | I/O   |
| 3    | IO_L16P_3              | H2         | I/O   |
| 3    | IO_L17N_3/VREF_3       | J1         | VREF  |
| 3    | IO_L17P_3              | J3         | I/O   |
| 3    | IO_L18N_3              | K4         | I/O   |
| 3    | IO_L18P_3              | K5         | I/O   |
| 3    | IO_L20N_3              | K2         | I/O   |
| 3    | IO_L20P_3              | K3         | I/O   |
| 3    | IO_L21N_3/LHCLK1       | L3         | LHCLK |
| 3    | IO_L21P_3/LHCLK0       | L5         | LHCLK |
| 3    | IO_L22N_3/IRDY2/LHCLK3 | L1         | LHCLK |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank | Pin Name               | FG484 Ball | Type  |
|------|------------------------|------------|-------|
| 3    | IO_L22P_3/LHCLK2       | K1         | LHCLK |
| 3    | IO_L24N_3/LHCLK5       | M2         | LHCLK |
| 3    | IO_L24P_3/LHCLK4       | M1         | LHCLK |
| 3    | IO_L25N_3/LHCLK7       | M4         | LHCLK |
| 3    | IO_L25P_3/TRDY2/LHCLK6 | M3         | LHCLK |
| 3    | IO_L26N_3              | N3         | I/O   |
| 3    | IO_L26P_3/VREF_3       | N1         | VREF  |
| 3    | IO_L28N_3              | P2         | I/O   |
| 3    | IO_L28P_3              | P1         | I/O   |
| 3    | IO_L29N_3              | P5         | I/O   |
| 3    | IO_L29P_3              | P3         | I/O   |
| 3    | IO_L30N_3              | N4         | I/O   |
| 3    | IO_L30P_3              | M5         | I/O   |
| 3    | IO_L32N_3              | R2         | I/O   |
| 3    | IO_L32P_3              | R1         | I/O   |
| 3    | IO_L33N_3              | R4         | I/O   |
| 3    | IO_L33P_3              | R3         | I/O   |
| 3    | IO_L34N_3              | T4         | I/O   |
| 3    | IO_L34P_3              | R5         | I/O   |
| 3    | IO_L36N_3              | T3         | I/O   |
| 3    | IO_L36P_3/VREF_3       | T1         | VREF  |
| 3    | IO_L37N_3              | U2         | I/O   |
| 3    | IO_L37P_3              | U1         | I/O   |
| 3    | IO_L38N_3              | V3         | I/O   |
| 3    | IO_L38P_3              | V1         | I/O   |
| 3    | IO_L40N_3              | U5         | I/O   |
| 3    | IO_L40P_3              | T5         | I/O   |
| 3    | IO_L41N_3              | U4         | I/O   |
| 3    | IO_L41P_3              | U3         | I/O   |
| 3    | IO_L42N_3              | W2         | I/O   |
| 3    | IO_L42P_3              | W1         | I/O   |
| 3    | IO_L43N_3              | W3         | I/O   |
| 3    | IO_L43P_3              | V4         | I/O   |
| 3    | IO_L44N_3              | Y2         | I/O   |
| 3    | IO_L44P_3              | Y1         | I/O   |
| 3    | IO_L45N_3              | AA2        | I/O   |
| 3    | IO_L45P_3              | AA1        | I/O   |
| 3    | IP_3/VREF_3            | J8         | VREF  |
| 3    | IP_3/VREF_3            | R6         | VREF  |
| 3    | IP_L04N_3/VREF_3       | H7         | VREF  |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank | Pin Name         | FG484 Ball | Type  |
|------|------------------|------------|-------|
| 3    | IP_L04P_3        | H8         | INPUT |
| 3    | IP_L11N_3        | K8         | INPUT |
| 3    | IP_L11P_3        | J7         | INPUT |
| 3    | IP_L15N_3/VREF_3 | L8         | VREF  |
| 3    | IP_L15P_3        | K7         | INPUT |
| 3    | IP_L19N_3        | M8         | INPUT |
| 3    | IP_L19P_3        | L7         | INPUT |
| 3    | IP_L23N_3        | M6         | INPUT |
| 3    | IP_L23P_3        | M7         | INPUT |
| 3    | IP_L27N_3        | N9         | INPUT |
| 3    | IP_L27P_3        | N8         | INPUT |
| 3    | IP_L31N_3        | N5         | INPUT |
| 3    | IP_L31P_3        | N6         | INPUT |
| 3    | IP_L35N_3        | P8         | INPUT |
| 3    | IP_L35P_3        | N7         | INPUT |
| 3    | IP_L39N_3        | R8         | INPUT |
| 3    | IP_L39P_3        | P7         | INPUT |
| 3    | IP_L46N_3/VREF_3 | T6         | VREF  |
| 3    | IP_L46P_3        | R7         | INPUT |
| 3    | VCCO_3           | E2         | VCCO  |
| 3    | VCCO_3           | J2         | VCCO  |
| 3    | VCCO_3           | J6         | VCCO  |
| 3    | VCCO_3           | N2         | VCCO  |
| 3    | VCCO_3           | P6         | VCCO  |
| 3    | VCCO_3           | V2         | VCCO  |
| GND  | GND              | A1         | GND   |
| GND  | GND              | A22        | GND   |
| GND  | GND              | AA11       | GND   |
| GND  | GND              | AA16       | GND   |
| GND  | GND              | AA7        | GND   |
| GND  | GND              | AB1        | GND   |
| GND  | GND              | AB22       | GND   |
| GND  | GND              | B12        | GND   |
| GND  | GND              | B16        | GND   |
| GND  | GND              | B7         | GND   |
| GND  | GND              | C20        | GND   |
| GND  | GND              | C3         | GND   |
| GND  | GND              | D14        | GND   |
| GND  | GND              | D9         | GND   |
| GND  | GND              | F11        | GND   |

Table 83: Spartan-3A FG484 Pinout(Continued)

| Bank   | Pin Name | FG484 Ball | Type     |
|--------|----------|------------|----------|
| GND    | GND      | F17        | GND      |
| GND    | GND      | F6         | GND      |
| GND    | GND      | G2         | GND      |
| GND    | GND      | G21        | GND      |
| GND    | GND      | J11        | GND      |
| GND    | GND      | J13        | GND      |
| GND    | GND      | J14        | GND      |
| GND    | GND      | J19        | GND      |
| GND    | GND      | J4         | GND      |
| GND    | GND      | J9         | GND      |
| GND    | GND      | K10        | GND      |
| GND    | GND      | K12        | GND      |
| GND    | GND      | L11        | GND      |
| GND    | GND      | L13        | GND      |
| GND    | GND      | L17        | GND      |
| GND    | GND      | L2         | GND      |
| GND    | GND      | L6         | GND      |
| GND    | GND      | L9         | GND      |
| GND    | GND      | M10        | GND      |
| GND    | GND      | M12        | GND      |
| GND    | GND      | M14        | GND      |
| GND    | GND      | M21        | GND      |
| GND    | GND      | N11        | GND      |
| GND    | GND      | N13        | GND      |
| GND    | GND      | P10        | GND      |
| GND    | GND      | P14        | GND      |
| GND    | GND      | P19        | GND      |
| GND    | GND      | P4         | GND      |
| GND    | GND      | P9         | GND      |
| GND    | GND      | T12        | GND      |
| GND    | GND      | T2         | GND      |
| GND    | GND      | T21        | GND      |
| GND    | GND      | U17        | GND      |
| GND    | GND      | U6         | GND      |
| GND    | GND      | W10        | GND      |
| GND    | GND      | W14        | GND      |
| GND    | GND      | Y20        | GND      |
| GND    | GND      | Y3         | GND      |
| VCCAUX | SUSPEND  | U18        | PWR MGMT |

Table 87: Spartan-3A FG676 Pinout(Continued)

| Bank | Pin Name             | FG676 Ball | Type     |
|------|----------------------|------------|----------|
| 2    | IO_L16N_2            | W12        | I/O      |
| 2    | IO_L16P_2            | V12        | I/O      |
| 2    | IO_L17N_2/VS2        | AA12       | DUAL     |
| 2    | IO_L17P_2/RDWR_B     | Y12        | DUAL     |
| 2    | IO_L18N_2            | AF8        | I/O      |
| 2    | IO_L18P_2            | AE8        | I/O      |
| 2    | IO_L19N_2/VS0        | AF9        | DUAL     |
| 2    | IO_L19P_2/VS1        | AE9        | DUAL     |
| 2    | IO_L20N_2            | W13        | I/O      |
| 2    | IO_L20P_2            | V13        | I/O      |
| 2    | IO_L21N_2            | AC12       | I/O      |
| 2    | IO_L21P_2            | AB12       | I/O      |
| 2    | IO_L22N_2/D6         | AF10       | DUAL     |
| 2    | IO_L22P_2/D7         | AE10       | DUAL     |
| 2    | IO_L23N_2            | AC11       | I/O      |
| 2    | IO_L23P_2            | AD11       | I/O      |
| 2    | IO_L24N_2/D4         | AE12       | DUAL     |
| 2    | IO_L24P_2/D5         | AF12       | DUAL     |
| 2    | IO_L25N_2/GCLK13     | Y13        | GCLK     |
| 2    | IO_L25P_2/GCLK12     | AA13       | GCLK     |
| 2    | IO_L26N_2/GCLK15     | AE13       | GCLK     |
| 2    | IO_L26P_2/GCLK14     | AF13       | GCLK     |
| 2    | IO_L27N_2/GCLK1      | AA14       | GCLK     |
| 2    | IO_L27P_2/GCLK0      | Y14        | GCLK     |
| 2    | IO_L28N_2/GCLK3      | AE14       | GCLK     |
| 2    | IO_L28P_2/GCLK2      | AF14       | GCLK     |
| 2    | IO_L29N_2            | AC14       | I/O      |
| 2    | IO_L29P_2            | AD14       | I/O      |
| 2    | IO_L30N_2/MOSI/CSI_B | AB15       | DUAL     |
| 2    | IO_L30P_2            | AC15       | I/O      |
| 2    | IO_L31N_2            | W15        | I/O      |
| 2    | IO_L31P_2            | V14        | I/O      |
| 2    | IO_L32N_2/DOUT       | AE15       | DUAL     |
| 2    | IO_L32P_2/AWAKE      | AD15       | PWR MGMT |
| 2    | IO_L33N_2            | AD17       | I/O      |
| 2    | IO_L33P_2            | AE17       | I/O      |
| 2    | IO_L34N_2/D3         | Y15        | DUAL     |
| 2    | IO_L34P_2/INIT_B     | AA15       | DUAL     |
| 2    | IO_L35N_2            | U15        | I/O      |

Table 87: Spartan-3A FG676 Pinout(Continued)

| Bank | Pin Name              | FG676 Ball | Type  |
|------|-----------------------|------------|-------|
| 2    | IO_L35P_2             | V15        | I/O   |
| 2    | IO_L36N_2/D1          | AE18       | DUAL  |
| 2    | IO_L36P_2/D2          | AF18       | DUAL  |
| 2    | IO_L37N_2             | AE19       | I/O   |
| 2    | IO_L37P_2             | AF19       | I/O   |
| 2    | IO_L38N_2             | AB16       | I/O   |
| 2    | IO_L38P_2             | AC16       | I/O   |
| 2    | IO_L39N_2             | AE20       | I/O   |
| 2    | IO_L39P_2             | AF20       | I/O   |
| 2    | IO_L40N_2             | AC19       | I/O   |
| 2    | IO_L40P_2             | AD19       | I/O   |
| 2    | IO_L41N_2             | AC20       | I/O   |
| 2    | IO_L41P_2             | AD20       | I/O   |
| 2    | IO_L42N_2             | U16        | I/O   |
| 2    | IO_L42P_2             | V16        | I/O   |
| 2    | IO_L43N_2             | Y17        | I/O   |
| 2    | IO_L43P_2             | AA17       | I/O   |
| 2    | IO_L44N_2             | AD21       | I/O   |
| 2    | IO_L44P_2             | AE21       | I/O   |
| 2    | IO_L45N_2             | AC21       | I/O   |
| 2    | IO_L45P_2             | AD22       | I/O   |
| 2    | IO_L46N_2             | V17        | I/O   |
| 2    | IO_L46P_2             | W17        | I/O   |
| 2    | IO_L47N_2             | AA18       | I/O   |
| 2    | IO_L47P_2             | AB18       | I/O   |
| 2    | IO_L48N_2             | AE23       | I/O   |
| 2    | IO_L48P_2             | AF23       | I/O   |
| 2    | IO_L51N_2             | AE25       | I/O   |
| 2    | IO_L51P_2             | AF25       | I/O   |
| 2    | IO_L52N_2/CCLK        | AE24       | DUAL  |
| 2    | IO_L52P_2/D0/DIN/MISO | AF24       | DUAL  |
| 2    | IP_2                  | AA19       | INPUT |
| 2    | IP_2                  | AB13       | INPUT |
| 2    | IP_2                  | AB17       | INPUT |
| 2    | IP_2                  | AB20       | INPUT |
| 2    | IP_2                  | AC7        | INPUT |
| 2    | IP_2                  | AC13       | INPUT |
| 2    | IP_2                  | AC17       | INPUT |
| 2    | IP_2                  | AC18       | INPUT |
| 2    | IP_2                  | AD9        | INPUT |

## User I/Os by Bank

Table 88 indicates how the 502 available user-I/O pins are distributed between the four I/O banks on the FG676 package. The AWAKE pin is counted as a dual-purpose I/O.

Table 88: User I/Os Per Bank for the XC3S1400A in the FG676 Package

| Package Edge | I/O Bank | Maximum I/O | All Possible I/O Pins by Type |           |           |           |           |
|--------------|----------|-------------|-------------------------------|-----------|-----------|-----------|-----------|
|              |          |             | I/O                           | INPUT     | DUAL      | VREF      | CLK       |
| Top          | 0        | 120         | 82                            | 20        | 1         | 9         | 8         |
| Right        | 1        | 130         | 67                            | 15        | 30        | 10        | 8         |
| Bottom       | 2        | 120         | 67                            | 14        | 21        | 10        | 8         |
| Left         | 3        | 132         | 97                            | 18        | 0         | 9         | 8         |
| <b>TOTAL</b> |          | <b>502</b>  | <b>313</b>                    | <b>67</b> | <b>52</b> | <b>38</b> | <b>32</b> |

## Footprint Migration Differences

The XC3S1400A FPGA is the only Spartan-3A device offered in the FG676 package. However, Table 89 summarizes footprint and functionality differences between the XC3S1400A and the XC3SD1800A in the Spartan-3A DSP family. There are 17 unconnected balls in the XC3S1400A that become 16 input-only pins and one I/O pin in the XC3SD1800A. All other pins not listed in Table 89 unconditionally migrate between the Spartan-3A devices and the Spartan-3A DSP devices available in the FG676 package. The arrows indicate the direction for easy migration. For more details on the Spartan-3A DSP family and pinouts, and additional differences in the FG676 pinout for the XC3SD3400A device, see [DS610](#).

Table 89: FG676 Footprint Differences

| Pin                | Bank | XC3S1400A | Migration | XC3SD1800A   |
|--------------------|------|-----------|-----------|--------------|
| A24                | 0    | N.C.      | →         | INPUT        |
| B24                | 0    | N.C.      | →         | INPUT        |
| D5                 | 0    | N.C.      | →         | INPUT        |
| E6                 | 0    | N.C.      | →         | VREF (INPUT) |
| E9                 | 0    | N.C.      | →         | INPUT        |
| F9                 | 0    | N.C.      | →         | VREF (INPUT) |
| F18                | 0    | N.C.      | →         | INPUT        |
| G18                | 0    | N.C.      | →         | VREF (INPUT) |
| W18                | 2    | N.C.      | →         | VREF (INPUT) |
| Y8                 | 2    | N.C.      | →         | VREF (INPUT) |
| Y18                | 2    | N.C.      | →         | INPUT        |
| Y19                | 2    | N.C.      | →         | INPUT        |
| AA8                | 2    | N.C.      | →         | INPUT        |
| AC5                | 2    | N.C.      | →         | INPUT        |
| AC22               | 2    | N.C.      | →         | I/O          |
| AD5                | 2    | N.C.      | →         | INPUT        |
| AD23               | 2    | N.C.      | →         | VREF(INPUT)  |
| <b>DIFFERENCES</b> |      |           | <b>17</b> |              |

Legend:



This pin can unconditionally migrate from the device on the left to the device on the right. Migration in the other direction is possible depending on how the pin is configured for the device on the right.

# FG676 Footprint

## Left Half of FG676 Package (Top View)

**313** I/O: Unrestricted, general-purpose user I/O

**67** INPUT: Unrestricted, general-purpose input pin

**51** DUAL: Configuration pins, then possible user I/O

**2** SUSPEND: Dedicated SUSPEND and dual-purpose AWAKE Power Management pins

**38** VREF: User I/O or input voltage reference for bank

**32** CLK: User I/O, input, or clock buffer input

**2** CONFIG: Dedicated configuration pins

**4** JTAG: Dedicated JTAG port pins

**77** GND: Ground

**36** VCCO: Output voltage supply for bank

**23** VCCINT: Internal core supply voltage (+1.2V)

**14** VCCAUX: Auxiliary supply voltage

**17** N.C.: Not connected

| Bank 0 |                     |                         |                   |                     |                     |                   |                   |                   |                         |                   |                   |                   |                   |
|--------|---------------------|-------------------------|-------------------|---------------------|---------------------|-------------------|-------------------|-------------------|-------------------------|-------------------|-------------------|-------------------|-------------------|
|        | 1                   | 2                       | 3                 | 4                   | 5                   | 6                 | 7                 | 8                 | 9                       | 10                | 11                | 12                | 13                |
| A      | GND                 | PROG_B                  | I/O L51P_0        | I/O L45P_0          | INPUT               | GND               | INPUT             | I/O L38P_0        | I/O L36P_0              | I/O L33P_0        | GND               | I/O L29P_0        | INPUT             |
| B      | I/O L02N_3          | I/O L02P_3              | I/O L51N_0        | I/O L45N_0          | VCCO_0              | I/O L41P_0        | I/O L42P_0        | I/O L38N_0        | I/O L36N_0              | I/O L33N_0        | VCCO_0            | I/O L29N_0        | I/O L28P_0 GCLK10 |
| C      | INPUT L04N_3 VREF_3 | INPUT L04P_3            | GND               | INPUT               | I/O L44P_0          | I/O L41N_0        | I/O L42N_0        | I/O L40P_0        | GND                     | I/O L34P_0        | I/O L32P_0        | I/O L30N_0        | I/O L28N_0 GCLK11 |
| D      | INPUT L08N_3        | INPUT L08P_3            | I/O L06P_3        | TMS                 | N.C.                | I/O L44N_0        | INPUT VREF_0      | I/O L40N_0        | I/O L37N_0              | I/O L34N_0        | I/O L32N_0 VREF_0 | INPUT             | I/O L30P_0        |
| E      | I/O L11P_3          | VCCO_3                  | I/O L07P_3        | I/O L06N_3          | VCCAUX              | N.C.              | I/O L48N_0        | VCCO_0            | N.C.                    | I/O L37P_0        | INPUT             | I/O L31P_0        | VCCO_0            |
| F      | GND                 | I/O L11N_3              | I/O L14N_3        | I/O L07N_3          | I/O L09P_3          | GND               | I/O L48P_0        | I/O L52P_0 VREF_0 | N.C.                    | INPUT             | GND               | I/O L31N_0        | I/O L27P_0 GCLK8  |
| G      | INPUT L16N_3        | INPUT L16P_3            | I/O L14P_3        | I/O L09N_3          | INPUT L12P_3        | I/O L03P_3        | TDI               | I/O L52N_0 PUDC_B | I/O L47P_0              | I/O L46P_0        | INPUT VREF_0      | I/O L35P_0        | I/O L27N_0 GCLK9  |
| H      | I/O L17N_3          | I/O L17P_3              | GND               | INPUT L12N_3 VREF_3 | VCCO_3              | I/O L10N_3        | I/O L03N_3        | GND               | I/O L47N_0              | I/O L46N_0        | VCCO_0            | I/O L35N_0        | INPUT             |
| J      | INPUT L24P_3        | INPUT L20N_3 VREF_3     | INPUT L20P_3      | I/O L19N_3          | I/O L19P_3          | I/O L13N_3        | I/O L10P_3        | I/O L01P_3        | I/O L01N_3              | INPUT             | I/O L43P_0        | I/O L39P_0        | INPUT             |
| K      | INPUT L24N_3        | I/O L23N_3              | I/O L23P_3        | I/O L22N_3          | I/O L22P_3          | I/O L18P_3        | I/O L13P_3        | I/O L05N_3        | I/O L05P_3              | GND               | I/O L43N_0        | I/O L39N_0        | VCCAUX            |
| L      | GND                 | VCCO_3                  | I/O L25N_3        | I/O L25P_3          | VCCAUX              | GND               | I/O L18N_3        | VCCO_3            | I/O L15N_3              | I/O L15P_3        | GND               | VCCINT            | GND               |
| M      | I/O L29N_3 VREF_3   | I/O L29P_3              | I/O L27N_3        | I/O L27P_3          | I/O L28P_3          | I/O L28N_3        | I/O L26N_3        | I/O L26P_3        | I/O L21N_3              | I/O L21P_3        | VCCINT            | GND               | VCCINT            |
| N      | I/O L31P_3          | I/O L31N_3              | GND               | I/O L30N_3          | I/O L30P_3          | I/O L32P_3 LHCLK0 | I/O L32N_3 LHCLK1 | GND               | I/O L35P_3 TRDY2 LHCLK6 | VCCAUX            | GND               | VCCINT            | VCCINT            |
| P      | I/O L33P_3 LHCLK2   | I/O L33N_3 IRDY2 LHCLK3 | I/O L34N_3 LHCLK5 | I/O L34P_3 LHCLK4   | VCCO_3              | I/O L39N_3        | I/O L39P_3        | I/O L41P_3        | I/O L41N_3              | I/O L35N_3 LHCLK7 | VCCINT            | GND               | VCCINT            |
| R      | I/O L36P_3 VREF_3   | I/O L36N_3              | I/O L37P_3        | I/O L37N_3          | I/O L40P_3          | I/O L40N_3        | I/O L45N_3        | I/O L45P_3        | I/O L43N_3              | I/O L43P_3 VREF_3 | GND               | VCCINT            | GND               |
| T      | GND                 | VCCO_3                  | I/O L38P_3        | I/O L38N_3          | I/O L42P_3          | GND               | I/O L51P_3        | VCCO_3            | I/O L48N_3              | I/O L48P_3        | VCCINT            | GND               | VCCINT            |
| U      | I/O L44P_3          | I/O L44N_3              | INPUT L46P_3      | I/O L42N_3          | I/O L49P_3          | I/O L51N_3        | I/O L56P_3        | I/O L56N_3        | I/O L61P_3              | GND               | I/O L13N_2        | VCCINT            | GND               |
| V      | I/O L47P_3          | I/O L47N_3              | GND               | INPUT L46N_3        | I/O L49N_3          | I/O L59N_3        | I/O L59P_3        | I/O L61N_3        | VCCAUX                  | I/O L09P_2        | I/O L13P_2        | I/O L16P_2        | I/O L20P_2        |
| W      | INPUT L50P_3        | INPUT L50N_3 VREF_3     | I/O L52P_3        | I/O L52N_3          | VCCO_3              | I/O L63N_3        | I/O L63P_3        | GND               | I/O L05P_2              | I/O L09N_2        | VCCO_2            | I/O L16N_2        | I/O L20N_2        |
| Y      | I/O L53P_3          | I/O L53N_3              | INPUT L54P_3      | INPUT L54N_3        | I/O L57P_3          | I/O L57N_3        | I/O L02P_2 M2     | N.C.              | I/O L05N_2              | I/O L12P_2        | INPUT             | I/O L17P_2 RDWR_B | I/O L25N_2 GCLK13 |
| A      | GND                 | I/O L55P_3              | I/O L55N_3        | INPUT L58P_3        | INPUT L58N_3 VREF_3 | GND               | I/O L02N_2 CSO_B  | N.C.              | INPUT VREF_2            | I/O L12N_2        | GND               | I/O L17N_2 VS2    | I/O L25P_2 GCLK12 |
| A      | I/O L60P_3          | VCCO_3                  | INPUT L62P_3      | INPUT L62N_3        | VCCAUX              | INPUT VREF_2      | I/O L14N_2        | VCCO_2            | I/O L15P_2              | INPUT VREF_2      | VCCAUX            | I/O L21P_2        | INPUT             |
| A      | I/O L60N_3          | I/O L64P_3              | I/O L64N_3        | I/O L01P_2 M1       | N.C.                | I/O L08P_2        | INPUT             | I/O L14P_2        | I/O L15N_2              | INPUT VREF_2      | I/O L23N_2        | I/O L21N_2        | INPUT             |
| A      | I/O L65P_3          | I/O L65N_3              | GND               | I/O L01N_2 M0       | N.C.                | I/O L08N_2        | I/O L11P_2        | GND               | INPUT                   | INPUT             | I/O L23P_2        | INPUT VREF_2      | GND               |
| A      | INPUT L66P_3        | INPUT L66N_3 VREF_3     | I/O L06P_2        | I/O L07P_2          | VCCO_2              | I/O L10N_2        | I/O L11N_2        | I/O L18P_2        | I/O L19P_2 VS1          | I/O L22P_2 D7     | VCCO_2            | I/O L24N_2 D4     | I/O L28N_2 GCLK15 |
| A      | GND                 | INPUT                   | I/O L06N_2        | I/O L07N_2          | I/O L10P_2          | GND               | INPUT             | I/O L18N_2        | I/O L19N_2 VS0          | I/O L22N_2 D6     | GND               | I/O L24P_2 D5     | I/O L28P_2 GCLK14 |
| Bank 2 |                     |                         |                   |                     |                     |                   |                   |                   |                         |                   |                   |                   |                   |

Figure 27: FG676 Package Footprint (Top View)

DS529-4\_07\_102506