



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |                                                                                                                                     |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Product Status                 | Obsolete                                                                                                                            |
| Number of LABs/CLBs            | 158500                                                                                                                              |
| Number of Logic Elements/Cells | 420000                                                                                                                              |
| Total RAM Bits                 | 37888000                                                                                                                            |
| Number of I/O                  | 432                                                                                                                                 |
| Number of Gates                | -                                                                                                                                   |
| Voltage - Supply               | 0.82V ~ 0.88V                                                                                                                       |
| Mounting Type                  | Surface Mount                                                                                                                       |
| Operating Temperature          | 0°C ~ 85°C (TJ)                                                                                                                     |
| Package / Case                 | 1152-BBGA, FCBGA                                                                                                                    |
| Supplier Device Package        | 1152-FBGA (35x35)                                                                                                                   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/intel/5sgxea4k3f35c2l">https://www.e-xfl.com/product-detail/intel/5sgxea4k3f35c2l</a> |

**Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 2 of 2)**

| Symbol                | Description                    | Minimum | Maximum | Unit |
|-----------------------|--------------------------------|---------|---------|------|
| V <sub>CCD_FPLL</sub> | PLL digital power supply       | −0.5    | 1.8     | V    |
| V <sub>CCA_FPLL</sub> | PLL analog power supply        | −0.5    | 3.4     | V    |
| V <sub>I</sub>        | DC input voltage               | −0.5    | 3.8     | V    |
| T <sub>J</sub>        | Operating junction temperature | −55     | 125     | °C   |
| T <sub>STG</sub>      | Storage temperature (No bias)  | −65     | 150     | °C   |
| I <sub>OUT</sub>      | DC output current per pin      | −25     | 40      | mA   |

Table 4 lists the absolute conditions for the transceiver power supply for Stratix V GX, GS, and GT devices.

**Table 4. Transceiver Power Supply Absolute Conditions for Stratix V GX, GS, and GT Devices**

| Symbol                | Description                                                  | Devices    | Minimum | Maximum | Unit |
|-----------------------|--------------------------------------------------------------|------------|---------|---------|------|
| V <sub>CCA_GXBL</sub> | Transceiver channel PLL power supply (left side)             | GX, GS, GT | −0.5    | 3.75    | V    |
| V <sub>CCA_GXBR</sub> | Transceiver channel PLL power supply (right side)            | GX, GS     | −0.5    | 3.75    | V    |
| V <sub>CCA_GTBR</sub> | Transceiver channel PLL power supply (right side)            | GT         | −0.5    | 3.75    | V    |
| V <sub>CCHIP_L</sub>  | Transceiver hard IP power supply (left side)                 | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCHIP_R</sub>  | Transceiver hard IP power supply (right side)                | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCHSSI_L</sub> | Transceiver PCS power supply (left side)                     | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCHSSI_R</sub> | Transceiver PCS power supply (right side)                    | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCR_GXBL</sub> | Receiver analog power supply (left side)                     | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCR_GXBR</sub> | Receiver analog power supply (right side)                    | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCR_GTBR</sub> | Receiver analog power supply for GT channels (right side)    | GT         | −0.5    | 1.35    | V    |
| V <sub>CCT_GXBL</sub> | Transmitter analog power supply (left side)                  | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCT_GXBR</sub> | Transmitter analog power supply (right side)                 | GX, GS, GT | −0.5    | 1.35    | V    |
| V <sub>CCT_GTBR</sub> | Transmitter analog power supply for GT channels (right side) | GT         | −0.5    | 1.35    | V    |
| V <sub>CCL_GTBR</sub> | Transmitter clock network power supply (right side)          | GT         | −0.5    | 1.35    | V    |
| V <sub>CCH_GXBL</sub> | Transmitter output buffer power supply (left side)           | GX, GS, GT | −0.5    | 1.8     | V    |
| V <sub>CCH_GXBR</sub> | Transmitter output buffer power supply (right side)          | GX, GS, GT | −0.5    | 1.8     | V    |

#### Maximum Allowed Overshoot and Undershoot Voltage

During transitions, input signals may overshoot to the voltage shown in Table 5 and undershoot to −2.0 V for input currents less than 100 mA and periods shorter than 20 ns.

**Table 6. Recommended Operating Conditions for Stratix V Devices (Part 2 of 2)**

| Symbol            | Description            | Condition    | Min <sup>(4)</sup> | Typ | Max <sup>(4)</sup> | Unit |
|-------------------|------------------------|--------------|--------------------|-----|--------------------|------|
| t <sub>RAMP</sub> | Power supply ramp time | Standard POR | 200 $\mu$ s        | —   | 100 ms             | —    |
|                   |                        | Fast POR     | 200 $\mu$ s        | —   | 4 ms               | —    |

**Notes to Table 6:**

- (1) V<sub>CCPD</sub> must be 2.5 V when V<sub>CCIO</sub> is 2.5, 1.8, 1.5, 1.35, 1.25 or 1.2 V. V<sub>CCPD</sub> must be 3.0 V when V<sub>CCIO</sub> is 3.0 V.
- (2) If you do not use the design security feature in Stratix V devices, connect V<sub>CCBAT</sub> to a 1.2- to 3.0-V power supply. Stratix V power-on-reset (POR) circuitry monitors V<sub>CCBAT</sub>. Stratix V devices will not exit POR if V<sub>CCBAT</sub> stays at logic low.
- (3) C2L and I2L can also be run at 0.90 V for legacy boards that were designed for the C2 and I2 speed grades.
- (4) The power supply value describes the budget for the DC (static) power supply tolerance and does not include the dynamic tolerance requirements. Refer to the PDN tool for the additional budget for the dynamic tolerance requirements.

Table 7 lists the transceiver power supply recommended operating conditions for Stratix V GX, GS, and GT devices.

**Table 7. Recommended Transceiver Power Supply Operating Conditions for Stratix V GX, GS, and GT Devices (Part 1 of 2)**

| Symbol                            | Description                                                                                   | Devices    | Minimum <sup>(4)</sup> | Typical | Maximum <sup>(4)</sup> | Unit |
|-----------------------------------|-----------------------------------------------------------------------------------------------|------------|------------------------|---------|------------------------|------|
| V <sub>CCA_GXBL</sub><br>(1), (3) | Transceiver channel PLL power supply (left side)                                              | GX, GS, GT | 2.85                   | 3.0     | 3.15                   | V    |
|                                   |                                                                                               |            | 2.375                  | 2.5     | 2.625                  |      |
| V <sub>CCA_GXBR</sub><br>(1), (3) | Transceiver channel PLL power supply (right side)                                             | GX, GS     | 2.85                   | 3.0     | 3.15                   | V    |
|                                   |                                                                                               |            | 2.375                  | 2.5     | 2.625                  |      |
| V <sub>CCA_GTBR</sub>             | Transceiver channel PLL power supply (right side)                                             | GT         | 2.85                   | 3.0     | 3.15                   | V    |
| V <sub>CCHIP_L</sub>              | Transceiver hard IP power supply (left side; C1, C2, I2, and I3YY speed grades)               | GX, GS, GT | 0.87                   | 0.9     | 0.93                   | V    |
|                                   | Transceiver hard IP power supply (left side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades)  | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
| V <sub>CCHIP_R</sub>              | Transceiver hard IP power supply (right side; C1, C2, I2, and I3YY speed grades)              | GX, GS, GT | 0.87                   | 0.9     | 0.93                   | V    |
|                                   | Transceiver hard IP power supply (right side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
| V <sub>CCHSSI_L</sub>             | Transceiver PCS power supply (left side; C1, C2, I2, and I3YY speed grades)                   | GX, GS, GT | 0.87                   | 0.9     | 0.93                   | V    |
|                                   | Transceiver PCS power supply (left side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades)      | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
| V <sub>CCHSSI_R</sub>             | Transceiver PCS power supply (right side; C1, C2, I2, and I3YY speed grades)                  | GX, GS, GT | 0.87                   | 0.9     | 0.93                   | V    |
|                                   | Transceiver PCS power supply (right side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades)     | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
| V <sub>CCR_GXBL</sub><br>(2)      | Receiver analog power supply (left side)                                                      | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
|                                   |                                                                                               |            | 0.87                   | 0.90    | 0.93                   |      |
|                                   |                                                                                               |            | 0.97                   | 1.0     | 1.03                   |      |
|                                   |                                                                                               |            | 1.03                   | 1.05    | 1.07                   |      |

Table 8 shows the transceiver power supply voltage requirements for various conditions.

**Table 8. Transceiver Power Supply Voltage Requirements**

| Conditions                                                                                                                                                                                                                                    | Core Speed Grade                  | VCCR_GXB & VCCT_GXB <sup>(2)</sup> | VCCA_GXB | VCCH_GXB | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|------------------------------------|----------|----------|------|
| If BOTH of the following conditions are true:<br><ul style="list-style-type: none"> <li>■ Data rate &gt; 10.3 Gbps.</li> <li>■ DFE is used.</li> </ul>                                                                                        | All                               | 1.05                               | 3.0      | 1.5      | V    |
| If ANY of the following conditions are true <sup>(1)</sup> :<br><ul style="list-style-type: none"> <li>■ ATX PLL is used.</li> <li>■ Data rate &gt; 6.5Gbps.</li> <li>■ DFE (data rate ≤ 10.3 Gbps), AEQ, or EyeQ feature is used.</li> </ul> | All                               | 1.0                                |          |          |      |
| If ALL of the following conditions are true:<br><ul style="list-style-type: none"> <li>■ ATX PLL is not used.</li> <li>■ Data rate ≤ 6.5Gbps.</li> <li>■ DFE, AEQ, and EyeQ are not used.</li> </ul>                                          | C1, C2, I2, and I3YY              | 0.90                               | 2.5      |          |      |
|                                                                                                                                                                                                                                               | C2L, C3, C4, I2L, I3, I3L, and I4 | 0.85                               | 2.5      |          |      |

**Notes to Table 8:**

- (1) Choose this power supply voltage requirement option if you plan to upgrade your design later with any of the listed conditions.
- (2) If the VCCR\_GXB and VCCT\_GXB supplies are set to 1.0 V or 1.05 V, they cannot be shared with the VCC core supply. If the VCCR\_GXB and VCCT\_GXB are set to either 0.90 V or 0.85 V, they can be shared with the VCC core supply.

## DC Characteristics

This section lists the supply current, I/O pin leakage current, input pin capacitance, on-chip termination tolerance, and hot socketing specifications.

### Supply Current

Supply current is the current drawn from the respective power rails used for power budgeting. Use the Excel-based Early Power Estimator (EPE) to get supply current estimates for your design because these currents vary greatly with the resources you use.



For more information about power estimation tools, refer to the *PowerPlay Early Power Estimator User Guide* and the *PowerPlay Power Analysis* chapter in the *Quartus II Handbook*.

**Table 13. OCT Variation after Power-Up Calibration for Stratix V Devices (Part 2 of 2) <sup>(1)</sup>**

| Symbol | Description                                          | V <sub>CCIO</sub> (V) | Typical | Unit              |
|--------|------------------------------------------------------|-----------------------|---------|-------------------|
| dR/dT  | OCT variation with temperature without recalibration | 3.0                   | 0.189   | %/ <sup>o</sup> C |
|        |                                                      | 2.5                   | 0.208   |                   |
|        |                                                      | 1.8                   | 0.266   |                   |
|        |                                                      | 1.5                   | 0.273   |                   |
|        |                                                      | 1.2                   | 0.317   |                   |

**Note to Table 13:**

(1) Valid for a V<sub>CCIO</sub> range of  $\pm 5\%$  and a temperature range of 0° to 85°C.

**Pin Capacitance**

Table 14 lists the Stratix V device family pin capacitance.

**Table 14. Pin Capacitance for Stratix V Devices**

| Symbol             | Description                                                      | Value | Unit |
|--------------------|------------------------------------------------------------------|-------|------|
| C <sub>IOTB</sub>  | Input capacitance on the top and bottom I/O pins                 | 6     | pF   |
| C <sub>IOLR</sub>  | Input capacitance on the left and right I/O pins                 | 6     | pF   |
| C <sub>OUTFB</sub> | Input capacitance on dual-purpose clock output and feedback pins | 6     | pF   |

**Hot Socketing**

Table 15 lists the hot socketing specifications for Stratix V devices.

**Table 15. Hot Socketing Specifications for Stratix V Devices**

| Symbol                    | Description                                | Maximum             |
|---------------------------|--------------------------------------------|---------------------|
| I <sub>IOPIN</sub> (DC)   | DC current per I/O pin                     | 300 $\mu$ A         |
| I <sub>IOPIN</sub> (AC)   | AC current per I/O pin                     | 8 mA <sup>(1)</sup> |
| I <sub>XCVR-TX</sub> (DC) | DC current per transceiver transmitter pin | 100 mA              |
| I <sub>XCVR-RX</sub> (DC) | DC current per transceiver receiver pin    | 50 mA               |

**Note to Table 15:**

(1) The I/O ramp rate is 10 ns or more. For ramp rates faster than 10 ns,  $|I_{IOPIN}| = C \, dv/dt$ , in which C is the I/O pin capacitance and dv/dt is the slew rate.

## Internal Weak Pull-Up Resistor

Table 16 lists the weak pull-up resistor values for Stratix V devices.

**Table 16. Internal Weak Pull-Up Resistor for Stratix V Devices <sup>(1), (2)</sup>**

| Symbol          | Description                                                                                                                                         | V <sub>CCIO</sub> Conditions (V) <sup>(3)</sup> | Value <sup>(4)</sup> | Unit |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|----------------------|------|
| R <sub>PU</sub> | Value of the I/O pin pull-up resistor before and during configuration, as well as user mode if you enable the programmable pull-up resistor option. | 3.0 ±5%                                         | 25                   | kΩ   |
|                 |                                                                                                                                                     | 2.5 ±5%                                         | 25                   | kΩ   |
|                 |                                                                                                                                                     | 1.8 ±5%                                         | 25                   | kΩ   |
|                 |                                                                                                                                                     | 1.5 ±5%                                         | 25                   | kΩ   |
|                 |                                                                                                                                                     | 1.35 ±5%                                        | 25                   | kΩ   |
|                 |                                                                                                                                                     | 1.25 ±5%                                        | 25                   | kΩ   |
|                 |                                                                                                                                                     | 1.2 ±5%                                         | 25                   | kΩ   |

### Notes to Table 16:

- (1) All I/O pins have an option to enable the weak pull-up resistor except the configuration, test, and JTAG pins.
- (2) The internal weak pull-down feature is only available for the JTAG TCK pin. The typical value for this internal weak pull-down resistor is approximately 25 kΩ.
- (3) The pin pull-up resistance values may be lower if an external source drives the pin higher than V<sub>CCIO</sub>.
- (4) These specifications are valid with a ±10% tolerance to cover changes over PVT.

## I/O Standard Specifications

Table 17 through Table 22 list the input voltage (V<sub>IH</sub> and V<sub>IL</sub>), output voltage (V<sub>OH</sub> and V<sub>OL</sub>), and current drive characteristics (I<sub>OH</sub> and I<sub>OL</sub>) for various I/O standards supported by Stratix V devices. These tables also show the Stratix V device family I/O standard specifications. The V<sub>OL</sub> and V<sub>OH</sub> values are valid at the corresponding I<sub>OH</sub> and I<sub>OL</sub>, respectively.

For an explanation of the terms used in Table 17 through Table 22, refer to “Glossary” on page 65. For tolerance calculations across all SSTL and HSTL I/O standards, refer to Altera knowledge base solution rd07262012\_486.

**Table 17. Single-Ended I/O Standards for Stratix V Devices**

| I/O Standard | V <sub>CCIO</sub> (V) |     |       | V <sub>IL</sub> (V) |                             | V <sub>IH</sub> (V)         |                         | V <sub>OL</sub> (V)         | V <sub>OH</sub> (V)         | I <sub>OL</sub> (mA) | I <sub>OH</sub> (mA) |
|--------------|-----------------------|-----|-------|---------------------|-----------------------------|-----------------------------|-------------------------|-----------------------------|-----------------------------|----------------------|----------------------|
|              | Min                   | Typ | Max   | Min                 | Max                         | Min                         | Max                     | Max                         | Min                         |                      |                      |
| LVTTTL       | 2.85                  | 3   | 3.15  | −0.3                | 0.8                         | 1.7                         | 3.6                     | 0.4                         | 2.4                         | 2                    | −2                   |
| LVC MOS      | 2.85                  | 3   | 3.15  | −0.3                | 0.8                         | 1.7                         | 3.6                     | 0.2                         | V <sub>CCIO</sub> − 0.2     | 0.1                  | −0.1                 |
| 2.5 V        | 2.375                 | 2.5 | 2.625 | −0.3                | 0.7                         | 1.7                         | 3.6                     | 0.4                         | 2                           | 1                    | −1                   |
| 1.8 V        | 1.71                  | 1.8 | 1.89  | −0.3                | 0.35 *<br>V <sub>CCIO</sub> | 0.65 *<br>V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.45                        | V <sub>CCIO</sub> − 0.45    | 2                    | −2                   |
| 1.5 V        | 1.425                 | 1.5 | 1.575 | −0.3                | 0.35 *<br>V <sub>CCIO</sub> | 0.65 *<br>V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.25 *<br>V <sub>CCIO</sub> | 0.75 *<br>V <sub>CCIO</sub> | 2                    | −2                   |
| 1.2 V        | 1.14                  | 1.2 | 1.26  | −0.3                | 0.35 *<br>V <sub>CCIO</sub> | 0.65 *<br>V <sub>CCIO</sub> | V <sub>CCIO</sub> + 0.3 | 0.25 *<br>V <sub>CCIO</sub> | 0.75 *<br>V <sub>CCIO</sub> | 2                    | −2                   |

**Table 18. Single-Ended SSTL, HSTL, and HSUL I/O Reference Voltage Specifications for Stratix V Devices**

| I/O Standard            | $V_{CCIO}$ (V) |      |       | $V_{REF}$ (V)     |                  |                   | $V_{TT}$ (V)      |                  |                   |
|-------------------------|----------------|------|-------|-------------------|------------------|-------------------|-------------------|------------------|-------------------|
|                         | Min            | Typ  | Max   | Min               | Typ              | Max               | Min               | Typ              | Max               |
| SSTL-2<br>Class I, II   | 2.375          | 2.5  | 2.625 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $V_{REF} - 0.04$  | $V_{REF}$        | $V_{REF} + 0.04$  |
| SSTL-18<br>Class I, II  | 1.71           | 1.8  | 1.89  | 0.833             | 0.9              | 0.969             | $V_{REF} - 0.04$  | $V_{REF}$        | $V_{REF} + 0.04$  |
| SSTL-15<br>Class I, II  | 1.425          | 1.5  | 1.575 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-135<br>Class I, II | 1.283          | 1.35 | 1.418 | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-125<br>Class I, II | 1.19           | 1.25 | 1.26  | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| SSTL-12<br>Class I, II  | 1.14           | 1.20 | 1.26  | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ |
| HSTL-18<br>Class I, II  | 1.71           | 1.8  | 1.89  | 0.85              | 0.9              | 0.95              | —                 | $V_{CCIO}/2$     | —                 |
| HSTL-15<br>Class I, II  | 1.425          | 1.5  | 1.575 | 0.68              | 0.75             | 0.9               | —                 | $V_{CCIO}/2$     | —                 |
| HSTL-12<br>Class I, II  | 1.14           | 1.2  | 1.26  | $0.47 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.53 * V_{CCIO}$ | —                 | $V_{CCIO}/2$     | —                 |
| HSUL-12                 | 1.14           | 1.2  | 1.3   | $0.49 * V_{CCIO}$ | $0.5 * V_{CCIO}$ | $0.51 * V_{CCIO}$ | —                 | —                | —                 |

**Table 19. Single-Ended SSTL, HSTL, and HSUL I/O Standards Signal Specifications for Stratix V Devices (Part 1 of 2)**

| I/O Standard            | $V_{IL(DC)}$ (V) |                   | $V_{IH(DC)}$ (V)  |                  | $V_{IL(AC)}$ (V)  | $V_{IH(AC)}$ (V)  | $V_{OL}$ (V)     | $V_{OH}$ (V)      | $I_{OI}$ (mA) | $I_{OH}$ (mA) |
|-------------------------|------------------|-------------------|-------------------|------------------|-------------------|-------------------|------------------|-------------------|---------------|---------------|
|                         | Min              | Max               | Min               | Max              | Max               | Min               | Max              | Min               |               |               |
| SSTL-2<br>Class I       | -0.3             | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$  | $V_{REF} + 0.31$  | $V_{TT} - 0.608$ | $V_{TT} + 0.608$  | 8.1           | -8.1          |
| SSTL-2<br>Class II      | -0.3             | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $V_{CCIO} + 0.3$ | $V_{REF} - 0.31$  | $V_{REF} + 0.31$  | $V_{TT} - 0.81$  | $V_{TT} + 0.81$   | 16.2          | -16.2         |
| SSTL-18<br>Class I      | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | $V_{TT} - 0.603$ | $V_{TT} + 0.603$  | 6.7           | -6.7          |
| SSTL-18<br>Class II     | -0.3             | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | $V_{CCIO} + 0.3$ | $V_{REF} - 0.25$  | $V_{REF} + 0.25$  | 0.28             | $V_{CCIO} - 0.28$ | 13.4          | -13.4         |
| SSTL-15<br>Class I      | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | 8             | -8            |
| SSTL-15<br>Class II     | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.175$ | $V_{REF} + 0.175$ | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | 16            | -16           |
| SSTL-135<br>Class I, II | —                | $V_{REF} - 0.09$  | $V_{REF} + 0.09$  | —                | $V_{REF} - 0.16$  | $V_{REF} + 0.16$  | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | —             | —             |
| SSTL-125<br>Class I, II | —                | $V_{REF} - 0.85$  | $V_{REF} + 0.85$  | —                | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | —             | —             |
| SSTL-12<br>Class I, II  | —                | $V_{REF} - 0.1$   | $V_{REF} + 0.1$   | —                | $V_{REF} - 0.15$  | $V_{REF} + 0.15$  | $0.2 * V_{CCIO}$ | $0.8 * V_{CCIO}$  | —             | —             |

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 5 of 7)**

| Symbol/<br>Description                                                | Conditions                                                 | Transceiver Speed<br>Grade 1 |                     |       | Transceiver Speed<br>Grade 2 |                     |       | Transceiver Speed<br>Grade 3 |                     |                                     | Unit     |
|-----------------------------------------------------------------------|------------------------------------------------------------|------------------------------|---------------------|-------|------------------------------|---------------------|-------|------------------------------|---------------------|-------------------------------------|----------|
|                                                                       |                                                            | Min                          | Typ                 | Max   | Min                          | Typ                 | Max   | Min                          | Typ                 | Max                                 |          |
| Programmable<br>DC gain                                               | DC Gain<br>Setting = 0                                     | —                            | 0                   | —     | —                            | 0                   | —     | —                            | 0                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 1                                     | —                            | 2                   | —     | —                            | 2                   | —     | —                            | 2                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 2                                     | —                            | 4                   | —     | —                            | 4                   | —     | —                            | 4                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 3                                     | —                            | 6                   | —     | —                            | 6                   | —     | —                            | 6                   | —                                   | dB       |
|                                                                       | DC Gain<br>Setting = 4                                     | —                            | 8                   | —     | —                            | 8                   | —     | —                            | 8                   | —                                   | dB       |
| <b>Transmitter</b>                                                    |                                                            |                              |                     |       |                              |                     |       |                              |                     |                                     |          |
| Supported I/O<br>Standards                                            | —                                                          | 1.4-V and 1.5-V PCML         |                     |       |                              |                     |       |                              |                     |                                     |          |
| Data rate<br>(Standard PCS)                                           | —                                                          | 600                          | —                   | 12200 | 600                          | —                   | 12200 | 600                          | —                   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps     |
| Data rate<br>(10G PCS)                                                | —                                                          | 600                          | —                   | 14100 | 600                          | —                   | 12500 | 600                          | —                   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps     |
| Differential on-<br>chip termination<br>resistors                     | 85- $\Omega$<br>setting                                    | —                            | 85 $\pm$<br>20%     | —     | —                            | 85 $\pm$<br>20%     | —     | —                            | 85 $\pm$<br>20%     | —                                   | $\Omega$ |
|                                                                       | 100- $\Omega$<br>setting                                   | —                            | 100<br>$\pm$<br>20% | —     | —                            | 100<br>$\pm$<br>20% | —     | —                            | 100<br>$\pm$<br>20% | —                                   | $\Omega$ |
|                                                                       | 120- $\Omega$<br>setting                                   | —                            | 120<br>$\pm$<br>20% | —     | —                            | 120<br>$\pm$<br>20% | —     | —                            | 120<br>$\pm$<br>20% | —                                   | $\Omega$ |
|                                                                       | 150- $\Omega$<br>setting                                   | —                            | 150<br>$\pm$<br>20% | —     | —                            | 150<br>$\pm$<br>20% | —     | —                            | 150<br>$\pm$<br>20% | —                                   | $\Omega$ |
| V <sub>OCM</sub> (AC<br>coupled)                                      | 0.65-V<br>setting                                          | —                            | 650                 | —     | —                            | 650                 | —     | —                            | 650                 | —                                   | mV       |
| V <sub>OCM</sub> (DC<br>coupled)                                      | —                                                          | —                            | 650                 | —     | —                            | 650                 | —     | —                            | 650                 | —                                   | mV       |
| Rise time <sup>(7)</sup>                                              | 20% to 80%                                                 | 30                           | —                   | 160   | 30                           | —                   | 160   | 30                           | —                   | 160                                 | ps       |
| Fall time <sup>(7)</sup>                                              | 80% to 20%                                                 | 30                           | —                   | 160   | 30                           | —                   | 160   | 30                           | —                   | 160                                 | ps       |
| Intra-differential<br>pair skew                                       | Tx V <sub>CM</sub> =<br>0.5 V and<br>slew rate of<br>15 ps | —                            | —                   | 15    | —                            | —                   | 15    | —                            | —                   | 15                                  | ps       |
| Intra-transceiver<br>block transmitter<br>channel-to-<br>channel skew | x6 PMA<br>bonded mode                                      | —                            | —                   | 120   | —                            | —                   | 120   | —                            | —                   | 120                                 | ps       |



**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 6 of 7)**

| Symbol/<br>Description                                                | Conditions                                   | Transceiver Speed<br>Grade 1 |     |                               | Transceiver Speed<br>Grade 2 |     |                               | Transceiver Speed<br>Grade 3 |     |                                     | Unit |
|-----------------------------------------------------------------------|----------------------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------------|------|
|                                                                       |                                              | Min                          | Typ | Max                           | Min                          | Typ | Max                           | Min                          | Typ | Max                                 |      |
| Inter-transceiver<br>block transmitter<br>channel-to-<br>channel skew | xN PMA<br>bonded mode                        | —                            | —   | 500                           | —                            | —   | 500                           | —                            | —   | 500                                 | ps   |
| <b>CMU PLL</b>                                                        |                                              |                              |     |                               |                              |     |                               |                              |     |                                     |      |
| Supported Data<br>Range                                               | —                                            | 600                          | —   | 12500                         | 600                          | —   | 12500                         | 600                          | —   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —                                            | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                                   | μs   |
| t <sub>pll_lock</sub> <sup>(16)</sup>                                 | —                                            | —                            | —   | 10                            | —                            | —   | 10                            | —                            | —   | 10                                  | μs   |
| <b>ATX PLL</b>                                                        |                                              |                              |     |                               |                              |     |                               |                              |     |                                     |      |
| Supported Data<br>Rate Range                                          | VCO<br>post-divider<br>L=2                   | 8000                         | —   | 14100                         | 8000                         | —   | 12500                         | 8000                         | —   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps |
|                                                                       | L=4                                          | 4000                         | —   | 7050                          | 4000                         | —   | 6600                          | 4000                         | —   | 6600                                | Mbps |
|                                                                       | L=8                                          | 2000                         | —   | 3525                          | 2000                         | —   | 3300                          | 2000                         | —   | 3300                                | Mbps |
|                                                                       | L=8,<br>Local/Central<br>Clock Divider<br>=2 | 1000                         | —   | 1762.5                        | 1000                         | —   | 1762.5                        | 1000                         | —   | 1762.5                              | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —                                            | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                                   | μs   |
| t <sub>pll_lock</sub> <sup>(16)</sup>                                 | —                                            | —                            | —   | 10                            | —                            | —   | 10                            | —                            | —   | 10                                  | μs   |
| <b>fPLL</b>                                                           |                                              |                              |     |                               |                              |     |                               |                              |     |                                     |      |
| Supported Data<br>Range                                               | —                                            | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | 600                          | —   | 3250/<br>3125 <sup>(25)</sup>       | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —                                            | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                                   | μs   |

Table 27 shows the  $V_{OD}$  settings for the GX channel.

**Table 27. Typical  $V_{OD}$  Setting for GX Channel, TX Termination = 100  $\Omega$  <sup>(2)</sup>**

| Symbol                                                                      | $V_{OD}$ Setting | $V_{OD}$ Value (mV) | $V_{OD}$ Setting | $V_{OD}$ Value (mV) |
|-----------------------------------------------------------------------------|------------------|---------------------|------------------|---------------------|
| <b><math>V_{OD}</math> differential peak to peak typical <sup>(3)</sup></b> | 0 <sup>(1)</sup> | 0                   | 32               | 640                 |
|                                                                             | 1 <sup>(1)</sup> | 20                  | 33               | 660                 |
|                                                                             | 2 <sup>(1)</sup> | 40                  | 34               | 680                 |
|                                                                             | 3 <sup>(1)</sup> | 60                  | 35               | 700                 |
|                                                                             | 4 <sup>(1)</sup> | 80                  | 36               | 720                 |
|                                                                             | 5 <sup>(1)</sup> | 100                 | 37               | 740                 |
|                                                                             | 6                | 120                 | 38               | 760                 |
|                                                                             | 7                | 140                 | 39               | 780                 |
|                                                                             | 8                | 160                 | 40               | 800                 |
|                                                                             | 9                | 180                 | 41               | 820                 |
|                                                                             | 10               | 200                 | 42               | 840                 |
|                                                                             | 11               | 220                 | 43               | 860                 |
|                                                                             | 12               | 240                 | 44               | 880                 |
|                                                                             | 13               | 260                 | 45               | 900                 |
|                                                                             | 14               | 280                 | 46               | 920                 |
|                                                                             | 15               | 300                 | 47               | 940                 |
|                                                                             | 16               | 320                 | 48               | 960                 |
|                                                                             | 17               | 340                 | 49               | 980                 |
|                                                                             | 18               | 360                 | 50               | 1000                |
|                                                                             | 19               | 380                 | 51               | 1020                |
|                                                                             | 20               | 400                 | 52               | 1040                |
|                                                                             | 21               | 420                 | 53               | 1060                |
|                                                                             | 22               | 440                 | 54               | 1080                |
|                                                                             | 23               | 460                 | 55               | 1100                |
|                                                                             | 24               | 480                 | 56               | 1120                |
|                                                                             | 25               | 500                 | 57               | 1140                |
|                                                                             | 26               | 520                 | 58               | 1160                |
|                                                                             | 27               | 540                 | 59               | 1180                |
|                                                                             | 28               | 560                 | 60               | 1200                |
|                                                                             | 29               | 580                 | 61               | 1220                |
|                                                                             | 30               | 600                 | 62               | 1240                |
|                                                                             | 31               | 620                 | 63               | 1260                |

**Note to Table 27:**

- (1) If TX termination resistance = 100 $\Omega$ , this VOD setting is illegal.
- (2) The tolerance is +/-20% for all VOD settings except for settings 2 and below.
- (3) Refer to Figure 2.

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 1 of 5) <sup>(1)</sup>**

| Symbol/<br>Description                                         | Conditions                                             | Transceiver<br>Speed Grade 2                                                           |           |      | Transceiver<br>Speed Grade 3 |           |      | Unit |
|----------------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------------------------------------|-----------|------|------------------------------|-----------|------|------|
|                                                                |                                                        | Min                                                                                    | Typ       | Max  | Min                          | Typ       | Max  |      |
| Reference Clock                                                |                                                        |                                                                                        |           |      |                              |           |      |      |
| Supported I/O<br>Standards                                     | Dedicated<br>reference<br>clock pin                    | 1.2-V PCML, 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS,<br>and HCSL |           |      |                              |           |      |      |
|                                                                | RX reference<br>clock pin                              | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS                                   |           |      |                              |           |      |      |
| Input Reference Clock<br>Frequency (CMU<br>PLL) <sup>(6)</sup> | —                                                      | 40                                                                                     | —         | 710  | 40                           | —         | 710  | MHz  |
| Input Reference Clock<br>Frequency (ATX PLL) <sup>(6)</sup>    | —                                                      | 100                                                                                    | —         | 710  | 100                          | —         | 710  | MHz  |
| Rise time                                                      | 20% to 80%                                             | —                                                                                      | —         | 400  | —                            | —         | 400  | ps   |
| Fall time                                                      | 80% to 20%                                             | —                                                                                      | —         | 400  | —                            | —         | 400  |      |
| Duty cycle                                                     | —                                                      | 45                                                                                     | —         | 55   | 45                           | —         | 55   | %    |
| Spread-spectrum<br>modulating clock<br>frequency               | PCI Express<br>(PCIe)                                  | 30                                                                                     | —         | 33   | 30                           | —         | 33   | kHz  |
| Spread-spectrum<br>downspread                                  | PCIe                                                   | —                                                                                      | 0 to −0.5 | —    | —                            | 0 to −0.5 | —    | %    |
| On-chip termination<br>resistors <sup>(19)</sup>               | —                                                      | —                                                                                      | 100       | —    | —                            | 100       | —    | Ω    |
| Absolute V <sub>MAX</sub> <sup>(3)</sup>                       | Dedicated<br>reference<br>clock pin                    | —                                                                                      | —         | 1.6  | —                            | —         | 1.6  | V    |
|                                                                | RX reference<br>clock pin                              | —                                                                                      | —         | 1.2  | —                            | —         | 1.2  |      |
| Absolute V <sub>MIN</sub>                                      | —                                                      | -0.4                                                                                   | —         | —    | -0.4                         | —         | —    | V    |
| Peak-to-peak<br>differential input<br>voltage                  | —                                                      | 200                                                                                    | —         | 1600 | 200                          | —         | 1600 | mV   |
| V <sub>ICM</sub> (AC coupled)                                  | Dedicated<br>reference<br>clock pin                    | 1050/1000 <sup>(2)</sup>                                                               |           |      | 1050/1000 <sup>(2)</sup>     |           |      | mV   |
|                                                                | RX reference<br>clock pin                              | 1.0/0.9/0.85 <sup>(22)</sup>                                                           |           |      | 1.0/0.9/0.85 <sup>(22)</sup> |           |      | V    |
| V <sub>ICM</sub> (DC coupled)                                  | HCSL I/O<br>standard for<br>PCIe<br>reference<br>clock | 250                                                                                    | —         | 550  | 250                          | —         | 550  | mV   |

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 3 of 5) <sup>(1)</sup>**

| Symbol/<br>Description                                                     | Conditions                      | Transceiver<br>Speed Grade 2 |               |        | Transceiver<br>Speed Grade 3 |               |        | Unit      |
|----------------------------------------------------------------------------|---------------------------------|------------------------------|---------------|--------|------------------------------|---------------|--------|-----------|
|                                                                            |                                 | Min                          | Typ           | Max    | Min                          | Typ           | Max    |           |
| Differential on-chip termination resistors <sup>(7)</sup>                  | GT channels                     | —                            | 100           | —      | —                            | 100           | —      | $\Omega$  |
| Differential on-chip termination resistors for GX channels <sup>(19)</sup> | 85- $\Omega$ setting            | —                            | 85 $\pm$ 30%  | —      | —                            | 85 $\pm$ 30%  | —      | $\Omega$  |
|                                                                            | 100- $\Omega$ setting           | —                            | 100 $\pm$ 30% | —      | —                            | 100 $\pm$ 30% | —      | $\Omega$  |
|                                                                            | 120- $\Omega$ setting           | —                            | 120 $\pm$ 30% | —      | —                            | 120 $\pm$ 30% | —      | $\Omega$  |
|                                                                            | 150- $\Omega$ setting           | —                            | 150 $\pm$ 30% | —      | —                            | 150 $\pm$ 30% | —      | $\Omega$  |
| V <sub>ICM</sub> (AC coupled)                                              | GT channels                     | —                            | 650           | —      | —                            | 650           | —      | mV        |
| VICM (AC and DC coupled) for GX Channels                                   | VCCR_GXB = 0.85 V or 0.9 V      | —                            | 600           | —      | —                            | 600           | —      | mV        |
|                                                                            | VCCR_GXB = 1.0 V full bandwidth | —                            | 700           | —      | —                            | 700           | —      | mV        |
|                                                                            | VCCR_GXB = 1.0 V half bandwidth | —                            | 750           | —      | —                            | 750           | —      | mV        |
| t <sub>LTR</sub> <sup>(9)</sup>                                            | —                               | —                            | —             | 10     | —                            | —             | 10     | $\mu$ s   |
| t <sub>LTD</sub> <sup>(10)</sup>                                           | —                               | 4                            | —             | —      | 4                            | —             | —      | $\mu$ s   |
| t <sub>LTD_manual</sub> <sup>(11)</sup>                                    | —                               | 4                            | —             | —      | 4                            | —             | —      | $\mu$ s   |
| t <sub>LTR_LTD_manual</sub> <sup>(12)</sup>                                | —                               | 15                           | —             | —      | 15                           | —             | —      | $\mu$ s   |
| Run Length                                                                 | GT channels                     | —                            | —             | 72     | —                            | —             | 72     | CID       |
|                                                                            | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| CDR PPM                                                                    | GT channels                     | —                            | —             | 1000   | —                            | —             | 1000   | $\pm$ PPM |
|                                                                            | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| Programmable equalization (AC Gain) <sup>(5)</sup>                         | GT channels                     | —                            | —             | 14     | —                            | —             | 14     | dB        |
|                                                                            | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| Programmable DC gain <sup>(6)</sup>                                        | GT channels                     | —                            | —             | 7.5    | —                            | —             | 7.5    | dB        |
|                                                                            | GX channels                     | <sup>(8)</sup>               |               |        |                              |               |        |           |
| Differential on-chip termination resistors <sup>(7)</sup>                  | GT channels                     | —                            | 100           | —      | —                            | 100           | —      | $\Omega$  |
| <b>Transmitter</b>                                                         |                                 |                              |               |        |                              |               |        |           |
| Supported I/O Standards                                                    | —                               | 1.4-V and 1.5-V PCML         |               |        |                              |               |        |           |
| Data rate (Standard PCS)                                                   | GX channels                     | 600                          | —             | 8500   | 600                          | —             | 8500   | Mbps      |
| Data rate (10G PCS)                                                        | GX channels                     | 600                          | —             | 12,500 | 600                          | —             | 12,500 | Mbps      |

Table 29 shows the  $V_{OD}$  settings for the GT channel.

**Table 29. Typical  $V_{OD}$  Setting for GT Channel, TX Termination = 100  $\Omega$**

| Symbol                                                                      | $V_{OD}$ Setting | $V_{OD}$ Value (mV) |
|-----------------------------------------------------------------------------|------------------|---------------------|
| <b><math>V_{OD}</math> differential peak to peak typical <sup>(1)</sup></b> | 0                | 0                   |
|                                                                             | 1                | 200                 |
|                                                                             | 2                | 400                 |
|                                                                             | 3                | 600                 |
|                                                                             | 4                | 800                 |
|                                                                             | 5                | 1000                |

**Note:**

(1) Refer to Figure 4.

Figure 6 shows the Stratix V DC gain curves for GT channels.

---

**Figure 6. DC Gain Curves for GT Channels**

---

---

**Transceiver Characterization**

This section summarizes the Stratix V transceiver characterization results for compliance with the following protocols:

- Interlaken
- 40G (XLAUI)/100G (CAUI)
- 10GBase-KR
- QSGMII
- XAUI
- SFI
- Gigabit Ethernet (Gbe / GIGE)
- SPAUI
- Serial Rapid IO (SRIO)
- CPRI
- OBSAI
- Hyper Transport (HT)
- SATA
- SAS
- CEI

**Table 33. Memory Block Performance Specifications for Stratix V Devices <sup>(1), (2)</sup> (Part 2 of 2)**

| Memory     | Mode                                                                                             | Resources Used |        | Performance |         |     |     |         |               |     | Unit |
|------------|--------------------------------------------------------------------------------------------------|----------------|--------|-------------|---------|-----|-----|---------|---------------|-----|------|
|            |                                                                                                  | ALUTs          | Memory | C1          | C2, C2L | C3  | C4  | I2, I2L | I3, I3L, I3YY | I4  |      |
| M20K Block | Single-port, all supported widths                                                                | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | Simple dual-port, all supported widths                                                           | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | Simple dual-port with the read-during-write option set to <b>Old Data</b> , all supported widths | 0              | 1      | 525         | 525     | 455 | 400 | 525     | 455           | 400 | MHz  |
|            | Simple dual-port with ECC enabled, 512 × 32                                                      | 0              | 1      | 450         | 450     | 400 | 350 | 450     | 400           | 350 | MHz  |
|            | Simple dual-port with ECC and optional pipeline registers enabled, 512 × 32                      | 0              | 1      | 600         | 600     | 500 | 450 | 600     | 500           | 450 | MHz  |
|            | True dual port, all supported widths                                                             | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | ROM, all supported widths                                                                        | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |

**Notes to Table 33:**

- (1) To achieve the maximum memory block performance, use a memory block clock that comes through global clock routing from an on-chip PLL set to **50%** output duty cycle. Use the Quartus II software to report timing for this and other memory block clocking schemes.
- (2) When you use the error detection cyclical redundancy check (CRC) feature, there is no degradation in F<sub>MAX</sub>.
- (3) The F<sub>MAX</sub> specification is only achievable with Fitter options, **MLAB Implementation In 16-Bit Deep Mode** enabled.

**Temperature Sensing Diode Specifications**

Table 34 lists the internal TSD specification.

**Table 34. Internal Temperature Sensing Diode Specification**

| Temperature Range | Accuracy | Offset Calibrated Option | Sampling Rate  | Conversion Time | Resolution | Minimum Resolution with no Missing Codes |
|-------------------|----------|--------------------------|----------------|-----------------|------------|------------------------------------------|
| –40°C to 100°C    | ±8°C     | No                       | 1 MHz, 500 KHz | < 100 ms        | 8 bits     | 8 bits                                   |

Table 35 lists the specifications for the Stratix V external temperature sensing diode.

**Table 35. External Temperature Sensing Diode Specifications for Stratix V Devices**

| Description                              | Min   | Typ   | Max   | Unit |
|------------------------------------------|-------|-------|-------|------|
| I <sub>bias</sub> , diode source current | 8     | —     | 200   | μA   |
| V <sub>bias</sub> , voltage across diode | 0.3   | —     | 0.9   | V    |
| Series resistance                        | —     | —     | < 1   | Ω    |
| Diode ideality factor                    | 1.006 | 1.008 | 1.010 | —    |

Figure 7 shows the dynamic phase alignment (DPA) lock time specifications with the DPA PLL calibration option enabled.

**Figure 7. DPA Lock Time Specification with DPA PLL Calibration Enabled**

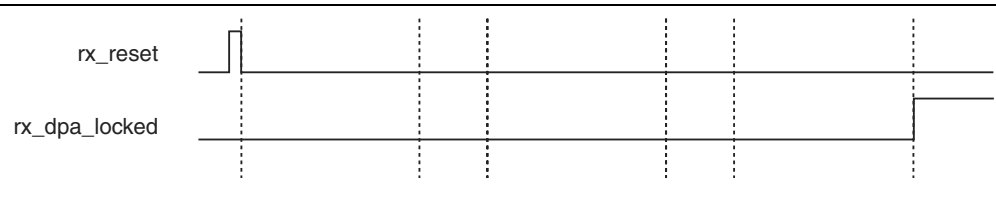


Table 37 lists the DPA lock time specifications for Stratix V devices.

**Table 37. DPA Lock Time Specifications for Stratix V GX Devices Only <sup>(1), (2), (3)</sup>**


| Standard           | Training Pattern     | Number of Data Transitions in One Repetition of the Training Pattern | Number of Repetitions per 256 Data Transitions <sup>(4)</sup> | Maximum              |
|--------------------|----------------------|----------------------------------------------------------------------|---------------------------------------------------------------|----------------------|
| SPI-4              | 00000000001111111111 | 2                                                                    | 128                                                           | 640 data transitions |
| Parallel Rapid I/O | 00001111             | 2                                                                    | 128                                                           | 640 data transitions |
|                    | 10010000             | 4                                                                    | 64                                                            | 640 data transitions |
| Miscellaneous      | 10101010             | 8                                                                    | 32                                                            | 640 data transitions |
|                    | 01010101             | 8                                                                    | 32                                                            | 640 data transitions |

**Notes to Table 37:**

- (1) The DPA lock time is for one channel.
- (2) One data transition is defined as a 0-to-1 or 1-to-0 transition.
- (3) The DPA lock time stated in this table applies to both commercial and industrial grade.
- (4) This is the number of repetitions for the stated training pattern to achieve the 256 data transitions.

Figure 8 shows the LVDS soft-clock data recovery (CDR)/DPA sinusoidal jitter tolerance specification for a data rate  $\geq 1.25$  Gbps. Table 38 lists the LVDS soft-CDR/DPA sinusoidal jitter tolerance specification for a data rate  $\geq 1.25$  Gbps.

**Figure 8. LVDS Soft-CDR/DPA Sinusoidal Jitter Tolerance Specification for a Data Rate  $\geq 1.25$  Gbps**

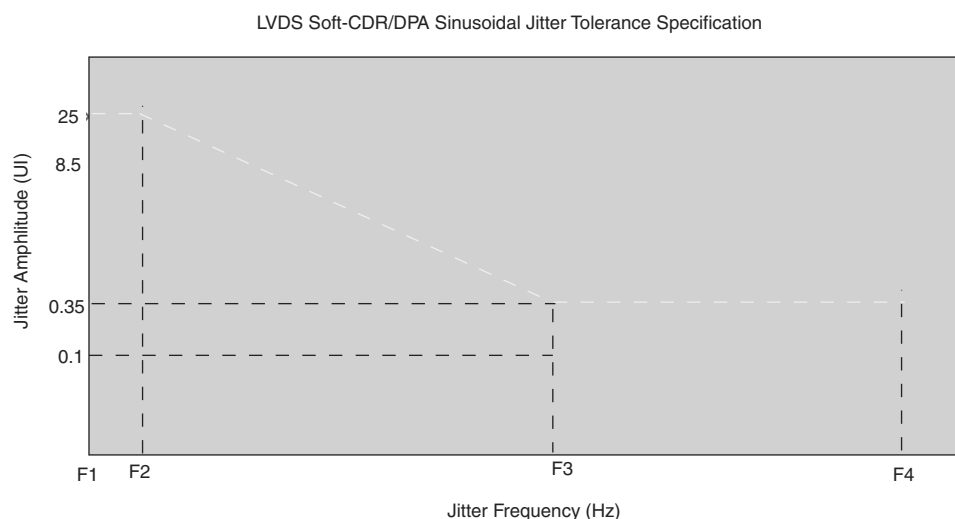



**Table 48. Minimum Configuration Time Estimation for Stratix V Devices**

| Variant | Member Code | Active Serial <sup>(1)</sup> |            |                     | Fast Passive Parallel <sup>(2)</sup> |            |                     |
|---------|-------------|------------------------------|------------|---------------------|--------------------------------------|------------|---------------------|
|         |             | Width                        | DCLK (MHz) | Min Config Time (s) | Width                                | DCLK (MHz) | Min Config Time (s) |
| GS      | D3          | 4                            | 100        | 0.344               | 32                                   | 100        | 0.043               |
|         | D4          | 4                            | 100        | 0.534               | 32                                   | 100        | 0.067               |
|         |             | 4                            | 100        | 0.344               | 32                                   | 100        | 0.043               |
|         | D5          | 4                            | 100        | 0.534               | 32                                   | 100        | 0.067               |
|         | D6          | 4                            | 100        | 0.741               | 32                                   | 100        | 0.093               |
|         | D8          | 4                            | 100        | 0.741               | 32                                   | 100        | 0.093               |
| E       | E9          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | EB          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |

**Notes to Table 48:**

- (1) DCLK frequency of 100 MHz using external CLKUSR.  
 (2) Max FPGA FPP bandwidth may exceed bandwidth available from some external storage or control logic.

## Fast Passive Parallel Configuration Timing

This section describes the fast passive parallel (FPP) configuration timing parameters for Stratix V devices.

### DCLK-to-DATA[] Ratio for FPP Configuration

FPP configuration requires a different DCLK-to-DATA [] ratio when you enable the design security, decompression, or both features. Table 49 lists the DCLK-to-DATA [] ratio for each combination.

**Table 49. DCLK-to-DATA[] Ratio <sup>(1)</sup> (Part 1 of 2)**


| Configuration Scheme | Decompression | Design Security | DCLK-to-DATA[] Ratio |
|----------------------|---------------|-----------------|----------------------|
| FPP ×8               | Disabled      | Disabled        | 1                    |
|                      | Disabled      | Enabled         | 1                    |
|                      | Enabled       | Disabled        | 2                    |
|                      | Enabled       | Enabled         | 2                    |
| FPP ×16              | Disabled      | Disabled        | 1                    |
|                      | Disabled      | Enabled         | 2                    |
|                      | Enabled       | Disabled        | 4                    |
|                      | Enabled       | Enabled         | 4                    |



## FPP Configuration Timing when DCLK-to-DATA [] = 1

Figure 12 shows the timing waveform for FPP configuration when using a MAX II or MAX V device as an external host. This waveform shows timing when the DCLK-to-DATA [] ratio is 1.

**Figure 12. FPP Configuration Timing Waveform When the DCLK-to-DATA[] Ratio is 1 <sup>(1), (2)</sup>**

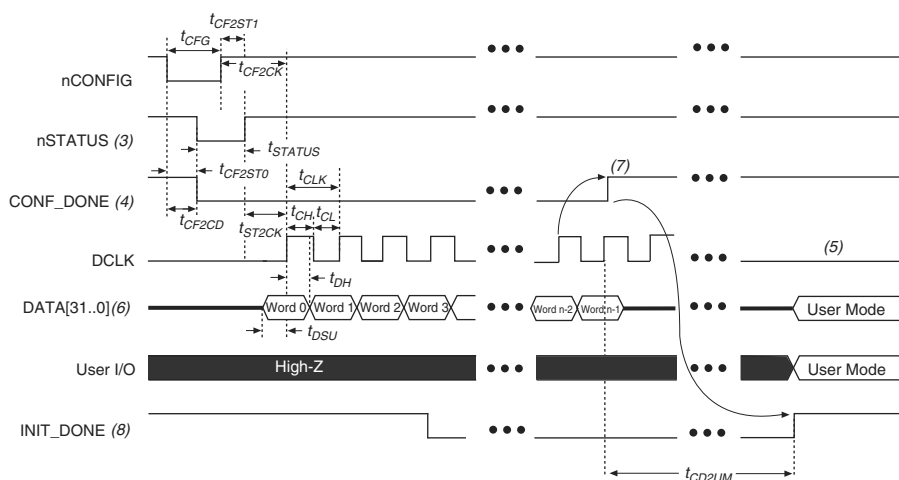

### Notes to Figure 12:

- (1) Use this timing waveform when the DCLK-to-DATA [] ratio is 1.
- (2) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF\_DONE are at logic-high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (3) After power-up, the Stratix V device holds nSTATUS low for the time of the POR delay.
- (4) After power-up, before and during configuration, CONF\_DONE is low.
- (5) Do not leave DCLK floating after configuration. DCLK is ignored after configuration is complete. It can toggle high or low if required.
- (6) For FPP x16, use DATA [15..0]. For FPP x8, use DATA [7..0]. DATA [31..0] are available as a user I/O pin after configuration. The state of this pin depends on the dual-purpose pin settings.
- (7) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF\_DONE is released high when the Stratix V device receives all the configuration data successfully. After CONF\_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (8) After the option bit to enable the INIT\_DONE pin is configured into the device, the INIT\_DONE goes low.

Table 54 lists the PS configuration timing parameters for Stratix V devices.

**Table 54. PS Timing Parameters for Stratix V Devices**

| Symbol                     | Parameter                                         | Minimum                                                         | Maximum              | Units   |
|----------------------------|---------------------------------------------------|-----------------------------------------------------------------|----------------------|---------|
| $t_{CF2CD}$                | nCONFIG low to CONF_DONE low                      | —                                                               | 600                  | ns      |
| $t_{CF2ST0}$               | nCONFIG low to nSTATUS low                        | —                                                               | 600                  | ns      |
| $t_{CFG}$                  | nCONFIG low pulse width                           | 2                                                               | —                    | $\mu$ s |
| $t_{STATUS}$               | nSTATUS low pulse width                           | 268                                                             | 1,506 <sup>(1)</sup> | $\mu$ s |
| $t_{CF2ST1}$               | nCONFIG high to nSTATUS high                      | —                                                               | 1,506 <sup>(2)</sup> | $\mu$ s |
| $t_{CF2CK}$ <sup>(5)</sup> | nCONFIG high to first rising edge on DCLK         | 1,506                                                           | —                    | $\mu$ s |
| $t_{ST2CK}$ <sup>(5)</sup> | nSTATUS high to first rising edge of DCLK         | 2                                                               | —                    | $\mu$ s |
| $t_{DSU}$                  | DATA [] setup time before rising edge on DCLK     | 5.5                                                             | —                    | ns      |
| $t_{DH}$                   | DATA [] hold time after rising edge on DCLK       | 0                                                               | —                    | ns      |
| $t_{CH}$                   | DCLK high time                                    | $0.45 \times 1/f_{MAX}$                                         | —                    | s       |
| $t_{CL}$                   | DCLK low time                                     | $0.45 \times 1/f_{MAX}$                                         | —                    | s       |
| $t_{CLK}$                  | DCLK period                                       | $1/f_{MAX}$                                                     | —                    | s       |
| $f_{MAX}$                  | DCLK frequency                                    | —                                                               | 125                  | MHz     |
| $t_{CD2UM}$                | CONF_DONE high to user mode <sup>(3)</sup>        | 175                                                             | 437                  | $\mu$ s |
| $t_{CD2CU}$                | CONF_DONE high to CLKUSR enabled                  | 4 × maximum DCLK period                                         | —                    | —       |
| $t_{CD2UMC}$               | CONF_DONE high to user mode with CLKUSR option on | $t_{CD2CU} + (8576 \times \text{CLKUSR period})$ <sup>(4)</sup> | —                    | —       |

**Notes to Table 54:**

- (1) This value is applicable if you do not delay configuration by extending the nCONFIG or nSTATUS low pulse width.
- (2) This value is applicable if you do not delay configuration by externally holding the nSTATUS low.
- (3) The minimum and maximum numbers apply only if you choose the internal oscillator as the clock source for initializing the device.
- (4) To enable the CLKUSR pin as the initialization clock source and to obtain the maximum frequency specification on these pins, refer to the “Initialization” section.
- (5) If nSTATUS is monitored, follow the  $t_{ST2CK}$  specification. If nSTATUS is not monitored, follow the  $t_{CF2CK}$  specification.

## Initialization

Table 55 lists the initialization clock source option, the applicable configuration schemes, and the maximum frequency.

**Table 55. Initialization Clock Source Option and the Maximum Frequency**

| Initialization Clock Source | Configuration Schemes      | Maximum Frequency | Minimum Number of Clock Cycles <sup>(1)</sup> |
|-----------------------------|----------------------------|-------------------|-----------------------------------------------|
| Internal Oscillator         | AS, PS, FPP                | 12.5 MHz          | 8576                                          |
| CLKUSR                      | AS, PS, FPP <sup>(2)</sup> | 125 MHz           |                                               |
| DCLK                        | PS, FPP                    | 125 MHz           |                                               |

**Notes to Table 55:**

- (1) The minimum number of clock cycles required for device initialization.
- (2) To enable CLKUSR as the initialization clock source, turn on the **Enable user-supplied start-up clock (CLKUSR)** option in the Quartus II software from the **General** panel of the **Device and Pin Options** dialog box.

**Table 61. Document Revision History (Part 2 of 3)**

| Date          | Version | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| November 2014 | 3.3     | <ul style="list-style-type: none"> <li>■ Added the I3YY speed grade and changed the data rates for the GX channel in Table 1.</li> <li>■ Added the I3YY speed grade to the <math>V_{CC}</math> description in Table 6.</li> <li>■ Added the I3YY speed grade to <math>V_{CCHIP\_L}</math>, <math>V_{CCHIP\_R}</math>, <math>V_{CCHSSI\_L}</math>, and <math>V_{CCHSSI\_R}</math> descriptions in Table 7.</li> <li>■ Added 240-<math>\Omega</math> to Table 11.</li> <li>■ Changed CDR PPM tolerance in Table 23.</li> <li>■ Added additional max data rate for fPLL in Table 23.</li> <li>■ Added the I3YY speed grade and changed the data rates for transceiver speed grade 3 in Table 25.</li> <li>■ Added the I3YY speed grade and changed the data rates for transceiver speed grade 3 in Table 26.</li> <li>■ Changed CDR PPM tolerance in Table 28.</li> <li>■ Added additional max data rate for fPLL in Table 28.</li> <li>■ Changed the mode descriptions for MLAB and M20K in Table 33.</li> <li>■ Changed the Max value of <math>f_{HCLK\_OUT}</math> for the C2, C2L, I2, I2L speed grades in Table 36.</li> <li>■ Changed the frequency ranges for C1 and C2 in Table 39.</li> <li>■ Changed the .rbf file sizes for 5SGSD6 and 5SGSD8 in Table 47.</li> <li>■ Added note about nSTATUS to Table 50, Table 51, Table 54.</li> <li>■ Changed the available settings in Table 58.</li> <li>■ Changed the note in “Periphery Performance”.</li> <li>■ Updated the “I/O Standard Specifications” section.</li> <li>■ Updated the “Raw Binary File Size” section.</li> <li>■ Updated the receiver voltage input range in Table 22.</li> <li>■ Updated the max frequency for the LVDS clock network in Table 36.</li> <li>■ Updated the DCLK note to Figure 11.</li> <li>■ Updated Table 23 <math>VO_{CM}</math> (DC Coupled) condition.</li> <li>■ Updated Table 6 and Table 7.</li> <li>■ Added the DCLK specification to Table 55.</li> <li>■ Updated the notes for Table 47.</li> <li>■ Updated the list of parameters for Table 56.</li> </ul> |
| November 2013 | 3.2     | ■ Updated Table 28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| November 2013 | 3.1     | ■ Updated Table 33                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| November 2013 | 3.0     | ■ Updated Table 23 and Table 28                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| October 2013  | 2.9     | ■ Updated the “Transceiver Characterization” section                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| October 2013  | 2.8     | <ul style="list-style-type: none"> <li>■ Updated Table 3, Table 12, Table 14, Table 19, Table 20, Table 23, Table 24, Table 28, Table 30, Table 31, Table 32, Table 33, Table 36, Table 39, Table 40, Table 41, Table 42, Table 47, Table 53, Table 58, and Table 59</li> <li>■ Added Figure 1 and Figure 3</li> <li>■ Added the “Transceiver Characterization” section</li> <li>■ Removed all “Preliminary” designations.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |