



Welcome to [E-XFL.COM](https://www.e-xfl.com)

### Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

### Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

#### Details

|                                |   |
|--------------------------------|---|
| Product Status                 | Obsolete  |
| Number of LABs/CLBs            | 234720  |
| Number of Logic Elements/Cells | 622000  |
| Total RAM Bits                 | 51200000  |
| Number of I/O                  | 600   |
| Number of Gates                | -   |
| Voltage - Supply               | 0.82V ~ 0.88V   |
| Mounting Type                  | Surface Mount   |
| Operating Temperature          | -40°C ~ 100°C (TJ)  |
| Package / Case                 | 1517-BBGA, FCBGA  |
| Supplier Device Package        | 1517-FBGA (40x40)   |
| Purchase URL                   | <a href="https://www.e-xfl.com/product-detail/intel/5sgxea7n2f40i3n">https://www.e-xfl.com/product-detail/intel/5sgxea7n2f40i3n</a> |

**Table 1. Stratix V GX and GS Commercial and Industrial Speed Grade Offering <sup>(1), (2), (3)</sup> (Part 2 of 2)**

| Transceiver Speed Grade  | Core Speed Grade |         |     |     |         |         |                    |     |
|--------------------------|------------------|---------|-----|-----|---------|---------|--------------------|-----|
|                          | C1               | C2, C2L | C3  | C4  | I2, I2L | I3, I3L | I3YY               | I4  |
| 3<br>GX channel—8.5 Gbps | —                | Yes     | Yes | Yes | —       | Yes     | Yes <sup>(4)</sup> | Yes |

**Notes to Table 1:**

- (1) C = Commercial temperature grade; I = Industrial temperature grade.  
 (2) Lower number refers to faster speed grade.  
 (3) C2L, I2L, and I3L speed grades are for low-power devices.  
 (4) I3YY speed grades can achieve up to 10.3125 Gbps.

Table 2 lists the industrial and commercial speed grades for the Stratix V GT devices.

**Table 2. Stratix V GT Commercial and Industrial Speed Grade Offering <sup>(1), (2)</sup>**

| Transceiver Speed Grade                            | Core Speed Grade |     |     |     |
|--|------------------|-----|-----|-----|
|  | C1               | C2  | I2  | I3  |
| 2<br>GX channel—12.5 Gbps<br>GT channel—28.05 Gbps | Yes              | Yes | —   | —   |
| 3<br>GX channel—12.5 Gbps<br>GT channel—25.78 Gbps | Yes              | Yes | Yes | Yes |

**Notes to Table 2:**

- (1) C = Commercial temperature grade; I = Industrial temperature grade.  
 (2) Lower number refers to faster speed grade.

**Absolute Maximum Ratings**

Absolute maximum ratings define the maximum operating conditions for Stratix V devices. The values are based on experiments conducted with the devices and theoretical modeling of breakdown and damage mechanisms. The functional operation of the device is not implied for these conditions.



Conditions other than those listed in Table 3 may cause permanent damage to the device. Additionally, device operation at the absolute maximum ratings for extended periods of time may have adverse effects on the device.

**Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 1 of 2)**

| Symbol              | Description  | Minimum | Maximum | Unit |
|---------------------|--|---------|---------|------|
| V <sub>CC</sub>     | Power supply for core voltage and periphery circuitry                  | −0.5    | 1.35    | V    |
| V <sub>CCPT</sub>   | Power supply for programmable power technology                         | −0.5    | 1.8     | V    |
| V <sub>CCPGM</sub>  | Power supply for configuration pins                                    | −0.5    | 3.9     | V    |
| V <sub>CC_AUX</sub> | Auxiliary supply for the programmable power technology                 | −0.5    | 3.4     | V    |
| V <sub>CCBAT</sub>  | Battery back-up power supply for design security volatile key register | −0.5    | 3.9     | V    |
| V <sub>CCPD</sub>   | I/O pre-driver power supply  | −0.5    | 3.9     | V    |
| V <sub>CCIO</sub>   | I/O power supply   | −0.5    | 3.9     | V    |

Table 5 lists the maximum allowed input overshoot voltage and the duration of the overshoot voltage as a percentage of device lifetime. The maximum allowed overshoot duration is specified as a percentage of high time over the lifetime of the device. A DC signal is equivalent to 100% of the duty cycle. For example, a signal that overshoots to 3.95 V can be at 3.95 V for only ~21% over the lifetime of the device; for a device lifetime of 10 years, the overshoot duration amounts to ~2 years.

**Table 5. Maximum Allowed Overshoot During Transitions**

| Symbol     | Description      | Condition (V) | Overshoot Duration as %<br>@ $T_J = 100^{\circ}\text{C}$ | Unit |
|------------|------------------|---------------|--|------|
| $V_i$ (AC) | AC input voltage | 3.8           | 100  | %    |
|            |                  | 3.85          | 64   | %    |
|            |                  | 3.9           | 36   | %    |
|            |                  | 3.95          | 21   | %    |
|            |                  | 4             | 12   | %    |
|            |                  | 4.05          | 7  | %    |
|            |                  | 4.1           | 4  | %    |
|            |                  | 4.15          | 2  | %    |
|            |                  | 4.2           | 1  | %    |

**Figure 1. Stratix V Device Overshoot Duration**



## Recommended Operating Conditions

This section lists the functional operating limits for the AC and DC parameters for Stratix V devices. Table 6 lists the steady-state voltage and current values expected from Stratix V devices. Power supply ramps must all be strictly monotonic, without plateaus.

**Table 6. Recommended Operating Conditions for Stratix V Devices (Part 1 of 2)**

| Symbol                            | Description   | Condition  | Min <sup>(4)</sup> | Typ  | Max <sup>(4)</sup> | Unit |
|-----------------------------------|---|------------|--------------------|------|--------------------|------|
| V <sub>CC</sub>                   | Core voltage and periphery circuitry power supply (C1, C2, I2, and I3YY speed grades)                             | —          | 0.87               | 0.9  | 0.93               | V    |
|                                   | Core voltage and periphery circuitry power supply (C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) <sup>(3)</sup> | —          | 0.82               | 0.85 | 0.88               | V    |
| V <sub>CCPT</sub>                 | Power supply for programmable power technology  | —          | 1.45               | 1.50 | 1.55               | V    |
| V <sub>CC_AUX</sub>               | Auxiliary supply for the programmable power technology  | —          | 2.375              | 2.5  | 2.625              | V    |
| V <sub>CCPD</sub> <sup>(1)</sup>  | I/O pre-driver (3.0 V) power supply   | —          | 2.85               | 3.0  | 3.15               | V    |
|                                   | I/O pre-driver (2.5 V) power supply   | —          | 2.375              | 2.5  | 2.625              | V    |
| V <sub>CCIO</sub>                 | I/O buffers (3.0 V) power supply  | —          | 2.85               | 3.0  | 3.15               | V    |
|                                   | I/O buffers (2.5 V) power supply  | —          | 2.375              | 2.5  | 2.625              | V    |
|                                   | I/O buffers (1.8 V) power supply  | —          | 1.71               | 1.8  | 1.89               | V    |
|                                   | I/O buffers (1.5 V) power supply  | —          | 1.425              | 1.5  | 1.575              | V    |
|                                   | I/O buffers (1.35 V) power supply   | —          | 1.283              | 1.35 | 1.45               | V    |
|                                   | I/O buffers (1.25 V) power supply   | —          | 1.19               | 1.25 | 1.31               | V    |
|                                   | I/O buffers (1.2 V) power supply  | —          | 1.14               | 1.2  | 1.26               | V    |
| V <sub>CCPGM</sub>                | Configuration pins (3.0 V) power supply   | —          | 2.85               | 3.0  | 3.15               | V    |
|                                   | Configuration pins (2.5 V) power supply   | —          | 2.375              | 2.5  | 2.625              | V    |
|                                   | Configuration pins (1.8 V) power supply   | —          | 1.71               | 1.8  | 1.89               | V    |
| V <sub>CCA_FPLL</sub>             | PLL analog voltage regulator power supply   | —          | 2.375              | 2.5  | 2.625              | V    |
| V <sub>CCD_FPLL</sub>             | PLL digital voltage regulator power supply  | —          | 1.45               | 1.5  | 1.55               | V    |
| V <sub>CCBAT</sub> <sup>(2)</sup> | Battery back-up power supply (For design security volatile key register)  | —          | 1.2                | —    | 3.0                | V    |
| V <sub>I</sub>                    | DC input voltage  | —          | −0.5               | —    | 3.6                | V    |
| V <sub>O</sub>                    | Output voltage  | —          | 0                  | —    | V <sub>CCIO</sub>  | V    |
| T <sub>J</sub>                    | Operating junction temperature  | Commercial | 0                  | —    | 85                 | °C   |
|                                   |   | Industrial | −40                | —    | 100                | °C   |

**Table 7. Recommended Transceiver Power Supply Operating Conditions for Stratix V GX, GS, and GT Devices (Part 2 of 2)**

| Symbol                 | Description  | Devices    | Minimum <sup>(4)</sup> | Typical | Maximum <sup>(4)</sup> | Unit |
|------------------------|--|------------|------------------------|---------|------------------------|------|
| $V_{CCR\_GXBR}$<br>(2) | Receiver analog power supply (right side)                    | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
|                        |  |            | 0.87                   | 0.90    | 0.93                   |      |
|                        |  |            | 0.97                   | 1.0     | 1.03                   |      |
|                        |  |            | 1.03                   | 1.05    | 1.07                   |      |
| $V_{CCR\_GTBR}$        | Receiver analog power supply for GT channels (right side)    | GT         | 1.02                   | 1.05    | 1.08                   | V    |
| $V_{CCT\_GXBL}$<br>(2) | Transmitter analog power supply (left side)                  | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
|                        |  |            | 0.87                   | 0.90    | 0.93                   |      |
|                        |  |            | 0.97                   | 1.0     | 1.03                   |      |
|                        |  |            | 1.03                   | 1.05    | 1.07                   |      |
| $V_{CCT\_GXBR}$<br>(2) | Transmitter analog power supply (right side)                 | GX, GS, GT | 0.82                   | 0.85    | 0.88                   | V    |
|                        |  |            | 0.87                   | 0.90    | 0.93                   |      |
|                        |  |            | 0.97                   | 1.0     | 1.03                   |      |
|                        |  |            | 1.03                   | 1.05    | 1.07                   |      |
| $V_{CCT\_GTBR}$        | Transmitter analog power supply for GT channels (right side) | GT         | 1.02                   | 1.05    | 1.08                   | V    |
| $V_{CCL\_GTBR}$        | Transmitter clock network power supply                       | GT         | 1.02                   | 1.05    | 1.08                   | V    |
| $V_{CCH\_GXBL}$        | Transmitter output buffer power supply (left side)           | GX, GS, GT | 1.425                  | 1.5     | 1.575                  | V    |
| $V_{CCH\_GXBR}$        | Transmitter output buffer power supply (right side)          | GX, GS, GT | 1.425                  | 1.5     | 1.575                  | V    |

**Notes to Table 7:**

- (1) This supply must be connected to 3.0 V if the CMU PLL, receiver CDR, or both, are configured at a base data rate > 6.5 Gbps. Up to 6.5 Gbps, you can connect this supply to either 3.0 V or 2.5 V.
- (2) Refer to Table 8 to select the correct power supply level for your design.
- (3) When using ATX PLLs, the supply must be 3.0 V.
- (4) This value describes the budget for the DC (static) power supply tolerance and does not include the dynamic tolerance requirements. Refer to the PDN tool for the additional budget for the dynamic tolerance requirements.

**Table 11. OCT Calibration Accuracy Specifications for Stratix V Devices <sup>(1)</sup> (Part 2 of 2)**

| Symbol   | Description  | Conditions                                    | Calibration Accuracy |            |            |            | Unit |
|--|--|---|----------------------|------------|------------|------------|------|
|  |  |   | C1                   | C2,I2      | C3,I3,I3YY | C4,I4      |      |
| 50-Ω R <sub>S</sub>                              | Internal series termination with calibration (50-Ω setting)                                      | V <sub>CCIO</sub> = 3.0, 2.5, 1.8, 1.5, 1.2 V | ±15                  | ±15        | ±15        | ±15        | %    |
| 34-Ω and 40-Ω R <sub>S</sub>                     | Internal series termination with calibration (34-Ω and 40-Ω setting)                             | V <sub>CCIO</sub> = 1.5, 1.35, 1.25, 1.2 V    | ±15                  | ±15        | ±15        | ±15        | %    |
| 48-Ω, 60-Ω, 80-Ω, and 240-Ω R <sub>S</sub>       | Internal series termination with calibration (48-Ω, 60-Ω, 80-Ω, and 240-Ω setting)               | V <sub>CCIO</sub> = 1.2 V                     | ±15                  | ±15        | ±15        | ±15        | %    |
| 50-Ω R <sub>T</sub>                              | Internal parallel termination with calibration (50-Ω setting)                                    | V <sub>CCIO</sub> = 2.5, 1.8, 1.5, 1.2 V      | -10 to +40           | -10 to +40 | -10 to +40 | -10 to +40 | %    |
| 20-Ω, 30-Ω, 40-Ω, 60-Ω, and 120-Ω R <sub>T</sub> | Internal parallel termination with calibration (20-Ω, 30-Ω, 40-Ω, 60-Ω, and 120-Ω setting)       | V <sub>CCIO</sub> = 1.5, 1.35, 1.25 V         | -10 to +40           | -10 to +40 | -10 to +40 | -10 to +40 | %    |
| 60-Ω and 120-Ω R <sub>T</sub>                    | Internal parallel termination with calibration (60-Ω and 120-Ω setting)                          | V <sub>CCIO</sub> = 1.2                       | -10 to +40           | -10 to +40 | -10 to +40 | -10 to +40 | %    |
| 25-Ω R <sub>S_left_shift</sub>                   | Internal left shift series termination with calibration (25-Ω R <sub>S_left_shift</sub> setting) | V <sub>CCIO</sub> = 3.0, 2.5, 1.8, 1.5, 1.2 V | ±15                  | ±15        | ±15        | ±15        | %    |

**Note to Table 11:**

(1) OCT calibration accuracy is valid at the time of calibration only.

Table 12 lists the Stratix V OCT without calibration resistance tolerance to PVT changes.

**Table 12. OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices (Part 1 of 2)**

| Symbol                      | Description  | Conditions                        | Resistance Tolerance |       |              |        | Unit |
|-----------------------------|--|-----------------------------------|----------------------|-------|--------------|--------|------|
|                             |  |                                   | C1                   | C2,I2 | C3, I3, I3YY | C4, I4 |      |
| 25-Ω R, 50-Ω R <sub>S</sub> | Internal series termination without calibration (25-Ω setting) | V <sub>CCIO</sub> = 3.0 and 2.5 V | ±30                  | ±30   | ±40          | ±40    | %    |
| 25-Ω R <sub>S</sub>         | Internal series termination without calibration (25-Ω setting) | V <sub>CCIO</sub> = 1.8 and 1.5 V | ±30                  | ±30   | ±40          | ±40    | %    |
| 25-Ω R <sub>S</sub>         | Internal series termination without calibration (25-Ω setting) | V <sub>CCIO</sub> = 1.2 V         | ±35                  | ±35   | ±50          | ±50    | %    |

**Table 19. Single-Ended SSTL, HSTL, and HSUL I/O Standards Signal Specifications for Stratix V Devices (Part 2 of 2)**

| I/O Standard     | $V_{IL(DC)}$ (V) |                  | $V_{IH(DC)}$ (V) |                   | $V_{IL(AC)}$ (V) | $V_{IH(AC)}$ (V) | $V_{OL}$ (V)      | $V_{OH}$ (V)      | $I_{ol}$ (mA) | $I_{oh}$ (mA) |
|------------------|------------------|------------------|------------------|-------------------|------------------|------------------|-------------------|-------------------|---------------|---------------|
|                  | Min              | Max              | Min              | Max               | Max              | Min              | Max               | Min               |               |               |
| HSTL-18 Class I  | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$  | $V_{REF} + 0.2$  | 0.4               | $V_{CCIO} - 0.4$  | 8             | -8            |
| HSTL-18 Class II | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$  | $V_{REF} + 0.2$  | 0.4               | $V_{CCIO} - 0.4$  | 16            | -16           |
| HSTL-15 Class I  | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$  | $V_{REF} + 0.2$  | 0.4               | $V_{CCIO} - 0.4$  | 8             | -8            |
| HSTL-15 Class II | —                | $V_{REF} - 0.1$  | $V_{REF} + 0.1$  | —                 | $V_{REF} - 0.2$  | $V_{REF} + 0.2$  | 0.4               | $V_{CCIO} - 0.4$  | 16            | -16           |
| HSTL-12 Class I  | -0.15            | $V_{REF} - 0.08$ | $V_{REF} + 0.08$ | $V_{CCIO} + 0.15$ | $V_{REF} - 0.15$ | $V_{REF} + 0.15$ | $0.25^* V_{CCIO}$ | $0.75^* V_{CCIO}$ | 8             | -8            |
| HSTL-12 Class II | -0.15            | $V_{REF} - 0.08$ | $V_{REF} + 0.08$ | $V_{CCIO} + 0.15$ | $V_{REF} - 0.15$ | $V_{REF} + 0.15$ | $0.25^* V_{CCIO}$ | $0.75^* V_{CCIO}$ | 16            | -16           |
| HSUL-12          | —                | $V_{REF} - 0.13$ | $V_{REF} + 0.13$ | —                 | $V_{REF} - 0.22$ | $V_{REF} + 0.22$ | $0.1^* V_{CCIO}$  | $0.9^* V_{CCIO}$  | —             | —             |

**Table 20. Differential SSTL I/O Standards for Stratix V Devices**

| I/O Standard         | $V_{CCIO}$ (V) |      |       | $V_{SWING(DC)}$ (V) |                  | $V_{X(AC)}$ (V)      |              |                      | $V_{SWING(AC)}$ (V)       |                           |
|----------------------|----------------|------|-------|---------------------|------------------|----------------------|--------------|----------------------|---------------------------|---------------------------|
|                      | Min            | Typ  | Max   | Min                 | Max              | Min                  | Typ          | Max                  | Min                       | Max                       |
| SSTL-2 Class I, II   | 2.375          | 2.5  | 2.625 | 0.3                 | $V_{CCIO} + 0.6$ | $V_{CCIO}/2 - 0.2$   | —            | $V_{CCIO}/2 + 0.2$   | 0.62                      | $V_{CCIO} + 0.6$          |
| SSTL-18 Class I, II  | 1.71           | 1.8  | 1.89  | 0.25                | $V_{CCIO} + 0.6$ | $V_{CCIO}/2 - 0.175$ | —            | $V_{CCIO}/2 + 0.175$ | 0.5                       | $V_{CCIO} + 0.6$          |
| SSTL-15 Class I, II  | 1.425          | 1.5  | 1.575 | 0.2                 | (1)              | $V_{CCIO}/2 - 0.15$  | —            | $V_{CCIO}/2 + 0.15$  | 0.35                      | —                         |
| SSTL-135 Class I, II | 1.283          | 1.35 | 1.45  | 0.2                 | (1)              | $V_{CCIO}/2 - 0.15$  | $V_{CCIO}/2$ | $V_{CCIO}/2 + 0.15$  | $2(V_{IH(AC)} - V_{REF})$ | $2(V_{IL(AC)} - V_{REF})$ |
| SSTL-125 Class I, II | 1.19           | 1.25 | 1.31  | 0.18                | (1)              | $V_{CCIO}/2 - 0.15$  | $V_{CCIO}/2$ | $V_{CCIO}/2 + 0.15$  | $2(V_{IH(AC)} - V_{REF})$ | —                         |
| SSTL-12 Class I, II  | 1.14           | 1.2  | 1.26  | 0.18                | —                | $V_{REF} - 0.15$     | $V_{CCIO}/2$ | $V_{REF} + 0.15$     | -0.30                     | 0.30                      |

**Note to Table 20:**

(1) The maximum value for  $V_{SWING(DC)}$  is not defined. However, each single-ended signal needs to be within the respective single-ended limits ( $V_{IH(DC)}$  and  $V_{IL(DC)}$ ).

**Table 21. Differential HSTL and HSUL I/O Standards for Stratix V Devices (Part 1 of 2)**

| I/O Standard        | $V_{CCIO}$ (V) |     |       | $V_{DIF(DC)}$ (V) |     | $V_{X(AC)}$ (V) |     |      | $V_{CM(DC)}$ (V) |     |      | $V_{DIF(AC)}$ (V) |     |
|---------------------|----------------|-----|-------|-------------------|-----|-----------------|-----|------|------------------|-----|------|-------------------|-----|
|                     | Min            | Typ | Max   | Min               | Max | Min             | Typ | Max  | Min              | Typ | Max  | Min               | Max |
| HSTL-18 Class I, II | 1.71           | 1.8 | 1.89  | 0.2               | —   | 0.78            | —   | 1.12 | 0.78             | —   | 1.12 | 0.4               | —   |
| HSTL-15 Class I, II | 1.425          | 1.5 | 1.575 | 0.2               | —   | 0.68            | —   | 0.9  | 0.68             | —   | 0.9  | 0.4               | —   |

## Switching Characteristics

This section provides performance characteristics of the Stratix V core and periphery blocks.

These characteristics can be designated as Preliminary or Final.

- Preliminary characteristics are created using simulation results, process data, and other known parameters. The title of these tables show the designation as “Preliminary.”
- Final numbers are based on actual silicon characterization and testing. The numbers reflect the actual performance of the device under worst-case silicon process, voltage, and junction temperature conditions. There are no designations on finalized tables.

### Transceiver Performance Specifications

This section describes transceiver performance specifications.

Table 23 lists the Stratix V GX and GS transceiver specifications.

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 1 of 7)**

| Symbol/<br>Description   | Conditions  | Transceiver Speed<br>Grade 1  |     |     | Transceiver Speed<br>Grade 2 |     |     | Transceiver Speed<br>Grade 3 |     |     | Unit |
|--|---|---|-----|-----|------------------------------|-----|-----|------------------------------|-----|-----|------|
|  |   | Min   | Typ | Max | Min                          | Typ | Max | Min                          | Typ | Max |      |
| Reference Clock  |   |   |     |     |                              |     |     |                              |     |     |      |
| Supported I/O<br>Standards                                     | Dedicated<br>reference<br>clock pin                               | 1.2-V PCML, 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS, and HCSL |     |     |                              |     |     |                              |     |     |      |
|  | RX reference<br>clock pin   | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS                                |     |     |                              |     |     |                              |     |     |      |
| Input Reference<br>Clock Frequency<br>(CMU PLL) <sup>(8)</sup> | —   | 40  | —   | 710 | 40                           | —   | 710 | 40                           | —   | 710 | MHz  |
| Input Reference<br>Clock Frequency<br>(ATX PLL) <sup>(8)</sup> | —   | 100   | —   | 710 | 100                          | —   | 710 | 100                          | —   | 710 | MHz  |
| Rise time  | Measure at<br>±60 mV of<br>differential<br>signal <sup>(26)</sup> | —   | —   | 400 | —                            | —   | 400 | —                            | —   | 400 | ps   |
| Fall time  | Measure at<br>±60 mV of<br>differential<br>signal <sup>(26)</sup> | —   | —   | 400 | —                            | —   | 400 | —                            | —   | 400 |      |
| Duty cycle   | —   | 45  | —   | 55  | 45                           | —   | 55  | 45                           | —   | 55  | %    |
| Spread-spectrum<br>modulating clock<br>frequency               | PCI Express®<br>(PCIe®)   | 30  | —   | 33  | 30                           | —   | 33  | 30                           | —   | 33  | kHz  |



**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 2 of 7)**

| Symbol/<br>Description   | Conditions   | Transceiver Speed<br>Grade 1     |                   |      | Transceiver Speed<br>Grade 2     |                   |      | Transceiver Speed<br>Grade 3     |                   |      | Unit        |
|--|--|----------------------------------|-------------------|------|----------------------------------|-------------------|------|----------------------------------|-------------------|------|-------------|
|  |  | Min                              | Typ               | Max  | Min                              | Typ               | Max  | Min                              | Typ               | Max  |             |
| Spread-spectrum<br>downspread                                      | PCIe   | —                                | 0 to<br>-0.5      | —    | —                                | 0 to<br>-0.5      | —    | —                                | 0 to<br>-0.5      | —    | %           |
| On-chip<br>termination<br>resistors <sup>(21)</sup>                | —  | —                                | 100               | —    | —                                | 100               | —    | —                                | 100               | —    | $\Omega$    |
| Absolute $V_{MAX}$ <sup>(5)</sup>                                  | Dedicated<br>reference<br>clock pin                    | —                                | —                 | 1.6  | —                                | —                 | 1.6  | —                                | —                 | 1.6  | V           |
|  | RX reference<br>clock pin                              | —                                | —                 | 1.2  | —                                | —                 | 1.2  | —                                | —                 | 1.2  |             |
| Absolute $V_{MIN}$   | —  | -0.4                             | —                 | —    | -0.4                             | —                 | —    | -0.4                             | —                 | —    | V           |
| Peak-to-peak<br>differential input<br>voltage                      | —  | 200                              | —                 | 1600 | 200                              | —                 | 1600 | 200                              | —                 | 1600 | mV          |
| $V_{ICM}$ (AC<br>coupled) <sup>(3)</sup>                           | Dedicated<br>reference<br>clock pin                    | 1050/1000/900/850 <sup>(2)</sup> |                   |      | 1050/1000/900/850 <sup>(2)</sup> |                   |      | 1050/1000/900/850 <sup>(2)</sup> |                   |      | mV          |
|  | RX reference<br>clock pin                              | 1.0/0.9/0.85 <sup>(4)</sup>      |                   |      | 1.0/0.9/0.85 <sup>(4)</sup>      |                   |      | 1.0/0.9/0.85 <sup>(4)</sup>      |                   |      | V           |
| $V_{ICM}$ (DC coupled)   | HCSL I/O<br>standard for<br>PCIe<br>reference<br>clock | 250                              | —                 | 550  | 250                              | —                 | 550  | 250                              | —                 | 550  | mV          |
| Transmitter<br>REFCLK Phase<br>Noise<br>(622 MHz) <sup>(20)</sup>  | 100 Hz   | —                                | —                 | -70  | —                                | —                 | -70  | —                                | —                 | -70  | dBc/Hz      |
|  | 1 kHz  | —                                | —                 | -90  | —                                | —                 | -90  | —                                | —                 | -90  | dBc/Hz      |
|  | 10 kHz   | —                                | —                 | -100 | —                                | —                 | -100 | —                                | —                 | -100 | dBc/Hz      |
|  | 100 kHz  | —                                | —                 | -110 | —                                | —                 | -110 | —                                | —                 | -110 | dBc/Hz      |
|  | $\geq 1$ MHz   | —                                | —                 | -120 | —                                | —                 | -120 | —                                | —                 | -120 | dBc/Hz      |
| Transmitter<br>REFCLK Phase<br>Jitter<br>(100 MHz) <sup>(17)</sup> | 10 kHz to<br>1.5 MHz<br>(PCIe)                         | —                                | —                 | 3    | —                                | —                 | 3    | —                                | —                 | 3    | ps<br>(rms) |
| $R_{REF}$ <sup>(19)</sup>  | —  | —                                | 1800<br>$\pm 1\%$ | —    | —                                | 1800<br>$\pm 1\%$ | —    | —                                | 1800<br>$\pm 1\%$ | —    | $\Omega$    |
| <b>Transceiver Clocks</b>  |  |                                  |                   |      |                                  |                   |      |                                  |                   |      |             |
| fixedclk clock<br>frequency  | PCIe<br>Receiver<br>Detect                             | —                                | 100<br>or<br>125  | —    | —                                | 100<br>or<br>125  | —    | —                                | 100<br>or<br>125  | —    | MHz         |

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 5 of 7)**

| Symbol/<br>Description  | Conditions   | Transceiver Speed<br>Grade 1 |                     |       | Transceiver Speed<br>Grade 2 |                     |       | Transceiver Speed<br>Grade 3 |                     |                                     | Unit     |
|---|--|------------------------------|---------------------|-------|------------------------------|---------------------|-------|------------------------------|---------------------|-------------------------------------|----------|
|   |  | Min                          | Typ                 | Max   | Min                          | Typ                 | Max   | Min                          | Typ                 | Max                                 |          |
| Programmable<br>DC gain   | DC Gain<br>Setting = 0                                     | —                            | 0                   | —     | —                            | 0                   | —     | —                            | 0                   | —                                   | dB       |
|   | DC Gain<br>Setting = 1                                     | —                            | 2                   | —     | —                            | 2                   | —     | —                            | 2                   | —                                   | dB       |
|   | DC Gain<br>Setting = 2                                     | —                            | 4                   | —     | —                            | 4                   | —     | —                            | 4                   | —                                   | dB       |
|   | DC Gain<br>Setting = 3                                     | —                            | 6                   | —     | —                            | 6                   | —     | —                            | 6                   | —                                   | dB       |
|   | DC Gain<br>Setting = 4                                     | —                            | 8                   | —     | —                            | 8                   | —     | —                            | 8                   | —                                   | dB       |
| <b>Transmitter</b>  |  |                              |                     |       |                              |                     |       |                              |                     |                                     |          |
| Supported I/O<br>Standards  | —  | 1.4-V and 1.5-V PCML         |                     |       |                              |                     |       |                              |                     |                                     |          |
| Data rate<br>(Standard PCS)   | —  | 600                          | —                   | 12200 | 600                          | —                   | 12200 | 600                          | —                   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps     |
| Data rate<br>(10G PCS)  | —  | 600                          | —                   | 14100 | 600                          | —                   | 12500 | 600                          | —                   | 8500/<br>10312.5<br><sup>(24)</sup> | Mbps     |
| Differential on-<br>chip termination<br>resistors                     | 85- $\Omega$<br>setting                                    | —                            | 85 $\pm$<br>20%     | —     | —                            | 85 $\pm$<br>20%     | —     | —                            | 85 $\pm$<br>20%     | —                                   | $\Omega$ |
|   | 100- $\Omega$<br>setting                                   | —                            | 100<br>$\pm$<br>20% | —     | —                            | 100<br>$\pm$<br>20% | —     | —                            | 100<br>$\pm$<br>20% | —                                   | $\Omega$ |
|   | 120- $\Omega$<br>setting                                   | —                            | 120<br>$\pm$<br>20% | —     | —                            | 120<br>$\pm$<br>20% | —     | —                            | 120<br>$\pm$<br>20% | —                                   | $\Omega$ |
|   | 150- $\Omega$<br>setting                                   | —                            | 150<br>$\pm$<br>20% | —     | —                            | 150<br>$\pm$<br>20% | —     | —                            | 150<br>$\pm$<br>20% | —                                   | $\Omega$ |
| V <sub>OCM</sub> (AC<br>coupled)                                      | 0.65-V<br>setting  | —                            | 650                 | —     | —                            | 650                 | —     | —                            | 650                 | —                                   | mV       |
| V <sub>OCM</sub> (DC<br>coupled)                                      | —  | —                            | 650                 | —     | —                            | 650                 | —     | —                            | 650                 | —                                   | mV       |
| Rise time <sup>(7)</sup>  | 20% to 80%   | 30                           | —                   | 160   | 30                           | —                   | 160   | 30                           | —                   | 160                                 | ps       |
| Fall time <sup>(7)</sup>  | 80% to 20%   | 30                           | —                   | 160   | 30                           | —                   | 160   | 30                           | —                   | 160                                 | ps       |
| Intra-differential<br>pair skew                                       | Tx V <sub>CM</sub> =<br>0.5 V and<br>slew rate of<br>15 ps | —                            | —                   | 15    | —                            | —                   | 15    | —                            | —                   | 15                                  | ps       |
| Intra-transceiver<br>block transmitter<br>channel-to-<br>channel skew | x6 PMA<br>bonded mode                                      | —                            | —                   | 120   | —                            | —                   | 120   | —                            | —                   | 120                                 | ps       |

**Table 23. Transceiver Specifications for Stratix V GX and GS Devices <sup>(1)</sup> (Part 6 of 7)**

| Symbol/<br>Description  | Conditions                                   | Transceiver Speed<br>Grade 1 |     |                               | Transceiver Speed<br>Grade 2 |     |                               | Transceiver Speed<br>Grade 3 |     |                               | Unit |
|---|--|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------|
|   |  | Min                          | Typ | Max                           | Min                          | Typ | Max                           | Min                          | Typ | Max                           |      |
| Inter-transceiver<br>block transmitter<br>channel-to-<br>channel skew | xN PMA<br>bonded mode                        | —                            | —   | 500                           | —                            | —   | 500                           | —                            | —   | 500                           | ps   |
| <b>CMU PLL</b>  |  |                              |     |                               |                              |     |                               |                              |     |                               |      |
| Supported Data<br>Range   | —  | 600                          | —   | 12500                         | 600                          | —   | 12500                         | 600                          | —   | 8500/<br>10312.5<br>(24)      | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —  | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                             | μs   |
| t <sub>pll_lock</sub> <sup>(16)</sup>                                 | —  | —                            | —   | 10                            | —                            | —   | 10                            | —                            | —   | 10                            | μs   |
| <b>ATX PLL</b>  |  |                              |     |                               |                              |     |                               |                              |     |                               |      |
| Supported Data<br>Rate Range  | VCO<br>post-divider<br>L=2                   | 8000                         | —   | 14100                         | 8000                         | —   | 12500                         | 8000                         | —   | 8500/<br>10312.5<br>(24)      | Mbps |
|   | L=4  | 4000                         | —   | 7050                          | 4000                         | —   | 6600                          | 4000                         | —   | 6600                          | Mbps |
|   | L=8  | 2000                         | —   | 3525                          | 2000                         | —   | 3300                          | 2000                         | —   | 3300                          | Mbps |
|   | L=8,<br>Local/Central<br>Clock Divider<br>=2 | 1000                         | —   | 1762.5                        | 1000                         | —   | 1762.5                        | 1000                         | —   | 1762.5                        | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —  | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                             | μs   |
| t <sub>pll_lock</sub> <sup>(16)</sup>                                 | —  | —                            | —   | 10                            | —                            | —   | 10                            | —                            | —   | 10                            | μs   |
| <b>fPLL</b>   |  |                              |     |                               |                              |     |                               |                              |     |                               |      |
| Supported Data<br>Range   | —  | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | 600                          | —   | 3250/<br>3125 <sup>(25)</sup> | Mbps |
| t <sub>pll_powerdown</sub> <sup>(15)</sup>                            | —  | 1                            | —   | —                             | 1                            | —   | —                             | 1                            | —   | —                             | μs   |

Table 27 shows the  $V_{OD}$  settings for the GX channel.

**Table 27. Typical  $V_{OD}$  Setting for GX Channel, TX Termination = 100  $\Omega$  <sup>(2)</sup>**

| Symbol  | $V_{OD}$ Setting | $V_{OD}$ Value (mV) | $V_{OD}$ Setting | $V_{OD}$ Value (mV) |
|---|------------------|---------------------|------------------|---------------------|
| <b><math>V_{OD}</math> differential peak to peak typical <sup>(3)</sup></b> | 0 <sup>(1)</sup> | 0                   | 32               | 640                 |
|   | 1 <sup>(1)</sup> | 20                  | 33               | 660                 |
|   | 2 <sup>(1)</sup> | 40                  | 34               | 680                 |
|   | 3 <sup>(1)</sup> | 60                  | 35               | 700                 |
|   | 4 <sup>(1)</sup> | 80                  | 36               | 720                 |
|   | 5 <sup>(1)</sup> | 100                 | 37               | 740                 |
|   | 6                | 120                 | 38               | 760                 |
|   | 7                | 140                 | 39               | 780                 |
|   | 8                | 160                 | 40               | 800                 |
|   | 9                | 180                 | 41               | 820                 |
|   | 10               | 200                 | 42               | 840                 |
|   | 11               | 220                 | 43               | 860                 |
|   | 12               | 240                 | 44               | 880                 |
|   | 13               | 260                 | 45               | 900                 |
|   | 14               | 280                 | 46               | 920                 |
|   | 15               | 300                 | 47               | 940                 |
|   | 16               | 320                 | 48               | 960                 |
|   | 17               | 340                 | 49               | 980                 |
|   | 18               | 360                 | 50               | 1000                |
|   | 19               | 380                 | 51               | 1020                |
|   | 20               | 400                 | 52               | 1040                |
|   | 21               | 420                 | 53               | 1060                |
|   | 22               | 440                 | 54               | 1080                |
|   | 23               | 460                 | 55               | 1100                |
|   | 24               | 480                 | 56               | 1120                |
|   | 25               | 500                 | 57               | 1140                |
|   | 26               | 520                 | 58               | 1160                |
|   | 27               | 540                 | 59               | 1180                |
|   | 28               | 560                 | 60               | 1200                |
|   | 29               | 580                 | 61               | 1220                |
|   | 30               | 600                 | 62               | 1240                |
|   | 31               | 620                 | 63               | 1260                |

**Note to Table 27:**

- (1) If TX termination resistance = 100 $\Omega$ , this VOD setting is illegal.
- (2) The tolerance is +/-20% for all VOD settings except for settings 2 and below.
- (3) Refer to Figure 2.

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 1 of 5) <sup>(1)</sup>**

| Symbol/<br>Description   | Conditions   | Transceiver<br>Speed Grade 2   |           |      | Transceiver<br>Speed Grade 3 |           |      | Unit |
|--|--|--|-----------|------|------------------------------|-----------|------|------|
|  |  | Min  | Typ       | Max  | Min                          | Typ       | Max  |      |
| Reference Clock  |  |  |           |      |                              |           |      |      |
| Supported I/O<br>Standards                                     | Dedicated<br>reference<br>clock pin                    | 1.2-V PCML, 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS,<br>and HCSL |           |      |                              |           |      |      |
|  | RX reference<br>clock pin                              | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS                                   |           |      |                              |           |      |      |
| Input Reference Clock<br>Frequency (CMU<br>PLL) <sup>(6)</sup> | —  | 40   | —         | 710  | 40                           | —         | 710  | MHz  |
| Input Reference Clock<br>Frequency (ATX PLL) <sup>(6)</sup>    | —  | 100  | —         | 710  | 100                          | —         | 710  | MHz  |
| Rise time  | 20% to 80%   | —  | —         | 400  | —                            | —         | 400  | ps   |
| Fall time  | 80% to 20%   | —  | —         | 400  | —                            | —         | 400  |      |
| Duty cycle   | —  | 45   | —         | 55   | 45                           | —         | 55   | %    |
| Spread-spectrum<br>modulating clock<br>frequency               | PCI Express<br>(PCIe)                                  | 30   | —         | 33   | 30                           | —         | 33   | kHz  |
| Spread-spectrum<br>downspread                                  | PCIe   | —  | 0 to −0.5 | —    | —                            | 0 to −0.5 | —    | %    |
| On-chip termination<br>resistors <sup>(19)</sup>               | —  | —  | 100       | —    | —                            | 100       | —    | Ω    |
| Absolute V <sub>MAX</sub> <sup>(3)</sup>                       | Dedicated<br>reference<br>clock pin                    | —  | —         | 1.6  | —                            | —         | 1.6  | V    |
|  | RX reference<br>clock pin                              | —  | —         | 1.2  | —                            | —         | 1.2  |      |
| Absolute V <sub>MIN</sub>                                      | —  | -0.4   | —         | —    | -0.4                         | —         | —    | V    |
| Peak-to-peak<br>differential input<br>voltage                  | —  | 200  | —         | 1600 | 200                          | —         | 1600 | mV   |
| V <sub>ICM</sub> (AC coupled)                                  | Dedicated<br>reference<br>clock pin                    | 1050/1000 <sup>(2)</sup>   |           |      | 1050/1000 <sup>(2)</sup>     |           |      | mV   |
|  | RX reference<br>clock pin                              | 1.0/0.9/0.85 <sup>(22)</sup>   |           |      | 1.0/0.9/0.85 <sup>(22)</sup> |           |      | V    |
| V <sub>ICM</sub> (DC coupled)                                  | HCSL I/O<br>standard for<br>PCIe<br>reference<br>clock | 250  | —         | 550  | 250                          | —         | 550  | mV   |

**Table 28. Transceiver Specifications for Stratix V GT Devices (Part 2 of 5) <sup>(1)</sup>**

| Symbol/<br>Description  | Conditions  | Transceiver<br>Speed Grade 2                         |               |        | Transceiver<br>Speed Grade 3 |               |        | Unit     |
|---|---|--|---------------|--------|------------------------------|---------------|--------|----------|
|   |   | Min  | Typ           | Max    | Min                          | Typ           | Max    |          |
| Transmitter REFCLK<br>Phase Noise (622<br>MHz) <sup>(18)</sup>  | 100 Hz  | —  | —             | -70    | —                            | —             | -70    | dBc/Hz   |
|   | 1 kHz   | —  | —             | -90    | —                            | —             | -90    |          |
|   | 10 kHz  | —  | —             | -100   | —                            | —             | -100   |          |
|   | 100 kHz   | —  | —             | -110   | —                            | —             | -110   |          |
|   | ≥ 1 MHz   | —  | —             | -120   | —                            | —             | -120   |          |
| Transmitter REFCLK<br>Phase Jitter (100<br>MHz) <sup>(15)</sup>   | 10 kHz to<br>1.5 MHz<br>(PCIe)  | —  | —             | 3      | —                            | —             | 3      | ps (rms) |
| RREF <sup>(17)</sup>  | —   | —  | 1800<br>± 1%  | —      | —                            | 1800<br>± 1%  | —      | Ω        |
| <b>Transceiver Clocks</b>   |   |  |               |        |                              |               |        |          |
| fixedclk clock<br>frequency   | PCIe<br>Receiver<br>Detect  | —  | 100 or<br>125 | —      | —                            | 100 or<br>125 | —      | MHz      |
| Reconfiguration clock<br>(mgmt_clk_clk)<br>frequency  | —   | 100  | —             | 125    | 100                          | —             | 125    | MHz      |
| <b>Receiver</b>   |   |  |               |        |                              |               |        |          |
| Supported I/O<br>Standards  | —   | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS |               |        |                              |               |        |          |
| Data rate<br>(Standard PCS) <sup>(21)</sup>   | GX channels   | 600  | —             | 8500   | 600                          | —             | 8500   | Mbps     |
| Data rate<br>(10G PCS) <sup>(21)</sup>  | GX channels   | 600  | —             | 12,500 | 600                          | —             | 12,500 | Mbps     |
| Data rate   | GT channels   | 19,600   | —             | 28,050 | 19,600                       | —             | 25,780 | Mbps     |
| Absolute V <sub>MAX</sub> for a<br>receiver pin <sup>(3)</sup>  | GT channels   | —  | —             | 1.2    | —                            | —             | 1.2    | V        |
| Absolute V <sub>MIN</sub> for a<br>receiver pin   | GT channels   | -0.4   | —             | —      | -0.4                         | —             | —      | V        |
| Maximum peak-to-peak<br>differential input<br>voltage V <sub>ID</sub> (diff p-p)<br>before device<br>configuration <sup>(20)</sup>                  | GT channels   | —  | —             | 1.6    | —                            | —             | 1.6    | V        |
|   | GX channels   | <sup>(8)</sup>                                       |               |        |                              |               |        |          |
| Maximum peak-to-peak<br>differential input<br>voltage V <sub>ID</sub> (diff p-p)<br>after device<br>configuration <sup>(16)</sup> , <sup>(20)</sup> | GT channels<br>V <sub>CCR_GTB</sub> =<br>1.05 V<br>(V <sub>ICM</sub> =<br>0.65 V) | —  | —             | 2.2    | —                            | —             | 2.2    | V        |
|   | GX channels   | <sup>(8)</sup>                                       |               |        |                              |               |        |          |
| Minimum differential<br>eye opening at receiver<br>serial input pins <sup>(4)</sup> , <sup>(20)</sup>   | GT channels   | 200  | —             | —      | 200                          | —             | —      | mV       |
|   | GX channels   | <sup>(8)</sup>                                       |               |        |                              |               |        |          |

Figure 4 shows the differential transmitter output waveform.

**Figure 4. Differential Transmitter/Receiver Output/Input Waveform**

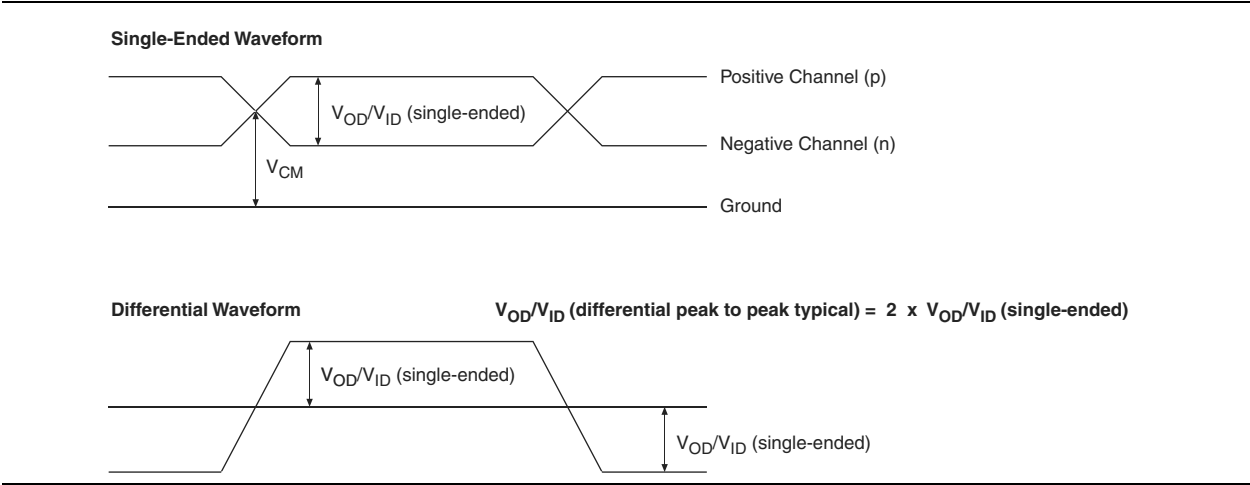


Figure 5 shows the Stratix V AC gain curves for GT channels.

**Figure 5. AC Gain Curves for GT Channels**

**Table 32. Block Performance Specifications for Stratix V DSP Devices (Part 2 of 2)**

| Mode                   | Peformance |         |         |     |               |     |     | Unit |
|------------------------|------------|---------|---------|-----|---------------|-----|-----|------|
|                        | C1         | C2, C2L | I2, I2L | C3  | I3, I3L, I3YY | C4  | I4  |      |
| Modes using Three DSPs |            |         |         |     |               |     |     |      |
| One complex 18 x 25    | 425        | 425     | 415     | 340 | 340           | 275 | 265 | MHz  |
| Modes using Four DSPs  |            |         |         |     |               |     |     |      |
| One complex 27 x 27    | 465        | 465     | 465     | 380 | 380           | 300 | 290 | MHz  |

### Memory Block Specifications

Table 33 lists the Stratix V memory block specifications.

**Table 33. Memory Block Performance Specifications for Stratix V Devices <sup>(1)</sup>, <sup>(2)</sup> (Part 1 of 2)**

| Memory | Mode                                       | Resources Used |        | Performance |         |     |     |         |               |     | Unit |
|--------|--|----------------|--------|-------------|---------|-----|-----|---------|---------------|-----|------|
|        |  | ALUTs          | Memory | C1          | C2, C2L | C3  | C4  | I2, I2L | I3, I3L, I3YY | I4  |      |
| MLAB   | Single port, all supported widths          | 0              | 1      | 450         | 450     | 400 | 315 | 450     | 400           | 315 | MHz  |
|        | Simple dual-port, x32/x64 depth            | 0              | 1      | 450         | 450     | 400 | 315 | 450     | 400           | 315 | MHz  |
|        | Simple dual-port, x16 depth <sup>(3)</sup> | 0              | 1      | 675         | 675     | 533 | 400 | 675     | 533           | 400 | MHz  |
|        | ROM, all supported widths                  | 0              | 1      | 600         | 600     | 500 | 450 | 600     | 500           | 450 | MHz  |



**Table 33. Memory Block Performance Specifications for Stratix V Devices <sup>(1), (2)</sup> (Part 2 of 2)**

| Memory     | Mode   | Resources Used |        | Performance |         |     |     |         |               |     | Unit |
|------------|--|----------------|--------|-------------|---------|-----|-----|---------|---------------|-----|------|
|            |  | ALUTs          | Memory | C1          | C2, C2L | C3  | C4  | I2, I2L | I3, I3L, I3YY | I4  |      |
| M20K Block | Single-port, all supported widths  | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | Simple dual-port, all supported widths   | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | Simple dual-port with the read-during-write option set to <b>Old Data</b> , all supported widths | 0              | 1      | 525         | 525     | 455 | 400 | 525     | 455           | 400 | MHz  |
|            | Simple dual-port with ECC enabled, 512 × 32  | 0              | 1      | 450         | 450     | 400 | 350 | 450     | 400           | 350 | MHz  |
|            | Simple dual-port with ECC and optional pipeline registers enabled, 512 × 32                      | 0              | 1      | 600         | 600     | 500 | 450 | 600     | 500           | 450 | MHz  |
|            | True dual port, all supported widths   | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |
|            | ROM, all supported widths  | 0              | 1      | 700         | 700     | 650 | 550 | 700     | 500           | 450 | MHz  |

**Notes to Table 33:**

- (1) To achieve the maximum memory block performance, use a memory block clock that comes through global clock routing from an on-chip PLL set to **50%** output duty cycle. Use the Quartus II software to report timing for this and other memory block clocking schemes.
- (2) When you use the error detection cyclical redundancy check (CRC) feature, there is no degradation in F<sub>MAX</sub>.
- (3) The F<sub>MAX</sub> specification is only achievable with Fitter options, **MLAB Implementation In 16-Bit Deep Mode** enabled.

**Temperature Sensing Diode Specifications**

Table 34 lists the internal TSD specification.

**Table 34. Internal Temperature Sensing Diode Specification**

| Temperature Range | Accuracy | Offset Calibrated Option | Sampling Rate  | Conversion Time | Resolution | Minimum Resolution with no Missing Codes |
|-------------------|----------|--------------------------|----------------|-----------------|------------|--|
| –40°C to 100°C    | ±8°C     | No                       | 1 MHz, 500 KHz | < 100 ms        | 8 bits     | 8 bits                                   |

Table 35 lists the specifications for the Stratix V external temperature sensing diode.

**Table 35. External Temperature Sensing Diode Specifications for Stratix V Devices**

| Description                              | Min   | Typ   | Max   | Unit |
|--|-------|-------|-------|------|
| I <sub>bias</sub> , diode source current | 8     | —     | 200   | μA   |
| V <sub>bias</sub> , voltage across diode | 0.3   | —     | 0.9   | V    |
| Series resistance                        | —     | —     | < 1   | Ω    |
| Diode ideality factor                    | 1.006 | 1.008 | 1.010 | —    |

**Table 47. Uncompressed .rbf Sizes for Stratix V Devices**

| Family                     | Device | Package | Configuration .rbf Size (bits) | IOCSR .rbf Size (bits) <sup>(4), (5)</sup> |
|----------------------------|--------|---------|--------------------------------|--|
| Stratix V E <sup>(1)</sup> | 5SEE9  | —       | 342,742,976                    | 700,888                                    |
|                            | 5SEEB  | —       | 342,742,976                    | 700,888                                    |

**Notes to Table 47:**

- (1) Stratix V E devices do not have PCI Express® (PCIe®) hard IP. Stratix V E devices do not support the CvP configuration scheme.
- (2) 36-transceiver devices.
- (3) 24-transceiver devices.
- (4) File size for the periphery image.
- (5) The IOCSR .rbf size is specifically for the CvP feature.

Use the data in Table 47 to estimate the file size before design compilation. Different configuration file formats, such as a hexadecimal (.hex) or tabular text file (.tff) format, have different file sizes. For the different types of configuration file and file sizes, refer to the Quartus II software. However, for a specific version of the Quartus II software, any design targeted for the same device has the same uncompressed configuration file size. If you are using compression, the file size can vary after each compilation because the compression ratio depends on your design.



For more information about setting device configuration options, refer to *Configuration, Design Security, and Remote System Upgrades in Stratix V Devices*. For creating configuration files, refer to the *Quartus II Help*.

Table 48 lists the minimum configuration time estimates for Stratix V devices.


**Table 48. Minimum Configuration Time Estimation for Stratix V Devices**

| Variant | Member Code | Active Serial <sup>(1)</sup> |            |                     | Fast Passive Parallel <sup>(2)</sup> |            |                     |
|---------|-------------|------------------------------|------------|---------------------|--------------------------------------|------------|---------------------|
|         |             | Width                        | DCLK (MHz) | Min Config Time (s) | Width                                | DCLK (MHz) | Min Config Time (s) |
| GX      | A3          | 4                            | 100        | 0.534               | 32                                   | 100        | 0.067               |
|         |             | 4                            | 100        | 0.344               | 32                                   | 100        | 0.043               |
|         | A4          | 4                            | 100        | 0.534               | 32                                   | 100        | 0.067               |
|         | A5          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |
|         | A7          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |
|         | A9          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | AB          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | B5          | 4                            | 100        | 0.676               | 32                                   | 100        | 0.085               |
|         | B6          | 4                            | 100        | 0.676               | 32                                   | 100        | 0.085               |
|         | B9          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
|         | BB          | 4                            | 100        | 0.857               | 32                                   | 100        | 0.107               |
| GT      | C5          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |
|         | C7          | 4                            | 100        | 0.675               | 32                                   | 100        | 0.084               |

## FPP Configuration Timing when DCLK-to-DATA [] = 1


Figure 12 shows the timing waveform for FPP configuration when using a MAX II or MAX V device as an external host. This waveform shows timing when the DCLK-to-DATA [] ratio is 1.

**Figure 12. FPP Configuration Timing Waveform When the DCLK-to-DATA[] Ratio is 1 <sup>(1)</sup>, <sup>(2)</sup>**

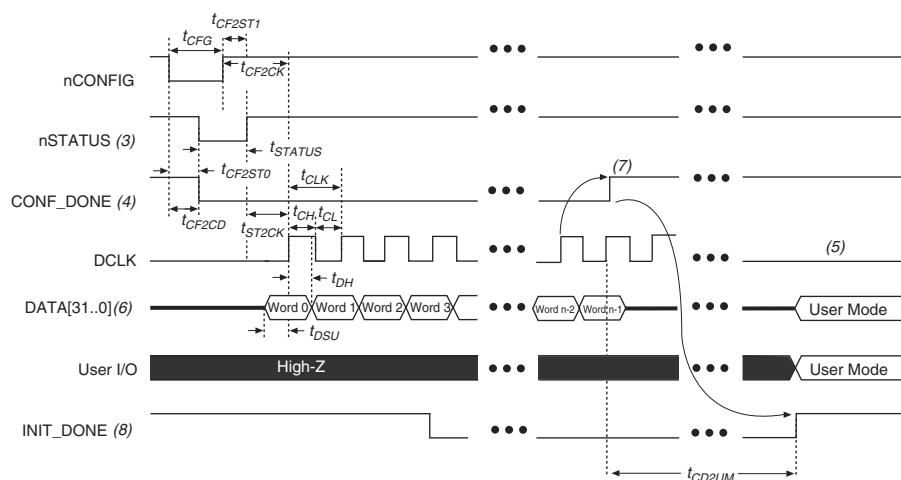

### Notes to Figure 12:

- (1) Use this timing waveform when the DCLK-to-DATA [] ratio is 1.
- (2) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF\_DONE are at logic-high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (3) After power-up, the Stratix V device holds nSTATUS low for the time of the POR delay.
- (4) After power-up, before and during configuration, CONF\_DONE is low.
- (5) Do not leave DCLK floating after configuration. DCLK is ignored after configuration is complete. It can toggle high or low if required.
- (6) For FPP x16, use DATA [15..0]. For FPP x8, use DATA [7..0]. DATA [31..0] are available as a user I/O pin after configuration. The state of this pin depends on the dual-purpose pin settings.
- (7) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF\_DONE is released high when the Stratix V device receives all the configuration data successfully. After CONF\_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (8) After the option bit to enable the INIT\_DONE pin is configured into the device, the INIT\_DONE goes low.

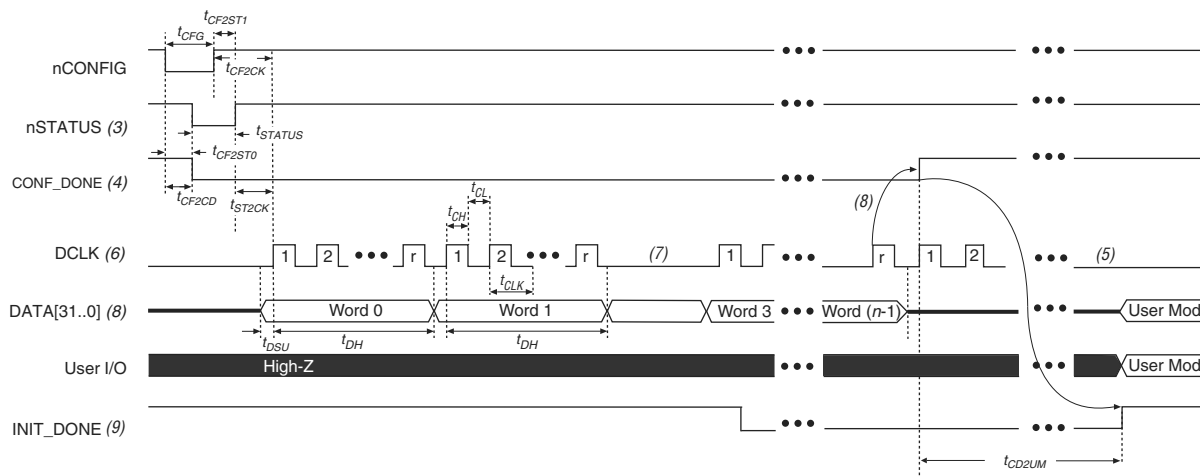**Figure 13. FPP Configuration Timing Waveform When the DCLK-to-DATA[] Ratio is >1 (1), (2)****Notes to Figure 13:**

- (1) Use this timing waveform and parameters when the DCLK-to-DATA[] ratio is >1. To find out the DCLK-to-DATA[] ratio for your system, refer to Table 49 on page 55.
- (2) The beginning of this waveform shows the device in user mode. In user mode, nCONFIG, nSTATUS, and CONF\_DONE are at logic high levels. When nCONFIG is pulled low, a reconfiguration cycle begins.
- (3) After power-up, the Stratix V device holds nSTATUS low for the time as specified by the POR delay.
- (4) After power-up, before and during configuration, CONF\_DONE is low.
- (5) Do not leave DCLK floating after configuration. You can drive it high or low, whichever is more convenient.
- (6) "r" denotes the DCLK-to-DATA[] ratio. For the DCLK-to-DATA[] ratio based on the decompression and the design security feature enable settings, refer to Table 49 on page 55.
- (7) If needed, pause DCLK by holding it low. When DCLK restarts, the external host must provide data on the DATA[31..0] pins prior to sending the first DCLK rising edge.
- (8) To ensure a successful configuration, send the entire configuration data to the Stratix V device. CONF\_DONE is released high after the Stratix V device receives all the configuration data successfully. After CONF\_DONE goes high, send two additional falling edges on DCLK to begin initialization and enter user mode.
- (9) After the option bit to enable the INIT\_DONE pin is configured into the device, the INIT\_DONE goes low.

**Table 61. Document Revision History (Part 3 of 3)**

| Date          | Version | Changes  |
|---------------|---------|--|
| May 2013      | 2.7     | <ul style="list-style-type: none"> <li>■ Updated Table 2, Table 6, Table 7, Table 20, Table 23, Table 27, Table 47, Table 60</li> <li>■ Added Table 24, Table 48</li> <li>■ Updated Figure 9, Figure 10, Figure 11, Figure 12</li> </ul>   |
| February 2013 | 2.6     | <ul style="list-style-type: none"> <li>■ Updated Table 7, Table 9, Table 20, Table 23, Table 27, Table 30, Table 31, Table 35, Table 46</li> <li>■ Updated “Maximum Allowed Overshoot and Undershoot Voltage”</li> </ul>   |
| December 2012 | 2.5     | <ul style="list-style-type: none"> <li>■ Updated Table 3, Table 6, Table 7, Table 8, Table 23, Table 24, Table 25, Table 27, Table 30, Table 32, Table 35</li> <li>■ Added Table 33</li> <li>■ Added “Fast Passive Parallel Configuration Timing”</li> <li>■ Added “Active Serial Configuration Timing”</li> <li>■ Added “Passive Serial Configuration Timing”</li> <li>■ Added “Remote System Upgrades”</li> <li>■ Added “User Watchdog Internal Circuitry Timing Specification”</li> <li>■ Added “Initialization”</li> <li>■ Added “Raw Binary File Size”</li> </ul> |
| June 2012     | 2.4     | <ul style="list-style-type: none"> <li>■ Added Figure 1, Figure 2, and Figure 3.</li> <li>■ Updated Table 1, Table 2, Table 3, Table 6, Table 11, Table 22, Table 23, Table 27, Table 29, Table 30, Table 31, Table 32, Table 35, Table 38, Table 39, Table 40, Table 41, Table 43, Table 56, and Table 59.</li> <li>■ Various edits throughout to fix bugs.</li> <li>■ Changed title of document to <i>Stratix V Device Datasheet</i>.</li> <li>■ Removed document from the Stratix V handbook and made it a separate document.</li> </ul>                            |
| February 2012 | 2.3     | <ul style="list-style-type: none"> <li>■ Updated Table 1–22, Table 1–29, Table 1–31, and Table 1–31.</li> </ul>  |
| December 2011 | 2.2     | <ul style="list-style-type: none"> <li>■ Added Table 2–31.</li> <li>■ Updated Table 2–28 and Table 2–34.</li> </ul>  |
| November 2011 | 2.1     | <ul style="list-style-type: none"> <li>■ Added Table 2–2 and Table 2–21 and updated Table 2–5 with information about Stratix V GT devices.</li> <li>■ Updated Table 2–11, Table 2–13, Table 2–20, and Table 2–25.</li> <li>■ Various edits throughout to fix SPRs.</li> </ul>  |
| May 2011      | 2.0     | <ul style="list-style-type: none"> <li>■ Updated Table 2–4, Table 2–18, Table 2–19, Table 2–21, Table 2–22, Table 2–23, and Table 2–24.</li> <li>■ Updated the “DQ Logic Block and Memory Output Clock Jitter Specifications” title.</li> <li>■ Chapter moved to Volume 1.</li> <li>■ Minor text edits.</li> </ul>   |
| December 2010 | 1.1     | <ul style="list-style-type: none"> <li>■ Updated Table 1–2, Table 1–4, Table 1–19, and Table 1–23.</li> <li>■ Converted chapter to the new template.</li> <li>■ Minor text edits.</li> </ul>   |
| July 2010     | 1.0     | Initial release.   |