



Welcome to [E-XFL.COM](https://www.e-xfl.com)

Understanding [Embedded - FPGAs \(Field Programmable Gate Array\)](#)

Embedded - FPGAs, or Field Programmable Gate Arrays, are advanced integrated circuits that offer unparalleled flexibility and performance for digital systems. Unlike traditional fixed-function logic devices, FPGAs can be programmed and reprogrammed to execute a wide array of logical operations, enabling customized functionality tailored to specific applications. This reprogrammability allows developers to iterate designs quickly and implement complex functions without the need for custom hardware.

Applications of Embedded - FPGAs

The versatility of Embedded - FPGAs makes them indispensable in numerous fields. In telecommunications.

Details

| | |
|--------------------------------|---|
| Product Status | Obsolete |
| Number of LABs/CLBs | 225400 |
| Number of Logic Elements/Cells | 597000 |
| Total RAM Bits | 53248000 |
| Number of I/O | 432 |
| Number of Gates | - |
| Voltage - Supply | 0.87V ~ 0.93V |
| Mounting Type | Surface Mount |
| Operating Temperature | -40°C ~ 100°C (TJ) |
| Package / Case | 1517-FBGA (40x40) |
| Supplier Device Package | 1517-FBGA (40x40) |
| Purchase URL | https://www.e-xfl.com/product-detail/intel/5sgxeb6r2f40i2n |

Table 3. Absolute Maximum Ratings for Stratix V Devices (Part 2 of 2)

| Symbol | Description | Minimum | Maximum | Unit |
|-----------------------|--------------------------------|---------|---------|------|
| V _{CCD_FPLL} | PLL digital power supply | −0.5 | 1.8 | V |
| V _{CCA_FPLL} | PLL analog power supply | −0.5 | 3.4 | V |
| V _I | DC input voltage | −0.5 | 3.8 | V |
| T _J | Operating junction temperature | −55 | 125 | °C |
| T _{STG} | Storage temperature (No bias) | −65 | 150 | °C |
| I _{OUT} | DC output current per pin | −25 | 40 | mA |

Table 4 lists the absolute conditions for the transceiver power supply for Stratix V GX, GS, and GT devices.

Table 4. Transceiver Power Supply Absolute Conditions for Stratix V GX, GS, and GT Devices

| Symbol | Description | Devices | Minimum | Maximum | Unit |
|-----------------------|--|------------|---------|---------|------|
| V _{CCA_GXBL} | Transceiver channel PLL power supply (left side) | GX, GS, GT | −0.5 | 3.75 | V |
| V _{CCA_GXBR} | Transceiver channel PLL power supply (right side) | GX, GS | −0.5 | 3.75 | V |
| V _{CCA_GTBR} | Transceiver channel PLL power supply (right side) | GT | −0.5 | 3.75 | V |
| V _{CCHIP_L} | Transceiver hard IP power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCHIP_R} | Transceiver hard IP power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCHSSI_L} | Transceiver PCS power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCHSSI_R} | Transceiver PCS power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCR_GXBL} | Receiver analog power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCR_GXBR} | Receiver analog power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCR_GTBR} | Receiver analog power supply for GT channels (right side) | GT | −0.5 | 1.35 | V |
| V _{CCT_GXBL} | Transmitter analog power supply (left side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCT_GXBR} | Transmitter analog power supply (right side) | GX, GS, GT | −0.5 | 1.35 | V |
| V _{CCT_GTBR} | Transmitter analog power supply for GT channels (right side) | GT | −0.5 | 1.35 | V |
| V _{CCL_GTBR} | Transmitter clock network power supply (right side) | GT | −0.5 | 1.35 | V |
| V _{CCH_GXBL} | Transmitter output buffer power supply (left side) | GX, GS, GT | −0.5 | 1.8 | V |
| V _{CCH_GXBR} | Transmitter output buffer power supply (right side) | GX, GS, GT | −0.5 | 1.8 | V |

Maximum Allowed Overshoot and Undershoot Voltage

During transitions, input signals may overshoot to the voltage shown in Table 5 and undershoot to −2.0 V for input currents less than 100 mA and periods shorter than 20 ns.

Table 5 lists the maximum allowed input overshoot voltage and the duration of the overshoot voltage as a percentage of device lifetime. The maximum allowed overshoot duration is specified as a percentage of high time over the lifetime of the device. A DC signal is equivalent to 100% of the duty cycle. For example, a signal that overshoots to 3.95 V can be at 3.95 V for only ~21% over the lifetime of the device; for a device lifetime of 10 years, the overshoot duration amounts to ~2 years.

Table 5. Maximum Allowed Overshoot During Transitions

| Symbol | Description | Condition (V) | Overshoot Duration as % @ $T_J = 100^{\circ}\text{C}$ | Unit |
|------------|------------------|---------------|--|------|
| V_i (AC) | AC input voltage | 3.8 | 100 | % |
| | | 3.85 | 64 | % |
| | | 3.9 | 36 | % |
| | | 3.95 | 21 | % |
| | | 4 | 12 | % |
| | | 4.05 | 7 | % |
| | | 4.1 | 4 | % |
| | | 4.15 | 2 | % |
| | | 4.2 | 1 | % |

Figure 1. Stratix V Device Overshoot Duration

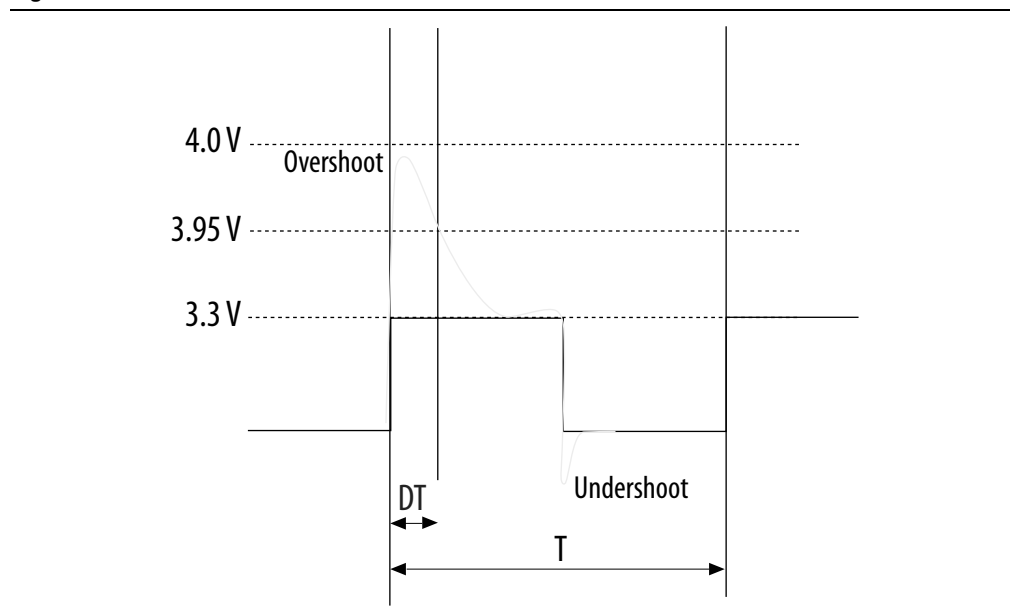


Table 6. Recommended Operating Conditions for Stratix V Devices (Part 2 of 2)

| Symbol | Description | Condition | Min ⁽⁴⁾ | Typ | Max ⁽⁴⁾ | Unit |
|-------------------|------------------------|--------------|--------------------|-----|--------------------|------|
| t_{RAMP} | Power supply ramp time | Standard POR | 200 μs | — | 100 ms | — |
| | | Fast POR | 200 μs | — | 4 ms | — |

Notes to Table 6:

- (1) V_{CCPD} must be 2.5 V when V_{CCIO} is 2.5, 1.8, 1.5, 1.35, 1.25 or 1.2 V. V_{CCPD} must be 3.0 V when V_{CCIO} is 3.0 V.
- (2) If you do not use the design security feature in Stratix V devices, connect V_{CCBAT} to a 1.2- to 3.0-V power supply. Stratix V power-on-reset (POR) circuitry monitors V_{CCBAT} . Stratix V devices will not exit POR if V_{CCBAT} stays at logic low.
- (3) C2L and I2L can also be run at 0.90 V for legacy boards that were designed for the C2 and I2 speed grades.
- (4) The power supply value describes the budget for the DC (static) power supply tolerance and does not include the dynamic tolerance requirements. Refer to the PDN tool for the additional budget for the dynamic tolerance requirements.

Table 7 lists the transceiver power supply recommended operating conditions for Stratix V GX, GS, and GT devices.

Table 7. Recommended Transceiver Power Supply Operating Conditions for Stratix V GX, GS, and GT Devices (Part 1 of 2)

| Symbol | Description | Devices | Minimum ⁽⁴⁾ | Typical | Maximum ⁽⁴⁾ | Unit |
|------------------------------------|---|------------|------------------------|---------|------------------------|------|
| $V_{\text{CCA_GXBL}}$ (1), (3) | Transceiver channel PLL power supply (left side) | GX, GS, GT | 2.85 | 3.0 | 3.15 | V |
| | | | 2.375 | 2.5 | 2.625 | |
| $V_{\text{CCA_GXBR}}$ (1), (3) | Transceiver channel PLL power supply (right side) | GX, GS | 2.85 | 3.0 | 3.15 | V |
| | | | 2.375 | 2.5 | 2.625 | |
| $V_{\text{CCA_GTBR}}$ | Transceiver channel PLL power supply (right side) | GT | 2.85 | 3.0 | 3.15 | V |
| $V_{\text{CCHIP_L}}$ | Transceiver hard IP power supply (left side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver hard IP power supply (left side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| $V_{\text{CCHIP_R}}$ | Transceiver hard IP power supply (right side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver hard IP power supply (right side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| $V_{\text{CCHSSI_L}}$ | Transceiver PCS power supply (left side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver PCS power supply (left side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| $V_{\text{CCHSSI_R}}$ | Transceiver PCS power supply (right side; C1, C2, I2, and I3YY speed grades) | GX, GS, GT | 0.87 | 0.9 | 0.93 | V |
| | Transceiver PCS power supply (right side; C2L, C3, C4, I2L, I3, I3L, and I4 speed grades) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| $V_{\text{CCR_GXBL}}$ (2) | Receiver analog power supply (left side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |

Table 7. Recommended Transceiver Power Supply Operating Conditions for Stratix V GX, GS, and GT Devices (Part 2 of 2)

| Symbol | Description | Devices | Minimum ⁽⁴⁾ | Typical | Maximum ⁽⁴⁾ | Unit |
|-----------------------------------|--|------------|------------------------|---------|------------------------|------|
| V_{CCR_GXBR} ⁽²⁾ | Receiver analog power supply (right side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |
| V_{CCR_GTBR} | Receiver analog power supply for GT channels (right side) | GT | 1.02 | 1.05 | 1.08 | V |
| V_{CCT_GXBL} ⁽²⁾ | Transmitter analog power supply (left side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |
| V_{CCT_GXBR} ⁽²⁾ | Transmitter analog power supply (right side) | GX, GS, GT | 0.82 | 0.85 | 0.88 | V |
| | | | 0.87 | 0.90 | 0.93 | |
| | | | 0.97 | 1.0 | 1.03 | |
| | | | 1.03 | 1.05 | 1.07 | |
| V_{CCT_GTBR} | Transmitter analog power supply for GT channels (right side) | GT | 1.02 | 1.05 | 1.08 | V |
| V_{CCL_GTBR} | Transmitter clock network power supply | GT | 1.02 | 1.05 | 1.08 | V |
| V_{CCH_GXBL} | Transmitter output buffer power supply (left side) | GX, GS, GT | 1.425 | 1.5 | 1.575 | V |
| V_{CCH_GXBR} | Transmitter output buffer power supply (right side) | GX, GS, GT | 1.425 | 1.5 | 1.575 | V |

Notes to Table 7:

- (1) This supply must be connected to 3.0 V if the CMU PLL, receiver CDR, or both, are configured at a base data rate > 6.5 Gbps. Up to 6.5 Gbps, you can connect this supply to either 3.0 V or 2.5 V.
- (2) Refer to Table 8 to select the correct power supply level for your design.
- (3) When using ATX PLLs, the supply must be 3.0 V.
- (4) This value describes the budget for the DC (static) power supply tolerance and does not include the dynamic tolerance requirements. Refer to the PDN tool for the additional budget for the dynamic tolerance requirements.

Table 11. OCT Calibration Accuracy Specifications for Stratix V Devices ⁽¹⁾ (Part 2 of 2)

| Symbol | Description | Conditions | Calibration Accuracy | | | | Unit |
|--|--|---|----------------------|------------|----------------|------------|------|
| | | | C1 | C2,I2 | C3,I3, I3YY | C4,I4 | |
| 50-Ω R _S | Internal series termination with calibration (50-Ω setting) | V _{CCIO} = 3.0, 2.5, 1.8, 1.5, 1.2 V | ±15 | ±15 | ±15 | ±15 | % |
| 34-Ω and 40-Ω R _S | Internal series termination with calibration (34-Ω and 40-Ω setting) | V _{CCIO} = 1.5, 1.35, 1.25, 1.2 V | ±15 | ±15 | ±15 | ±15 | % |
| 48-Ω, 60-Ω, 80-Ω, and 240-Ω R _S | Internal series termination with calibration (48-Ω, 60-Ω, 80-Ω, and 240-Ω setting) | V _{CCIO} = 1.2 V | ±15 | ±15 | ±15 | ±15 | % |
| 50-Ω R _T | Internal parallel termination with calibration (50-Ω setting) | V _{CCIO} = 2.5, 1.8, 1.5, 1.2 V | -10 to +40 | -10 to +40 | -10 to +40 | -10 to +40 | % |
| 20-Ω, 30-Ω, 40-Ω, 60-Ω, and 120-Ω R _T | Internal parallel termination with calibration (20-Ω, 30-Ω, 40-Ω, 60-Ω, and 120-Ω setting) | V _{CCIO} = 1.5, 1.35, 1.25 V | -10 to +40 | -10 to +40 | -10 to +40 | -10 to +40 | % |
| 60-Ω and 120-Ω R _T | Internal parallel termination with calibration (60-Ω and 120-Ω setting) | V _{CCIO} = 1.2 | -10 to +40 | -10 to +40 | -10 to +40 | -10 to +40 | % |
| 25-Ω R _{S_left_shift} | Internal left shift series termination with calibration (25-Ω R _{S_left_shift} setting) | V _{CCIO} = 3.0, 2.5, 1.8, 1.5, 1.2 V | ±15 | ±15 | ±15 | ±15 | % |

Note to Table 11:

(1) OCT calibration accuracy is valid at the time of calibration only.

Table 12 lists the Stratix V OCT without calibration resistance tolerance to PVT changes.

Table 12. OCT Without Calibration Resistance Tolerance Specifications for Stratix V Devices (Part 1 of 2)

| Symbol | Description | Conditions | Resistance Tolerance | | | | Unit |
|-----------------------------|--|-----------------------------------|----------------------|-------|-----------------|--------|------|
| | | | C1 | C2,I2 | C3, I3, I3YY | C4, I4 | |
| 25-Ω R, 50-Ω R _S | Internal series termination without calibration (25-Ω setting) | V _{CCIO} = 3.0 and 2.5 V | ±30 | ±30 | ±40 | ±40 | % |
| 25-Ω R _S | Internal series termination without calibration (25-Ω setting) | V _{CCIO} = 1.8 and 1.5 V | ±30 | ±30 | ±40 | ±40 | % |
| 25-Ω R _S | Internal series termination without calibration (25-Ω setting) | V _{CCIO} = 1.2 V | ±35 | ±35 | ±50 | ±50 | % |



-  You typically use the interactive Excel-based Early Power Estimator before designing the FPGA to get a magnitude estimate of the device power. The Quartus II PowerPlay Power Analyzer provides better quality estimates based on the specifics of the design after you complete place-and-route. The PowerPlay Power Analyzer can apply a combination of user-entered, simulation-derived, and estimated signal activities that, when combined with detailed circuit models, yields very accurate power estimates.
-  For more information about power estimation tools, refer to the *PowerPlay Early Power Estimator User Guide* and the *PowerPlay Power Analysis* chapter in the *Quartus II Handbook*.

Table 23. Transceiver Specifications for Stratix V GX and GS Devices ⁽¹⁾ (Part 2 of 7)

| Symbol/ Description | Conditions | Transceiver Speed Grade 1 | | | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--|--|----------------------------------|-------------------|------|----------------------------------|-------------------|------|----------------------------------|-------------------|------|-------------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Spread-spectrum downspread | PCIe | — | 0 to -0.5 | — | — | 0 to -0.5 | — | — | 0 to -0.5 | — | % |
| On-chip termination resistors ⁽²¹⁾ | — | — | 100 | — | — | 100 | — | — | 100 | — | Ω |
| Absolute V_{MAX} ⁽⁵⁾ | Dedicated reference clock pin | — | — | 1.6 | — | — | 1.6 | — | — | 1.6 | V |
| | RX reference clock pin | — | — | 1.2 | — | — | 1.2 | — | — | 1.2 | |
| Absolute V_{MIN} | — | -0.4 | — | — | -0.4 | — | — | -0.4 | — | — | V |
| Peak-to-peak differential input voltage | — | 200 | — | 1600 | 200 | — | 1600 | 200 | — | 1600 | mV |
| V_{ICM} (AC coupled) ⁽³⁾ | Dedicated reference clock pin | 1050/1000/900/850 ⁽²⁾ | | | 1050/1000/900/850 ⁽²⁾ | | | 1050/1000/900/850 ⁽²⁾ | | | mV |
| | RX reference clock pin | 1.0/0.9/0.85 ⁽⁴⁾ | | | 1.0/0.9/0.85 ⁽⁴⁾ | | | 1.0/0.9/0.85 ⁽⁴⁾ | | | V |
| V_{ICM} (DC coupled) | HCSL I/O standard for PCIe reference clock | 250 | — | 550 | 250 | — | 550 | 250 | — | 550 | mV |
| Transmitter REFCLK Phase Noise (622 MHz) ⁽²⁰⁾ | 100 Hz | — | — | -70 | — | — | -70 | — | — | -70 | dBc/Hz |
| | 1 kHz | — | — | -90 | — | — | -90 | — | — | -90 | dBc/Hz |
| | 10 kHz | — | — | -100 | — | — | -100 | — | — | -100 | dBc/Hz |
| | 100 kHz | — | — | -110 | — | — | -110 | — | — | -110 | dBc/Hz |
| | ≥ 1 MHz | — | — | -120 | — | — | -120 | — | — | -120 | dBc/Hz |
| Transmitter REFCLK Phase Jitter (100 MHz) ⁽¹⁷⁾ | 10 kHz to 1.5 MHz (PCIe) | — | — | 3 | — | — | 3 | — | — | 3 | ps (rms) |
| R_{REF} ⁽¹⁹⁾ | — | — | 1800 $\pm 1\%$ | — | — | 1800 $\pm 1\%$ | — | — | 1800 $\pm 1\%$ | — | Ω |
| Transceiver Clocks | | | | | | | | | | | |
| fixedclk clock frequency | PCIe Receiver Detect | — | 100 or 125 | — | — | 100 or 125 | — | — | 100 or 125 | — | MHz |

Table 23. Transceiver Specifications for Stratix V GX and GS Devices ⁽¹⁾ (Part 4 of 7)

| Symbol/ Description | Conditions | Transceiver Speed Grade 1 | | | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--|---|------------------------------|-----------|-----|------------------------------|-----------|-----|------------------------------|-----------|-----|------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Differential on-chip termination resistors ⁽²¹⁾ | 85-Ω setting | — | 85 ± 30% | — | — | 85 ± 30% | — | — | 85 ± 30% | — | Ω |
| | 100-Ω setting | — | 100 ± 30% | — | — | 100 ± 30% | — | — | 100 ± 30% | — | Ω |
| | 120-Ω setting | — | 120 ± 30% | — | — | 120 ± 30% | — | — | 120 ± 30% | — | Ω |
| | 150-Ω setting | — | 150 ± 30% | — | — | 150 ± 30% | — | — | 150 ± 30% | — | Ω |
| V _{ICM} (AC and DC coupled) | V _{CCR_GXB} = 0.85 V or 0.9 V full bandwidth | — | 600 | — | — | 600 | — | — | 600 | — | mV |
| | V _{CCR_GXB} = 0.85 V or 0.9 V half bandwidth | — | 600 | — | — | 600 | — | — | 600 | — | mV |
| | V _{CCR_GXB} = 1.0 V/1.05 V full bandwidth | — | 700 | — | — | 700 | — | — | 700 | — | mV |
| | V _{CCR_GXB} = 1.0 V half bandwidth | — | 750 | — | — | 750 | — | — | 750 | — | mV |
| t _{LTR} ⁽¹¹⁾ | — | — | — | 10 | — | — | 10 | — | — | 10 | μs |
| t _{LTD} ⁽¹²⁾ | — | 4 | — | — | 4 | — | — | 4 | — | — | μs |
| t _{LTD_manual} ⁽¹³⁾ | — | 4 | — | — | 4 | — | — | 4 | — | — | μs |
| t _{LTR_LTD_manual} ⁽¹⁴⁾ | — | 15 | — | — | 15 | — | — | 15 | — | — | μs |
| Run Length | — | — | — | 200 | — | — | 200 | — | — | 200 | UI |
| Programmable equalization (AC Gain) ⁽¹⁰⁾ | Full bandwidth (6.25 GHz) Half bandwidth (3.125 GHz) | — | — | 16 | — | — | 16 | — | — | 16 | dB |

Table 23. Transceiver Specifications for Stratix V GX and GS Devices ⁽¹⁾ (Part 6 of 7)

| Symbol/ Description | Conditions | Transceiver Speed Grade 1 | | | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|---|--|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------------------------------|-----|-------------------------------|------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Inter-transceiver block transmitter channel-to- channel skew | xN PMA bonded mode | — | — | 500 | — | — | 500 | — | — | 500 | ps |
| CMU PLL | | | | | | | | | | | |
| Supported Data Range | — | 600 | — | 12500 | 600 | — | 12500 | 600 | — | 8500/ 10312.5 (24) | Mbps |
| t _{pll_powerdown} ⁽¹⁵⁾ | — | 1 | — | — | 1 | — | — | 1 | — | — | μs |
| t _{pll_lock} ⁽¹⁶⁾ | — | — | — | 10 | — | — | 10 | — | — | 10 | μs |
| ATX PLL | | | | | | | | | | | |
| Supported Data Rate Range | VCO post-divider L=2 | 8000 | — | 14100 | 8000 | — | 12500 | 8000 | — | 8500/ 10312.5 (24) | Mbps |
| | L=4 | 4000 | — | 7050 | 4000 | — | 6600 | 4000 | — | 6600 | Mbps |
| | L=8 | 2000 | — | 3525 | 2000 | — | 3300 | 2000 | — | 3300 | Mbps |
| | L=8, Local/Central Clock Divider =2 | 1000 | — | 1762.5 | 1000 | — | 1762.5 | 1000 | — | 1762.5 | Mbps |
| t _{pll_powerdown} ⁽¹⁵⁾ | — | 1 | — | — | 1 | — | — | 1 | — | — | μs |
| t _{pll_lock} ⁽¹⁶⁾ | — | — | — | 10 | — | — | 10 | — | — | 10 | μs |
| fPLL | | | | | | | | | | | |
| Supported Data Range | — | 600 | — | 3250/ 3125 ⁽²⁵⁾ | 600 | — | 3250/ 3125 ⁽²⁵⁾ | 600 | — | 3250/ 3125 ⁽²⁵⁾ | Mbps |
| t _{pll_powerdown} ⁽¹⁵⁾ | — | 1 | — | — | 1 | — | — | 1 | — | — | μs |

Table 24 shows the maximum transmitter data rate for the clock network.

Table 24. Clock Network Maximum Data Rate Transmitter Specifications ⁽¹⁾

| Clock Network | ATX PLL | | | CMU PLL ⁽²⁾ | | | fPLL | | |
|--------------------------------|------------------------|--------------------|---------------------------------------|------------------------|--------------------|---------------------------------------|------------------------|--------------------|---------------------------------------|
| | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span | Non-bonded Mode (Gbps) | Bonded Mode (Gbps) | Channel Span |
| x1 ⁽³⁾ | 14.1 | — | 6 | 12.5 | — | 6 | 3.125 | — | 3 |
| x6 ⁽³⁾ | — | 14.1 | 6 | — | 12.5 | 6 | — | 3.125 | 6 |
| x6 PLL Feedback ⁽⁴⁾ | — | 14.1 | Side-wide | — | 12.5 | Side-wide | — | — | — |
| xN (PCIe) | — | 8.0 | 8 | — | 5.0 | 8 | — | — | — |
| xN (Native PHY IP) | 8.0 | 8.0 | Up to 13 channels above and below PLL | 7.99 | 7.99 | Up to 13 channels above and below PLL | 3.125 | 3.125 | Up to 13 channels above and below PLL |
| | — | 8.01 to 9.8304 | Up to 7 channels above and below PLL | | | | | | |

Notes to Table 24:

- (1) Valid data rates below the maximum specified in this table depend on the reference clock frequency and the PLL counter settings. Check the MegaWizard message during the PHY IP instantiation.
- (2) ATX PLL is recommended at 8 Gbps and above data rates for improved jitter performance.
- (3) Channel span is within a transceiver bank.
- (4) Side-wide channel bonding is allowed up to the maximum supported by the PHY IP.

Figure 2 shows the differential transmitter output waveform.

Figure 2. Differential Transmitter Output Waveform

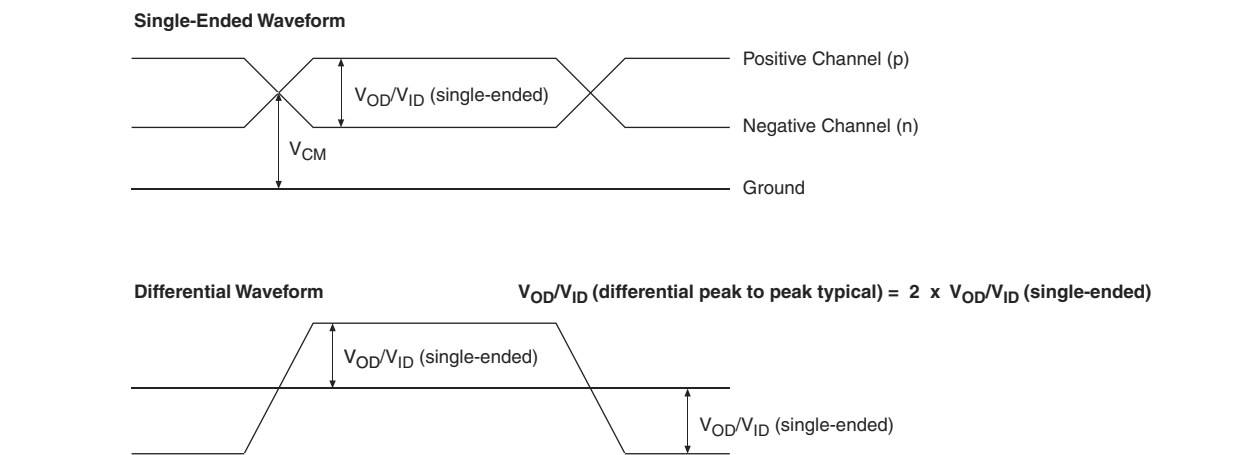


Figure 3 shows the Stratix V AC gain curves for GX channels.

Figure 3. AC Gain Curves for GX Channels (full bandwidth)



Stratix V GT devices contain both GX and GT channels. All transceiver specifications for the GX channels not listed in Table 28 are the same as those listed in Table 23.

Table 28 lists the Stratix V GT transceiver specifications.

Table 28. Transceiver Specifications for Stratix V GT Devices (Part 1 of 5) ⁽¹⁾

| Symbol/ Description | Conditions | Transceiver Speed Grade 2 | | | Transceiver Speed Grade 3 | | | Unit |
|--|--|--|-----------|------|------------------------------|-----------|------|------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Reference Clock | | | | | | | | |
| Supported I/O Standards | Dedicated reference clock pin | 1.2-V PCML, 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, Differential LVPECL, LVDS, and HCSL | | | | | | |
| | RX reference clock pin | 1.4-V PCML, 1.5-V PCML, 2.5-V PCML, LVPECL, and LVDS | | | | | | |
| Input Reference Clock Frequency (CMU PLL) ⁽⁶⁾ | — | 40 | — | 710 | 40 | — | 710 | MHz |
| Input Reference Clock Frequency (ATX PLL) ⁽⁶⁾ | — | 100 | — | 710 | 100 | — | 710 | MHz |
| Rise time | 20% to 80% | — | — | 400 | — | — | 400 | ps |
| Fall time | 80% to 20% | — | — | 400 | — | — | 400 | |
| Duty cycle | — | 45 | — | 55 | 45 | — | 55 | % |
| Spread-spectrum modulating clock frequency | PCI Express (PCIe) | 30 | — | 33 | 30 | — | 33 | kHz |
| Spread-spectrum downspread | PCIe | — | 0 to −0.5 | — | — | 0 to −0.5 | — | % |
| On-chip termination resistors ⁽¹⁹⁾ | — | — | 100 | — | — | 100 | — | Ω |
| Absolute V _{MAX} ⁽³⁾ | Dedicated reference clock pin | — | — | 1.6 | — | — | 1.6 | V |
| | RX reference clock pin | — | — | 1.2 | — | — | 1.2 | |
| Absolute V _{MIN} | — | -0.4 | — | — | -0.4 | — | — | V |
| Peak-to-peak differential input voltage | — | 200 | — | 1600 | 200 | — | 1600 | mV |
| V _{ICM} (AC coupled) | Dedicated reference clock pin | 1050/1000 ⁽²⁾ | | | 1050/1000 ⁽²⁾ | | | mV |
| | RX reference clock pin | 1.0/0.9/0.85 ⁽²²⁾ | | | 1.0/0.9/0.85 ⁽²²⁾ | | | V |
| V _{ICM} (DC coupled) | HCSL I/O standard for PCIe reference clock | 250 | — | 550 | 250 | — | 550 | mV |

Figure 4 shows the differential transmitter output waveform.

Figure 4. Differential Transmitter/Receiver Output/Input Waveform

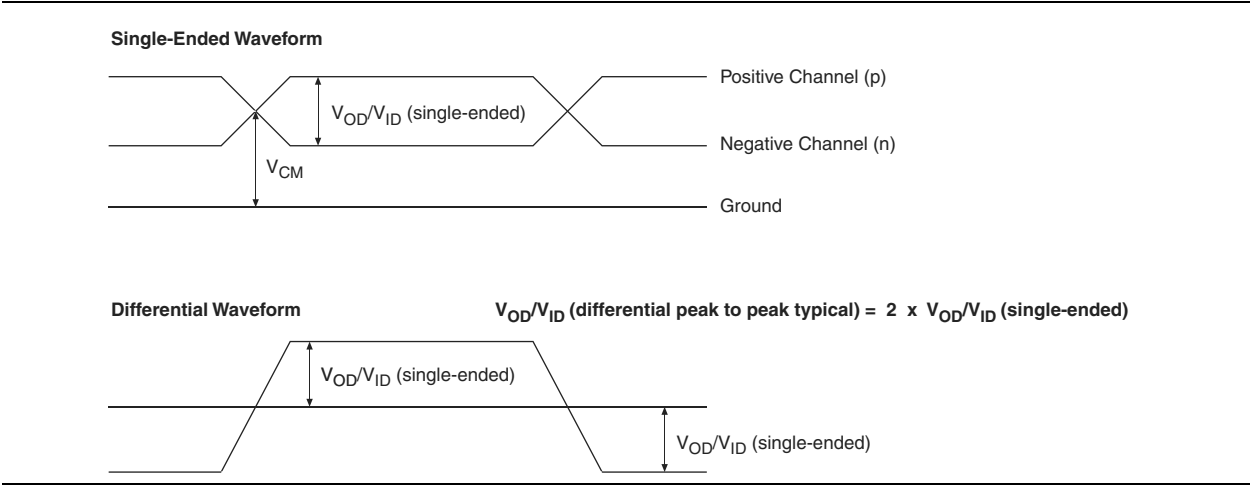


Figure 5 shows the Stratix V AC gain curves for GT channels.

Figure 5. AC Gain Curves for GT Channels

- XFI
- ASI
- HiGig/HiGig+
- HiGig2/HiGig2+
- Serial Data Converter (SDC)
- GPON
- SDI
- SONET
- Fibre Channel (FC)
- PCIe
- QPI
- SFF-8431

Download the Stratix V Characterization Report Tool to view the characterization report summary for these protocols.

Core Performance Specifications

This section describes the clock tree, phase-locked loop (PLL), digital signal processing (DSP), memory blocks, configuration, and JTAG specifications.

Clock Tree Specifications

Table 30 lists the clock tree specifications for Stratix V devices.

Table 30. Clock Tree Performance for Stratix V Devices ⁽¹⁾

| Symbol | Performance | | | Unit |
|---------------------------|--------------------------|-----------------------|--------|------|
| | C1, C2, C2L, I2, and I2L | C3, I3, I3L, and I3YY | C4, I4 | |
| Global and Regional Clock | 717 | 650 | 580 | MHz |
| Periphery Clock | 550 | 500 | 500 | MHz |

Note to Table 30:

(1) The Stratix V ES devices are limited to 600 MHz core clock tree performance.

Table 36. High-Speed I/O Specifications for Stratix V Devices ⁽¹⁾, ⁽²⁾ (Part 3 of 4)

| Symbol | Conditions | C1 | | | C2, C2L, I2, I2L | | | C3, I3, I3L, I3YY | | | C4, I4 | | | Unit |
|--|---|----------------|-----|----------------|------------------|-----|----------------|-------------------|-----|----------------|----------------|-----|----------------|------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| t_{DUTY} | Transmitter output clock duty cycle for both True and Emulated Differential I/O Standards | 45 | 50 | 55 | 45 | 50 | 55 | 45 | 50 | 55 | 45 | 50 | 55 | % |
| t_{RISE} & t_{FALL} | True Differential I/O Standards | — | — | 160 | — | — | 160 | — | — | 200 | — | — | 200 | ps |
| | Emulated Differential I/O Standards with three external output resistor networks | — | — | 250 | — | — | 250 | — | — | 250 | — | — | 300 | ps |
| TCCS | True Differential I/O Standards | — | — | 150 | — | — | 150 | — | — | 150 | — | — | 150 | ps |
| | Emulated Differential I/O Standards | — | — | 300 | — | — | 300 | — | — | 300 | — | — | 300 | ps |
| Receiver | | | | | | | | | | | | | | |
| True Differential I/O Standards - f_{HSDRDP} (data rate) | SERDES factor J = 3 to 10 ⁽¹¹⁾ , ⁽¹²⁾ , ⁽¹³⁾ , ⁽¹⁴⁾ , ⁽¹⁵⁾ , ⁽¹⁶⁾ | 150 | — | 1434 | 150 | — | 1434 | 150 | — | 1250 | 150 | — | 1050 | Mbps |
| | SERDES factor J ≥ 4 | 150 | — | 1600 | 150 | — | 1600 | 150 | — | 1600 | 150 | — | 1250 | Mbps |
| | LVDS RX with DPA ⁽¹²⁾ , ⁽¹⁴⁾ , ⁽¹⁵⁾ , ⁽¹⁶⁾ | 150 | — | 1600 | 150 | — | 1600 | 150 | — | 1600 | 150 | — | 1250 | Mbps |
| | SERDES factor J = 2, uses DDR Registers | ⁽⁶⁾ | — | ⁽⁷⁾ | ⁽⁶⁾ | — | ⁽⁷⁾ | ⁽⁶⁾ | — | ⁽⁷⁾ | ⁽⁶⁾ | — | ⁽⁷⁾ | Mbps |
| | SERDES factor J = 1, uses SDR Register | ⁽⁶⁾ | — | ⁽⁷⁾ | ⁽⁶⁾ | — | ⁽⁷⁾ | ⁽⁶⁾ | — | ⁽⁷⁾ | ⁽⁶⁾ | — | ⁽⁷⁾ | Mbps |

Table 48. Minimum Configuration Time Estimation for Stratix V Devices

| Variant | Member Code | Active Serial ⁽¹⁾ | | | Fast Passive Parallel ⁽²⁾ | | |
|---------|-------------|------------------------------|------------|---------------------|--------------------------------------|------------|---------------------|
| | | Width | DCLK (MHz) | Min Config Time (s) | Width | DCLK (MHz) | Min Config Time (s) |
| GS | D3 | 4 | 100 | 0.344 | 32 | 100 | 0.043 |
| | D4 | 4 | 100 | 0.534 | 32 | 100 | 0.067 |
| | | 4 | 100 | 0.344 | 32 | 100 | 0.043 |
| | D5 | 4 | 100 | 0.534 | 32 | 100 | 0.067 |
| | D6 | 4 | 100 | 0.741 | 32 | 100 | 0.093 |
| | D8 | 4 | 100 | 0.741 | 32 | 100 | 0.093 |
| E | E9 | 4 | 100 | 0.857 | 32 | 100 | 0.107 |
| | EB | 4 | 100 | 0.857 | 32 | 100 | 0.107 |

Notes to Table 48:

- (1) DCLK frequency of 100 MHz using external CLKUSR.
 (2) Max FPGA FPP bandwidth may exceed bandwidth available from some external storage or control logic.

Fast Passive Parallel Configuration Timing

This section describes the fast passive parallel (FPP) configuration timing parameters for Stratix V devices.

DCLK-to-DATA[] Ratio for FPP Configuration

FPP configuration requires a different DCLK-to-DATA [] ratio when you enable the design security, decompression, or both features. Table 49 lists the DCLK-to-DATA [] ratio for each combination.

Table 49. DCLK-to-DATA[] Ratio ⁽¹⁾ (Part 1 of 2)

| Configuration Scheme | Decompression | Design Security | DCLK-to-DATA[] Ratio |
|----------------------|---------------|-----------------|----------------------|
| FPP ×8 | Disabled | Disabled | 1 |
| | Disabled | Enabled | 1 |
| | Enabled | Disabled | 2 |
| | Enabled | Enabled | 2 |
| FPP ×16 | Disabled | Disabled | 1 |
| | Disabled | Enabled | 2 |
| | Enabled | Disabled | 4 |
| | Enabled | Enabled | 4 |

Remote System Upgrades

Table 56 lists the timing parameter specifications for the remote system upgrade circuitry.

Table 56. Remote System Upgrade Circuitry Timing Specifications

| Parameter | Minimum | Maximum | Unit |
|--------------------------|---------|---------|------|
| $t_{RU_nCONFIG}^{(1)}$ | 250 | — | ns |
| $t_{RU_nRSTIMER}^{(2)}$ | 250 | — | ns |

Notes to Table 56:

- (1) This is equivalent to strobing the reconfiguration input of the ALTREMOTE_UPDATE megafunction high for the minimum timing specification. For more information, refer to the Remote System Upgrade State Machine section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.
- (2) This is equivalent to strobing the reset_timer input of the ALTREMOTE_UPDATE megafunction high for the minimum timing specification. For more information, refer to the User Watchdog Timer section of the “Configuration, Design Security, and Remote System Upgrades in Stratix V Devices” chapter.

User Watchdog Internal Circuitry Timing Specification

Table 57 lists the operating range of the 12.5-MHz internal oscillator.

Table 57. 12.5-MHz Internal Oscillator Specifications

| Minimum | Typical | Maximum | Units |
|---------|---------|---------|-------|
| 5.3 | 7.9 | 12.5 | MHz |

I/O Timing

Altera offers two ways to determine I/O timing—the Excel-based I/O Timing and the Quartus II Timing Analyzer.

Excel-based I/O timing provides pin timing performance for each device density and speed grade. The data is typically used prior to designing the FPGA to get an estimate of the timing budget as part of the link timing analysis. The Quartus II Timing Analyzer provides a more accurate and precise I/O timing data based on the specifics of the design after you complete place-and-route.



You can download the Excel-based I/O Timing spreadsheet from the Stratix V Devices Documentation web page.

Programmable IOE Delay

Table 58 lists the Stratix V IOE programmable delay settings.

Table 58. IOE Programmable Delay for Stratix V Devices (Part 1 of 2)

| Parameter (1) | Available Settings | Min Offset (2) | Fast Model | | Slow Model | | | | | | | Unit |
|------------------|-----------------------|----------------------|------------|------------|------------|-------|-------|-------|-------|-------------|-------|------|
| | | | Industrial | Commercial | C1 | C2 | C3 | C4 | I2 | I3, I3YY | I4 | |
| D1 | 64 | 0 | 0.464 | 0.493 | 0.838 | 0.838 | 0.924 | 1.011 | 0.844 | 0.921 | 1.006 | ns |
| D2 | 32 | 0 | 0.230 | 0.244 | 0.415 | 0.415 | 0.459 | 0.503 | 0.417 | 0.456 | 0.500 | ns |

Table 60. Glossary (Part 2 of 4)

| Letter | Subject | Definitions |
|-----------------------|----------------------------|---|
| G H I | — | — |
| J | JTAG Timing Specifications | <p>High-speed I/O block—Deserialization factor (width of parallel data bus).</p> <p>JTAG Timing Specifications:</p> |
| K L M N O | — | — |
| P | PLL Specifications | <p>Diagram of PLL Specifications ⁽¹⁾</p> <p>Note: ⁽¹⁾ Core Clock can only be fed by dedicated clock input pins or PLL outputs.</p> |
| Q | — | — |
| R | R _L | Receiver differential input discrete resistor (external to the Stratix V device). |

Table 61. Document Revision History (Part 3 of 3)

| Date | Version | Changes |
|---------------|---------|--|
| May 2013 | 2.7 | <ul style="list-style-type: none"> ■ Updated Table 2, Table 6, Table 7, Table 20, Table 23, Table 27, Table 47, Table 60 ■ Added Table 24, Table 48 ■ Updated Figure 9, Figure 10, Figure 11, Figure 12 |
| February 2013 | 2.6 | <ul style="list-style-type: none"> ■ Updated Table 7, Table 9, Table 20, Table 23, Table 27, Table 30, Table 31, Table 35, Table 46 ■ Updated “Maximum Allowed Overshoot and Undershoot Voltage” |
| December 2012 | 2.5 | <ul style="list-style-type: none"> ■ Updated Table 3, Table 6, Table 7, Table 8, Table 23, Table 24, Table 25, Table 27, Table 30, Table 32, Table 35 ■ Added Table 33 ■ Added “Fast Passive Parallel Configuration Timing” ■ Added “Active Serial Configuration Timing” ■ Added “Passive Serial Configuration Timing” ■ Added “Remote System Upgrades” ■ Added “User Watchdog Internal Circuitry Timing Specification” ■ Added “Initialization” ■ Added “Raw Binary File Size” |
| June 2012 | 2.4 | <ul style="list-style-type: none"> ■ Added Figure 1, Figure 2, and Figure 3. ■ Updated Table 1, Table 2, Table 3, Table 6, Table 11, Table 22, Table 23, Table 27, Table 29, Table 30, Table 31, Table 32, Table 35, Table 38, Table 39, Table 40, Table 41, Table 43, Table 56, and Table 59. ■ Various edits throughout to fix bugs. ■ Changed title of document to <i>Stratix V Device Datasheet</i>. ■ Removed document from the Stratix V handbook and made it a separate document. |
| February 2012 | 2.3 | <ul style="list-style-type: none"> ■ Updated Table 1–22, Table 1–29, Table 1–31, and Table 1–31. |
| December 2011 | 2.2 | <ul style="list-style-type: none"> ■ Added Table 2–31. ■ Updated Table 2–28 and Table 2–34. |
| November 2011 | 2.1 | <ul style="list-style-type: none"> ■ Added Table 2–2 and Table 2–21 and updated Table 2–5 with information about Stratix V GT devices. ■ Updated Table 2–11, Table 2–13, Table 2–20, and Table 2–25. ■ Various edits throughout to fix SPRs. |
| May 2011 | 2.0 | <ul style="list-style-type: none"> ■ Updated Table 2–4, Table 2–18, Table 2–19, Table 2–21, Table 2–22, Table 2–23, and Table 2–24. ■ Updated the “DQ Logic Block and Memory Output Clock Jitter Specifications” title. ■ Chapter moved to Volume 1. ■ Minor text edits. |
| December 2010 | 1.1 | <ul style="list-style-type: none"> ■ Updated Table 1–2, Table 1–4, Table 1–19, and Table 1–23. ■ Converted chapter to the new template. ■ Minor text edits. |
| July 2010 | 1.0 | Initial release. |

